



MÓDULO 2: Arquitecturas CAG (Cache Augmented Generation)


Sesión 3: Patrones de diseño para wrappers de modelos

Mentor: Antonio Pérez

LIDR.co, training the Tech Leaders' of the future

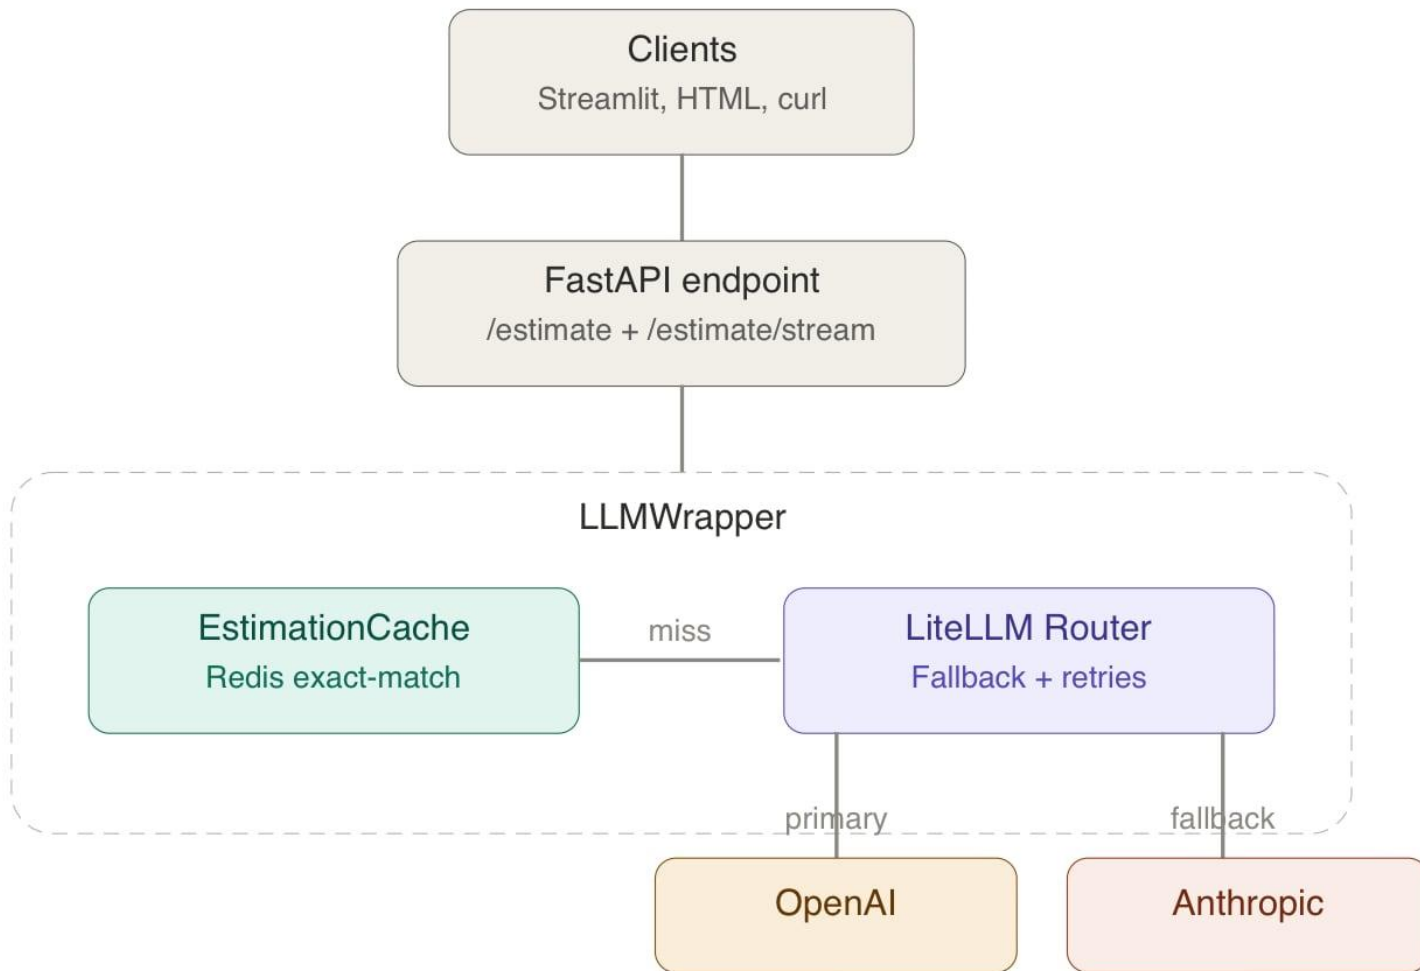

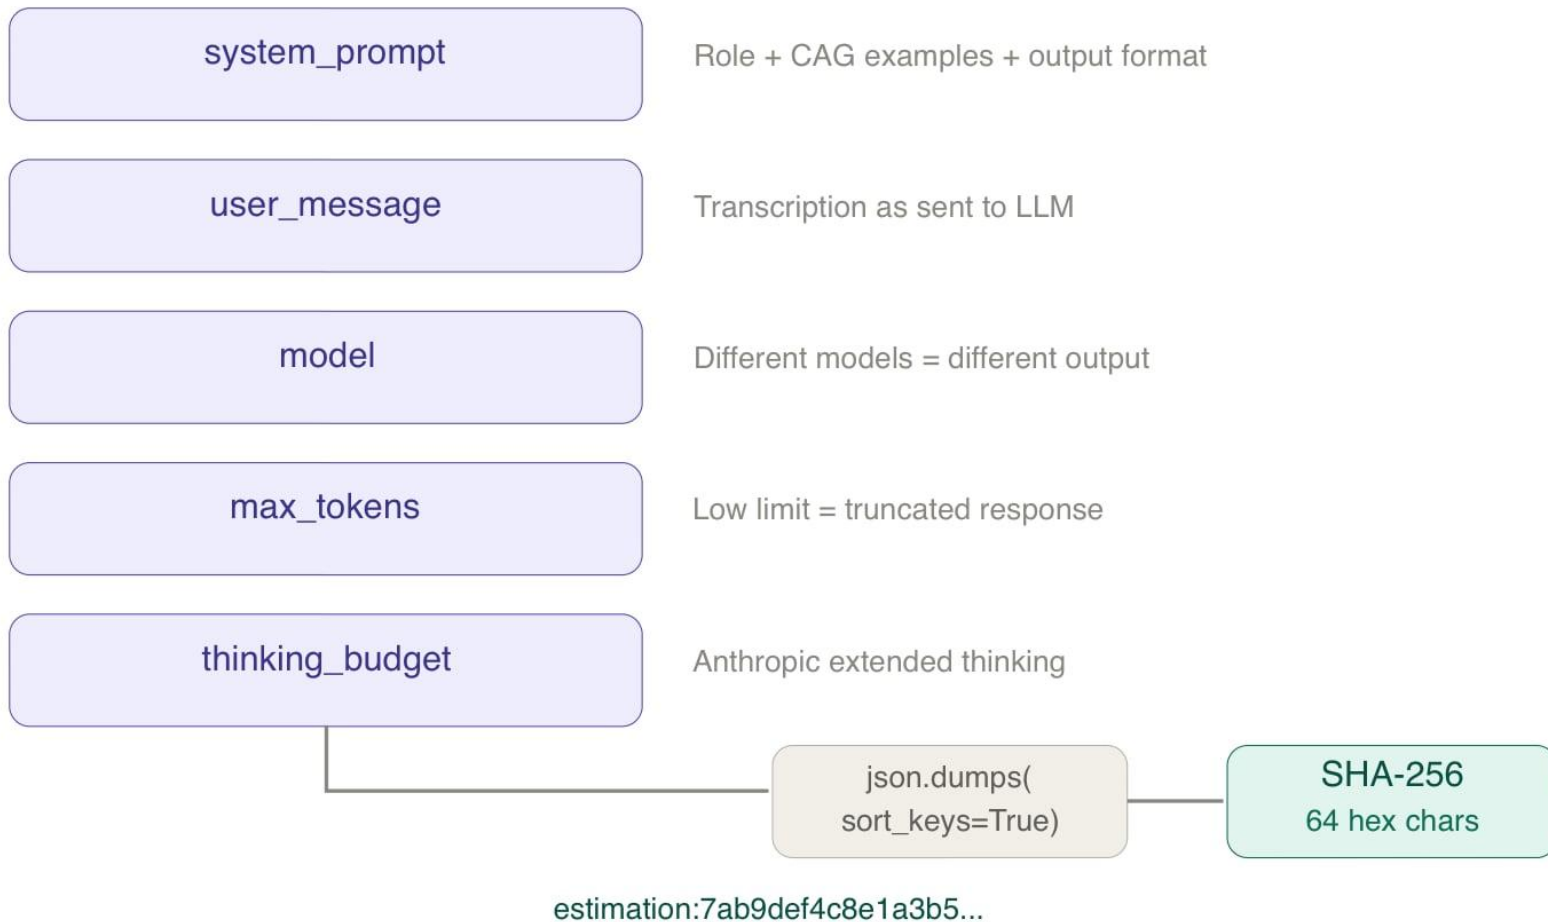

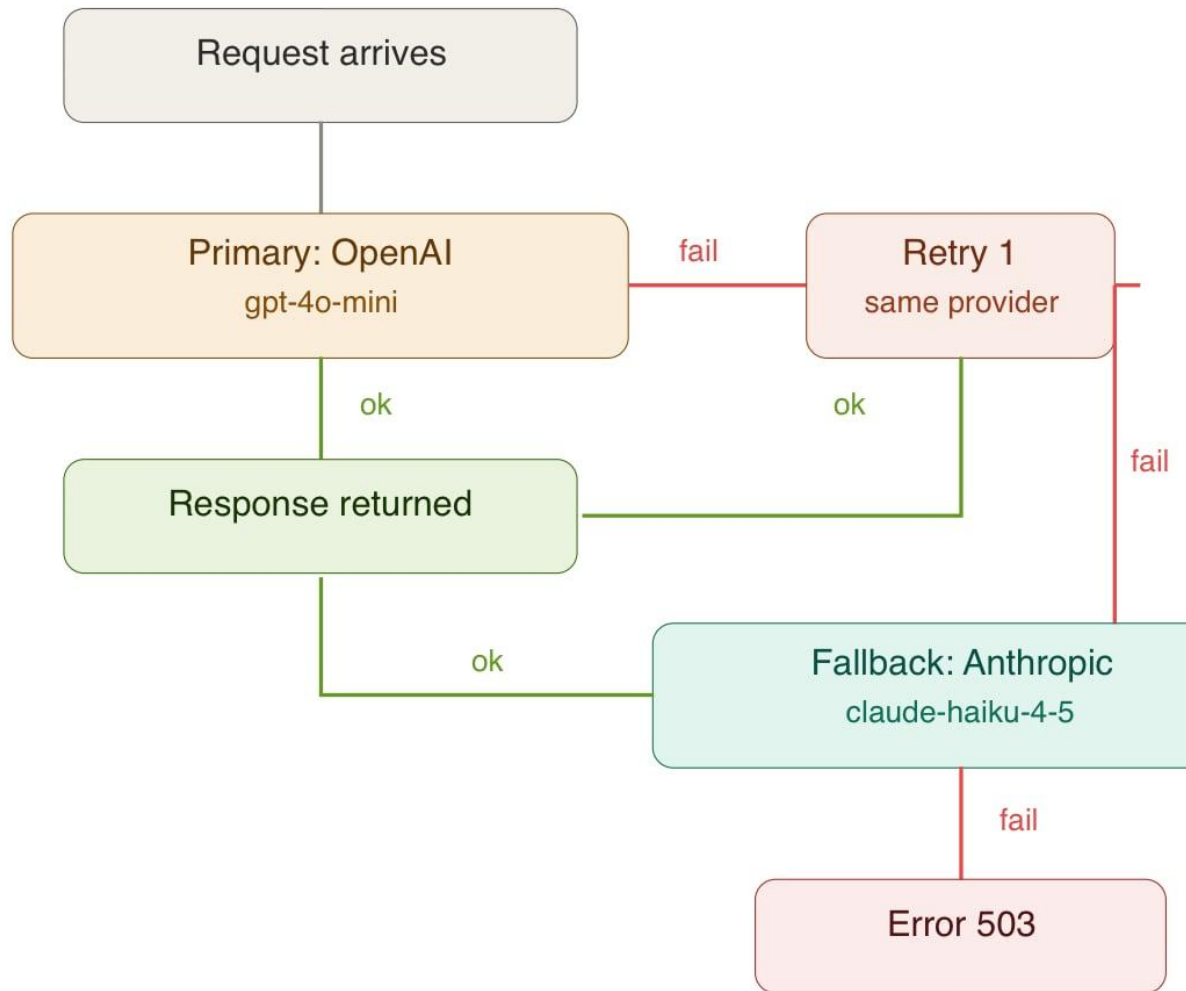

Plain text logging

```
INFO: LLM call to gpt-4o-  
mini took 8123ms, used  
2841 tokens, cost $0.0042
```

Average cost per model?
Requires regex parsing

Cache hit rate? grep + count
p95 latency? Impossible
Fallback frequency? Hope
Correlate by request? Regex

Structured logging

```
"event": "llm_call_completed"  
"model": "gpt-4o-mini"  
"cost_usd": 0.0042  
"latency_ms": 8123
```

Average cost per model?
avg(cost_usd) by model

Cache hit rate? count() by event
p95 latency? p95(latency_ms)
Fallback? filter provider
Correlate? filter request_id



Ejercicios para la Sesión 04



Leer el contenido del módulo 4



Completa el perfil en la plataforma



Realiza los ejercicios previos de la sesión 4



Participa en los debates, en el feed y en los comentarios de las lecciones.



Tiempo para el feedback con ROTI

¿Cuánto valor te ha agregado esta sesión?



Absolutamente
nada



Poco



Suficiente




Bastante



Más de lo que
esperaba

ROTI

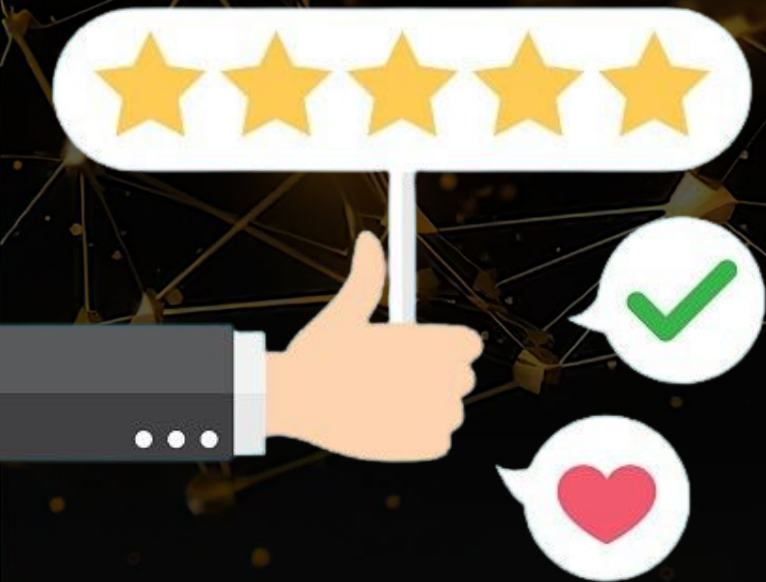

¡GRACIAS!

LIDR.co, AI-Powered Careers

 @lidr_ai

#followtheLIDR