

Payer Authentication

REST API



Cybersource Contact Information

For general information about our company, products, and services, go to <https://www.cybersource.com>.

For sales questions about any Cybersource service, email sales@cybersource.com or call 650-432-7350 or 888-330-2300 (toll free in the United States).

For support information about any Cybersource service, visit the Support Center: <https://www.cybersource.com/support>

Copyright

© 2020. Cybersource Corporation. All rights reserved. Cybersource Corporation ("Cybersource") furnishes this document and the software described in this document under the applicable agreement between the reader of this document ("You") and Cybersource ("Agreement"). You may use this document and/or software only in accordance with the terms of the Agreement. Except as expressly set forth in the Agreement, the information contained in this document is subject to change without notice and therefore should not be interpreted in any way as a guarantee or warranty by Cybersource. Cybersource assumes no responsibility or liability for any errors that may appear in this document. The copyrighted software that accompanies this document is licensed to You for use only in strict accordance with the Agreement. You should read the Agreement carefully before using the software. Except as permitted by the Agreement, You may not reproduce any part of this document, store this document in a retrieval system, or transmit this document, in any form or by any means, electronic, mechanical, recording, or otherwise, without the prior written consent of Cybersource.

Restricted Rights Legends

For Government or defense agencies: Use, duplication, or disclosure by the Government or defense agencies is subject to restrictions as set forth in the Rights in Technical Data and Computer Software clause at DFARS 252.227-7013 and in similar clauses in the FAR and NASA FAR Supplement.

For civilian agencies: Use, reproduction, or disclosure is subject to restrictions set forth in subparagraphs (a) through (d) of the Commercial Computer Software Restricted Rights clause at 52.227-19 and the limitations set forth in Cybersource Corporation's standard commercial agreement for this software. Unpublished rights reserved under the copyright laws of the United States.

Trademarks

Authorize.Net, eCheck.Net, and The Power of Payment are registered trademarks of Cybersource Corporation. Cybersource, Cybersource Payment Manager, Cybersource Risk Manager, Cybersource Decision Manager, and Cybersource Connect are trademarks and/or service marks of Cybersource Corporation. Visa, Visa International, Cybersource, the Visa logo, and the Cybersource logo are the registered trademarks of Visa International in the United States and other countries. All other trademarks, service marks, registered marks, or registered service marks are the property of their respective owners.

Confidentiality Notice

This document is furnished to you solely in your capacity as a client of Cybersource and as a participant in the Visa payments system.

By accepting this document, you acknowledge that the information contained herein (the "Information") is confidential and subject to the confidentiality restrictions contained in Visa's operating regulations and/or other confidentiality agreements, which limit our use of the Information. You agree to keep the Information confidential and not to use the Information for any purpose other than its intended purpose and in your capacity as a customer of Cybersource or as a participant in the Visa payments system. The Information may only be disseminated within your organization on a need-to-know basis to enable your participation in the Visa payments system. Please be advised that the Information may constitute material non-public information under U.S. federal securities laws and that purchasing or selling securities of Visa Inc. while being aware of material non-public information would constitute a violation of applicable U.S. federal securities laws.

Revision

Version: 26.03.01

Contents

Recent Revisions to This Document.....	9
Payer Authentication Developer Guide.....	12
VISA Platform Connect: Specifications and Conditions for Resellers/Partners.....	13
Introduction to Payer Authentication.....	14
Why Payer Authentication Is Needed.....	15
EMV 3-D Secure 2.0.....	17
Payer Authentication Customer Workflow.....	17
Payer Authentication Merchant Workflow.....	19
Acquirer Information.....	20
Enable Merchant Account for EMV 3-D Secure.....	21
Payer Authentication Configuration Testing.....	22
Request Endpoints.....	22
Payer Authentication Integrations.....	22
Implementing Direct API for Payer Authentication.....	24
Prerequisites.....	24
After Implementation and Before Go Live.....	25
Step 1: Setup Service.....	26
Request Fields.....	27
Important Response Fields.....	28
Step 2: Device Data Collection.....	29
Which Device Data is Collected.....	31
Building the Iframe.....	31
Initiating the Device Data Collection Iframe.....	32
Submitting the Device Data Collection Iframe.....	32
Receiving the Device Data Collection URL Response.....	33
Step 3: Payer Authentication Check Enrollment Service.....	34
Request Fields.....	36
Interpreting the Check Enrollment Response.....	37
Important Response Fields.....	39
Step 4: Step-Up Iframe.....	40
Building the Iframe Parameters.....	42

Creating the Iframe.....	43
Invoking the Iframe.....	43
Receiving the Step-Up Results.....	43
Step 5: Payer Authentication Validation Service.....	45
Request Fields.....	46
Interpreting the Validation Response.....	46
Redirecting Customers to Pass or Fail Message Page.....	47
Combining the Authentication and the Authorization Services.....	48
Combining Check Enrollment and the Authorization Services.....	48
Check Enrollment Response Fields and Their Equivalent Authorization	
Request Fields.....	49
Combining the Validation and the Authorization Services.....	50
Validation Fields and their Equivalent Authorization Fields.....	51
Implementing SDK Payer Authentication.....	52
Implementation Overview.....	52
Process Flow for SDK Integration.....	53
Prerequisites for SDK Implementation.....	54
Credentials/API Keys.....	54
Mobile Device Data Collected.....	54
Using the Android SDK.....	55
Updating the Gradle Build Properties.....	55
Configuring the Android SDK.....	56
Setting Up the Initial Request.....	57
Using the iOS SDK.....	58
Downloading and Importing the SDK.....	58
Configuring Your Build Environment.....	59
Configuring the iOS SDK.....	59
Setting Up the Initial Request.....	61
Running Payer Authentication with SDK.....	62
Requesting the Check Enrollment Service (SDK).....	62
Interpreting the Response.....	64
Authenticating Enrolled Cards.....	64
Requesting the Validation Service.....	67
Authentication Examples Using Primary Account Numbers.....	70
Setting Up Device Data Collection.....	70
Required Fields for Device Data Collection.....	71
Optional Fields for Device Data Collection.....	72
REST Example: Setting Up Data Collection.....	72
Checking Enrollment in Payer Authentication.....	73
Required Fields for Checking Enrollment in Payer Authentication.....	75
Optional Fields for Checking Enrollment in Payer Authentication.....	76
REST Example: Checking Enrollment.....	81
Checking Enrollment and Authorizing a Transaction.....	83
Required Fields for Checking Enrollment in Payer Authentication.....	85
REST Example: Checking Enrollment and Authorizing a Transaction.....	86
Validating a Challenge.....	89

Required Fields for Validating a Challenge.....	90
Optional Fields for Validating a Challenge.....	91
REST Example: Validating a Challenge.....	91
Validating and Authorizing a Transaction.....	92
Required Fields for Processing an Authorization Using Visa Secure.....	93
Optional Fields for Validating a Challenge.....	94
REST Example: Validating and Authorizing a Transaction.....	94
Non-Payment Authentication.....	97
Required Fields for Checking Enrollment in Payer Authentication.....	99
REST Example: Checking Enrollment for Non-Payment Authentication.....	101
Examples Using 3-D Secure Data Only.....	103
Visa Data Only.....	103
Required Fields for Visa Data Only.....	104
REST Example: Visa Data Only.....	105
REST Example: Bundled Authentication and Authorization with Visa Data Only.....	107
Mastercard Data Only.....	110
Required Fields for Mastercard Data Only.....	110
REST Example: Mastercard Data Only.....	111
REST Example: Bundled Authentication and Authorization with Mastercard Data Only.....	113
Mastercard Identity Check Insights (IDCI).....	116
Required Fields for Mastercard IDCI.....	117
REST Example: Mastercard IDCI.....	118
REST Example: Bundled Authentication and Authorization with Mastercard IDCI.....	120
Authentication Examples Using Digital Payment (Google Pay).....	124
Setting Up Device Data Collection Using Digital Payment (Google Pay).....	124
.....	125
.....	126
REST Example: Setting Up Device Data Collection When Using Digital Payment (Google Pay).....	126
Checking Enrollment in Payer Authentication Using Digital Payment (Google Pay).....	128
.....	129
.....	131
REST Example: Checking Enrollment in Payer Authentication Using Google Pay.....	136
Validating a Challenge Using Digital Payment (Google Pay).....	138
.....	139
.....	139
REST Example: Validating a Challenge When Using Google Pay.....	140
Authentication Examples Using TMS Tokens.....	142
Setting Up Device Data Collection with a TMS Token.....	142
Required Fields for Setting Up Data Collection When Using a TMS Token.....	143
REST Example: Setting Up Device Data Collection When Using a TMS Token....	143

Checking Enrollment When Using a TMS Token.....	144
Required Fields for Checking Enrollment in Payer Authentication While Using a TMS Token.....	146
REST Example: Checking Enrollment When Using a TMS Token.....	147
Validating a Challenge When Using a TMS Token.....	149
Required Fields for Validating a Challenge When Using a TMS Token.....	150
REST Example: Validating a Challenge When Using a TMS Token.....	151
Authentication Examples Using Flex Microform Tokens.....	153
Setting Up Device Data Collection When Using a Flex Microform Token.....	153
Required Fields for Setting Up Device Data Collection When Using a Flex Microform Token.....	154
REST Example: Setting Up Device Data Collection When Using a Flex Microform Token.....	154
Checking Enrollment When Using a Flex Microform Token.....	155
Required Fields for Checking Enrollment When Using a Flex Microform Token.....	156
REST Example: Checking Enrollment When Using a Flex Microform Token (Challenge).....	157
Validating a Challenge When Using a Flex Microform Token.....	159
Required Fields for Validating a Challenge When Using a Flex Microform Token.....	159
REST Example: Validating a Challenge When Using a Flex Microform Token.....	160
Authentication Examples Using Network Token/Tokenized Cards.....	162
Setting Up Device Data Collection with a Network Token/Tokenized Card.....	162
Required Fields for Setting Up Device Data Collection with a Network Token/Tokenized Card.....	163
REST Example: Setting Up Device Data Collection When Using a Network Token/Tokenized Card.....	163
Checking Enrollment with a Network Token/Tokenized Card.....	164
Required Fields for Checking Enrollment When Using a Network Token/ Tokenized Card.....	166
REST Example: Checking Enrollment When Using a Network Token/ Tokenized Card (Frictionless).....	167
Authentication Examples of Merchant-Initiated Transactions.....	169
Challenge Responses to 3RI Transactions.....	170
Network-Specific Values for Multi-Party Commerce/Online Travel Agency (OTA).....	170
1a: Initial Recurring Transaction.....	171
Required Fields for 3RI 1a: Initial Recurring Transaction.....	171
REST Example: Checking Enrollment for a 3RI Initial Recurring Transaction.....	172
REST Example: Validating the Challenge for a 3RI Initial Recurring Transaction.....	173
1b: Recurring Payments - Subsequent Transaction (Mastercard).....	175
Required Fields for 3RI 1b: Recurring Payments - Subsequent Transaction (Mastercard).....	175

REST Example: Validating the Challenge for 3RI Subsequent Installment Transactions.....	176
2a: Installment - Customer Initiated Transaction (Mastercard).....	178
Required Fields for 3RI 2a: Installment - Customer Initiated Transaction (Mastercard).....	178
REST Example: Checking Enrollment for a 3RI Customer Initiated Total Installments (Mastercard).....	179
REST Example: Validating the Challenge for a 3RI Customer Initiated Total Installments (Mastercard).....	181
3a: Split/Partial Shipment (Mastercard).....	182
Required Fields for 3RI 3a: Split/Partial Shipment (Mastercard).....	182
REST Example: Checking Enrollment for 3RI Split Shipment Transaction (Mastercard).....	183
3b: Split/Delayed Shipment (Mastercard).....	184
Required Fields for 3RI 3b: Split/Delayed Shipment (Visa).....	185
REST Example: Checking Enrollment for 3RI Split Shipment Transaction (Mastercard).....	185
4a: Multi-Party Commerce or OTA (Visa).....	187
Required Fields for 3RI 4a: Multi-Party Commerce or OTA (Visa).....	188
REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Visa).....	188
4b: Multi-Party Commerce or OTA (MasterCard).....	190
Required Fields for 3RI 4b: Multi-Party Commerce or OTA (MasterCard).....	190
REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Mastercard).....	191
REST Example: Validating the Challenge for 3RI Multi-Party Commerce Transaction (Mastercard).....	193
4c: Multi-Party Commerce or OTA (MasterCard).....	194
Required Fields for 3RI 4c: Multi-Party Commerce or OTA (MasterCard).....	195
REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Mastercard).....	195
Testing Payer Authentication.....	198
Testing Process.....	198
Enrollment Check Response Fields.....	198
Authentication Validation Response Fields.....	199
Test Cases for 3-D Secure 2.x.....	199
2.1: Frictionless Authentication Is Successful.....	200
2.2: Frictionless Authentication Is Unsuccessful.....	204
2.3: Stand-In Frictionless Authentication is Attempted.....	209
2.4: Frictionless Authentication Is Unavailable.....	213
2.5: Frictionless Authentication Is Rejected.....	217
2.6: Authentication Is Not Available.....	222
2.7: Check Enrollment Error.....	226
2.8: Time Out.....	230
2.9: Step-Up Authentication Is Successful.....	234
2.10: Step-Up Authentication Is Unsuccessful.....	240

2.11: Step-Up Authentication Is Unavailable.....	245
2.12: Error During Authentication.....	250
2.13: Authentication Is Bypassed.....	255
2.14: Require Method URL.....	259
Additional Test Cases.....	260
1a: First Recurring Transaction: Fixed Amount.....	260
2a: Card Authentication Failed.....	261
2b: Suspected Fraud.....	261
2c: Cardholder Not Enrolled in Service.....	262
2d: Transaction Timed Out at the ACS.....	262
2e: Non-Payment Transaction Not Supported.....	262
2f: 3RI Transaction Not Supported.....	263
3a: TRA Exemption—Low Value: Mastercard EMV 3-D Secure 2.1 and 2.2.....	263
3b: TRA—Low Value: Visa.....	264
3c: TRA—Low Value: Discover.....	265
3d: Acquirer TRA: Cartes Bancaires.....	265
4a: Trusted Beneficiary Prompt for Trustlist.....	266
4b: Use Trusted Beneficiary Exemption.....	267
5a: Visa Data Only.....	267
5b: Identity Check Insights (ScoreRequest = Y).....	268
Website Modification Reference.....	270
Website Modification Checklist.....	270
EMV 3-D Secure Service Logos.....	271
Informational Message Examples.....	272
Finding Payer Authentication Transaction Details in the Business Center.....	273
Searching for Transactions.....	273
Storing Payer Authentication Data.....	274
Searching for Payer Authentication Details.....	274
Enrolling a Card.....	274
Card Not Enrolled.....	275
Payer Authentication Reports.....	277
Payer Authentication Summary Report.....	277
Download the Report.....	277
Matching the Report to the Transaction Search Results.....	278
Interpreting the Report.....	278
Comparing Payer Authentication and Payment Reports.....	279
Payer Authentication Detail Report.....	280
Report Element.....	280
PayerAuthDetail Element.....	280
PAReq Element.....	281
PARes Element.....	283
AuthInfo Element.....	285
Report Examples.....	285
HTTP Status Codes.....	288
Glossary.....	289

Recent Revisions to This Document

26.03.01

New Test Card Numbers

Added RuPay card numbers for the 3-D Secure 2.x test cases. See [Test Cases for 3-D Secure 2.x](#) on page 199.

Updated the Flex Microform Endpoints

The REST Test and Production endpoints for checking enrollment and validating 3-D Secure transactions while using Flex Microform tokens were corrected. See [Checking Enrollment When Using a Flex Microform Token](#) on page 155 and [Validating a Challenge When Using a Flex Microform Token](#) on page 159.

Updated Step-Up Payload Description

Clarified that the Step-Up response is not URL-encoded or Base64-encoded by removing the statement. See [Receiving the Step-Up Results](#) on page 43.

26.01.01

New Jaywan Card Test Numbers

Added Jaywan card numbers for the 3-D Secure 2.x test cases. See [Test Cases for 3-D Secure 2.x](#) on page 199.

Added Endpoints

Added endpoints to the descriptions of the different stages of 3-D Secure authentication. For an example, see [Step 1: Setup Service](#) on page 26.

Required Fields Update for Setup Service

Updated the fields listed for the Setup step. For more information, see [Request Fields](#) on page 27.

New Mastercard Data Only Example

Updated Mastercard Data Only 3-D Secure 2.x test cases to include Identity Check Insights (IDCI). See [Mastercard Data Only](#) on page 110.

New PayPak Test Card Numbers

Added PayPak test card numbers for 3-D Secure authentication. See [Test Cases for 3-D Secure 2.x](#) on page 199.

25.10.01

Updated Required Fields for Visa Data Only

The list of required fields for Visa Data Only was updated removing the Message Category field since it is not a required field and corrected the spelling of the Challenge Code field. See [Required Fields for Visa Data Only](#) on page 104.

25.09.02

Updated XID Values

The Test Cases for 3-D Secure 2.x section were updated to better reflect which card schemes returned XID values during Enrollment and Validation. See [Test Cases for 3-D Secure 2.x](#).

Updated ECI String and ECI Raw Values for ITMX

The Test Cases for 3-D Secure 2.x section were updated to include ECI string and raw values for ITMX. See [Test Cases for 3-D Secure 2.x](#)

25.09.01

This revision contains only editorial changes and no technical updates.

25.07.01

Updated Content

Removed the section Upgrading Your Payer Authentication Implementation that was no longer needed.

eftpos Test Card Numbers

Added eftpos card numbers for the 3-D Secure 2.x test cases. These new card numbers are in addition to the existing co-

badged eftpos card numbers. See [Test Cases for 3-D Secure 2.x](#) on page 199.

25.05.01

Updated China UnionPay References

Consolidated references to China UnionPay and UnionPay International to "China UnionPay."

Payer Authentication Developer Guide

This section describes how to use this guide and where to find further information.

Audience and Purpose

This guide is written for merchant application developers who want to use the REST API to integrate payer authentication services into their system. It describes the tasks you must perform in order to complete this integration. Implementing payer authentication services requires software development skills.

Scope

This guide describes how to use the REST API to integrate payer authentication services with your order management system. It does not describe how to get started using the REST API nor does it explain how to use services other than payer authentication. For that information, see the Related Documentation section.

Conventions

These special statements are used in this document:



Important

An Important statement contains information essential to successfully completing a task or learning a concept.



Warning

A Warning contains information or instructions, which, if not followed, can result in a security risk, irreversible loss of data, or significant cost in time or revenue.

Related Documentation

Visit the [Documentation Hub](#) to find additional documentation.

Customer Support

For support information about any service, visit the Support Center:

<https://support.visaacceptance.com>.

VISA Platform Connect: Specifications and Conditions for Resellers/Partners

The following are specifications and conditions that apply to a Reseller/Partner enabling its merchants through Cybersource for Visa Platform Connect (“VPC”) processing. Failure to meet any of the specifications and conditions below is subject to the liability provisions and indemnification obligations under Reseller/Partner’s contract with Visa/Cybersource.

1. Before boarding merchants for payment processing on a VPC acquirer’s connection, Reseller/Partner and the VPC acquirer must have a contract or other legal agreement that permits Reseller/Partner to enable its merchants to process payments with the acquirer through the dedicated VPC connection and/or traditional connection with such VPC acquirer.
2. Reseller/Partner is responsible for boarding and enabling its merchants in accordance with the terms of the contract or other legal agreement with the relevant VPC acquirer.
3. Reseller/Partner acknowledges and agrees that all considerations and fees associated with chargebacks, interchange downgrades, settlement issues, funding delays, and other processing related activities are strictly between Reseller and the relevant VPC acquirer.
4. Reseller/Partner acknowledges and agrees that the relevant VPC acquirer is responsible for payment processing issues, including but not limited to, transaction declines by network/issuer, decline rates, and interchange qualification, as may be agreed to or outlined in the contract or other legal agreement between Reseller/Partner and such VPC acquirer.

DISCLAIMER: NEITHER VISA NOR CYBERSOURCE WILL BE RESPONSIBLE OR LIABLE FOR ANY ERRORS OR OMISSIONS BY THE Visa Platform Connect ACQUIRER IN PROCESSING TRANSACTIONS. NEITHER VISA NOR CYBERSOURCE WILL BE RESPONSIBLE OR LIABLE FOR RESELLER/PARTNER BOARDING MERCHANTS OR ENABLING MERCHANT PROCESSING IN VIOLATION OF THE TERMS AND CONDITIONS IMPOSED BY THE RELEVANT Visa Platform Connect ACQUIRER.

Introduction to Payer Authentication

Cybersource has a variety of products to manage and minimize the risk of fraud that merchants face in their daily transactions. While these risk management products can operate independently to address specific areas of risk, the best results are achieved when the entire suite of products works in concert to detect patterns of fraud in a business's online activity.

- **Payer Authentication:** Uses the 3-D Secure protocol in online transactions to verify that payment is coming from the actual cardholder. Most transactions can be authenticated without the customer being aware of the process, but higher risk transactions might require an exchange of one-time passwords (OTPs) during authentication. This authentication of the payer before the transaction is authorized benefits the merchant by shifting chargeback liability from the merchant to the card issuer. You can use Decision Manager with payer authentication services so that the risk level of an order determines when to invoke payer authentication. For example, low-risk orders can be set to skip payer authentication and proceed directly to authorization.
- **Decision Manager:** Uses AI to help large enterprises analyze the vast amount of data from their online transactions to detect known patterns of fraudulent behavior. Each potential transaction can be compared to past patterns and automatically assigned a risk score before authorizing a transaction. Behavior analysis of past transaction data enables you to recommend rules that identify risky transactions and to suggest how to handle them. Machine learning capabilities in Decision Manager enable you to create hypothetical environments to test strategies for dealing with risky scenarios so that you can either reject them or require payer authentication.
- **Fraud Management Essentials:** helps small-to-medium businesses monitor their online transactions using AI and preconfigured rules to spot and avoid fraudulent transactions. You can adjust the fraud detection settings to match your risk tolerance and manually review transactions flagged for risk review.
- **Account Takeover Protection:** monitors customer account activity to detect compromised accounts. You create account events and define rules to determine the types and levels of activity in a customer account that trigger a manual review for

potential fraud. The activity data that happens within a customer account can be easily integrated into Decision Manager and used to assess risky payment behavior.

This guide documents the payer authentication aspect of fraud management and how payer authentication can be used to satisfy the Strong Customer Authentication (SCA) requirement of the Payment Services Directive (PSD2) that applies to the European Economic Area (EEA) and the United Kingdom. SCA requires banks to perform additional verification when customers make payments to confirm their identity. Access to the documentation for other aspects of the risk management portfolio requires a Cybersource support license for that product.

Transactions where the card is not present have a high risk of fraud, so authenticating a payer before processing a transaction greatly reduces the merchant risk for chargebacks. Payer authentication is a way of verifying that a customer making an e-commerce purchase is the owner of the payment card being used. The protocol that is followed to authenticate customers during online transactions is called [EMV 3-D Secure](#).

This EMV 3-D Secure protocol is used by all major payment cards to implement payer authentication, but payment companies usually brand it under a different name:

- Visa: Visa Secure
- Mastercard: Mastercard Identity Check
- American Express: American Express SafeKey
- JCB: J/Secure
- Discover/Diners: ProtectBuy
- Elo: Compra Segura (Secure Shopping)
- Cartes Bancaires: FAST'R
- China UnionPay: 3-D Secure

Supported Card Networks

These card networks support using EMV 3-D Secure during transactions:

- Amex
- Cartes Bancaires
- China UnionPay
- Discover/Diners
- eftpos
- Elo
- JCB
- Mada
- Mastercard
- Visa

Why Payer Authentication Is Needed

As e-commerce developed, the number of fraudulent transactions also grew, taking advantage of the difficulty authenticating a cardholder during a transaction when the

card is not present. To create a standard for secure payment card processing, Europay, Mastercard, and Visa collaborated as EMV. Other card providers wanted input on creating new payment standards, so a consortium called EMVCo was formed to enable equal input from Visa, Mastercard, JCB, China UnionPay, Discover, and American Express. EMVCo developed 3-D Secure as the protocol to provide customer authentication during an online transaction. EMV 3-D Secure reduced chargebacks to merchants, and when the buyer was authenticated, the issuing bank assumed any liability when a chargeback occurred.

The same need to reduce fraud prompted Europe to develop a standard called Strong Customer Authentication (SCA) to regulate authentication during electronic payments. The use of SCA is mandated by the European Banking Authority in the Payment Services Directive (PSD2) that took effect in 2018 to promote and regulate the technical aspects of financial transactions between merchants and their customers in Europe. SCA requires two-factor authentication. A customer must be able to authenticate by providing two of these three factors:

- Something the customer knows (such as a password, PIN, or challenge questions)
- Something the customer has (such as a phone or hardware token)
- Something the customer is (biometric data, such as fingerprint or face recognition)

Although SCA is required for almost all online transactions, some exceptions are allowed. If a payment is considered low risk, you can request an exemption from SCA to bypass authentication of the customer. The issuing bank must approve the exemption before the transaction can be exempted from SCA. Although an exemption from SCA results in a frictionless transaction, liability is not shifted to the issuing bank, and the merchant assumes responsibility for any chargeback that occurs. An exemption from SCA might apply to these types of transactions:

- Payer authentication is unavailable because of a system outage.
- Payment cards used specifically for business-to-business transactions are exempt.
- Payer authentication is performed outside of the authorization workflow.
- Follow-on installment payments of a fixed amount are exempt after the first transaction.
- Follow-on recurring payments of a fixed amount are exempt after the first transaction.
- Fraud levels associated with this type of transaction are considered a low risk.
- Low transaction value does not warrant SCA.
- Merchant-initiated transactions (MITs) are follow-on transactions that are also exempt.
- Stored credentials were authenticated before they were stored, so stored credential transactions are exempt.
- Trusted merchants registered as trusted beneficiaries, are exempt.

For additional information about transactions that are exempt from SCA, see the [Payments Developer Guide](#).

EMV 3-D Secure meets the SCA mandate for authenticating the customer during e-commerce transactions.

EMV 3-D Secure 2.0

To improve the customer experience, a new version of 3-D Secure was developed. EMV 3-D Secure 2.x uses a less intrusive process to authenticate a buyer, which provides a better customer experience.

Enhancements to 3-D Secure 2.x include:

- More robust device data collection to improve risk analysis by the issuing bank.
- Small screens that pop up on your webpage to avoid full-page redirects.
- SDK version for mobile devices like phones and tablets.
- Streamlined shopping experience.




Important

On September 25, 2024, support for EMV 3-D Secure 2.1.0 ended. Merchants and their acquirers must support EMV 3-D Secure 2.2.0 or a later version before that date so that transactions can continue without any interruption in service. Contact support for additional information on updating your system to use EMV 3-D Secure 2.2.0.

Payer Authentication Customer Workflow

During authentication for each transaction, data is collected about the customer's device, and the shipping and billing information is compared with transaction history. The workflow in payer authentication can go one of two possible ways: frictionless and challenge (also known as step-up).

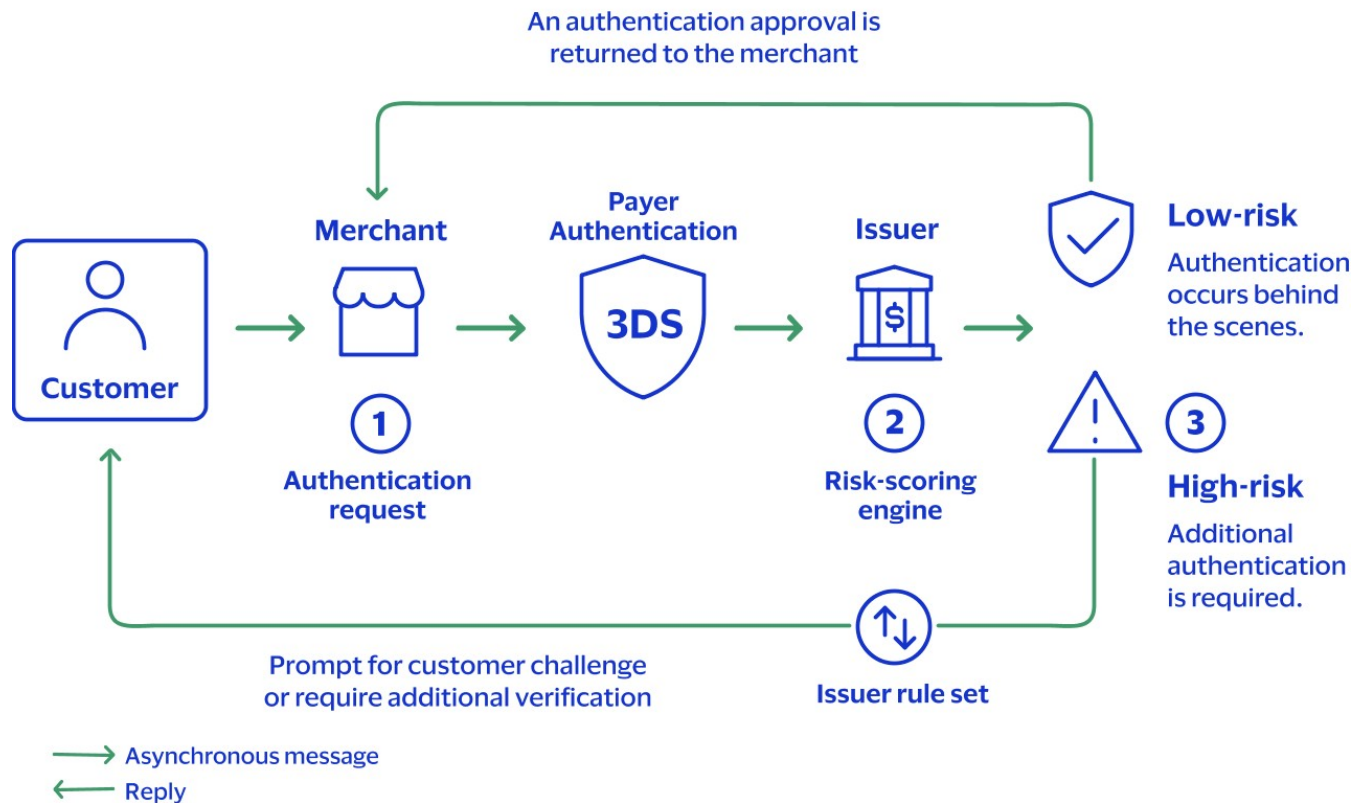

Payer Authentication Workflow

Frictionless Workflow

With frictionless flow, the authentication process is not visible to the customer. The data collected during the transaction matches the data collected from past transactions with the customer. The risk for fraud is calculated to be low enough that further authentication is unnecessary. The transaction can continue to authorization.

1. The customer enters card information at checkout. Information about the device being used by the customer and shopping behavior is collected and relayed from the merchant to the issuing bank. A delay of about 10 seconds is built into the process to ensure that the device data can be transmitted and assessed before the **Buy** option is enabled.
2. The customer selects **Buy**.
3. The issuing bank verifies the information it receives against previous transactions. If the device data correlates with the information, the transaction is approved without the buyer having to provide any additional information.

Challenge Workflow

A challenge flow occurs when the data collected during the transaction does not match the information on file from previous transactions with the customer. This process occurs

for multiple reasons and does not necessarily mean that the customer has fraudulent intent. For example, it could occur because the customer got a new device that has not been registered yet or because they bought something while traveling. The issuer of the card decides whether further authentication of the customer is required and if necessary, requests that the customer prove their identity by returning a passcode to the issuer. This sequence describes the interaction from the customer viewpoint.

1. The customer enters card information at checkout. Information about the customer's device is collected and sent from the merchant to the issuing bank.
2. The customer selects **Buy**.
3. The issuing bank assesses risk by comparing the information it receives to information on file from previous transactions with the customer. If the device data does not match the information collected previously, the issuer requests further authentication.
4. A small window opens on the checkout page where a message from the bank asks if the customer wants to use email or text message to receive a one-time password (OTP) from the bank.
5. The customer chooses how the password is sent.
6. The issuer sends an OTP to the account on file for the customer.
7. A window opens on the checkout page on the customer device prompting the customer to enter the OTP sent by the issuer.
8. The customer enters the password that they received and sends it back to the issuer.
9. If the password entered by the customer matches the password sent by the issuer, the customer is authenticated, and the transaction can proceed to authorization. If the password does not match the password that the bank sent, the customer receives a message that the transaction is declined and that they should attempt another form of payment.

Payer Authentication Merchant Workflow

Transaction circumstances might result in differences to the more detailed payer authentication process described below.

1. Before the **Buy** button is selected at checkout, the Setup service is called. The full card number identifies how to contact the issuing bank. The issuing bank sends an access token and a URL (called the DCC URL) to use for the data collected about the device where the transaction is occurring.
2. The merchant collects data about the device and includes billing and shipping information. The merchant posts this data to a hidden 10 pixel x 10 pixel iframe to send to the DCC URL provided by the card issuer for comparison with past transactions. After the data points are collected and sent, the issuing bank confirms that data collection ended and the **Buy** button is enabled. An 8-10 second delay ensures enough time for data collection.
3. Clicking **Buy** triggers the Check Enrollment service sending the order data (and session ID) to the issuer. If the bank is not part of an EMV 3-D Secure program, the payer authentication process stops. If the issuing bank is part of an EMV 3-D Secure program,

the device data is compared to information on file collected at the bank during previous transactions with the cardholder.

- The issuer's risk analysis software determines whether enough data points collected by the merchant match the data in the bank's files. If the data matches well, no further interaction is needed. This is called frictionless flow because no challenge to the buyer is necessary. The response returned to the merchant includes a payload with values like the ECI, CAVV, DS Transaction Id, and the PARES Status. These values must be passed on during the request for authorization. It is important to note that while frictionless flow can occur because the payer is authenticated, it can also occur for other reasons. For example, the issuing bank does not participate in payer authentication. Therefore, response values must be verified to determine why no step-up is needed.
 - If a significant discrepancy occurs between the transaction data and the data on file with the bank, the bank requests that the payer authenticate. This is a friction workflow and is called a step up or challenge. The response from the bank contains the same values returned for a frictionless workflow but also includes additional values like the Access Control Server (ACS) URL, the PAREq payload, a Pares Status = C, a Step Up URL, a new JWT, and a Transaction Id.
4. The JWT and the step up URL received in the check enrollment response are returned to the customer. Using the step up URL with the JWT as a POST parameter, a challenge screen opens in a viewable iframe on the buyer's device so that the cardholder can view and respond to the bank challenge. The challenge consists of the bank sending a pass code that the customer returns to the bank. The challenge asks how the customer wants to receive a pass code, by text or email. After the customer chooses, they receive a pass code that they must enter into the challenge screen.
 5. After the cardholder enters and sends the passcode, the response is sent to the merchant's return URL contained in the JWT. This response causes the merchant to make a validation call to the bank to obtain the final authentication outcome. The response to this validation request contains the final authentication results including these values: ECI, CAVV (if successful), DSTransactionId, ThreeDSVersion, and PARES Status (Y or A = successful or N, U, R = failed, unavailable, or rejected).
 6. The next action depends on the outcome:
 - Successful: proceed to authorization, and append the EMV 3-D Secure data points to the authorization message.
 - Failed, unavailable, or rejected: display a message to prompt the customer to try payment with a different card.

Acquirer Information

To properly configure payer authentication, Cybersource uses three items of information that your acquiring bank uses to manage payments for your account. If you do not know this information, contact your acquiring bank Cybersource.

- **Acquiring Merchant ID (MID):** This unique identifier for your business account is assigned by your acquiring bank or payment processor. A MID consists of 8-24 alpha-numeric characters. The MID can be different than the business deposit identifier used in settlements.
- **Acquiring Bank Identification Number (BIN):** This unique number is assigned to the acquiring bank by a payment card network to identify that bank when settling transactions. Each payment card assigns its own BIN for an acquiring bank, and the BINs have their own unique characteristics. For example, all Visa BINs start with a 4, Mastercard BINs start with a 2 or 5, and Discover BINs start with a 3 or 6.
- **Merchant Category Code (MCC):** This four-digit numeric value is assigned by the acquirer to the merchant to classify the merchandise or services provided by the business. The MCC indicates the kind of business transaction that the merchant processes.

Enable Merchant Account for EMV 3-D Secure

Partners and merchants use the Business Center to go online and view transaction activity and to generate reports about their transactions. For each partner, an account is created, and a portfolio merchant ID (MID) is assigned. For each of the merchants within the partner's portfolio, an account is also created and assigned a merchant ID (MID). Access to the various functions in the Business Center is managed by the partner through the MID.

When the MID account is created, the various services that the merchant needs must be enabled. For more information about configuring your account in the Business Center for payer authentication and other services, see the [Merchant User Boarding Guide](#). Payer authentication is a service that might need to be turned on by support. To set up an account for payer authentication, you need this information:

- MID.
- Merchant website URL.
- Two-character ISO code for your country.
- Merchant category code.
- EMV 3-D Secure requestor ID (optional).
- EMV 3-D Secure requestor name (optional).
- Name of merchant's bank.
- Name, address, and email address of bank contact.

For each payment card that you accept, your acquirer must provide this information:

- Eight-digit BIN number.
- Merchant ID assigned by your acquirer.
- List of all of the currencies that you can process.

Payer Authentication Configuration Testing

After the payer authentication functionality is enabled for your account and you have installed and configured the software, you must run tests to ensure that payer authentication is working properly. You must ensure that the proper data is being collected and sent to the issuer and that the proper status for a particular circumstance is returned. To ensure that the proper statuses are returned under all possible circumstances, extensive testing is required before you go live with payer authentication. A sandbox testing environment is provided to resolve any bugs in your system. In this testing environment, you can simulate various transaction scenarios with the types of payment cards that you accept. Test card numbers for the various types of payment cards are provided so that you can run transaction simulations. You can verify that the values generated during the simulations are the correct values that should occur during that transaction scenario.

When your test results are correct, contact customer support and request to go live. When you go live, you will use the production host name to process transactions instead of the test host name that you used when processing transactions in the test environment.

The host name for the testing environment:

POST <https://apitest.cybersource.com>

The host name for the production environment:

POST <https://api.cybersource.com>

Details about testing your payer authentication configuration are available in the [Testing Payer Authentication Services](#) section.

Request Endpoints

When posting a request for payer authentication, you must add an endpoint to each hostname, whether you are using the test environment or the production environment. These endpoints are used with payer authentication.

[/risk/v1/authentications](#): use when verifying that a card is enrolled in a card authentication program or requesting authentication from the issuer.

[/risk/v1/authentication-results](#): use when retrieving and validating authentication results from the issuer so that the merchant can process the payment.

[/pts/v2/payments](#): use when bundling multiple payments together.

For example, a test request might look like this:

POST <https://apitest.cybersource.com/risk/v1/authentications>

Payer Authentication Integrations

Payer authentication was designed to authenticate buyers during online transactions. During the early growth of internet transactions, e-commerce was conducted only on computers. Mobile phones had limited capabilities. When mobile phones (and tablets)

could access the internet, online transactions quickly grew, and now they comprise almost half of all e-commerce transactions. A key part of updating the EMV 3-D Secure protocol from 1.0 to 2.0 was to ensure that payer authentication became available for e-commerce done on mobile devices.

Two types of payer authentication integration are available for merchants:

- API for browser authentication from a computer.
- SDK for authentication from mobile devices (available for Android and iOS). Contact support to obtain the SDK.

**Important**

Payer Authentication supports message-level encryption. For more information, see [Message Level Encryption](#).

Merchants should integrate payer authentication for online shopping on both types of devices. The next sections in this guide describe how to integrate payer authentication into those shopping experiences.

Implementing Direct API for Payer Authentication

The Direct API integrates EMV 3-D Secure 2.x into your business's website. This integration uses an iframe to complete the device profiling and EMV 3-D Secure authentication requirements without including third-party JavaScript directly on your site. This implementation requires the use of JavaScript to leverage the authentication. The JavaScript is hosted and contained inside the iframe and does not directly access your web page.



Important

Payer Authentication uses Cardinal Centinel as the technology platform to manage all EMV 3-D Secure authentication processes. Any references to Cardinal in this document refer to the underlying services that are provided by Cardinal technology.

A website that provides a demo tool to help users understand how payer authentication works is available:

<https://developer.cybersource.com/demo/index.html>.

You can complete the steps required to implement payer authentication on their website and examine the code underlying the process. Use test card numbers to walk through the process and enter **123** as the security code.

Prerequisites

Notify your account representative that you want to implement payer authentication (3-D Secure) using the Direct API integration. Provide the merchant ID that you will use for testing. For more information, see [Required Merchant Information](#).

Before you can implement payer authentication services, your business team must contact your acquirer and Cybersource to establish the service. Your software development team should become familiar with the API fields and technical details of this service.

After Implementation and Before Go Live

Use the test cases to test your preliminary code and make appropriate changes. See [Testing Payer Authentication](#) on page 198. Testing ensures that your account is configured for production and that your transactions are processed quickly and correctly.


Step 1: Setup Service

Request the Setup service before selecting the button to submit payment. Request the Setup service separately without including other services. The Setup service response will include a JSON Web Token (JWT) that contains credentials to create a secure channel with you. The Setup response also includes a reference ID to use during the authentication and a URL to use when transferring the device data that is collected in the next step.

**Important**

The Setup service is used only in the Direct API integration. The SDK integration does not use this step.

Run the Setup service as soon as the customer enters their card number to avoid any delay in the customer experience. The next step in the process, device data collection, cannot start until the Setup response is received because the response has the URL where the device data will be sent.

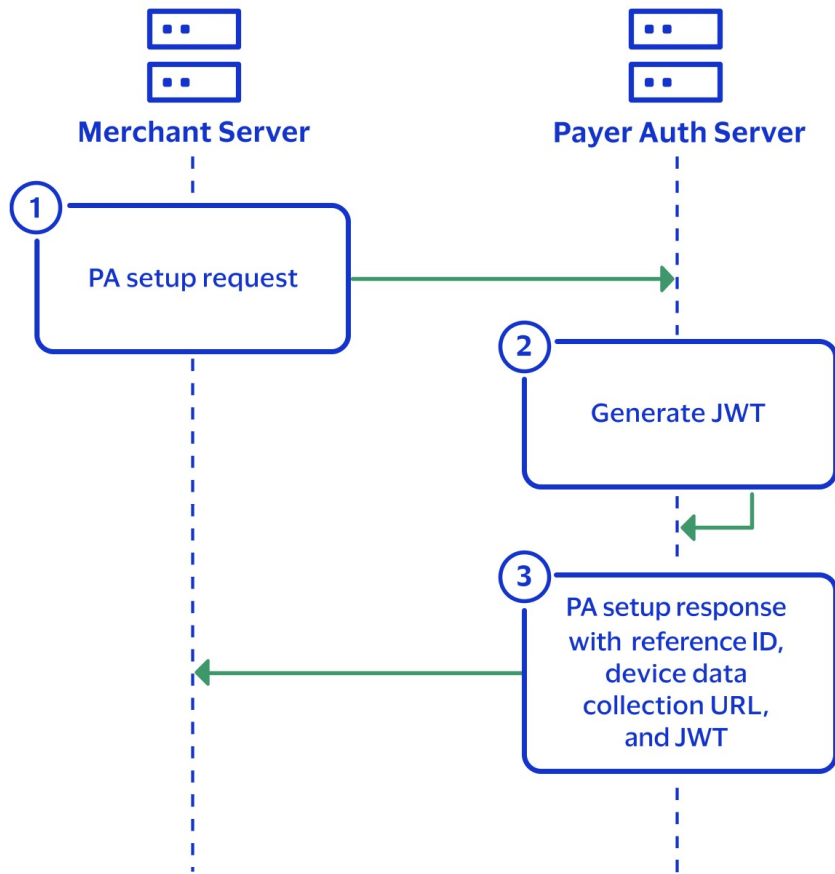

Process Flow for Setup for Payer Authentication

Best Practices

This practice should be followed so that this step achieves optimal performance and to minimize potential operating issues.

After the customer credit card is entered, immediately begin device data collection.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Request Fields

When requesting the Setup service, you must send the customer's payment information. This can be either the actual encrypted card information or a token associated with the payment data.

These fields are required:

- **paymentInformation.card.expirationMonth**
- **paymentInformation.card.expirationYear**

- **paymentInformation.card.number**
- **paymentInformation.card.type**

Besides the required fields, the request might also include any of these fields:

- **paymentInformation.tokenizedCard.number**
- **paymentInformation.customer.customerId**
- **tokenInformation.transientToken**

The **paymentInformation.card.type** field is required when the card type is JCB, Cartes Bancaires, or China UnionPay.

Important Response Fields

The response from the issuing bank might include these API fields.

- **consumerAuthenticationInformation.accessToken** is used in [Step 2: Device Data Collection](#) on page 29.
- **consumerAuthenticationInformation.deviceDataCollectionUrl** is used in [Step 2: Device Data Collection](#) on page 29.
- **consumerAuthenticationInformation.referenceId** is used in [Step 3: Payer Authentication Check Enrollment Service](#) on page 34.


For further details on examples, see [REST Example: Setting Up Data Collection](#) on page 72

Step 2: Device Data Collection

Device data collection starts on the merchant end after you receive the server-side Setup service response as described in [Step 1: Setup Service](#) on page 26 and pass the access token and the device data collection URL to the front end. When device data gets to the data collection URL, a Method URL stipulated in the 3-D Secure protocol captures the entire card number to identify the issuing bank.

A hidden 10 x 10 pixel iframe is rendered in the browser, and using the access token, you send the customer device data to the device data collection URL. The device data collection can take up to 10 seconds. If you proceed with the check enrollment service as described in [Step 3: Payer Authentication Check Enrollment Service](#) on page 34 before a response is received, the collection process is short-circuited and an error occurs. Despite the error, as long as you include the data from the eleven browser fields as explained in [Step 3: Payer Authentication Check Enrollment Service](#), you can still proceed with the EMV authentication.

It is recommended that the device data collection start immediately after you receive the customer card number to ensure that the data collection runs in the background while the customer continues with the checkout process, ensuring a minimum of waiting. When a customer changes to a different card number, begin the Setup and device data collection process again as soon as the new card number is entered.

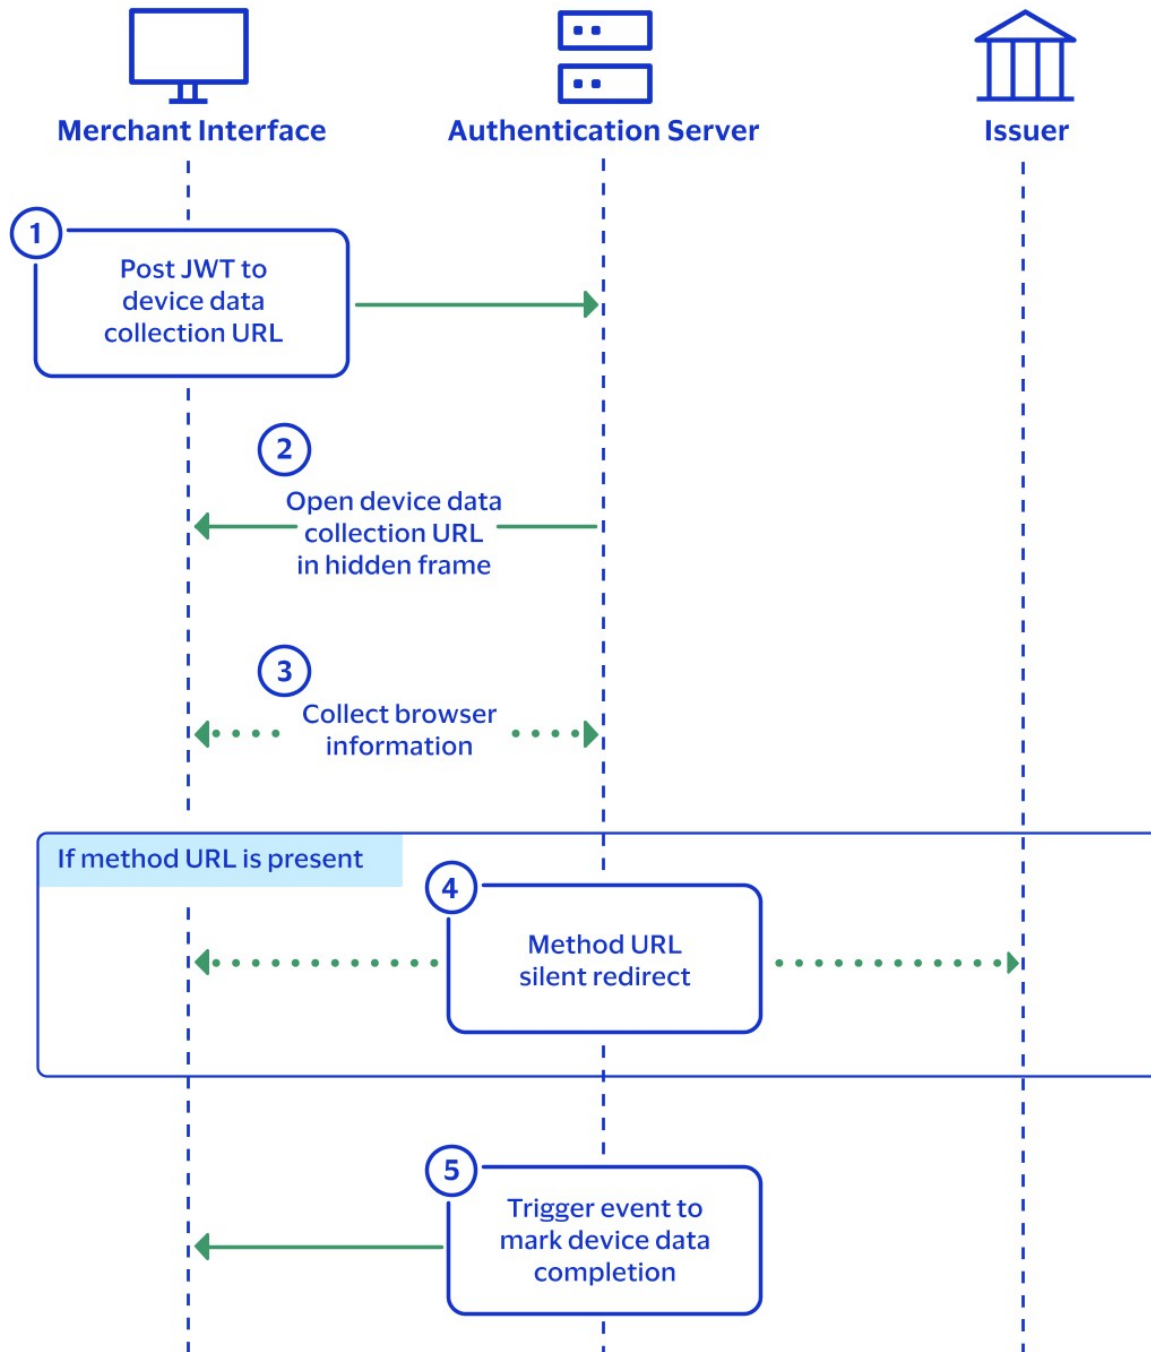

Process Flow for Device Data Collection

Best Practices

These practices should be followed for this step in order to achieve optimal performance and to minimize potential operating issues.

- After the customer credit card number is entered, immediately begin the device data collection.

- Device data collection must complete before the enrollment check begins.
- While not required, it is highly recommended to pass the values from the 11 browser-based fields in the request. The information from these fields serves as a backup, in case the device data collection does not complete correctly.
- As much billing data as possible (unless restricted by regional mandates) should be supplied to the issuing bank to ensure that the issuer's risk assessment software has the most comprehensive data.
- The billing data such as state and country must be formatted according to ISO 3166-2 format specifications to ensure that the network can properly validate the data.

Which Device Data is Collected

One of the key components to authenticating a cardholder during an online transaction is to compare information about the device that the customer is currently using to the information in the bank's database about devices the customer used in past transactions. This information is maintained in the access control server (ACS) at the issuing bank. This device information focuses on the web browser and includes these types of data:

- IP address
- Browser language
- Browser type
- Browser version
- Computer operating system
- System time zone
- Screen dimensions
- Color depth

A successful device data collection process that includes the 11 browser fields listed in the check enrollment step increases the chances of a frictionless authentication. See [Step 3: Payer Authentication Check Enrollment Service](#) for the list of 11 browser fields. Business rules evaluate whether a transaction is risky enough to require the buyer to authenticate their identity. These business rules are configured in the issuer's risk analysis software that evaluates each transaction.

Building the Iframe

The iframe has these parameters:

- Form POST Action: The POST goes to the URL that is opened within an iframe. This URL is the value provided by the **consumerAuthenticationInformation.deviceDataCollectionUrl** response field discussed in [Step 1: Setup Service](#) on page 26.

- JWT POST Parameter: Use the value from the **consumerAuthenticationInformation.accessToken** response field discussed in [Step 1: Setup Service](#) on page 26.

Initiating the Device Data Collection Iframe

Initiate a form POST in a hidden 10 x 10 pixel iframe and send it to the device data collection URL (**consumerAuthenticationInformation.deviceDataCollectionUrl**).

Place the HTML anywhere inside the `<body>` element of the checkout page. Dynamically replace the value of the form action attribute and JWT POST parameter with the response values discussed in [Step 1: Setup Service](#) on page 26. See this example.

Initiate the Device Data Collection Iframe

```
<iframe id="cardinal_collection_iframe" name="collectionIframe" height="10" width="10" style="display: none;"></iframe>
<form id="cardinal_collection_form" method="POST" target="collectionIframe" action=https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect>
  <input id="cardinal_collection_form_input" type="hidden" name="JWT"
  value="eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJJSZlcmVuY2VJZCI6ImE0NjVlYzU1LTMwNTU1OTYwZC05MGE0LWZjMDNlMGE2MwQxOSIsIlJldHVyb1VybCI6Imh0dHA6XC9cL2xvY2FsaG9zdDo4MDgyXC9yZXF1ZXN0LWNhdGNoZXJcL2NhdGNoLXJlcXVlc3QucGhwIiwianRpIjoianRpXzVmMDVhM2VhY2U0MjYzLjc5MjQwNzZiIiwiaWF0IjoxNTk0MjE3NDUzLCJpc3MiOiI1YjIzZjhjMGJmOWUyZjBkMzQ3ZGQ1YmEiLCJpcmdVbm10SWQiOiI1NWVmM2YwY2Y3MjNhYTQzMWM5OWI0MzgifQ.Yw9cB9Hdrg71GPL40oAC0g3CVKYE1NGe0uvN9JAaw2E">
</form>
```

Submitting the Device Data Collection Iframe

Add JavaScript to invoke the iframe form POST. Place the JavaScript after the closing `</body>` element as shown in this example. The JavaScript invokes the iframe form POST automatically when the window loads. You must submit it before requesting the Check Enrollment service.

JavaScript to Invoke the Iframe Form POST

```
<script>
window.onload = function() {
var cardinalCollectionForm = document.querySelector('#cardinal_collection_form');
if(cardinalCollectionForm) // form exists
cardinalCollectionForm.submit();
}
</script>
```

Receiving the Device Data Collection URL Response

Receiving the response indicates that the device data collection URL completed its processing. The response is an event callback that contains a message with the status of the device data collection process.

Use the `event.origin` URL that corresponds to your environment:

- Test: `https://centinelapistag.cardinalcommerce.com`
- Production: `https://centinelapi.cardinalcommerce.com`

Study the example below to understand how to subscribe to the event. Add JavaScript to receive the response from the device data collection iframe. Place the JavaScript after the closing `</body>` element.

Listen for Device Data Collection Response

```
window.addEventListener("message", function(event) {  
  if (event.origin === https://centinelapistag.cardinalcommerce.com) {  
    console.log(event.data);  
  }  
}, false);
```

This example shows a response payload from the event. None of the returned data needs to be stored for future use.

Event Listener Callback Payload

```
{  
  "MessageType": "profile.completed",  
  "Session Id": "f54ea591-51ac-48de-b908-eecf4ff6beff",  
  "Status": true  
}
```

Step 3: Payer Authentication Check Enrollment Service


Request the Check Enrollment service only after you receive the device data collection response. Checking enrollment before receiving the device data collection response stops the data collection process. Data collection can take up to 10 seconds. The merchant should set a timer that expires after 10 seconds of waiting for a response to the data collection so that the check enrollment service starts even when the device data collection response was not received.

You must include these 11 browser field values in the check enrollment request. These fields provide the information that ensures a transaction qualifies as an EMV 3-D Secure transaction. The information in these fields provides a backup for the occasions when the device data collection fails to complete.

- **consumerAuthenticationInformation.deviceChannel**
- **deviceInformation.httpAcceptContent**
- **deviceInformation.httpBrowserColorDepth**
- **deviceInformation.httpBrowserJavaEnabled**
- **deviceInformation.httpBrowserJavaScriptEnabled**
- **deviceInformation.httpBrowserLanguage**
- **deviceInformation.httpBrowserScreenHeight**
- **deviceInformation.httpBrowserScreenWidth**
- **deviceInformation.httpBrowserTimeDifference**
- **deviceInformation.ipAddress**
- **deviceInformation.userAgentBrowserValue**

With the device data collected, the issuer runs a risk assessment that results in one of these outcomes:

- Frictionless success (low risk)
- Challenge required (moderate risk)
- Frictionless failure or decline (high risk)

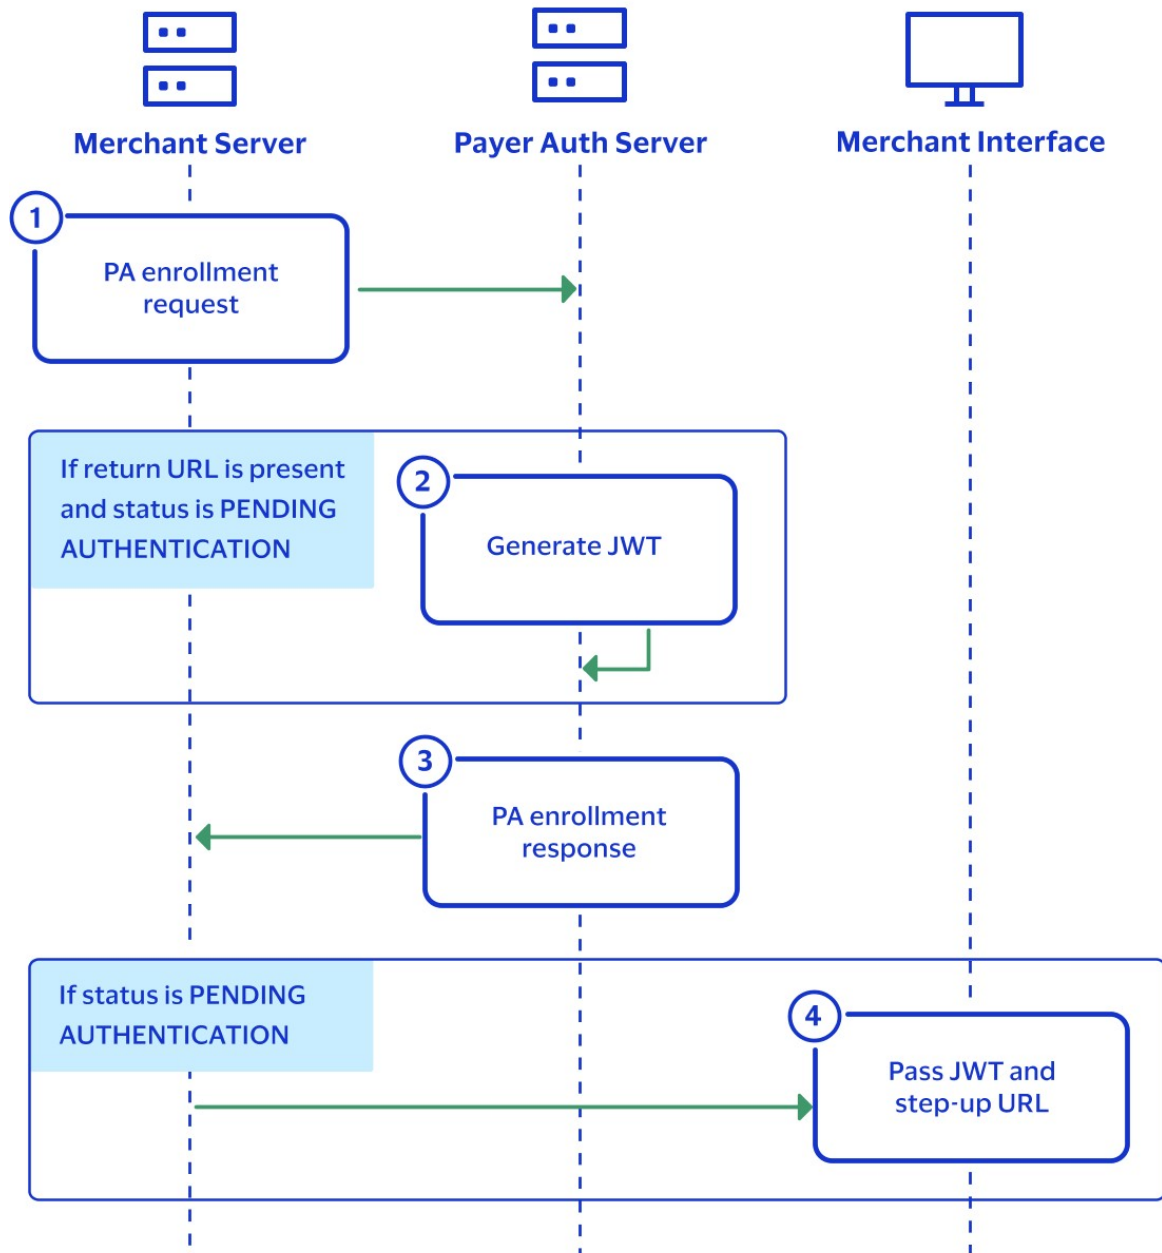

Process Flow for Checking Enrollment in Payer Authentication

Best Practices

Follow these practices for this step to achieve optimal performance:

- Do not start checking enrollment until the device data collection is complete.
- Notify cardholders to contact their bank for instructions if a problem occurs. Information about additional action required of the cardholder should be displayed on the checkout page. Providing instructions to the customer avoids multiple attempts to resubmit the same card.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Request Fields

The **consumerAuthenticationInformation.referenceId** field is mapped from the **consumerAuthenticationInformation.referenceId** field as discussed in [Step 1: Setup Service](#) on page 26.

The **consumerAuthenticationInformation.returnUrl** value is set to the URL to which the issuing bank redirects the customer as discussed in [Step 4: Step-Up Iframe](#) on page 40. To request the Check Enrollment service, you must send the encrypted payment data or a token or some other equivalent of card data used by your integration. The request fields can include any of these:

- **paymentInformation.card.number**
- **paymentInformation.fluidData.descriptor**
- **paymentInformation.fluidData.value**
- **paymentInformation.customer.customerID**
- **tokenInformation.transientToken**

These fields are required (merchant ID is in the header):

- **buyerInformation.mobilePhone** (if no other phone number is available)
- **buyerInformation.workPhone** (if no other phone number is available)
- **consumerAuthenticationInformation.referenceId**
- **consumerAuthenticationInformation.returnUrl**
- **deviceInformation.ipAddress**
- **orderInformation.amountDetails.currency**
- **orderInformation.amountDetails.totalAmount**
- **orderInformation.billTo.address1**
- **orderInformation.billTo.administrativeArea**
- **orderInformation.billTo.country**
- **orderInformation.billTo.email**
- **orderInformation.billTo.firstName**
- **orderInformation.billTo.lastName**
- **orderInformation.billTo.phoneNumber** (if no other phone number is available)
- **orderInformation.billTo.postalCode**
- **paymentInformation.card.expirationMonth**
- **paymentInformation.card.expirationYear**
- **paymentInformation.card.cardType**
- **paymentInformation.card.number**

You can send additional request data to reduce your issuer step-up authentication rates. Send all available fields. As a backup, if device data collection fails, include the 11 device information fields listed among the optional fields for the Check Enrollment service in your request. If a failure does occur, adding these device information fields ensures a transaction is not downgraded. If you do not have data for a field, do not send dummy data.

The size of the step-up iframe discussed in [Step 4: Step-Up Iframe](#) on page 40 can vary depending on the EMV 3-D Secure version of the transaction. You can request the size of the challenge window in the **consumerAuthenticationInformation.acsWindowSize** request field.

Requesting a specific window size does not guarantee this size. Parsing the PAREq as described in [Step 4: Step-Up Iframe](#) on page 40 determines the actual size.

For further details on individual API fields, refer to the [API Field Reference Guide](#). The field values should use the ISO 3166-2 format.

Interpreting the Check Enrollment Response

It is important to check the status values in the response. These possible statuses are the same for all card types.

PENDING_AUTHENTICATION

- VERes enrolled = **Y**
- PAREs status = **C**

The account number is enrolled in payer authentication. The cardholder is challenged to authenticate. Authenticate the cardholder before authorizing the transaction.

AUTHENTICATION_SUCCESSFUL

Frictionless authentication was successful/Stepup authentication is not required.

- VERes enrolled = **Y**
- PAREs status = **Y**

The account is enrolled in payer authentication, and the cardholder was successfully authenticated. If enrollment and authorization are made in separate calls, the payer authentication data must be included in the authorization request to receive liability shift protection.

Attempt Stand-in Frictionless Authentication

- VERes enrolled = **Y**
- PAREs status = **A**

This status indicates that the account is enrolled in payer authentication, but the issuer does not support the program. This is called stand-in authentication. If check enrollment

and authorization are made in separate calls, the payer authentication data must be included in the authorization request to receive liability shift protection.

Card Not Enrolled

- VERes enrolled = **B** or **U**

This status indicates that the account is not eligible for a payer authentication program, authentication was bypassed, or an error or timeout occurred. If enrollment and authorization are made in separate calls, you can request authorization, but there is no liability shift protection.

Unavailable Frictionless Authentication

- VERes enrolled = **Y**
- PAREs status = **U**

This status indicates that the account is enrolled in payer authentication, but authentication is currently unavailable. The merchant can attempt to retry authentication or proceed with authorization. If enrollment and authorization are made in separate calls, you can continue and request authorization, but there is no liability shift protection. Without authentication of the customer, the merchant remains liable for any chargeback.

AUTHENTICATION_FAILED

Failed Frictionless Authentication

- VERes enrolled = **Y**
- PAREs status = **N**

This status indicates that the account is enrolled in payer authentication but frictionless authentication failed. Merchants cannot submit this transaction for authorization. Instead, ask for another form of payment.

Rejected Frictionless Authentication

- VERes enrolled = **Y**
- PAREs status = **R**

This status indicates that the account is enrolled in payer authentication but frictionless authentication was rejected by the issuing bank without requiring a challenge. Merchants cannot submit this transaction for authorization. Instead, ask for another form of payment.

When an AUTHENTICATION_FAILED status occurs, the merchant should display a message from the card issuer to the cardholder using the **consumerAuthenticationInformation.cardholderMessage** field. The text of the message is provided by the ACS/issuer during a frictionless or decoupled transaction to convey information to the cardholder. An message example might be, "Additional authentication

is needed for this transaction, contact (issuer name) at xxx-xxx-xxxx.” An example of the entry that would appear in the log for such an occurrence is: "cardholderInfo":"You cannot complete this purchase right now. For help, call CommBank at (111) 555-2222"

Important Response Fields


When you receive a **PENDING_AUTHENTICATION** response, you also receive these fields:

- **consumerAuthenticationInformation.stepUpUrl** discussed in [Step 4: Step-Up Iframe](#) on page 40.
- **consumerAuthenticationInformation.accessToken** discussed in [Step 4: Step-Up Iframe](#) on page 40.

These fields contain values that are used in the Step-Up service, which runs when a customer is challenged to authenticate.

Step 4: Step-Up Iframe

Initiate step-up authentication on the front end after you receive the response as discussed in [Step 3: Payer Authentication Check Enrollment Service](#) on page 34. Note that frictionless authentication does not require this step-up iframe step. This step is only for step-up authentication when the issuing bank wants to challenge the cardholder. When a challenge is needed to prove a customer's identity, a JSON Web Token is returned to you that contains a step-up URL. You open an iframe where the access token to the step-up URL (also known as the endpoint) is posted. The iframe must be sized appropriately to enable the cardholder to complete the challenge. The iframe manages customer interaction with the card-issuing bank's access control server. The bank asks the customer to provide identifying information. Once the customer completes the challenge, the process moves to validating the information that the customer sent.

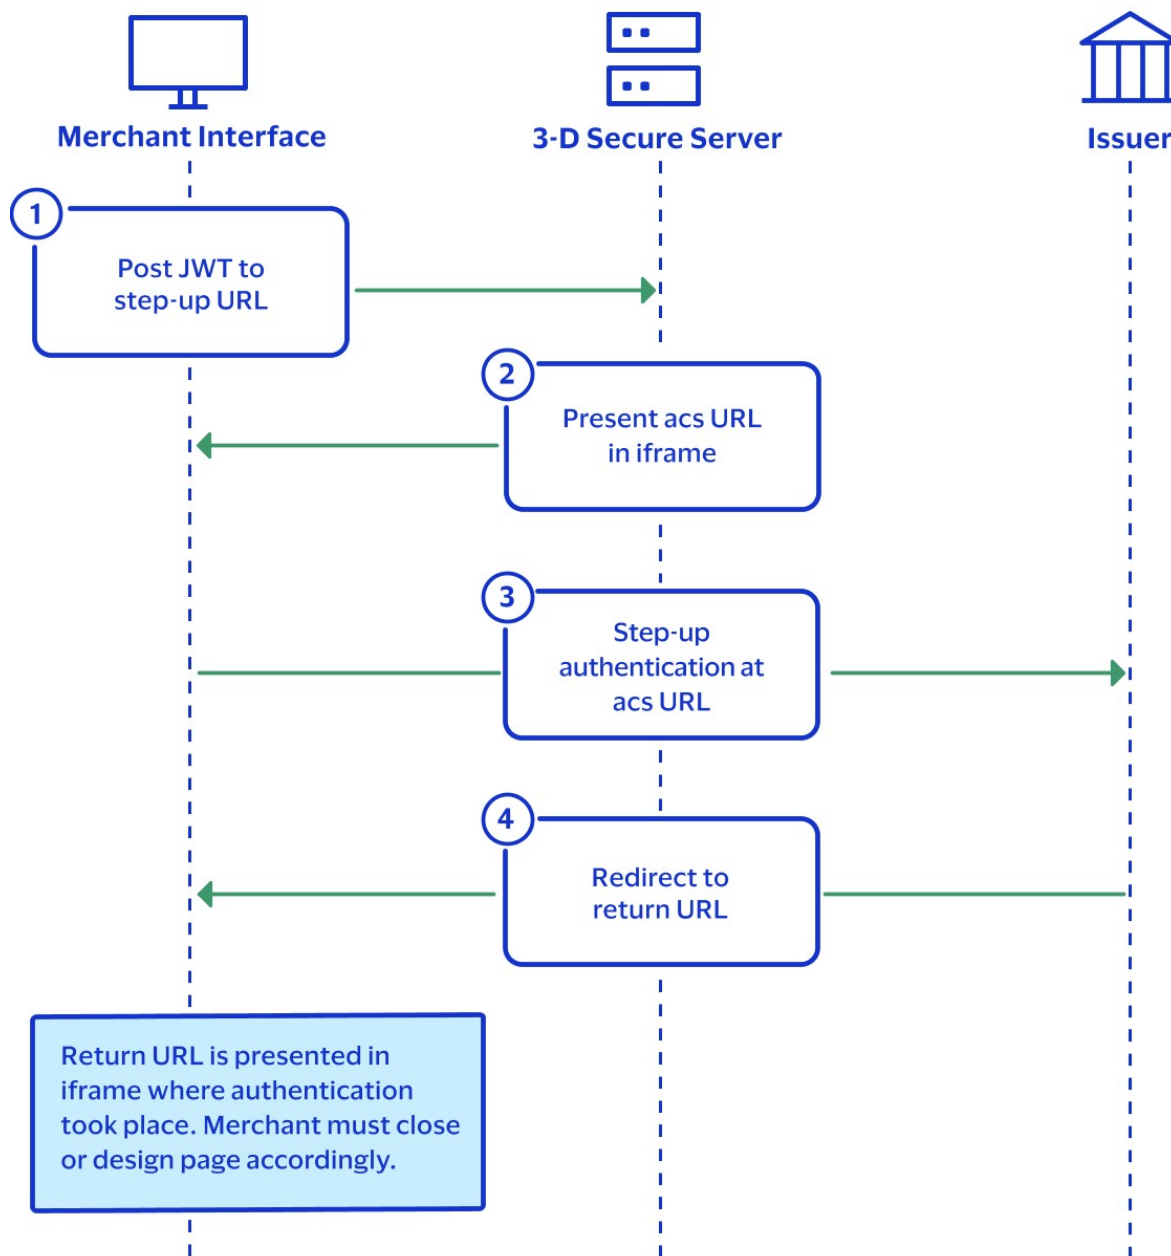

Process Flow for Step-Up Authentication

Best Practices

These practices should be followed for this step to achieve optimal performance and to minimize potential operating issues.

- When a transaction requires a challenge, according to EMVCo protocol, the challenge must be issued within 30 seconds of the Enrollment Check response. When more than 30 seconds elapses, the ACS times out.

Building the Iframe Parameters

The iframe that you display should be sized to enable the customer bank to exchange authentication information between itself and the customer. Because a bank can use various methods to authenticate, the iframe has four size options. The bank will request that you ensure that the iframe size provides room to display the bank logo and the card network being used, the amount of the transaction, and a brief explanation of what the customer needs to do. You manage the size of the challenge window to ensure that the challenge window matches with your presentation screen. You choose the iframe parameters and pass the window size to the issuer.

- Use the JWT POST Parameter value from the **consumerAuthenticationInformation.accessToken** response field and do a form POST within the iframe to the step up Url value that is passed by the **consumerAuthenticationInformation.stepUpUrl** response field.
- MD POST Parameter: Merchant-defined data returned in the response. This field is optional.
- Iframe height and width: EMV 3-D Secure 2.x offers multiple size options:
 - Use the **consumerAuthenticationInformation.acsWindowSize** request field to request a specific window size.
 - Use the **consumerAuthenticationInformation.pareq** response field to determine iframe dimensions by Base64 decoding the string and cross-referencing a Challenge Window Size value with its corresponding size.

This table lists the possible values for iframe size and the sizes associated with the value.

Challenge Window Size Value and Corresponding Size

Challenge Window Size Value	Step-Up Iframe Dimensions (Width x Height in pixels)
01	250 x 400
02	390 x 400
03	500 x 600
04	600 x 400
05	Full screen

This is an example for the decoded value.

Challenge Window Size Decoded Value

```
{
  "messageType":"CReq","messageVersion":"2.2.0",
  "threeDSServerTransID":"c4b911d6-1f5c-40a4-bc2b-51986a98f991",
  "acsTransID":"47956453-b477-4f02-a9ef-0ec3f9f779b3",
  "challengeWindowSize":"02"
```

}

Creating the Iframe

Create an iframe that is the same size as the Challenge Window Size to send a POST request to the step-up URL. Study this example.

Send a POST Request to the Step-Up URL

```
<iframe name="step-up-iframe" height="400" width="400"></iframe>
<form id="step-up-form" target="step-up-iframe" method="post" action=" https://centinelapistag.
cardinalcommerce.com/V2/Cruise/StepUp"> <input type="hidden" name="JWT" value="eyJhbGciOiJIUz
I1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiJmNmFmMTRmOS04YWRjLTRiNzktOGVkYS04YWV1MTI2NTkzZTEiLCJp
YXQiOiJlOTYwNTEyNzYsImZlcyI6IjVkdGZyYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTU5NjA1NDg3NiwiT3Jn
VW5pdElkIjoIjoiNTVlZjNmNTZmNzIzYWE0MzFjOTlkNTRiIiwiaWF0IjE5OTYwNTEyNzYsImZlcyI6IjVkdGZyYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTU5NjA1NDg3NiwiT3Jn
ZXJjaGFudGFjc3N0YWcuY2FyZGluYWxjb21tZXJjZS5jb20vTWV5Y2hhbnRBQ1NXZWV3JlS5qc3AiLCJQYX1sb2
FKIjoIjoiZlZlZjY0Y2FyZGluYWxjb21tZXJjZS5jb20vTWV5Y2hhbnRBQ1NXZWV3JlS5qc3AiLCJQYX1sb2
aWRHaHlaV1ZFVTFObGNuWmxjbFJ5WVc1e1NVUWlPaUpsTkdKaVpqazNNeTFqTW1FeUxJUTNOREF0T1RWak5
DMWpNVGhoTVRNeE16TmlPRFFpTENKaFkzTlVjbUZ1YzBsRUlqb2lNVGMzT0RFRM016SXROREK1TVMwME1HUmlMVG
xoTkRndE1ESm1OREpoTlRZd1lqYzVJaXdpWTJoaGJHeGxibWRsVjJsdVpHOTNVMMmw2W1NjNk1qQX1Jbja1LCJQYX1sb2
Fuc2FjdGlvbklkIjoIjoiQnh5a0hYVEp4M1JuNHBGWnF1bjAifSwiOiJ0IiwiaWF0IjE5OTYwNTEyNzYsImZlcyI6IjVkdGZyYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTU5NjA1NDg3NiwiT3Jn
dXJuVXJsIjoiaHR0cHM6Ly9taWNoYWVsdGF5bG9yLm1vL2N5YnMvc3RvcmlVEZW1vL3B1YmxpYy9saXN0ZW51ci5
weSJ9.H8j-VYCJK_7ZEHxGz82_IwZGKBODzPaceJNNC99xZRo" /> <input type="hidden" name="MD"
value="optionally_include_custom_data_that_will_be_returned_as_is"/> </form>
```

Invoking the Iframe

Add JavaScript to invoke the iframe form POST. Place the JavaScript after the closing `</body>` tag as shown in the example below. The JavaScript invokes the iframe form POST automatically when the window loads. While you can submit the form at a different time, you must submit the form before requesting the validation service.

```
<script>
window.onload = function() {
  var stepUpForm = document.querySelector('#step-up-form');
  if(stepUpForm) // Step-Up form exists
    stepUpForm.submit();
}
</script>
```

Receiving the Step-Up Results

After the customer interacts with the issuing bank, the customer is returned to the **consumerAuthenticationInformation.returnUrl** within the iframe as specified in [Step 3](#):

[Payer Authentication Check Enrollment Service](#) on page 34. Since you host the return URL, you can then close the iframe after redirection.

The response sent back to the return URL contains these values:


- Transaction ID: (**consumerAuthenticationInformation.authenticationTransactionId** response field). This value is used in [Step 5: Payer Authentication Validation Service](#) on page 45.
- MD: merchant data returned if present in the POST to step-up URL; otherwise, null.

POST to Return URL

```
TransactionId=BwNsDeDPsQV4q8uy1Kq1&MD=null
```

Step 5: Payer Authentication Validation Service

When you receive the step-up response as discussed in [Step 4: Step-Up Iframe](#) on page 40, verify that the customer was successfully authenticated. Note that frictionless authentication does not require this validation step. Validation is required only for step-up authentication.

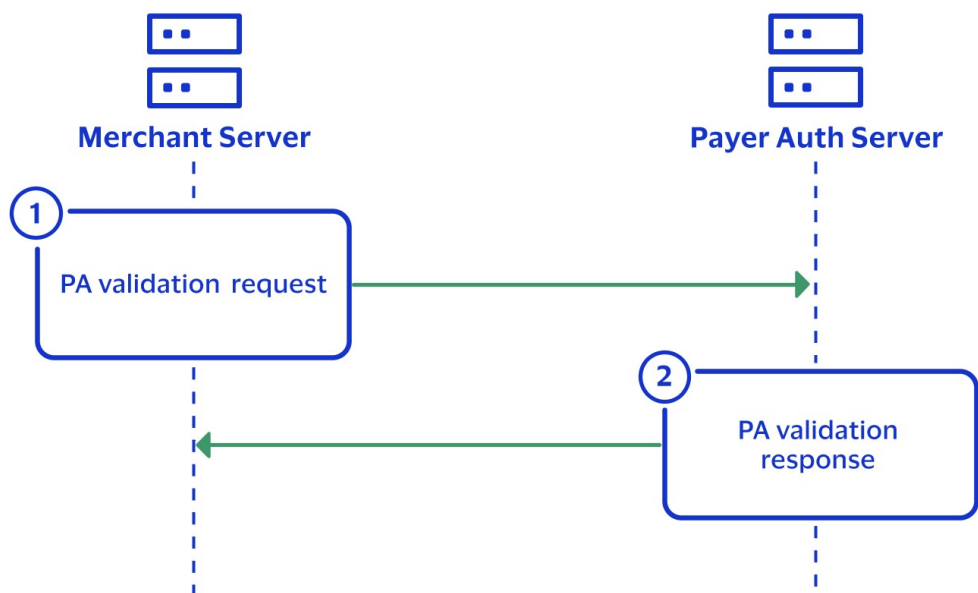

Process Flow for Validation of the Cardholder

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-results>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-results>

Request Fields

The **consumerAuthenticationInformation.authenticationTransactionId** field in this step is mapped from the **consumerAuthenticationInformation.authenticationTransactionId** field in [Step 4: Step-Up Iframe](#) on page 40.

These fields are required:

- **clientReferenceInformation.code**
- **consumerAuthenticationInformation.authenticationTransactionId**
- **orderInformation.amountDetails.currency**
- **orderInformation.amountDetails.total Amount** or **orderInformation.lineItems.unitPrice**
- **paymentInformation.card.expirationMonth**
- **paymentInformation.card.expirationYear**
- **paymentInformation.card.number**
- **paymentInformation.card.type**

For examples, see [Validating a Challenge](#) on page 89.

For further details on individual API fields, refer to the [API Field Reference Guide](#).

Interpreting the Validation Response

If the authentication is rejected (TransStatus R), Visa, China UnionPay, Elo, JCB, Diners Club, Discover, and American Express recommend not proceeding to authorization.

Instead, ask the customer to use another payment method.

Proceed with the order according to the validation response that you receive. The possible validation response statuses are the same for all of the card types.

AUTHENTICATION_SUCCESSFUL

Successful Step-Up Authentication

- PRes status = **Y**

Step-up authentication of the customer was successful. If you request the Validate Authentication and Authorization services separately, you must add the required payer validate payload values to your authorization request before you can receive chargeback protection that shifts the liability to the issuer.

Unavailable Step-up Authentication

- PRes status = **U**

Step-up authentication was unavailable and the customer could not be authenticated.

This status does not necessarily indicate any fraudulent intent from the customer.

Merchants can either attempt to retry authentication or continue to authorization. If you are making separate validation and authorization calls, you can still proceed with the

authorization request but there is no liability shift. Without authentication, the merchant remains liable for any chargeback if it should occur with the transaction.

AUTHENTICATION_FAILED

Unavailable Step-up Authentication

- PAREs status = **N**

The customer could not be authenticated. Do not submit this transaction for authorization. Instead ask the customer for another form of payment.

Error

If you receive an error from the payment card company, process the order according to your business rules. If the error occurs frequently, report it to customer supportcustomer supportcustomer support. If you receive a system error, determine the cause of the error and proceed with card authorization only when appropriate.

Redirecting Customers to Pass or Fail Message Page

After authentication is complete, redirect the customer to a page containing a success or failure message. You must ensure that the messages that display to customers are accurate and complete, and that the message addresses all possible scenarios for enrolled and non-enrolled cards. For example, if the authentication fails, display a message such as this to the customer:

Authentication Failed

Your card issuer cannot authenticate this card. Please select another card or form of payment to complete your purchase.

Combining the Authentication and the Authorization Services

After the customer is successfully authenticated, you must get authorization from the issuing bank to proceed with the transaction. While these are separate processes, it is recommended that you link these services by immediately passing the returned values into a request to authorize the transaction. The two services can be linked when:

- Checking enrollment determines that no challenge is required. Pass the values returned from checking enrollment to the authorization request.
- Validating a challenge authenticates the cardholder. Pass the values returned from validating the challenge to the authorization request.

With the same request transactions, a different endpoint must be referenced for the authorization, and an additional element must be added to the JSON. When step-up authentication is required, transaction processing stops to allow completion of authentication, and authorization is not called until after the challenge response is validated. This integration method is recommended.

Depending on your card type, you might not receive the XID value. If you receive this field under a frictionless scenario, it is required for authorization.

Combining Check Enrollment and the Authorization Services

Receiving certain responses from checking enrollment allows the authorization to be requested immediately afterwards. The possible checking enrollment responses are:

- Successful frictionless authentication
- Attempted stand-in frictionless authentication
- Issuer does not support the payer authentication program
- Account is not eligible for a payer authentication program

- Unavailable frictionless authentication
- Failed frictionless authentication
- Rejected frictionless authentication

In all checking enrollment scenarios, it is recommended that you integrate these services by combining the checking enrollment and authorization services into a single transaction. When the services are combined, one of these conditions occurs:

- No additional integration work is required to manually map the appropriate check enrollment results to the corresponding authorization request fields.
- If further authentication is needed, the authorization cannot happen until after authentication completes and you can proceed to the next steps for challenging.

With same request transactions, a different endpoint must be referenced for the authorization, and an additional element must be added to the JSON. Depending on your card type, you might not receive the XID value. If you receive this field under a frictionless scenario, it is required for authorization.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Check Enrollment Response Fields and Their Equivalent Authorization Request Fields

When a customer is authenticated without a challenge, the transaction can be authorized either in the same request or in a separate authorization request. Whether authorization occurs in the same request or a separate request, the values from the check enrollment response must be passed to the authorization request to qualify for a liability shift. This table matches the check enrollment fields with their equivalent authorization fields. Sometimes a check enrollment response field is the same field used in the authorization request.

Be sure to include the following card-specific information in your authorization request:

- For Visa, JCB, China UnionPay, Elo, Diners Club, Discover, and American Express include the CAVV.
- For Mastercard only, include the collection indicator and the AAV (also known as UCAF).

Enrollment Check and Response Fields

Identifier	Enrollment Check Response Field	Card Authorization Request Field
E-commerce indicator	consumerAuthenticationInformation.ecommerceIndicator	processingInformation.commerceIndicator

Identifier	Enrollment Check Response Field	Card Authorization Request Field
Collection indicator	consumerAuthenticationInformation.ucafCollectionIndicator	consumerAuthenticationInformation.ucafCollectionIndicator
CAVV	consumerAuthenticationInformation.cavv	consumerAuthenticationInformation.cavv
AAV	consumerAuthenticationInformation.ucafAuthenticationData	consumerAuthenticationInformationData
XID	consumerAuthenticationInformation.xid	consumerAuthenticationInformation.xid
Result of the enrollment check for Asia, Middle East, and Africa Gateway	consumerAuthenticationInformation.veresEnrolled	consumerAuthenticationInformation.veresEnrolled
3-D Secure version	consumerAuthenticationInformation.specificationVersion	consumerAuthenticationInformation.paSpecificationVersion
Directory server transaction ID	consumerAuthenticationInformation.directoryServerTransactionId	consumerAuthenticationInformation.directoryServerTransactionId

Combining the Validation and the Authorization Services

After the customer is successfully authenticated, you must get authorization from the issuing bank to proceed with the transaction. While these are separate processes, you should integrate these two services into a single process whenever possible. When you do so, no additional integration work is required on your part to manually map the appropriate validation results to corresponding authorization request fields.

With the same request transactions, a different endpoint must be referenced for the authorization, and an additional element must be added to the JSON. When step-up authentication is required, transaction processing stops to allow authentication to complete, and authorization is not called until after the challenge response is validated. This integration method is highly recommended. Depending on your card type, you might not receive the XID value. If you receive this field under a frictionless scenario, it is required for authorization.

Endpoint

Production: [POST https://api.cybersource.com/pts/v2/payments](https://api.cybersource.com/pts/v2/payments)

Test: POST <https://apitest.cybersource.com/pts/v2/payments>

Validation Fields and their Equivalent Authorization Fields

When a customer is authenticated after a challenge, the transaction can be authorized in the same request or in a separate authorization request. Whether authorization is combined with validation or occurs in a separate request, the values from the validation response must be passed to the authorization request to qualify for a liability shift to the issuing bank. This table pairs the Validation field with its equivalent Authorization API field. Be sure to include the following card-specific information in your authorization request:

- For Visa, JCB, China UnionPay, Elo, Diners Club, Discover, and American Express include the CAVV.
- For Mastercard only, include the collection indicator and the AAV (also known as UCAF).

Validation Check and Response Fields

Identifier	Validation Check Response Field	Card Authorization Request Field
E-commerce indicator	consumerAuthenticationInformation.indicator	processingInformation.commerceIndicator
Collection indicator	consumerAuthenticationInformation.ucafCollectionIndicator	consumerAuthenticationInformation.ucafCollectionIndicator
CAVV	consumerAuthenticationInformation.cavv	consumerAuthenticationInformation.cavv
AAV	consumerAuthenticationInformation.ucafAuthenticationData	consumerAuthenticationInformation.ucafAuthenticationData
XID	consumerAuthenticationInformation.xid	consumerAuthenticationInformation.xid
3-D Secure version	consumerAuthenticationInformation.specificationVersion	consumerAuthenticationInformation.paSpecificationVersion
Directory server transaction ID	consumerAuthenticationInformation.directoryServerTransactionId	consumerAuthenticationInformation.directoryServerTransactionId

Implementing SDK Payer Authentication

This chapter summarizes the process of integrating SDK Payer Authentication services into your mobile application. Payer authentication services use the Mobile SDK for iOS or Android to facilitate the authentication. New SDK versions are frequently released and you should ensure that you stay current with the latest release. One way to stay informed on about new releases is to subscribe to a distribution list to be informed of updates and other product announcements. You can subscribe by going to this link: [Cardinal SDK Notifications](#).

Implementing the SDK in your mobile application requires either Android or iOS platform application programming skills. Android API 21 or iOS 9 and XCode 8 are required. The SDK is only designed to handle EMV 3-D Secure 2.x transactions.

Implementation Overview

Notify your account representative that you want to implement payer authentication (EMV 3-D Secure). Give the representative the merchant ID that you will use for testing. For more information, see [Payer Authentication Merchant Workflow](#) on page 19.



Important

The SDK integration operates in a similar manner to the Direct API integration, but SDK does not have a Setup service step.

Implementation tasks include:

- Download, import, and configure the Mobile SDK for either iOS or Android.
- For each purchase request:
 - Build the authentication request.
 - Invoke the authentication.
 - Handle declines.

- Make another back-end, server-to-server call to request these services:
 - : Payer Authentication Validation
 - : Card Authorization service (optional)
- Use the test cases to test your preliminary code and make appropriate changes. See [Testing Payer Authentication](#) on page 198.
- Ensure that your account is configured for production.

Note that calling the Payer Authentication Setup Service is not required with the SDK mobile version.

Process Flow for SDK Integration

The steps required to integrate payer authentication into an SDK mobile application are described below.

1. Contact customer support to register for an API key.
2. Download and import the Mobile SDK for either iOS or Android.
3. Set up your build environment.
4. Configure your SDK.
5. Setup the initial request to Cardinal.
6. Create an API request to your merchant server to request the Enrollment Check service, passing in transaction details and the **consumerAuthenticationInformation.referenceId** request field.
7. If the issuing bank does not require authentication, you receive this information in the Enrollment Check response:
 - E-commerce indicator (**consumerAuthenticationInformation.ecommerceIndicator**)
 - CAVV (all card types except Mastercard) (**consumerAuthenticationInformation.cavv**)
 - AAV (Mastercard only) (**consumerAuthenticationInformation.ucafCollectionIndicator**)
 - Transaction ID (**consumerAuthenticationInformation.xid**)
 - 3-D Secure version (**consumerAuthenticationInformation.specificationVersion**)
 - Directory server transaction ID (**consumerAuthenticationInformation.directoryServerTransactionId**)
8. If the issuing bank requires authentication, you receive a response with the payload and the transaction ID that you include in the Cardinal.continue call from your SDK.
9. The Mobile SDK displays an authentication window, and the customer enters the authentication information into that window.
10. The bank validates the customer credentials and a JSON Web Token (JWT) is returned by the SDK in the onValidated callback that the merchant is required to validate server-side for security reasons.
11. Create an API call to your merchant server to request the Validate Authentication service, extracting the processor transaction ID value from the JWT and sending it in the **consumerAuthenticationInformation.authenticationTransactionId** request field. You

receive the e-commerce indicator, CAVV or AAV, transaction ID, 3-D Secure version, and directory server transaction ID.

Verify that the authentication was successful and continue processing your order. You must pass all pertinent data for the card type and processor in your authorization request. For more information, see [Requesting the Validation Service](#) on page 67.

Prerequisites for SDK Implementation

Before you can implement payer authentication services, your business team must contact your acquirer and Cybersource to establish the service. Your software development team should become familiar with the API fields and technical details of this service.

Creating a mobile application with the SDK implementation, requires that you perform some preliminary procedures before the starting the actual payer authentication implementation process. These processes involving JWTs are described in this section.

Credentials/API Keys

API keys are required to create the JSON Web Token (JWT). For further information, contact [customer support](#).

You will receive an email with your username and a temporary password. Your username will be in this format:

`cybersource_merchant name_contact name`

For example:

`cybersource_petairways_peter`

Once you receive your credentials, log in to your JFrog account and update your temporary password. Follow the process below to generate your API key.

Generating your API Key:

1. Log in to your JFrog account.
2. In the top-right of the JFrog Platform, select the Welcome drop-down menu and click **Edit Profile**.
3. Enter your password and click **Unlock**.
4. Under Authentication Settings, click **Generate API Key**.

Mobile Device Data Collected

One of the key components to authenticating a cardholder during an online transaction is to compare information about the mobile device that the buyer is using to the information about mobile devices that the buyer used in past transactions. This information is maintained in the access control server (ACS) at the issuing bank.

In mobile device transactions, information collected about the buyer device can include:

- Device ID
- Device model
- Operating system version
- System language
- Country
- Time zone
- Screen dimensions

A successful device data collection process that includes the eleven browser fields listed in the check enrollment step, increases the chances of a frictionless authentication. The decision to escalate a transaction to a level of risk high enough to require challenging the buyer to authenticate their identity is managed by business rules that are configured in the issuer's risk analysis software that evaluates each transaction.

Using the Android SDK

A mobile SDK is available for integrating payer authentication services into mobile applications running on the Android platform.

Updating the Gradle Build Properties

In Android Studio, open the app directory (which can also be labeled Module: app) and open the build.gradle file. Edit the Gradle file located in the app directory. Add the contents shown in the example below to the Gradle file.

```
repositories {
    ...
    maven {
        url "https://cardinalcommerceprod.jfrog.io/artifactory/android"
        credentials {
            username Artifactory username
            password Artifactory user API Key
        }
    }
}
dependencies {
    ...
    //Cardinal Mobile SDK
    implementation 2.5-1
}
```

If your project uses Proguard, add the lines shown below to the proguard-rules.pro file.

```
-keep class com.cardinalcommerce.dependencies.internal.bouncycastle.**
-keep class com.cardinalcommerce.dependencies.internal.nimbusds.**
```

Configuring the Android SDK

Get the instance of the Cardinal object by running the `Cardinal.getInstance()` process. Use the default configuration options. See the example below to understand how to run the `Cardinal.configure()` process.

For more details on configuration, refer to the configuration options table after the example.

```
private Cardinal cardinal = Cardinal.getInstance();
@Override
protected void onCreate(Bundle savedInstanceState) {

    CardinalConfigurationParameters cardinalConfigurationParameters = new
    CardinalConfigurationParameters();
    cardinalConfigurationParameters.setEnvironment(CardinalEnvironment.STAGING);
    cardinalConfigurationParameters.setTimeout(8000);
    JSONArray rType = new JSONArray();
    rType.put(CardinalRenderType.OTP);
    rType.put(CardinalRenderType.SINGLE_SELECT);
    rType.put(CardinalRenderType.MULTI_SELECT);
    rType.put(CardinalRenderType.OOB);
    rType.put(CardinalRenderType.HTML);
    cardinalConfigurationParameters.setRenderType(rType);

    cardinalConfigurationParameters.setUiType(CardinalUiType.BOTH);

    UiCustomization yourUICustomizationObject = new UiCustomization();
    cardinalConfigurationParameters.setUICustomization(yourUICustomizationObject);

    cardinal.configure(this,cardinalConfigurationParameters);
}
```

Android Configuration Options

Method	Description	Default Values
<code>setEnabledDFSsync (boolean enableDFSsync)</code>	On setting true, onSetupCompleted is called after the collected device data is sent to the server.	False
<code>setEnabledQuickAuth (boolean enableQuickAuth)</code>	Sets enable quick auth false.	False
<code>setEnvironment(Setting up mobile SDK - Android- V 2.1# CardinalEnvironment environment)</code>	Sets the environment to which the SDK must connect.	CardinalEnvironment. PRODUCTION
<code>setProxyAddress(java.lang.String proxyAddress)</code>	Sets the proxy to which the SDK must connect.	“ “

Method	Description	Default Values
setRenderType(org.json. JSONArray renderType)	Sets renderLists all user interface types that the device supports for displaying specific challenge user interfaces within the SDK.	JSONArray rType = new JSONArray(); rType.put(Cardinal RenderType.OTP); rType.put(Cardinal RenderType.SINGLE_SELECT); rType.put(Cardinal RenderType.MULTI_SELECT); rType.put(Cardinal RenderType.OOB); rType.put(Cardinal RenderType.HTML);
setTimeout(int timeout)	Sets the maximum amount of time (in milliseconds) for all exchanges.	8000
setUICustomization (UiCustomization UI Customization)	Sets UICustomization	Device Default Values
setUiType(CardinalUiType uiType)	Sets all user interface types that the device supports for displaying specific challenge user interfaces within the SDK.	CardinalUiType.BOTH

Setting Up the Initial Request

Run the Cardinal.init() process to:

- Begin the communication process with Cardinal.
- Authenticate your credentials (server JWT).
- Complete the data collection process.

By the time the customer is ready to check out, all necessary preprocessing is complete. Each time a user begins a mobile transaction, Cardinal assigns a unique identifier to the consumer session called a **consumerSessionId**. This **consumerSessionId** ensures that Cardinal matches the correct device data collection results to a request. Cybersource calls this session identifier **payerAuthEnrollService_referenceID**. You must assign the value of the **consumerSessionId** field to the **payerAuthEnrollService_referenceID** field so that Cybersource can also track the calls for each user session.

Study the code example shown below for completing the cardinal.init() process.

Cardinal.init() (Android SDK)

```
cardinal = Cardinal.getInstance();
String serverJwt = "INSERT_YOUR_JWT_HERE";
cardinal.init(serverJwt ,
new CardinalInitService() {
    /**
     * You may have your Submit button disabled on page load. Once you are
```

```

* set up for CCA, you may then enable it. This will prevent users
* from submitting their order before CCA is ready.
*/
@Override
public void onSetupCompleted(String consumerSessionId) {

}
/**
* If there was an error with set up, Cardinal will call this function
* with validate response and empty serverJWT
* @param validateResponse
* @param serverJwt will be an empty
*/
@Override
public void onValidated(ValidateResponse validateResponse, String serverJwt) {

}
});

```

See [Running Payer Authentication with SDK](#) on page 62 for the next steps.

Using the iOS SDK

A mobile SDK is available for integrating payer authentication services into mobile applications running on the iOS platform.

Downloading and Importing the SDK

Download the CardinalMobile.framework file using the cURL program in this example.
Download CardinalMobile.framework

```

curl -L -u <USER_NAME>
: <API_KEY> https://cardinalcommerceprod.jfrog.io/artifactory/ios/<VERSION>-<BUILD_NUMBER>/
cardinalmobilesdk.zip
-o <LOCAL_FILE_NAME.EXT>

#Example:
curl -L -u UserName:ApiKey "https://cardinalcommerceprod.jfrog.io/artifactory/ios/2.2.5-1/
cardinalmobilesdk.zip" -o cardinalmobile2.2.5-1.zip

```

Download the CardinalMobile.xcframework file using the cURL in this example.
Download CardinalMobile.xcframework

```

curl -L -u <USER_NAME>
: <API_KEY> https://cardinalcommerceprod.jfrog.io/artifactory/ios/<VERSION>-<BUILD_NUMBER>/
CardinalMobileiOSXC.zip
-o <LOCAL_FILE_NAME.EXT>

#Example:
curl -L -u UserName:ApiKey "https://cardinalcommerceprod.jfrog.io/artifactory/ios/2.2.5-1/
CardinalMobileiOSXC.zip" -o cardinalmobile2.2.5-1.zip

```

In your Xcode project, drag the CardinalMobile.framework file into the Frameworks group in your Xcode Project. (Create the group if it does not already exist.) In the import dialog box, check the box to Copy items into the destinations group folder (or Destination: Copy items if needed). The iOS SDK files are now available for linking in your project.

Configuring Your Build Environment

Follow these to configure your build environment:

1. Open Xcode, and in the source list to the left of the main editor area, choose your project.
2. Under the Targets section, select your application and open the General tab.
3. Expand the Embedded Binaries section and click the small plus (+) at the bottom of the list.
4. From the list, add the CardinalMobile.framework file.

Configuring the iOS SDK

Use `CardinalSession new` to create a new instance of the cardinal object. Use the default configuration options. Study these examples to complete the iOS SDK configuration.

For more details on configuration options, refer to the table after the examples.

CardinalSession new (iOS SDK - Objective-C)

```
#import <CardinalMobile/CardinalMobile.h>

CardinalSession *session;

//Setup can be called in viewDidLoad
- (void)setupCardinalSession {
    session = [CardinalSession new];
    CardinalSessionConfiguration *config = [CardinalSessionConfiguration new];
    config.environment = CardinalSessionEnvironmentProduction;
    config.timeout = CardinalSessionTimeoutStandard;
    config.uiType = CardinalSessionUITypeBoth;

    UiCustomization *yourCustomUi = [[UiCustomization alloc] init];
    //Set various customizations here. See "iOS UI Customization" documentation for detail.
    config.uiCustomization = yourCustomUi;

    CardinalSessionRenderTypeArray *renderType = [[CardinalSessionRenderTypeArray alloc]
initWithObjects:
    CardinalSessionRenderTypeOTP,
    CardinalSessionRenderTypeHTML,
    nil];
    config.renderType = renderType;

    config.enableQuickAuth = false;
    [session configure:config];
}
```

CardinalSession new (iOS SDK - Swift)

```
import CardinalMobile
```

```

var session : CardinalSession!

//Setup can be called in viewDidLoad
func setupCardinalSession{
    session = CardinalSession()
    var config = CardinalSessionConfiguration()
    config.environment = .production
    config.timeout = 8000
    config.uiType = .both

    let yourCustomUi = UiCustomization()
    //Set various customizations here. See "iOS UI Customization" documentation for detail.
    config.uiCustomization = yourCustomUi

    config.renderType = [CardinalSessionRenderTypeOTP, CardinalSessionRenderTypeHTML]
    config.enableQuickAuth = true
    session.configure(config)
}

```

iOS Configuration Options

Method	Description	Default Values	Possible Values
deploymentEnvironment	The environment to which the SDK connects.	CardinalSessionEnvironmentProduction	CardinalSessionEnvironmentStaging CardinalSessionEnvironmentProduction
timeoutInMilliseconds	Maximum amount of time (in milliseconds) for all exchanges.	8000	
uiType	Interface types that the device supports for displaying specific challenge user interfaces within the SDK.	CardinalSessionUiTypeBoth	CardinalSessionUiTypeBoth CardinalSessionUiTypeNative CardinalSessionUiTypeHTML
renderType	List of all the render types that the device supports for displaying specific challenge user interfaces within the SDK.	[CardinalSessionRenderTypeOTP, CardinalSessionRenderTypeHTML, CardinalSessionRenderTypeOOB, CardinalSessionRenderTypeSingleSelect, CardinalSessionRenderTypeMultiSelect]	CardinalSessionRenderTypeOTP CardinalSessionRenderTypeHTML CardinalSessionRenderTypeOOB CardinalSessionRenderTypeSingleSelect CardinalSessionRenderTypeMultiSelect

Method	Description	Default Values	Possible Values
proxyServerURL	Proxy server through which the Cardinal SDK Session operates.	nil	
enableQuickAuth	Enable Quick Authentication	false	
uiCustomization	Set Custom UI Customization for SDK-Controlled Challenge UI.	nil	
enableDFSync	Enable DF Sync to get onSetupCompleted called after collected device data is sent to the server.	false	

Setting Up the Initial Request

Requesting the cardinal session setup process begins the communication process, authenticates your credentials (server JWT), and completes the data collection process. By the time the customer is ready to check out, all necessary preprocessing is complete. Each time a user begins a mobile transaction, a unique value is assigned to the **consumerSessionId** API field to identify the session. This value ensures that the correct device data collection results are matched to each user request. Cybersource uses its **payerAuthEnrollService_referenceId** field to contain Cardinal's **consumerSessionId** value. You must assign the value of the **consumerSessionId** field to the **payerAuthEnrollService_referenceId** field so that Cybersource can also track the requests for each user session.

Study these code examples to understand how to complete setting up the cardinal session process. The function request must be placed in your Checkout ViewController.

Cardinal session setup (iOS SDK - Objective-C)

```

NSString *accountNumberString = @"1234567890123456";
NSString *jwtString = @"INSERT_YOUR_JWT_HERE";

[session setupWithJWT:jwtString
 didComplete:^(NSString * _Nonnull consumerSessionId){
//
// You may have your Submit button disabled on page load. Once you are
// setup for CCA, you may then enable it. This will prevent users
// from submitting their order before CCA is ready.
//
} didValidate:^(CardinalResponse * _Nonnull validateResponse) {
// Handle failed setup
// If there was an error with setup, cardinal will call this
// function with validate response and empty serverJWT

```

```
}};
```

Cardinal session setup (iOS SDK – Swift)

```
let accountNumberString = "1234567890123456"
let jwtString = "INSERT_YOUR_JWT_HERE"

session.setup(jwtString: jwtString, completed: { (consumerSessionId: String) in
    //
    // You may have your Submit button disabled on page load. Once you
    // are setup for CCA, you may then enable it. This will prevent
    // users from submitting their order before CCA is ready.
    //
}) { (validateResponse: CardinalResponse) in
    // Handle failed setup
    // If there was an error with setup, cardinal will call this
    // function with validate response and empty serverJWT
}
```

Running Payer Authentication with SDK

The payer authentication process in SDK requires checking whether a customer is participating in a card authentication program. If the customer is enrolled in payer authentication, you validate their current status in the program and authorize the transaction. The following procedures describe how to ensure the correct data values are passed during the payer authentication process.

Requesting the Check Enrollment Service (SDK)

After the SDK completes the device collection from your mobile application, and after the customer clicks the Buy button, you must make a back-end, server-to-server call to request the Enrollment Check service.

The Check Enrollment service verifies that the card is enrolled in a card authentication program. The merchant ID is included as part of the header, but these fields are required in the request:

- **consumerAuthenticationInformation.referenceId**
- **orderInformation.amountDetails.currency**
- **orderInformation.amountDetails.totalAmount**
- **orderInformation.billTo.address1**
- **orderInformation.billTo.administrativeArea**
- **orderInformation.billTo.country**
- **orderInformation.billTo.email**
- **orderInformation.billTo.firstName**
- **orderInformation.billTo.lastName**
- **orderInformation.billTo.locality**
- **orderInformation.billTo.postalCode**
- **paymentInformation.card.expirationMonth**

- `paymentInformation.card.expirationYear`
- `paymentInformation.card.number`
- `paymentInformation.card.type`



Important

To reduce your issuer step-up authentication rates, you can send additional request data in the order. It is best to send all available fields.

Use the enrollment check and card authorization services in the same request or in separate requests:

- Same request: Cybersource attempts to authorize the card if your customer is not enrolled in a payer authentication program. In this case, the field values that are required to prove that you attempted to check enrollment are passed automatically to the authorization service. If authentication is required, processing automatically stops.
- Separate requests: Manually include the enrollment check result values (Enrollment Check response fields) in the authorization service request (Card Authorization request fields).

Be sure to include the following card-specific information in your authorization request:

- For Visa, JCB, China UnionPay, Elo, Diners Club, Discover and American Express include the CAVV.
- For Mastercard only, include the collection indicator and the AAV (also known as UCAF).

These fields are listed in this table.

Enrollment Check and Response Fields

Identifier	Enrollment Check Response Field	Card Authorization Request Field
E-commerce indicator	<code>consumerAuthenticationInformation.ecommerceIndicator</code>	<code>processingInformation.commerceIndicator</code>
Collection indicator	<code>consumerAuthenticationInformation.ucafCollectionIndicator</code>	<code>consumerAuthenticationInformation.ucafCollectionIndicator</code>
CAVV	<code>consumerAuthenticationInformation.cavv</code>	<code>consumerAuthenticationInformation.cavv</code>
AAV	<code>consumerAuthenticationInformation.ucafAuthenticationData</code>	<code>consumerAuthenticationInformation.ucafAuthenticationData</code>
XID	<code>consumerAuthenticationInformation.xid</code>	<code>consumerAuthenticationInformation.xid</code>

Identifier	Enrollment Check Response Field	Card Authorization Request Field
Result of the enrollment check for Asia, Middle East, and Africa Gateway	consumerAuthenticationInformation.veresEnrolled	consumerAuthenticationInformation.veresEnrolled
3-D Secure version	consumerAuthenticationInformation.specificationVersion	consumerAuthenticationInformation.paSpecificationVersion
Directory server transaction ID	consumerAuthenticationInformation.directoryServerTransactionId	consumerAuthenticationInformation.directoryServerTransactionId

Interpreting the Response

In EMV 3-D Secure, there are two possible responses:

- **Frictionless:** No challenge or stepup to the cardholder. While frictionless authentication can indicate a successfully authenticated outcome because the customer's card is enrolled in a payer authentication program, it can also result from the bank failing or rejecting authentication without challenging the cardholder. In the frictionless authentication flow, you receive a PARESStatus of either **Y**, **A**, **N**, **I**, **R**, or **U** with an associated ECI value. With successful frictionless authentication, the PARESStatus = **Y** or **A** and you receive a CAVV. You may also receive a PARESStatus = **I** indicating successful authentication, but it might not include a CAVV.
- **Challenge:** The response contains PARESStatus = **C**. A challenge response has a payload and contains an ACS URL and a step up URL. Challenge the cardholder to provide additional authentication information and display an authentication challenge window to the cardholder so the cardholder can respond to a validation request and receive a validation response.

Authenticating Enrolled Cards

In the response from the enrollment check service, confirm that you receive these fields and values:

- 3-D Secure version = 2.x
- VERes enrolled = Y
- PARES status = C

These values identify whether it is an EMV 3-D Secure 2.x transaction and that a challenge is required.

After you validate these fields, you request the Cardinal.cca_continue process (Android SDK) or the Cardinal session continueprocess (iOS SDK) for the SDK to perform the challenge between the customer and the issuing bank.

Calling Cardinal.cca_continue (Android SDK)

After you verify that a customer's card is enrolled in a card authentication program, you must include the payload and the **consumerAuthenticationInformation.authenticationTransactionId** response field and incorporate them into the Cardinal.cca_continue function as shown in this example before proceeding with the authentication session.

```
/**
 * Cca continue.
 *
 * @param transactionId the transaction id
 * @param payload the payload
 * @param currentActivity the current activity
 * @throws InvalidInputException the invalid input exception
 * @throws JSONException the json exception
 * @throws UnsupportedEncodingException the unsupported encoding exception
 */
try {
    cardinal.cca_continue("[TRANSACTION ID]", "[PAYLOAD]", this, new CardinalValidateReceiver() {
        /**
         * This method is triggered when the transaction
         * has been terminated. This is how SDK hands back
         * control to the merchant's application. This method will
         * include data on how the transaction attempt ended and
         * you should have your logic for reviewing the results of
         * the transaction and making decisions regarding next steps.
         * JWT will be empty if validate was not successful.
         *
         * @param validateResponse
         * @param serverJWT
         */
        @Override
        public void onValidated(Context currentContext, ValidateResponse validateResponse, String
serverJWT) {
        }
    });
}
catch (Exception e) {
    // Handle exception
}
```

Calling Cardinal session continue (iOS SDK)

When you have verified that a customer's card is enrolled in a card authentication program, include the payload, and the response field and incorporate them into the Cardinal session continue function before proceeding with the authentication session. In the Cardinal session continue function, you should pass a class conforming to the CardinalValidationDelegate protocol (and implement the stepUpDidValidate method) as a parameter. These examples show a class conforming to the CardinalValidationDelegate protocol.

Objective-C Examples

Cardinal session continue (iOS SDK - Objective-C)

```
@interface YourViewController()<CardinalValidationDelegate>{ //Conform your ViewController or any
other class to CardinalValidationDelegate protocol

}
@end

@implementation YourViewController

/**
 * This method is triggered when the transaction has
 * been terminated.This is how SDK hands back
 * control to the merchant's application. This method will
 * include data on how the transaction attempt ended and
 * you should have your logic for reviewing the results of
 * the transaction and making decisions regarding next steps.
 * JWT will be empty if validate was not successful
 *
 * @param session
 * @param validateResponse
 * @param serverJWT
 */
-(void)cardinalSession:(CardinalSession *)session stepUpDidValidateWithResponse:(CardinalResponse
*)validateResponse serverJWT:(NSString *)serverJWT{

}

@end
```

If the Cardinal.continue process is requested in the same class, request the method shown in the following example to start the step up flow.

Cardinal.continue Request in the Same Class (Objective-C)

```
[session continueWithTransactionId: @"[TRANSACTION_ID]"
      payload: @"[PAYLOAD]"
      didValidateDelegate: self];
```

Swift Examples

Cardinal session continue (iOS SDK - Swift)

```
class YourViewController:CardinalValidationDelegate {

/**
 * This method is triggered when the transaction has been
 * terminated.This is how SDK hands back
 * control to the merchant's application. This method will
 * include data on how the transaction attempt ended and
 * you should have your logic for reviewing the results of
 * the transaction and making decisions regarding next steps.
 * JWT will be empty if validate was not successful
 *
 */
```

```

    * @param session
    * @param validateResponse
    * @param serverJWT
    */
    func cardinalSession(cardinalSession session: CardinalSession!, stepUpValidated validateResponse:
    CardinalResponse!, serverJWT: String!) {

    }

}

```

If the `Cardinal.continue` function is requested in the same class, request the method shown in the example below to start the step up flow.

Cardinal.continue Request in the Same Class (Swift)

```
session.continueWith(transactionId: "[TRANSACTION_ID]", payload: "[PAYLOAD]", validationDelegate: self)
```

When necessary, the SDK displays the authentication window and the customer enters their authentication information.

Receiving the Authentication Results

Next, the `onValidated()` function (Android SDK) or the `stepUpDidValidate` function (iOS SDK) launches and returns the authentication results and response JWT along with the processor transaction ID as shown in this example.

Decoded Response JWT

```

{
  "iss": "5a4504be6fe3d1127cdfd94e",
  "iat": 1555075930,
  "exp": 1555083130,
  "jti": "cc532159-636d-4fa8-931d-d4b0f4c83b99",
  "ConsumerSessionId": "0_9a16b7f5-8b94-480d-bf92-09cd302c9230",
  "aud": "d0cf3392-62c5-4107-bf6a-8fc3bb49922b",
  "Payload": {
    "Payment": {
      "Type": "CCA",
      "ProcessorTransactionId": "YGSaOBivyG0dzCFs2Zv0"
    },
    "ErrorNumber": 0,
    "ErrorDescription": "Success"
  }
}

```

Requesting the Validation Service

For enrolled cards, the next step is to make a back-end, server-to-server request for the validation service.

When you make the validation request, you must:

- Send the **consumerAuthenticationInformation.authenticationTransactionId** request field.

- Send the credit card information including the PAN, currency, and expiration date (month and year).

The response that you receive contains the validation result.

It is recommended that you request the payer authentication and card authorization services at the same time. Doing so automatically sends the correct information to your payment processor and converts the values of these fields to the proper format required by your payment processor:

- **consumerAuthenticationInformation.ecommerceIndicator**
- **consumerAuthenticationInformation.cavv**
- **consumerAuthenticationInformation.ucafAuthenticationData**
- **consumerAuthenticationInformation.xid** and **consumerAuthenticationInformation.xid**

If you request the services separately, manually include the validation result values (Validation Check response fields) in the authorization service request (Card Authorization request fields). To receive liability shift protection, you must ensure that you pass all pertinent data for the card type and processor in your request. Failure to do so might invalidate your liability shift for that transaction. Include the electronic commerce indicator (ECI), the transaction ID (XID), the 3-D Secure version, the directory server transaction ID, and this card-specific information in your authorization request.

- For Visa, JCB,, China UnionPay, Elo, Diners Club, Discover, and American Express include the CAVV.
- For Mastercard only, include the collection indicator and the AAV (also known as UCAF).

Validation Check and Response Fields

Identifier	Validation Check Response Field	Card Authorization Request Field
E-commerce indicator	consumerAuthenticationInformation.indicator	processingInformation.commerceIndicator
Collection indicator	consumerAuthenticationInformation.ucafCollectionIndicator	consumerAuthenticationInformation.ucafCollectionIndicator
CAVV	consumerAuthenticationInformation.cavv	consumerAuthenticationInformation.cavv
AAV	consumerAuthenticationInformation.ucafAuthenticationData	consumerAuthenticationInformation.ucafAuthenticationData
XID	consumerAuthenticationInformation.xid	consumerAuthenticationInformation.xid
3-D Secure version	consumerAuthenticationInformation.specificationVersion	consumerAuthenticationInformation.paSpecificationVersion

Identifier	Validation Check Response Field	Card Authorization Request Field
Directory server transaction ID	consumerAuthenticationInformation.directoryServerTransactionId	consumerAuthenticationInformation.directoryServerTransactionId

Interpreting the Response



Important

If the authentication fails, Visa, Diners Club, Discover, JCB, China UnionPay, Elo, and American Express require that you not accept the card. Instead, you must ask the customer to use another payment method.

Proceed with the order according to the validation response received. The responses are similar for all card types:

- Success: You receive `AUTHENTICATION_SUCCESSFUL`, and other service requests, including authorization, are processed normally.
- Failure: You receive `AUTHENTICATION_FAILED`, so the other services in your request are not processed.
- Error: If you receive an error from the payment card company, process the order according to your business rules. If the error occurs frequently, report it to [customer support](#). If you receive a system error, determine the cause, and proceed with card authorization only if appropriate.

To verify that the enrollment and validation checks are for the same transaction, ensure that the XID in the enrollment check and validation responses are identical.

Redirecting Customers to the Message Page

After authentication is complete, redirect the customer to a page containing a success or failure message. Ensure that all messages that display to customers are accurate, complete, and address all possible scenarios for enrolled and non-enrolled cards. For example, if the authentication fails, display a message such as this to the customer:

Authentication Failed

Your card issuer cannot authenticate this card. Please select another card or form of payment to complete your purchase.

Authentication Examples Using Primary Account Numbers

These examples list the API fields that are required or optional for the Setup, Check Enrollment, and Validate Authentication services. An example of a request payload and a successful response that occur with each service is provided. Payer authentication has three types of examples:

- Primary Account Number (PAN): Illustrates how the payer authentication services work with customer PANs during transactions.
- Tokens: Illustrates how the payer authentication services work with different types of tokens.
- 3RI: Illustrates how the payer authentication services work with merchant-initiated transactions.

In certain circumstances, some payment card companies and some countries require more information than is normally collected when authenticating the customer. These circumstances, and the API fields to use in those circumstances, are noted for each case.

Setting Up Device Data Collection

The Setup service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for Device Data Collection

These fields are the minimum fields required when you request the Payer Authentication Setup service. Other fields that can be used to collect additional information during a transaction are listed in the optional fields section. Under certain circumstances, a field that is normally optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

**merchantInformation.merchantDescriptor.
country**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

**orderInformation.billTo.administrativeArea
orderInformation.billTo.postalCode**

This field is required for the US and Canada.

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

**paymentInformation.card.expirationMonth
paymentInformation.card.expirationYear
paymentInformation.card.number**

paymentInformation.card.type
paymentInformation.card.type

This field is required when the card type is Cartes Bancaires, JCB, China UnionPay, or Meeza.

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Device Data Collection

These fields are optional for setting up a Payer Authentication transaction. Under certain circumstances, a field might appear as both an optional field and a required field.

clientReferenceInformation.code
orderInformation.billTo.address1
orderInformation.billTo.administrativeArea
orderInformation.billTo.country
orderInformation.billTo.email
orderInformation.billTo.firstName
orderInformation.billTo.lastName
orderInformation.billTo.locality
orderInformation.billTo.postalCode

REST Example: Setting Up Data Collection

Request

```
{
  "paymentInformation": {
    "card": {
      "type": "001",
      "expirationMonth": "12",
      "expirationYear": "2025",
      "number": "4XXXXXXXXXXXXXX"
    }
  }
}
```

Response

```
{
  "clientReferenceInformation": {
    "code": "1675295420285",
  },
  "consumerAuthenticationInformation": {
    "accessToken":
    "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiIwYTZmZjNmYS02YTdiLTQ0NjYtYTgzOC04NTNjOTk2ZTMw"
```

```
MDYiLCJpYXQiOjE2NzUyOTU0MjAsImZcyI6IjVkdGZyMmYwMGU0MjNkMTQ5OGRjYmFjYSI6ImV4cCI6MTY3NTI
50TAyMCwiT3JnVW5pdElkIjoiNWl5YzRiYjNmZjYyNmIxMzQ0ODEwYTAxIiwiaU00MjNkMTQ5OGRjYmFjYSI6ImV4cCI6MTY3NTI
GMjZC1jMWU0LTQ0NjUtYWNlMy1lYjMyZDVhMWQ1NTkifQ.d13w8s_ZpjA7kWmikyyYHO1Ak4TnzUHV8BuPra
tQukc",
  "deviceDataCollectionUrl": "https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect",
  "referenceId": "39160c2d-c1e4-4465-ace3-eb32d5a1d559",
  "token": "AxizbwSTbhQXqCrDMCazABEBT9u+U5WYAXsQyaSZejFczCmAMAAAwAnp"
},
  "id": "6752954202146024203955",
  "status": "COMPLETED",
  "submitTimeUtc": "2023-02-01T23:50:20Z"
}
```

Checking Enrollment in Payer Authentication

The Check Enrollment service tries to authenticate the cardholder. If the cardholder can be authenticated without additional information, the transaction can be authorized. If more information is required, the cardholder will be challenged to provide additional authentication.

Card-Specific Requirements

Some payment cards require information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard	This field is recommended for Discover ProtectBuy.
consumerAuthenticationInformation.mcc	This field is required when the card type is Cartes Bancaires.
consumerAuthenticationInformation.productCode	This field is required for American Express SafeKey (U.S.) when the product code is AIR for an airline purchase.
merchantInformation.merchantDescriptor.name	This field is required for Visa Secure travel.
orderInformation.shipTo.address1	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.address2	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.administrativeArea	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.country	This field is required for American Express SafeKey (US).

orderInformation.shipTo.postalCode

This field is required for American Express SafeKey (US).

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore

This field is required for transactions processed in France.

consumerAuthenticationInformation.overrideCountryCode

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

merchantInformation.merchantDescriptor.country

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.locality

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

orderInformation.shipTo.administrativeArea

This field is required when the **orderInformation.shipTo.country** field value is **CA**, **US**, or **China**.

orderInformation.shipTo.postalCode

This field is required when the **orderInformation.shipTo.country** field value is **US** or **CA**.

Processor-Specific Requirements

These fields are required by specific processors for transactions.

processingInformation.authorizationOptions.transactionMode

This field is required only for merchants in Saudi Arabia.

Endpoint

Production: **POST** <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment in Payer Authentication

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

consumerAuthenticationInformation.deviceChannel

This field is required for SDK integration. When you use the SDK integration, this field is dynamically set to **SDK**. When you use the JavaScript code, this field is dynamically set to **Browser**. For merchant-initiated or 3RI transactions, you must set the field to **3RI**. When you use this field in addition to JavaScript code, you must set the field to **Browser**.

consumerAuthenticationInformation.messageCategory

For non-payment authentication, set to a value of **02**.

consumerAuthenticationInformation.referenceId

consumerAuthenticationInformation.returnUrl

consumerAuthenticationInformation.overrideCountryCode

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

deviceInformation.httpBrowserJavaScriptEnabled

deviceInformation.httpBrowserLanguage

[deviceInformation.httpBrowserScreenHeight](#)

[deviceInformation.httpBrowserScreenWidth](#)

[deviceInformation.httpBrowserTimeDifference](#)

[deviceInformation.ipAddress](#)

[deviceInformation.userAgentBrowserValue](#) When the customer's browser provides this value, you must include that value in your request.

[merchantInformation.merchantDescriptor.country](#) For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

[orderInformation.amountDetails.currency](#)

[orderInformation.amountDetails.totalAmount](#) This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

[orderInformation.billTo.address1](#)

[orderInformation.billTo.administrativeArea](#) This field is required for transactions in the US and Canada.

[paymentInformation.card.expirationYear](#) This field is required when the **paymentInformation.card.number** field is included.

[paymentInformation.card.expirationMonth](#) This field is required when the **paymentInformation.card.number** field is included.

[paymentInformation.card.type](#)

[paymentInformation.card.number](#)

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Checking Enrollment in Payer Authentication

These fields are usually optional when you verify enrollment for a Payer Authentication transaction. In certain circumstances, the information provided by an optional field might be required before a transaction can proceed. Those optional fields that are sometimes required are also listed as required fields with the circumstance described.

[acquirerInformation.bin](#)

[acquirerInformation.country](#)

acquirerInformation.merchantId

clientReferenceInformation.code

consumerAuthenticationInformation.acsWindowSize

consumerAuthenticationInformation.alternateAuthenticationData

consumerAuthenticationInformation.alternateAuthenticationDate

consumerAuthenticationInformation.alternateAuthenticationMethod

consumerAuthenticationInformation.authenticationBrand This field is only used with mada cards.

consumerAuthenticationInformation.authenticationTransactionId

consumerAuthenticationInformation.authorizationPayload

consumerAuthenticationInformation.challengeCode



Warning

Modifying this field could affect your liability shifts. Unless you are very familiar with the various types of authentication, do not change the default settings before consulting with customer support.

consumerAuthenticationInformation.credentialEncrypted

consumerAuthenticationInformation.customerCardAlias

consumerAuthenticationInformation.sdkMaxTimeout

consumerAuthenticationInformation.decoupledAuthenticationIndicator

consumerAuthenticationInformation.decoupledAuthenticationMaxTime

consumerAuthenticationInformation.defaultCard This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.marketingOptIn This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.marketingSource This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

consumerAuthenticationInformation.merchantFraudRate

consumerAuthenticationInformation.merchantScore

consumerAuthenticationInformation.messageCategory

consumerAuthenticationInformation.otpToken

consumerAuthenticationInformation.overrideCountryCode
consumerAuthenticationInformation.overridePaymentMethod
consumerAuthenticationInformation.priorAuthenticationData
consumerAuthenticationInformation.priorAuthenticationMethod
consumerAuthenticationInformation.priorAuthenticationReferenceId
consumerAuthenticationInformation.priorAuthenticationTime
consumerAuthenticationInformation.productCode
consumerAuthenticationInformation.requestorName
consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator
consumerAuthenticationInformation.returnURL
consumerAuthenticationInformation.scoreRequest
consumerAuthenticationInformation.sdkMaxTimeout
consumerAuthenticationInformation.strongAuthentication.authenticationIndicator
consumerAuthenticationInformation.strongAuthentication.secureCorporatePaymentIndicator
consumerAuthenticationInformation.strongAuthentication.transactionMode
consumerAuthenticationInformation.whiteListStatus
merchantInformation.merchantDescriptor.name
merchantInformation.merchantDescriptor.url
orderInformation.amountDetails.currency
orderInformation.billTo.address2
orderInformation.billTo.country
orderInformation.billTo.email
orderInformation.billTo.firstName
orderInformation.billTo.lastName
orderInformation.billTo.locality
orderInformation.billTo.postalCode
orderInformation.lineItems.passenger.firstName
orderInformation.lineItems.passenger.lastName
orderInformation.lineItems.productDescription
orderInformation.lineItems.productName
orderInformation.lineItems.productSku

This field is required for US and Canada.

orderInformation.lineItems.quantity
orderInformation.lineItems.shippingAddress1
orderInformation.lineItems.shippingAddress2
orderInformation.lineItems.shippingCity
orderInformation.lineItems.shippingCountryCode
orderInformation.lineItems.shippingDestinationTypes
orderInformation.lineItems.shippingLastName
orderInformation.lineItems.shippingMiddleName
orderInformation.lineItems.shippingPhone
orderInformation.lineItems.shippingPostalCode
orderInformation.lineItems.shippingState
orderInformation.lineItems.unitPrice
orderInformation.lineItems[].quantity
orderInformation.lineItems[].totalAmount
orderInformation.lineItems.shippingDestinationTypes
orderInformation.reordered
orderInformation.shippingDetails.shippingMethod
orderInformation.shipTo.address1
orderInformation.shipTo.address2
orderInformation.shipTo.address3
orderInformation.shipTo.administrativeArea
orderInformation.shipTo.country
orderInformation.shipTo.destinationCode
orderInformation.shipTo.email
orderInformation.shipTo.firstName
orderInformation.shipTo.lastName
orderInformation.shipTo.middleName
orderInformation.shipTo.locality
orderInformation.shipTo.phoneNumber
orderInformation.shipTo.postalCode
orderInformation.totalOffersCount
paymentInformation.card.number
paymentInformation.card.type

This field is strongly recommended.

paymentInformation.card.securityCode

paymentInformation.fluidData.value

paymentInformation.tokenizedCard.cryptogram

This field is strongly recommended.

paymentInformation.tokenizedcard.expirationMonth

paymentInformation.tokenizedCard.expirationYear

paymentInformation.tokenizedcard.number

paymentInformation.tokenizedCard.transactionType

paymentInformation.tokenizedCard.type

recurringPaymentsInformation.originalPurchaseDate

When this field is empty, the current date is used.

riskInformation.buyerHistory.transactionCountDay

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.transactionCountYear

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.accountPurchases

Contact customer support for more information about this field.

riskInformation.buyerHistory.addCardAttempts

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.customerAccount.createDate

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.customerAccount.lastChangeDate

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.customerAccount.passwordChangeDate

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

riskInformation.buyerHistory.customerAccount.shipAddressUsageDate

Contact customer support for more information about this field.

riskInformation.buyerHistory.paymentAccountDate

Contact customer support for more information about this field.

riskInformation.buyerHistory.priorSuspiciousActivity

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
transactionCountDay**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
transactionCountYear**

Contact customer support for more information about this field.

travellInformation.legs.carrierCode

travellInformation.legs.departureDate

travellInformation.legs.origination

travellInformation.numberOfPassengers

travellInformation.passengers.firstName

travellInformation.passengers.lastName

REST Example: Checking Enrollment

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "100"
    },
    "billTo": {
      "address1": "901 metro center blvd",
      "address2": "metro 3",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "18007097779",
      "postalCode": "94404",
      "email": "email@email.com"
    }
  },
  "paymentInformation": {
    "card": {
      "number": "4XXXXXXXXXXXXXXXXX",
      "expirationMonth": "08",
      "expirationYear": 2026
    }
  },
  "deviceInformation": {
    "ipAddress": "139.130.4.5",
    "httpAcceptContent": "test",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": "N",
    "httpBrowserJavaScriptEnabled": "Y",
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "100000",
    "httpBrowserScreenWidth": "100000",
```

```

    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "GxKnLy8TFDUFxJP1t"
  },
  "consumerAuthenticationInformation": {
    "referenceId": "c44224db-0dda-40aa-9536-ac1595fd2e8d",
    "transactionMode": "S",
    "returnUrl": "https://wv730hw7033250:3002/restapi/cardinalDirect/StepUp/Response"
  }
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "1675295420285"
  },
  "consumerAuthenticationInformation": {
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "challengeRequired": "N",
    "stepUpUrl": "https://centinelapistag.cardinalcommerce.com/V2/Cruise/StepUp",
    "authenticationTransactionId": "1xRSplPEoTNsinp8XUK0",
    "pareq":
    "eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMS4wIiwidGhyZWVEU1NlcnZlclRyYW5zSUQiO
    iI4NGU2YzIzYi11NjIxLTQ2NGUtYWFlYy0xOGNkZDE1YTBlZWMiLCJhY3NUcmFuc01EIjoizWU3NDVlM2MtYzI2Ny00YzM0LT
    kzMTEtMGi3NTYwYzJkNjhmIiwia2hhbGxlbmdlV2luZG93U2l6ZSI6IjAyIn0",
    "directoryServerTransactionId": "4d19781a-49d7-4c90-a145-72b8107fed8f",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "84e6c23b-e621-464e-aaec-18cdd15a0eec",
    "accessToken":
    "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiIyN2I1Mjc5YS00OWFiLTQ5YjQtYTljYy1mMTBhYjcx
    MGMyYjciLCJpYXQiOiJlM2MzAwOTkxNjMsImZlcyI6IjVkb2ZyYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTYzMDUw
    Mjc2MywiT3JnVW5pdElkIjoiaWNTk1YWRhYjAzM2ZhZGQyYzUwZTg5NDYxIiwiaWF0Ij01NjU0OTUwZG9hZCI6IjE5ZDZl
    ovLzBtZXJjaGFudGFjc3N0YWcuY2FyZGluYWxjb21tZXJjZS5jb20vTWV5Y2hhbnRBQ1NXZWVhY3JlcS5qc3AiLCJQYXlzb2FkIjo
    iZX1KdFpYtTnpZV2RsVkhsd1pTSTZJa05TW1hFaUxDSnRaWE56WVdkbFZtVnljMmx2Ym1JNk1qSXVNUzR3SW13aWRHaHlaV1
    ZFVTFObGNuWmxjbFJ5WVc1e1NVUW1PaUk0TkdlVml16SXpZaTFsTmJJeXUUTJOR1V0WVdGbF15MHhPR05rWkRfMV1U
    QmxaV01pTENKaFkzT1VjbUZ1YzBsRU1qb2laV1UzTkRWbE0yTXRZekkyTnkwMF6TTBMVGt6TVRFdE1HSTNOVF13WXpKa0
    5qaG1JaXdpWTJoaGJHeGxibWRsVjJsdVpHOTNVMMmw2W1NjNk1qQX1Jbja1LCJlcmFuc2FjdGlvbk1kIjoiaWNTk1YWRhYjAz
    E5zaW5wOFhVSzAifSwiOiJlM2MzZW50aWZ5UGF5bG9hZCI6IjE5ZDZlZWVhY3JlcS5qc3AiLCJQYXlzb2FkIjoiaWNTk1YWRh
    1MDozMDAyL3Jlc3RhcGkvY2FyZGluYWxjaXJlY3QvU3RlcFVwL1Jlc3Bvb3NlIn0.ixbdhFoB8M_BWI2sAIIQUjWtIOMzIwRI
    mrg5iu7AyNE",
    "specificationVersion": "2.1.0",
    "token": "AxjzbwSTVZPTJPD7ixR8ADUBURxP1CnnpA6cQE1129JMvRiuHCKArAAAx/+g",
    "acsTransactionId": "ee745e3c-c267-4c34-9311-0b7560c2d68f"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
  }
}

```

```

    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder
    before continuing with the transaction."
  },
  "id": "6300991627296049403004",
  "paymentInformation": {
    "card": {
      "bin": "4XXXXXX",
      "type": "VISA"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2022-08-27T21:19:23Z"
}

```

Checking Enrollment and Authorizing a Transaction

The Checking Enrollment service can be combined with the Authorization service so that when a customer's authentication does not require a challenge, the transaction is automatically submitted for authorization.

Card-Specific Requirements

Some payment cards require information to be collected during a transaction.

**consumerAuthenticationInformation.
defaultCard**

This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

This field is required when the card type is Cartes Bancaires.

**consumerAuthenticationInformation.
productCode**

This field is required for American Express SafeKey (U.S.) when the product code is **AIR** for an airline purchase.

**merchantInformation.merchantDescriptor.
name**

This field is required for Visa Secure travel.

orderInformation.shipTo.address1

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.address2

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.administrativeArea

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.country

This field is required for American Express SafeKey (US).

orderInformation.shipTo.postalCode

This field is required for American Express SafeKey (US).

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore

This field is required for transactions processed in France.

consumerAuthenticationInformation.overrideCountryCode

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

merchantInformation.merchantDescriptor.country

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.locality

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

orderInformation.shipTo.administrativeArea

This field is required when the **orderInformation.shipTo.country** field value is **CA**, **US**, or **China**.

orderInformation.shipTo.postalCode

This field is required when the **orderInformation.shipTo.country** field value is **US** or **CA**.

Processor-Specific Requirements

These fields are required by specific processors for transactions.

processingInformation.authorizationOptions.transactionMode

This field is required only for merchants in Saudi Arabia.

Endpoint

Production: **POST** <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment in Payer Authentication

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

consumerAuthenticationInformation.deviceChannel

This field is required for SDK integration. When you use the SDK integration, this field is dynamically set to **SDK**. When you use the JavaScript code, this field is dynamically set to **Browser**. For merchant-initiated or 3RI transactions, you must set the field to **3RI**. When you use this field in addition to JavaScript code, you must set the field to **Browser**.

consumerAuthenticationInformation.messageCategory

For non-payment authentication, set to a value of **02**.

consumerAuthenticationInformation.referenceId

consumerAuthenticationInformation.returnUrl

consumerAuthenticationInformation.overrideCountryCode

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

deviceInformation.httpBrowserJavaScriptEnabled

deviceInformation.httpBrowserLanguage

deviceInformation.httpBrowserScreenHeight

deviceInformation.httpBrowserScreenWidth

deviceInformation.httpBrowserTimeDifference

deviceInformation.ipAddress

deviceInformation.userAgentBrowserValue When the customer's browser provides this value, you must include that value in your request.

merchantInformation.merchantDescriptor.country For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

orderInformation.billTo.address1

orderInformation.billTo.administrativeArea This field is required for transactions in the US and Canada.

paymentInformation.card.expirationYear This field is required when the **paymentInformation.card.number** field is included.

paymentInformation.card.expirationMonth This field is required when the **paymentInformation.card.number** field is included.

paymentInformation.card.type

paymentInformation.card.number

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment and Authorizing a Transaction

Request

```
{
  "clientReferenceInformation": {
    "code": "test"
  },
  "processingInformation": {
    "capture": "true"
  },
  "actionList": [
```

```

    "CONSUMER_AUTHENTICATION"
  ]
},
"paymentInformation": {
  "card": {
    "expirationYear": "2031",
    "number": "4XXXXXXXXXX2701",
    "securityCode": "123",
    "expirationMonth": "12",
    "type": "001"
  }
},
"orderInformation": {
  "amountDetails": {
    "totalAmount": "100.00",
    "currency": "GBP"
  },
  "billTo": {
    "firstName": "John",
    "lastName": "Smith",
    "address1": "201 S. Division St._1",
    "address2": "Suite 500",
    "locality": "Foster City",
    "administrativeArea": "CA",
    "postalCode": "94404",
    "country": "US",
    "email": "accept@email.com",
    "phoneNumber": "6504327113"
  }
},
"deviceInformation": {
  "ipAddress": "139.130.4.5",
  "httpAcceptContent": "test",
  "httpBrowserLanguage": "en_us",
  "httpBrowserJavaEnabled": "N",
  "httpBrowserJavaScriptEnabled": "Y",
  "httpBrowserColorDepth": "24",
  "httpBrowserScreenHeight": "100000",
  "httpBrowserScreenWidth": "100000",
  "httpBrowserTimeDifference": "300",
  "userAgentBrowserValue": "GxKnLy8TFDUFxJP1t"
},
"consumerAuthenticationInformation": {
  "returnUrl": "https://webhook.site/bdf16530-2577-4885-9dee-e9d6c4f98bc0",
  "referenceId": "72b727bc-a6a4-4481-b25c-a5939d48fef6"
}
}

```

Response to a Successful Request

```

{
  "_links": {
    "void": {
      "method": "POST",
      "href": "/pts/v2/payments/7478240150646451804805/voids"
    }
  },
}

```

```

    "self": {
      "method": "GET",
      "href": "/pts/v2/payments/7478240150646451804805"
    }
  },
  "clientReferenceInformation": {
    "code": "test"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "05",
    "authenticationTransactionId": "2BE13ZGIzjXdFfKw2Fi0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "eci": "05",
    "token": "Axj//wSTlWVuE5k5bxqFAAIU3YMmzhgzYM2Ce/LXc7XAKe/
LXc7XZ0OnEFBWGTSTL0Yua1eAwHScqytwMnLeNQo+xnO",
    "cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "paresStatus": "Y",
    "acsReferenceNumber": "CardinalACS",
    "xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "4689476f-168b-415e-bad5-aee47a270086",
    "veresEnrolled": "Y",
    "threeDSSTransactionId": "bda6f2d1-5c18-4589-a150-1e8c6e795e85",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "vbm",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "5bbd605d-80e4-48ef-82b5-0406774c66e3"
  },
  "id": "7478240150646451804805",
  "orderInformation": {
    "amountDetails": {
      "totalAmount": "100.00",
      "authorizedAmount": "100.00",
      "currency": "GBP"
    }
  },
  "paymentAccountInformation": {
    "card": {
      "brandName": "VISA",
      "type": "001"
    }
  },
  "paymentInformation": {
    "tokenizedCard": {
      "type": "001"
    },
    "card": {
      "bin": "400000",
      "type": "001"
    }
  },
  "pointOfSaleInformation": {
    "terminalId": "12345678"
  },
  "processorInformation": {

```

```

    "paymentAccountReferenceNumber": "V0010013018036776997406844475",
    "merchantNumber": "12345678",
    "approvalCode": "100",
    "cardVerification": {
      "resultCodeRaw": "3",
      "resultCode": "2"
    },
    "merchantAdvice": {
      "code": "00",
      "codeRaw": "0"
    },
    "networkTransactionId": "123456789012345",
    "transactionId": "123456789012345",
    "responseCode": "0",
    "avs": {
      "code": "U",
      "codeRaw": "00"
    }
  },
  "reconciliationId": "7026803030",
  "status": "AUTHORIZED",
  "submitTimeUtc": "2025-05-21T10:40:15Z"
}

```

Validating a Challenge

Running the Validation service compares the customer's response to the challenge from the issuing bank to validate the customer identity.

Card-Specific Requirements

Some payment cards require additional information to be collected during a transaction.

**consumerAuthenticationInformation.
defaultCard**

This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

This field is required when the card type is Cartes Bancaires.

**consumerAuthenticationInformation.
productCode**

This field is required for American Express SafeKey (US) when the product code is **AIR** for an airline purchase).

**merchantInformation.merchantDescriptor.
name**

This field is required for Visa Secure travel.

orderInformation.shipTo.address1

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.address2

This field is required only for American Express SafeKey (US)

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore	This field is required for transactions processed in France.
orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
orderInformation.billTo.locality	This field is required for transactions in the US and Canada.
orderInformation.billTo.postalCode	This field is required when the orderInformation.billTo.country field value is US or CA .

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-results>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-results>

Required Fields for Validating a Challenge

These are the minimum fields required when validating the customer. Other fields for collecting additional information during a transaction are described in the list of optional fields. Under certain circumstances, a field that is optional might be required. The circumstance that makes an optional field required is described.

Required Fields

clientReferenceInformation.code	
consumerAuthenticationInformation.authenticationTransactionId	
orderInformation.amountDetails.currency	
orderInformation.amountDetails.totalAmount	This field is required when the orderInformation.lineItems.unitPrice field is not used.
orderInformation.lineItems.unitPrice	This field is required when the orderInformation.amountDetails.totalAmount field is not used.
paymentInformation.card.expirationMonth	This field is required when the paymentInformation.card.number field is included.
paymentInformation.card.expirationYear	This field is required when the paymentInformation.card.number field is included.
paymentInformation.card.number	

paymentInformation.card.type

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Validating a Challenge

These fields are optional when validating a Payer Authentication transaction. In certain circumstances, the information provided by an optional field might be required before a transaction can proceed. Those optional fields that are sometimes required are listed in the required fields with the circumstance described.

consumerAuthenticationInformation.authenticationBrand This field is only used with mada cards.

consumerAuthenticationInformation.credentialEncrypted

consumerAuthenticationInformation.responseAccessToken

consumerAuthenticationInformation.signedPares

REST Example: Validating a Challenge

Request

```
{
  "paymentInformation": {
    "card": {
      "type": "001"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "bE4fdH96vKejWyz6rXy1"
  }
}
```

Response to a Successful Request

```
{
  "consumerAuthenticationInformation": {
    "indicator": "vbv",
    "eciRaw": "05",
    "authenticationResult": "0",
    "authenticationStatusMsg": "Success",
    "eci": "05",
    "token": "AxiJLwSTVYSa8ZmiITBhAAJRHE+rXi4ATWhk0kyxdfAuewAA4iW6",
    "cavv": "MTIzNDU2Nzg5MDEyMzQ1Njc4OTA=",
    "paresStatus": "Y",
    "xid": "MTIzNDU2Nzg5MDEyMzQ1Njc4OTA=",
    "directoryServerTransactionId": "144ecc30-264f-4d2c-8a4e-798a4f311b1f",
    "threeDSServerTransactionId": "6773483d-e16a-40f5-bc5d-93d709c8a06b",
    "specificationVersion": "2.1.0",
  }
}
```

```

    "acsTransactionId": "6eab6816-72d2-40e8-a03f-0a6c8bfe3156"
  },
  "id": "6299894944336529404001",
  "paymentInformation": {
    "card": {
      "bin": "400000",
      "type": "VISA"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2021-08-26T14:51:34Z"
}

```

Validating and Authorizing a Transaction

The Validation service can be combined with the Authorization service so that when a customer's authentication is validated, the transaction is automatically submitted for authorization.

Fields Specific to a Visa Secure Transaction

These API fields are required specifically for this use case.

processingInformation.commerceIndicator	Set this field to vbv for a successful authentication (EMV 3-D Secure value of 05), vbv_attempted if authentication was attempted but did not succeed (EMV 3-D Secure value of 06), or vbv_failure if authentication failed (EMV 3-D Secure value of 07).
consumerAuthenticationInformation.cavv	This field is required when payer authentication is successful.

Card-Specific Requirements

Some payment cards require information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard	This field is recommended for Discover ProtectBuy.
consumerAuthenticationInformation.mcc	This field is required when the card type is Cartes Bancaires.
consumerAuthenticationInformation.productCode	This field is required for American Express SafeKey (US) when the product code is AIR for an airline purchase.
merchantInformation.merchantDescriptor.name	This field is required for Visa Secure travel.

orderInformation.shipTo.address1

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.address2

This field is required only for American Express SafeKey (US).

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore

This field is required for transactions processed in France.

orderInformation.billTo.locality

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

Endpoint

Production: POST <https://api.cybersource.com/pts/v2/payments>

Test: POST <https://apitest.cybersource.com/pts/v2/payments>

Required Fields for Processing an Authorization Using Visa Secure

Important

When relaxed requirements for address data and the expiration date are being used, not all fields in this list are required. It is your responsibility to determine whether your account is enabled to use this feature and which fields are required. For details about relaxed requirements, see [Relaxed Requirements for Address Data and Expiration Date in Payment Transactions](#).

clientReferenceInformation.code**consumerAuthenticationInformation.cavv**

This field is required when payer authentication is successful. Otherwise, this field is optional.

consumerAuthenticationInformation.xid**orderInformation.amountDetails.currency****orderInformation.amountDetails.totalAmount****orderInformation.billTo.address1****orderInformation.billTo.administrativeArea**

[orderInformation.billTo.country](#)
[orderInformation.billTo.email](#)
[orderInformation.billTo.firstName](#)
[orderInformation.billTo.lastName](#)
[orderInformation.billTo.locality](#)
[orderInformation.billTo.postalCode](#)
[paymentInformation.card.expirationMonth](#)
[paymentInformation.card.expirationYear](#)
[paymentInformation.card.number](#)
[paymentInformation.card.type](#)
[processingInformation.commerceIndicator](#)

Set this field to one of these values:

- **vbv**: Successful authentication (EMV 3-D Secure value of **05**).
- **vbv_attempted**: Authentication was attempted (EMV 3-D Secure value of **06**).
- **vbv_failure**: or **internet**: Authentication failed or was not attempted (EMV 3-D Secure value of **07**).

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Validating a Challenge

These fields are optional when validating a Payer Authentication transaction. In certain circumstances, the information provided by an optional field might be required before a transaction can proceed. Those optional fields that are sometimes required are listed in the required fields with the circumstance described.

[consumerAuthenticationInformation.authenticationBrand](#)

This field is only used with mada cards.

[consumerAuthenticationInformation.credentialEncrypted](#)

[consumerAuthenticationInformation.responseAccessToken](#)

[consumerAuthenticationInformation.signedPares](#)

REST Example: Validating and Authorizing a Transaction

Request

```
{
```

```

"clientReferenceInformation": {
  "code": "test"
},
"processingInformation": {
  "capture": "true",
  "authorizationOptions": {
    "ignoreAvsResult": "true"
  },
  "actionList": [
    "VALIDATE_CONSUMER_AUTHENTICATION"
  ]
},
"paymentInformation": {
  "card": {
    "expirationYear": "2031",
    "number": "4XXXXXXXXXX25X3",
    "securityCode": "123",
    "expirationMonth": "12",
    "type": "001"
  }
},
"orderInformation": {
  "amountDetails": {
    "totalAmount": "100.00",
    "currency": "GBP"
  },
  "billTo": {
    "firstName": "John",
    "lastName": "Smith",
    "address1": "201 S. Division St._1",
    "address2": "Suite 500",
    "locality": "Foster City",
    "administrativeArea": "CA",
    "postalCode": "94404",
    "country": "US",
    "email": "accept@email.com",
    "phoneNumber": "6504327113"
  }
},
"consumerAuthenticationInformation": {
  "authenticationTransactionId": "2b4eAa4K3H778X34Ciy0"
}
}

```

Response to a Successful Request

```

{
  "_links": {
    "void": {
      "method": "POST",
      "href": "/pts/v2/payments/7478305945626990404807/voids"
    },
    "self": {
      "method": "GET",
      "href": "/pts/v2/payments/7478305945626990404807"
    }
  }
}

```

```

},
"clientReferenceInformation": {
  "code": "test"
},
"consumerAuthenticationInformation": {
  "indicator": "vbv",
  "eciRaw": "05",
  "authenticationResult": "0",
  "strongAuthentication": {
    "OutageExemptionIndicator": "0"
  },
  "authenticationStatusMsg": "Success",
  "eci": "05",
  "token": "Axj/wSTlWZX08jkcOTHAAlU3YmMzhgzcn2ie/LXsgSgKe/LXsgS50OnEFBWGTSTL0Yua1eAwHScqzK
+nkcjhyY4wDi0",
  "cavv": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
  "paresStatus": "Y",
  "xid": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
  "directoryServerTransactionId": "fa628ed8-ad77-4723-b28f-91952eaca8fe",
  "threeDSSTransactionId": "71399671-8456-4c97-b056-e127622a5e26",
  "specificationVersion": "2.2.0",
  "acsTransactionId": "5f9fb589-08cc-4952-866d-30939868f411"
},
"id": "7478305945626990404807",
"orderInformation": {
  "amountDetails": {
    "totalAmount": "100.00",
    "authorizedAmount": "100.00",
    "currency": "GBP"
  }
},
"paymentAccountInformation": {
  "card": {
    "brandName": "VISA",
    "type": "001"
  }
},
"paymentInformation": {
  "tokenizedCard": {
    "type": "001"
  },
  "card": {
    "bin": "400000",
    "type": "VISA"
  }
},
"pointOfSaleInformation": {
  "terminalId": "12345678"
},
"processorInformation": {
  "paymentAccountReferenceNumber": "V0010013018036776997406844475",
  "merchantNumber": "12345678",
  "approvalCode": "100",
  "cardVerification": {
    "resultCodeRaw": "3",
    "resultCode": "2"
  }
}

```

```

    },
    "merchantAdvice": {
      "code": "00",
      "codeRaw": "0"
    },
    "networkTransactionId": "123456789012345",
    "transactionId": "123456789012345",
    "responseCode": "0",
    "avs": {
      "code": "U",
      "codeRaw": "00"
    }
  },
  "reconciliationId": "7026803874",
  "status": "AUTHORIZED",
  "submitTimeUtc": "2025-05-21T12:29:54Z"
}

```

Non-Payment Authentication

Non-Payment Authentication (NPA) requests enable a merchant to authenticate a customer without a transaction. A non-payment use case can be used for such tasks as adding a card to a merchant website, updating cardholder information on file, or to verify a cardholder's identity when creating a token for future use. The same authentication used during the checking enrollment process is used for NPA. Non-payment use cases are enabled using a combination of the **consumerAuthenticationInformation.messageCategory** and **consumerAuthenticationInformation.strongAuthentication.authenticationIndicator** values. For example to add a card to a loyalty program, set the Message Category value to **02** and the Authentication Indicator value to **04**. For other possible NPA use cases, refer to the other possible values for **consumerAuthenticationInformation.messageCategory**. The **consumerAuthenticationInformation.messageCategory** value must be set to **02** (non-payment authentication) to specify that the authentication is not for a transaction.

Card-Specific Requirements

Some payment cards require information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard

This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

This field is required when the card type is Cartes Bancaires.

consumerAuthenticationInformation.productCode

This field is required for American Express SafeKey (U.S.) when the product code is **AIR** for an airline purchase.

merchantInformation.merchantDescriptor.name

This field is required for Visa Secure travel.

orderInformation.shipTo.address1	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.address2	This field is required only for American Express SafeKey (US.)
orderInformation.shipTo.administrativeArea	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.country	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.postalCode	This field is required for American Express SafeKey (US).
paymentInformation.card.type	This field is required when the card type is JCB Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore	This field is required for transactions processed in France.
consumerAuthenticationInformation.overrideCountryCode	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
merchantInformation.merchantDescriptor.country	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
orderInformation.billTo.locality	This field is required for transactions in the US and Canada.
orderInformation.billTo.postalCode	This field is required when the orderInformation.billTo.country field value is US or CA .
orderInformation.shipTo.administrativeArea	This field is required when the orderInformation.shipTo.country field value is CA , US , or China .

orderInformation.shipTo.postalCode

This field is required when the **orderInformation.shipTo.country** field value is **US** or **CA**.

Processor-Specific Requirements

These fields are required by specific processors for transactions.

<https://developer.cybersource.com/docs/cybs/en-us/api-fields/reference/all/so/api-fields/transaction-mode.html#processingInformation.authorizationOptions.transactionMode>

This field is required only for merchants in Saudi Arabia.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment in Payer Authentication

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

consumerAuthenticationInformation.deviceChannel

This field is required for SDK integration. When you use the SDK integration, this field is dynamically set to **SDK**. When you use the JavaScript code, this field is dynamically set to **Browser**. For merchant-initiated or 3RI transactions, you must set the field to **3RI**. When you use this field in addition to JavaScript code, you must set the field to **Browser**.

consumerAuthenticationInformation.messageCategory

For non-payment authentication, set to a value of **02**.

consumerAuthenticationInformation.referenceId

consumerAuthenticationInformation.returnUrl

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

deviceInformation.httpBrowserJavaScriptEnabled

deviceInformation.httpBrowserLanguage

deviceInformation.httpBrowserScreenHeight

deviceInformation.httpBrowserScreenWidth

deviceInformation.httpBrowserTimeDifference

deviceInformation.ipAddress

deviceInformation.userAgentBrowserValue

When the customer's browser provides this value, you must include that value in your request.

**merchantInformation.merchantDescriptor.
country**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount

This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

orderInformation.billTo.address1

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

paymentInformation.card.expirationYear

This field is required when the **paymentInformation.card.number** field is included.

paymentInformation.card.expirationMonth

This field is required when the **paymentInformation.card.number** field is included.

paymentInformation.card.type

paymentInformation.card.number**Related Information**

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for Non-Payment Authentication**Request**

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "001",
      "expirationMonth": "12",
      "expirationYear": "2025",
      "number": "4XXXXXXXXXX2503"
    }
  },
  "buyerInformation": {
    "merchantCustomerId": "334124572",
    "mobilePhone": "1245789632"
  },
  "deviceInformation": {
    "ipAddress": "139.130.4.5",
    "httpAcceptContent": "test",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "1000000",
    "httpBrowserScreenWidth": "1000000",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "GxKnLy8TFDUFxJP1t"
  }
}
```

```

"consumerAuthenticationInformation": {
  "deviceChannel": "BROWSER",
  "messageCategory": "02",
  "transactionMode": "eCommerce"
}
}

```

Response

```

{
  "clientReferenceInformation": {
    "code": "1729234929433"
  },
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "MXvfrk1911nHJpC18OI0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTi1GtFWKe0Yg5ABEBTyDdd93DSBcS0MRdrSTL0YrmYUwDgAAAWBV8",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "stepUpUrl": "https://centinelapistag.cardinalcommerce.com/V2/Cruise/StepUp",
    "pareq":
"eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMi4wIiwidGhyZWVEU1NlcnZlc1RyYW5zSUQiOiJkOTkzM2U5ZS",
    "directoryServerTransactionId": "0656bace-7519-4dd9-9450-98dfc6f35d7c",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "d9933e9e-90b8-46ac-8a07-8739c5e82b5c",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "de0a1125-81b4-4b38-9aa0-e8c72de00399"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder before continuing with the transaction."
  },
  "id": "7292349292916631504953",
  "paymentInformation": {
    "card": {
      "bin": "400000",
      "type": "VISA"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-10-18T07:02:09Z"
}

```

Examples Using 3-D Secure Data Only

3-D Secure Data Only is a solution that shares data that merchants collect during transactions with the issuer, so that the issuers can make more informed authorization decisions for future transactions. Data Only uses the 3-D Secure infrastructure, but it is not a complete 3-D Secure authentication. 3-D Secure Data Only is a frictionless experience.

Data Only can increase authorization approvals and reduce fraud in the following ways:

- Merchants share additional transaction data with the issuer, allowing the issuer to feel more comfortable with the transaction's risk level. The issuer can gain additional insight into who the buyer is and what they are purchasing which enables better authorization decisions.
- Since Data Only is not a full authentication, merchants retain fraud liability, putting less risk on the issuers, which might lead to a higher approval rate when compared to non-authenticated transactions.

Visa supports the Visa Data Only program, and Mastercard has two options for Data Only. These Mastercard options are:

- Mastercard Data Share Only: This option mirrors the Visa Data Only program by allowing the AReq message to reach the Issuer. The Issuer can then obtain all of the enhanced data and link that information on the authorization message.
- Mastercard Identity Check Insights: This option stops the AReq at the Mastercard Directory Server. Mastercard returns a Data Only response to the merchant and then passes a risk score outside of the transaction flow to the Issuer that the Issuer can append to the authorization to aid in their decision process.

Visa Data Only

Visa has a data only data flow so that merchants can share customer data with the issuers without going through authentication. The additional data provided to the issuer helps the issuer make risk assessments about approving cardholder transactions. Data only data

flows are frictionless and do not affect the customer experience. When sending a Visa data only check enrollment request, be sure to include all of the required fields and set the **consumerAuthenticationInformation.challengeCode** field to **06**.

The response from the data only request will include this data:

- ECI = **07**
- PAREs = **I**
- <CAVV> value

This data from the response must be included in the authorization request.

Endpoint

Production: POST <https://api.cybersource.com/pts/v2/payments>

Test: POST <https://apitest.cybersource.com/pts/v2/payments>

Required Fields for Visa Data Only

These fields are the minimum fields required when you request the Visa Data service. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

clientReferenceInformation.code

consumerAuthenticationInformation.challengeCode

consumerAuthenticationInformation.referenceId

customerInformation.merchantCustomerId

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount

orderInformation.billTo.address1

orderInformation.billTo.administrativeArea

orderInformation.billTo.country

orderInformation.billTo.email

orderInformation.billTo.firstName
 orderInformation.billTo.lastName
 orderInformation.billTo.locality
 orderInformation.billTo.phoneNumber
 orderInformation.billTo.postalCode

 paymentInformation.card.expirationYear
 paymentInformation.card.expirationMonth
 paymentInformation.card.number
 orderInformation.shipTo.address1
 orderInformation.shipTo.administrativeArea
 orderInformation.shipTo.country
 orderInformation.shipTo.locality
 orderInformation.shipTo.phoneNumber
 orderInformation.shipTo.postalCode

REST Example: Visa Data Only

Request

```

{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "Test",
      "lastName": "Testlastname",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "card": {

```

```

        "expirationMonth": "05",
        "expirationYear": "2029",
        "number": "4XXXXXXXXXX2X24"
    }
},
"deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
},
"consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "challengeCode": "06"
}
}

```

Response to Successful Request

```

{
    "clientReferenceInformation": {
        "code": "test"
    },
    "consumerAuthenticationInformation": {
        "eciRaw": "07",
        "authenticationTransactionId": "2DkdQ8ZG1urNNQR0XTM1",
        "strongAuthentication": {
            "OutageExemptionIndicator": "0"
        },
        "effectiveAuthenticationType": "FR",
        "authorizationPayload":
"eyJjb250YWluZXJWZXJzaW9uIjojMSIsImF1dGh1bnRyY2Y0aW9uVmFsdWUiOiJBJSmtCQmtoZ1FRQUFBRTNlU0VKZWRRQUFBQUE9",
        "eci": "07",
        "token": "AxjzbwSTlC3VWiL9QyNJAEQBTRduBSgekC4lp/cMm2OKOP1RqQoBgAAAhZr",
        "cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
        "paresStatus": "I",
        "acsReferenceNumber": "CardinalACS",
        "xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
        "directoryServerTransactionId": "ce8c3595-1868-4242-b3ee-35689df2f2ce",
        "veresEnrolled": "Y",
        "threeDSServerTransactionId": "205e97c1-f15a-480f-8497-55e9a68cf046",
        "acsOperatorID": "MerchantACS",
        "ecommerceIndicator": "internet",
        "specificationVersion": "2.2.0",
        "acsTransactionId": "3047573f-590e-46b5-83f4-6a49c1b4239c"
    },
    "id": "7455787250786729403209",
    "paymentInformation": {
        "card": {
            "bin": "400000",

```

```

    "type": "VISA"
  }
},
"status": "AUTHENTICATION_SUCCESSFUL",
"submitTimeUtc": "2025-04-25T10:58:47Z"
}

```

REST Example: Bundled Authentication and Authorization with Visa Data Only

Request

```

{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "Test",
      "lastName": "Testlastname",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "processingInformation": {
    "actionList": [
      "CONSUMER_AUTHENTICATION"
    ]
  },
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029",
      "number": "4XXXXXXXXXX20X4"
    }
  },
  "deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,

```

```

    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "challengeCode": "06"
  }
}

```

Response to Successful Request

```

{
  "_links": {
    "authReversal": {
      "method": "POST",
      "href": "/pts/v2/payments/7455831774536819703209/reversals"
    },
    "self": {
      "method": "GET",
      "href": "/pts/v2/payments/7455831774536819703209"
    },
    "capture": {
      "method": "POST",
      "href": "/pts/v2/payments/7455831774536819703209/captures"
    }
  },
  "clientReferenceInformation": {
    "code": "test"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "07",
    "authenticationTransactionId": "301LF8FUJmwmp3VofTC1",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "effectiveAuthenticationType": "FR",
    "authorizationPayload":
"eyJjb250YWluZXJWZXJzaW9uIjojMSIsImF1dGh1bnRpdY2F0aW9uVmFsdWUiOiJBJSmtCQmtoZ1FRQUFBRTU0VKeWRRQUFBQUE9",
    "eci": "07",
    "token":
"Axj/7wSTlC5ziEBhdn2pAEQs3aNWrmxht2jVm2cMXLdgzZMHKaLtwTReAU0Xbgmi9pAuJaf3Djtjijj5UakLAZJyhcx5CAwuz7UgAA",
    "cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "paresStatus": "I",
    "acsReferenceNumber": "CardinalACS",
    "xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "6a86e628-7686-478f-b5e3-4f31c115c70f",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "4e4689c5-97ac-469b-8d67-0613d8794de7",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "internet",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "750f9938-0c63-4734-864c-d6891a276ef2"
  }
}

```

```

},
"id": "7455831774536819703209",
"orderInformation": {
  "amountDetails": {
    "authorizedAmount": "10.99",
    "currency": "USD"
  }
},
"paymentAccountInformation": {
  "card": {
    "type": "001"
  }
},
"paymentInformation": {
  "tokenizedCard": {
    "type": "001"
  },
  "card": {
    "bin": "400000",
    "type": "001"
  }
},
"processorInformation": {
  "systemTraceAuditNumber": "061920",
  "approvalCode": "831000",
  "merchantAdvice": {
    "code": "01",
    "codeRaw": "M001"
  },
  "responseDetails": "ABC",
  "networkTransactionId": "016153570198200",
  "retrievalReferenceNumber": "511512061920",
  "consumerAuthenticationResponse": {
    "code": "2",
    "codeRaw": "2"
  },
  "transactionId": "016153570198200",
  "responseCode": "00",
  "avs": {
    "code": "Y",
    "codeRaw": "Y"
  }
},
"reconciliationId": "7455831774536819703209",
"status": "AUTHORIZED",
"submitTimeUtc": "2025-04-25T12:12:59Z",
"tokenInformation": {
  "additionalInformation": "0"
}
}

```

Mastercard Data Only

Mastercard has a Data Only data flow so that merchants can share customer data with the issuers without going through authentication. The additional data provided to the issuer helps the issuer make risk assessments about approving cardholder transactions. Data Only data flows are frictionless and do not affect the customer experience.

When sending a Mastercard Data Only check enrollment request, be sure to include all of the required fields and set the **consumerAuthenticationInformation.challengeCode** to **06**. The response from the Data Only request includes this data:

- ECI = **06**
- CAVV value
- Directory server transaction ID
- paresStatus = **I**
- Risk score
- Reason code

This data from the response must be included in the authorization request.

Endpoint

Production: POST <https://api.cybersource.com/pts/v2/payments>

Test: POST <https://apitest.cybersource.com/pts/v2/payments>

Required Fields for Mastercard Data Only

These fields are the minimum fields required when you request the Mastercard Data service. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.



Important

Merchants should ensure that they run the device collection and 3-D Secure Method URL portions of the flow before sending in the pa_enroll request.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

clientReferenceInformation.code
 consumerAuthenticationInformation.
 challengeCode
 consumerAuthenticationInformation.referenceId
 customerInformation.merchantCustomerId
 orderInformation.amountDetails.currency
 orderInformation.amountDetails.totalAmount
 orderInformation.billTo.address1
 orderInformation.billTo.administrativeArea
 orderInformation.billTo.country
 orderInformation.billTo.email
 orderInformation.billTo.firstName
 orderInformation.billTo.lastName
 orderInformation.billTo.locality
 orderInformation.billTo.phoneNumber
 orderInformation.billTo.postalCode
 paymentInformation.card.expirationYear
 paymentInformation.card.expirationMonth
 paymentInformation.card.number
 orderInformation.shipTo.address1
 orderInformation.shipTo.administrativeArea
 orderInformation.shipTo.country
 orderInformation.shipTo.locality
 orderInformation.shipTo.phoneNumber
 orderInformation.shipTo.postalCode

REST Example: Mastercard Data Only

Request

```

{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {

```

```

        "currency": "USD",
        "totalAmount": "10.99"
    },
    "billTo": {
        "address1": "1 Market St",
        "address2": "Address 2",
        "administrativeArea": "CA",
        "country": "US",
        "locality": "san francisco",
        "firstName": "Test",
        "lastName": "Testlastname",
        "phoneNumber": "4158880000",
        "email": "test@email.com",
        "postalCode": "94105"
    }
},
"paymentInformation": {
    "card": {
        "expirationMonth": "05",
        "expirationYear": "2029",
        "number": "52XXXXXXXXXX28X5"
    }
},
"deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
},
"consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "challengeCode": "06",
    "scoreRequest": "N"
}
}

```

Response to Successful Request

```

{
    "clientReferenceInformation": {
        "code": "test"
    },
    "consumerAuthenticationInformation": {
        "eciRaw": "06",
        "challengeRequired": "N",
        "authenticationTransactionId": "KjNeRerYgMLXJD8gzC51",
        "strongAuthentication": {
            "OutageExemptionIndicator": "0"
        },
        "effectiveAuthenticationType": "FR",
    }
}

```

```

"authorizationPayload":
"eyJjb250YWluZXJWZXJzaW9uIjoimSIImVjaSI6IjA0IiwiaXV0aGVudGljYXRpb25WYXN1ZSI6IkkFKA0JCa2hnUVFBQUFFNGdTRUp5ZlY3RpdmVBdXR0VHlwZSI6IkkZSIiwiaWYWNzT3BlcmF0b3JJRCI6Ikk1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlZlGF0dXMiOiJlJViiwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc55zSUQiOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWVvy2hhbnRDb3VudHJ5Q29kZSI6Ijg0cmNoYXNlRGF0ZSI6IjIwMjUwNDI1MDUzODAwIiwicHVyY2hhc2VbW91bnQiOiI5MDk5IiwibWVvy2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkwmMDMzIiwiaWYWNxdWlyZXJNZXJjaGFudEIEIjoizGVmYXVsdCI5InRocmVlRFNSZXF1ZXN0b3JOYW11IjoizQ0FSMTM0NzNfUEFUZXN0N0b3JJRCI6IkkNBUIEzNDczX2RlZmF1bHQiLCJjYXJkbnJhbmQiOiJNQNURVJDQVJEIn0=",
  "token": "AxjzbwSTlCspnzdze9IJAEQCTRdt8KnmkC4lp/UMm2OKOP1RqQoCwAAASaee",
  "paresStatus": "I",
  "acsReferenceNumber": "CardinalACS",
  "ucafCollectionIndicator": "6",
  "ucafAuthenticationData": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
  "directoryServerTransactionId": "4135d39c-cb43-4c4f-81bf-9b3797d3b8f9",
  "veresEnrolled": "Y",
  "threeDSSTransactionId": "9c4d80a0-1624-4061-8f08-78c59b335e8c",
  "acsOperatorID": "MerchantACS",
  "ecommerceIndicator": "spa",
  "specificationVersion": "2.2.0",
  "acsTransactionId": "99b3872c-8e36-49dd-b826-b4f0c583f825"
},
"id": "7455594797856844403209",
"paymentInformation": {
  "card": {
    "bin": "520000",
    "type": "MASTERCARD"
  }
},
"status": "AUTHENTICATION_SUCCESSFUL",
"submitTimeUtc": "2025-04-25T05:38:01Z"
}

```

REST Example: Bundled Authentication and Authorization with Mastercard Data Only

Request

```

{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    }
  }
}

```

```

    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "Test",
      "lastName": "Testlastname",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "processingInformation": {
    "actionList": [
      "CONSUMER_AUTHENTICATION"
    ]
  },
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029",
      "number": "52XXXXXXXXXX28X5"
    }
  },
  "deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "challengeCode": "06",
    "scoreRequest": "N"
  }
}

```

Response to Successful Request

```

{
  "_links": {
    "authReversal": {
      "method": "POST",
      "href": "/pts/v2/payments/7455833000666819803209/reversals"
    },
    "self": {
      "method": "GET",
      "href": "/pts/v2/payments/7455833000666819803209"
    }
  }
}

```

```

    },
    "capture": {
      "method": "POST",
      "href": "/pts/v2/payments/74558330000666819803209/captures"
    }
  },
  "clientReferenceInformation": {
    "code": "test"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "06",
    "challengeRequired": "N",
    "authenticationTransactionId": "d94pknkLH4BhjWxylay1",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "effectiveAuthenticationType": "FR",
    "authorizationPayload":
"eyJjb250YWluZXJWZXJzaW9uIjoiaSI6ImVjaSI6IjA0IiwiaXYw0aGVudGljYXRpb25WYWx1ZSI6IkkFKa0JCa2hnUVFBQUFFNGdTRUp55",
    "token": "Axj/7wSTlC5342kEkThJAEQs3aNWrhmzYMGDZs2cMXLhgZMHKaLtwTRfAk0Xbgmi/
pAuJaf3DJtjijj5UakLATJyhC78bSCSJwkgAAA4wBh",
    "paresStatus": "I",
    "acsReferenceNumber": "CardinalACS",
    "ucafCollectionIndicator": "6",
    "ucafAuthenticationData": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "6a0f491a-b105-498f-9997-81a02b9971ca",
    "veresEnrolled": "Y",
    "threeDSSTransactionId": "319f6440-64d6-4d49-bd27-d190bd418599",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "spa",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "e91a8472-24aa-44de-a54c-4aa145e7ccd3"
  },
  "id": "74558330000666819803209",
  "issuerInformation": {
    "clearingData": "6700040102F0F1"
  },
  "orderInformation": {
    "amountDetails": {
      "authorizedAmount": "10.99",
      "currency": "USD"
    }
  },
  "paymentAccountInformation": {
    "card": {
      "brandName": "MASTERCARD",
      "type": "002"
    }
  },
  "paymentInformation": {
    "tokenizedCard": {
      "type": "002"
    },
    "card": {
      "bin": "520000",
      "type": "002"
    }
  }
}

```

```

    }
  },
  "processorInformation": {
    "systemTraceAuditNumber": "061923",
    "approvalCode": "831000",
    "merchantAdvice": {
      "code": "01",
      "codeRaw": "M001"
    },
  },
  "responseDetails": "ABC",
  "networkTransactionId": "0425MCC444569",
  "retrievalReferenceNumber": "511512061923",
  "consumerAuthenticationResponse": {
    "code": "2",
    "codeRaw": "2"
  },
  },
  "transactionId": "0425MCC444569",
  "responseCode": "00",
  "avs": {
    "code": "Y",
    "codeRaw": "Y"
  }
  },
  },
  "reconciliationId": "7455833000666819803209",
  "status": "AUTHORIZED",
  "submitTimeUtc": "2025-04-25T12:15:03Z",
  "tokenInformation": {
    "additionalInformation": "0"
  }
  }
}

```

Mastercard Identity Check Insights (IDCI)

Mastercard has an IDCI data flow so that merchants can share customer data with the issuers without going through authentication. Unlike the Data Only flow, the AReq remains at the Mastercard Directory Server. Using the device information and additional data, Mastercard calculates a risk score for the transaction that is then shared with the issuer during authorization. The additional data provided to the issuer helps the issuer make risk assessments about approving cardholder transactions. Mastercard IDCI data flows are frictionless and do not affect the customer experience.

When sending a Mastercard IDCI check enrollment request, be sure to include all of the required fields and set the **consumerAuthenticationInformation.messageCategory** to **80**. The response from the IDCI request includes this data:

- ECI = **04**
- CAVV value
- Directory server transaction ID
- paresStatus = **U**
- Risk score
- Reason code

This data from the response must be included in the authorization request.

Endpoint

Production: POST <https://api.cybersource.com/pts/v2/payments>

Test: POST <https://apitest.cybersource.com/pts/v2/payments>

Required Fields for Mastercard IDCI

These fields are the minimum fields required when you request the Mastercard Data Only IDCI service. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.



Important

Merchants should ensure that they run the device collection and 3-D Secure Method URL portions of the flow before sending in the pa_enroll request.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

clientReferenceInformation.code

consumerAuthenticationInformation.messageCategory

consumerAuthenticationInformation.referenceId

customerInformation.merchantCustomerId

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount

orderInformation.billTo.address1

orderInformation.billTo.administrativeArea

orderInformation.billTo.country

orderInformation.billTo.email

orderInformation.billTo.firstName

orderInformation.billTo.lastName

orderInformation.billTo.locality

[orderInformation.billTo.phoneNumber](#)
[orderInformation.billTo.postalCode](#)
[paymentInformation.card.expirationYear](#)
[paymentInformation.card.expirationMonth](#)
[paymentInformation.card.number](#)
[orderInformation.shipTo.address1](#)
[orderInformation.shipTo.administrativeArea](#)
[orderInformation.shipTo.country](#)
[orderInformation.shipTo.locality](#)
[orderInformation.shipTo.phoneNumber](#)
[orderInformation.shipTo.postalCode](#)

REST Example: Mastercard IDC1

Request

```
{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "Test",
      "lastName": "Testlastname",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029",
      "number": "52XXXXXXXXXX28X5"
    }
  },
}
```

```
{
  "deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "messageCategory": "80",
    "scoreRequest": "N"
  }
}
```

Response to Successful Request

```
{
  "clientReferenceInformation": {
    "code": "test"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "04",
    "challengeRequired": "N",
    "authenticationTransactionId": "KjNeRerYgMLXJD8gzC51",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "effectiveAuthenticationType": "FR",
    "authorizationPayload":
"eyJjb250YWwluZXJWZXJzaW9uIjoiaSIiImVjaSI6IjA0IiwiaXV0aGVudGl1YXRpb25WYXN1ZSI6IjFKa0JCa2hnUVFBQUFFNGdTRUp5ZlY3RpdmdVbDR0VHlwZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnROcmNoYXNlRGF0ZSI6IjIwMjUwNDI1MDUzODAwIiwicHVyY2hhc2VBbW91bnQiOiIiXMDk5IiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbnZ3ZXJmZWZzIjoiZGVmYXVsdCIiImRocmV1RfNSZXF1ZXN0b3JOYW11IjoiaQ0FSMTM0NzNfUEF1ZXN0N0b3JJRCI6IjI1cmNoYXN1ZSI6IjZSIiwiaWYwbnZ3BlcmF0b3JJRCI6IjI1cmNoYW50QUNTIiwidGhyZWVEU1JlcXVlc3RvckNoYWxsZW5nZlUdGF0dXMiOiJVViwidHJhbnNTdGF0dXNSZWZzb24iOiI4MCIiImRzVHJhbnNJRCI6IjQxMzVkMzljLWNIiNDMtNGM0Zi04MWJmLTliMzc5ZSU0iOiI5OWIzODcyYy04ZTM2LTQ5ZGQtYjgyNi1iNGYwYzU4M2Y4MjUiLCJtZXNzYWdlVmVyc2lubiI6IjIuMi4wIiwibWV5Y2hhbnRDb3VudHJ5Q29kZSI6Ijg0TkxMDMzIiwiaWYwbn
```

```

    "paymentInformation": {
      "card": {
        "bin": "520000",
        "type": "MASTERCARD"
      }
    },
    "status": "AUTHENTICATION_SUCCESSFUL",
    "submitTimeUtc": "2025-04-25T05:38:01Z"
  }
}

```

REST Example: Bundled Authentication and Authorization with Mastercard IDCI

Request

```

{
  "clientReferenceInformation": {
    "code": "test"
  },
  "customerInformation": {
    "merchantCustomerId": "SW489TT19",
  }
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "Test",
      "lastName": "Testlastname",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "processingInformation": {
    "actionList": [
      "CONSUMER_AUTHENTICATION"
    ]
  },
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029",
      "number": "52XXXXXXXXXX28X5"
    }
  },
  "deviceInformation": {
    "httpAcceptBrowserValue": "data",
    "httpAcceptContent": "pa_http_user_accept_value",
  }
}

```

```

    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": false,
    "httpBrowserJavaScriptEnabled": false,
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "864",
    "httpBrowserScreenWidth": "1536",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "123"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "Browser",
    "messageCategory": "80",
    "scoreRequest": "N"
  }
}

```

Response to Successful Request

```

{
  "_links": {
    "authReversal": {
      "method": "POST",
      "href": "/pts/v2/payments/7455833000666819803209/reversals"
    },
    "self": {
      "method": "GET",
      "href": "/pts/v2/payments/7455833000666819803209"
    },
    "capture": {
      "method": "POST",
      "href": "/pts/v2/payments/7455833000666819803209/captures"
    }
  },
  "clientReferenceInformation": {
    "code": "test"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "04",
    "challengeRequired": "N",
    "authenticationTransactionId": "d94pknkLH4BhjWxylay1",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "effectiveAuthenticationType": "FR",
    "authorizationPayload":
"eyJjb250YWluZXJWZXJzaW9uIjojMSIsImVjaSI6IjA0IiwiaXYwVGluYXRpb25WYWx1ZSI6IkkFKa0JCa2hnUVFBQUFFNGdTRUp5",
    "signedParesStatusReason": "80",
    "token": "Axj/7wSTlC5342kEkThJAEQs3aNWrhmzYMGDZs2cMXLhgZMHKaLtwTRfAk0Xbgmi/
pAuJaf3DJtjij5UakLATJyhC78bSCSJwkgAAA4wBh",
    "paresStatus": "U",
    "acsReferenceNumber": "CardinalACS",
    "ucafCollectionIndicator": "4",
    "ucafAuthenticationData": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "6a0f491a-b105-498f-9997-81a02b9971ca",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "319f6440-64d6-4d49-bd27-d190bd418599",

```

```

    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "spa",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "e91a8472-24aa-44de-a54c-4aa145e7ccd3"
  },
  "id": "7455833000666819803209",
  "issuerInformation": {
    "clearingData": "6700040102F0F1"
  },
  "orderInformation": {
    "amountDetails": {
      "authorizedAmount": "10.99",
      "currency": "USD"
    }
  },
  "paymentAccountInformation": {
    "card": {
      "brandName": "MASTERCARD",
      "type": "002"
    }
  },
  "paymentInformation": {
    "tokenizedCard": {
      "type": "002"
    },
    "card": {
      "bin": "520000",
      "type": "002"
    }
  },
  "processorInformation": {
    "systemTraceAuditNumber": "061923",
    "approvalCode": "831000",
    "merchantAdvice": {
      "code": "01",
      "codeRaw": "M001"
    }
  },
  "responseDetails": "ABC",
  "networkTransactionId": "0425MCC444569",
  "retrievalReferenceNumber": "511512061923",
  "consumerAuthenticationResponse": {
    "code": "2",
    "codeRaw": "2"
  },
  "transactionId": "0425MCC444569",
  "responseCode": "00",
  "avs": {
    "code": "Y",
    "codeRaw": "Y"
  }
},
"reconciliationId": "7455833000666819803209",
"status": "AUTHORIZED",
"submitTimeUtc": "2025-04-25T12:15:03Z",
"tokenInformation": {
  "additionalInformation": "0"
}

```

```
}  
}
```

Authentication Examples Using Digital Payment (Google Pay)

Digital payments are electronic payments that transfer funds from one payment account to another. These use cases demonstrate how the authentication service works using a digital payment method like Google Pay.

Setting Up Device Data Collection Using Digital Payment (Google Pay)

Running the Setup service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. This use case demonstrates how the service works using a digital payment method like Google Pay.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

[paymentInformation.card.type](#)

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

**[consumerAuthenticationInformation.
overrideCountryCode](#)**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
orderInformation.billTo.postalCode	This field is required when the orderInformation.billTo.country field value is US or CA .
merchantInformation.merchantDescriptor.country	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for Device Data Collection

These fields are the minimum fields required when you request the Payer Authentication Setup service. Other fields that can be used to collect additional information during a transaction are listed in the optional fields section. Under certain circumstances, a field that is normally optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

consumerAuthenticationInformation.overrideCountryCode	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
merchantInformation.merchantDescriptor.country	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
orderInformation.billTo.administrativeArea orderInformation.billTo.postalCode	This field is required for the US and Canada. This field is required when the orderInformation.billTo.country field value is US or CA .
paymentInformation.card.expirationMonth paymentInformation.card.expirationYear paymentInformation.card.number	

paymentInformation.card.type
paymentInformation.card.type

This field is required when the card type is Cartes Bancaires, JCB, China UnionPay, or Meeza.

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Device Data Collection

These fields are optional for setting up a Payer Authentication transaction. Under certain circumstances, a field might appear as both an optional field and a required field.

clientReferenceInformation.code

orderInformation.billTo.address1

orderInformation.billTo.administrativeArea

orderInformation.billTo.country

orderInformation.billTo.email

orderInformation.billTo.firstName

orderInformation.billTo.lastName

orderInformation.billTo.locality

orderInformation.billTo.postalCode

REST Example: Setting Up Device Data Collection When Using Digital Payment (Google Pay)

Request

```
{
  "paymentInformation": {
    "fluidData": {
      "value":
        "eyJzaWduYXR1cmUiOiJNRVFDZSUwVVBmc1RIMERyMnZmeG8wVkF1Z3N2bH1SRzdENEfsYmRwa1pPd1NzZGtBaUFVO
        DE2aHpmMG5BMzJzQmx6an1USURyZXBHNUY1eEt1RmNnSE9aK3RML2ZRXHUwMDNkXHUwMDNkIiwiaW50ZXJtZW
        RpYXR1U21nbmluZ0tleSI6eyJzaWduZWRLZXkiOiJ7XCJrZX1WYWx1ZVwiOiwiTUZrd0V3WUhlb1pJemowQ0FRWU1Lb1p
        JemowREFRY0RRZ0FFOFdKSHVMOFVuWW9WWDNHV3dGVkJPcnh6L3lJdG10aW9neWhDeGpCRm5tS3pCcWs2K3ln
        VU5SUGF4THdaaWtILzBxV0s1QXhlc3BDNVhwn1NHNUN1T1FcXHUwMDNkXFc1MDAaZGF
        wiLFwia2V5RXhwaXJhdG
        1vblwiOlwiMTYzMDUxNjYyODAwODVwifSIsInNpZ25hdHVyZXMiOiwiTUUVVQ01RRH1TQTV
        1T2t5UXQ5cFoyQ1EzaXBmcG
        NWT0F5ZmIzM2ozUEZPQUw3K1o5S3dJZ2FjWWp2YWJpTEUyWHFkNU1xNGphNStEVldoREttVHpoMmk1RGlnb1lFQ
```

```

ndcdTawM2QiXX0sInByb3RvY29sVmVyc2lubi
I6IkVDdjIiLCJzaWduZWRNZXNzYWdlIjoie1wiZW5jcnlwdGVkTWVzc2F

nZVwiOlwiWG5qOGxSSWhGMDVEWwdRK3hwNEE5YUhsVGE1U2ljduJac2w1L2NNRkJlc1BBY1RzaE4zRF1Ob1Mvde
VkRkRYRzZJRxBpV1cxVnV6OUprejNWWGdpMzJrT21EVk9aakJNWTFvVHdTQnA5WG53ejlLYUtOekYvRFBSTy9jbStob
W9iZ2dSdmxGSStOekN5U1VNWW1hbTJjZFUyZGRZWmZHck9nZWNSc3FrdW1tNm1Ma0xGQTFJcDfrNWFRV21EUE
lEdTh1SnNmbWs4bzMyMlpteVdMMVVWenE0WHFkNTZScXZol1VFeEp3RC9HZXU5SW00M0pmb1ZqckVkeDE0Ykx1
OUpmMHJrcU5ONG5sM0NVZEFoMVNhZnBzdktuTVRML1Nmenk1ZGdDZlRDcHJDdW85UVZPaXVValBJNUdXR1BKS
WVVVVU1cUZhcis3NXFBT2dvZ0tNRUZ3OFVxL1A0UjBDcXczcF1lNnc2enlaVzdDV1YxRzRmc3BITTNRaE83bFZNNmR
jSWZQWW00ZitubWI3UzgwY29KTXR1QjKxVEhjZzJmVXhwM2FrWEhSdzNyN3BRZk9KWWFieU1URmtieDh0Yi9ieW16
VUZEVVU4S3EwTmVVCVTrQng2L21qUDg4bWxoWkE2ZERrNWJvc2o4SDBDSk9nWUtCbVgyR09vamRtTDd5Y1BnTU
5vNnhsYjRtUzVkaTJjZUpFakFybEZFa3NWNTlsS2lodk5pckRZc1BTU21TRFVZnJBMUXVvTEErYjFMSnpCMkpYelFcIixcI
mVwaGVtZXJhbFB1YmXpY0tleVwiOlwiQk84bmtEbE0ycV1CmpQd00wbDdUTFY2UytUbzZDTF10eXArWGM2cXpQY
k1LTEgXVytySGh3NUlWU2lqb11tb3Vac1NuWU9LV21yRVAYYmtLMk4rTWfZXFx1MDAaZfwiLFwidGFnXCI6XCJJuVU5x
UV1xcy9YRVlDMmg0WFlibnVpajFLb1NzUfPacEpqVGI4TVVZcUZNXF1MDAaZfwiFwifSJ9"
}
},
"processingInformation": {
  "paymentSolution": "012"
}
}
}

```

Response to Successful Request

```

{
  "consumerAuthenticationInformation": {
    "accessToken":
"eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiI5MjhlZDAwYy0zMmEyLTQ5ODgtODRjNC1hYTcxMGFlY2I1
OGEiLCJpYXQiOiJlY2MjY5NjAsImZlcyI6IjVkdGZzYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTYyOTg
zMDU2MCwiT3JnVW5pdElkIjoie1wiZW5jcnlwdGVkTWVzc2F

ZjJiZi04NmIwLTQ0ZmYtYmJjZS0wZjU1MjNlMWIzNGEifQ.FgVbwbW9_lwnlr4ovYR5VVPuV16Ck1AVHHXS_5OD
skA",
    "deviceDataCollectionUrl": "https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect",
    "referenceId": "9493f2bf-86b0-44ff-bbce-0f5523e1b34a",
    "token": "AxizbwSTVW4Mj1fvsU27ABEBURxPZebOAE1IZNJMVriuZhTA9AAA+QBf"
  },
  "id": "6298269599786696003003",
  "status": "COMPLETED",
  "submitTimeUtc": "2022-08-24T17:42:40Z"
}

```

Checking Enrollment in Payer Authentication Using Digital Payment (Google Pay)

Running the Check Enrollment service collects data about the device that the customer is using to place the order and verifies that the customer is enrolled in a payer authentication program. This use case demonstrates how the service works with a digital payment method like Google Pay.

Card-Specific Requirements

Some payment cards require information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard	This field is recommended for Discover ProtectBuy.
consumerAuthenticationInformation.mcc	This field is required when the card type is Cartes Bancaires.
consumerAuthenticationInformation.productCode	This field is required for American Express SafeKey (U.S.) when the product code is AIR for an airline purchase.
merchantInformation.merchantDescriptor.name	This field is required for Visa Secure travel.
orderInformation.shipTo.address1	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.address2	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.administrativeArea	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.country	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.postalCode	This field is required for American Express SafeKey (US).
paymentInformation.card.type	This field is required when the card type is Cartes Bancaires, JCB, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore	This field is required for transactions processed in France.
--	--

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

**merchantInformation.merchantDescriptor.
country**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.locality

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

orderInformation.shipTo.administrativeArea

This field is required when the **orderInformation.shipTo.country** field value is **CA**, **US**, or **China**.

orderInformation.shipTo.postalCode

This field is required when the **orderInformation.shipTo.country** field value is **US** or **CA**.

Processor-Specific Requirements

These fields are required by specific processors for transactions.

processingInformation.authorizationOptions.transactionMode This field is required only for merchants in Saudi Arabia.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment in Payer Authentication

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

buyerInformation.mobilePhone

This field is required (when available) if **buyerInformation.workPhone** is not used, unless market or regional mandate restricts sending this information.

buyerInformation.workPhone

This field is required (when available) if **buyerInformation.mobilePhone** is not used, unless market or regional mandate restricts sending this information.

consumerAuthenticationInformation. deviceChannel

This field is required for SDK integration. When you use the SDK integration, this field is dynamically set to **SDK**. When you use the JavaScript code, this field is dynamically set to **Browser**. For merchant-initiated or 3RI transactions, you must set the field to **3RI**. When you use this field in addition to JavaScript code, you must set the field to **Browser**.

consumerAuthenticationInformation. messageCategory

For non-payment authentication, set to a value of **02**.

consumerAuthenticationInformation.referenceId

consumerAuthenticationInformation.returnUrl

consumerAuthenticationInformation. overrideCountryCode

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in the merchant configuration during merchant boarding.

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

deviceInformation.httpBrowserJavaScriptEnabled

deviceInformation.httpBrowserLanguage

deviceInformation.httpBrowserScreenHeight

deviceInformation.httpBrowserScreenWidth

deviceInformation.httpBrowserTimeDifference

deviceInformation.ipAddress

deviceInformation.userAgentBrowserValue	When the customer's browser provides this value, you must include that value in your request.
merchantInformation.merchantDescriptor.country	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
orderInformation.amountDetails.currency	
orderInformation.amountDetails.totalAmount	This field is required when the orderInformation.lineItems.unitPrice field is not used.
orderInformation.billTo.address1	
orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
paymentInformation.card.expirationYear	This field is required when the paymentInformation.card.number field is included.
paymentInformation.card.expirationMonth	This field is required when the paymentInformation.card.number field is included.
paymentInformation.card.type	
paymentInformation.card.number	

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Checking Enrollment in Payer Authentication

These fields are usually optional when you verify enrollment for a Payer Authentication transaction. In certain circumstances, the information provided by an optional field might be required before a transaction can proceed. Those optional fields that are sometimes required are also listed as required fields with the circumstance described.

acquirerInformation.bin
acquirerInformation.country
acquirerInformation.merchantId
clientReferenceInformation.code
consumerAuthenticationInformation.acsWindowSize

consumerAuthenticationInformation.alternateAuthenticationData

consumerAuthenticationInformation.alternateAuthenticationDate

consumerAuthenticationInformation.alternateAuthenticationMethod

consumerAuthenticationInformation.authenticationBrand This field is only used with mada cards.

consumerAuthenticationInformation.authenticationTransactionId

consumerAuthenticationInformation.authorizationPayload

consumerAuthenticationInformation.challengeCode



Warning

Modifying this field could affect your liability shifts. Unless you are very familiar with the various types of authentication, do not change the default settings before consulting with customer support.

consumerAuthenticationInformation.credentialEncrypted

consumerAuthenticationInformation.customerCardAlias

consumerAuthenticationInformation.sdkMaxTimeout

consumerAuthenticationInformation.decoupledAuthenticationIndicator

consumerAuthenticationInformation.decoupledAuthenticationMaxTime

consumerAuthenticationInformation.defaultCard This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.marketingOptIn This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.marketingSource This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

consumerAuthenticationInformation.merchantFraudRate

consumerAuthenticationInformation.merchantScore

consumerAuthenticationInformation.messageCategory

consumerAuthenticationInformation.otpToKen

consumerAuthenticationInformation.overrideCountryCode

consumerAuthenticationInformation.overridePaymentMethod

consumerAuthenticationInformation.priorAuthenticationData

consumerAuthenticationInformation.priorAuthenticationMethod
 consumerAuthenticationInformation.priorAuthenticationReferenceId
 consumerAuthenticationInformation.priorAuthenticationTime
 consumerAuthenticationInformation.productCode
 consumerAuthenticationInformation.requestorName
 consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator
 consumerAuthenticationInformation.returnURL
 consumerAuthenticationInformation.scoreRequest
 consumerAuthenticationInformation.sdkMaxTimeout
 consumerAuthenticationInformation.strongAuthentication.authenticationIndicator
 consumerAuthenticationInformation.strongAuthentication.secureCorporate
 PaymentIndicator
 consumerAuthenticationInformation.strongAuthentication.transactionMode
 consumerAuthenticationInformation.whiteListStatus
 merchantInformation.merchantDescriptor.name
 merchantInformation.merchantDescriptor.url
 orderInformation.amountDetails.currency
 orderInformation.billTo.address2
 orderInformation.billTo.country This field is required for US and Canada.
 orderInformation.billTo.email
 orderInformation.billTo.firstName
 orderInformation.billTo.lastName
 orderInformation.billTo.locality
 orderInformation.billTo.postalCode
 orderInformation.lineItems.passenger.firstName
 orderInformation.lineItems.passenger.lastName
 orderInformation.lineItems.productDescription
 orderInformation.lineItems.productName
 orderInformation.lineItems.productSku
 orderInformation.lineItems.quantity
 orderInformation.lineItems.shippingAddress1
 orderInformation.lineItems.shippingAddress2

orderInformation.lineItems.shippingCity
orderInformation.lineItems.shippingCountryCode
orderInformation.lineItems.shippingDestinationTypes
orderInformation.lineItems.shippingLastName
orderInformation.lineItems.shippingMiddleName
orderInformation.lineItems.shippingPhone
orderInformation.lineItems.shippingPostalCode
orderInformation.lineItems.shippingState
orderInformation.lineItems.unitPrice
orderInformation.lineItems[].quantity
orderInformation.lineItems[].totalAmount
orderInformation.lineItems.shippingDestinationTypes
orderInformation.reordered
orderInformation.shippingDetails.shippingMethod
orderInformation.shipTo.address1
orderInformation.shipTo.address2
orderInformation.shipTo.address3
orderInformation.shipTo.administrativeArea
orderInformation.shipTo.country
orderInformation.shipTo.destinationCode
orderInformation.shipTo.email
orderInformation.shipTo.firstName
orderInformation.shipTo.lastName
orderInformation.shipTo.middleName
orderInformation.shipTo.locality
orderInformation.shipTo.phoneNumber
orderInformation.shipTo.postalCode
orderInformation.totalOffersCount
paymentInformation.card.number
paymentInformation.card.type
paymentInformation.card.securityCode
paymentInformation.fluidData.value

This field is strongly recommended.

**paymentInformation.tokenizedCard.
cryptogram**

This field is strongly recommended.

paymentInformation.tokenizedcard.expirationMonth

paymentInformation.tokenizedCard.expirationYear

paymentInformation.tokenizedcard.number

paymentInformation.tokenizedCard.transactionType

paymentInformation.tokenizedCard.type

**recurringPaymentsInformation.
originalPurchaseDate**

When this field is empty, the current date is used.

**riskInformation.buyerHistory.
transactionCountDay**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
transactionCountYear**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
accountPurchases**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
addCardAttempts**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
customerAccount.createDate**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
customerAccount.lastChangeDate**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
customerAccount.passwordChangeDate**

This field is recommended for Discover ProtectBuy. Contact customer support for more information about this field.

**riskInformation.buyerHistory.
customerAccount.shipAddressUsageDate**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
paymentAccountDate**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
priorSuspiciousActivity**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
transactionCountDay**

Contact customer support for more information about this field.

**riskInformation.buyerHistory.
transactionCountYear**

Contact customer support for more information about this field.

[travellInformation.legs.carrierCode](#)[travellInformation.legs.departureDate](#)[travellInformation.legs.origination](#)[travellInformation.numberOfPassengers](#)[travellInformation.passengers.firstName](#)[travellInformation.passengers.lastName](#)

REST Example: Checking Enrollment in Payer Authentication Using Google Pay

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "fluidData": {
      "value":
        "eyJzaWduYXR1cmUiOiJNRVFDZSUwVVBmc1RIMERyMnZmeG8wVkF1Z3N2bH1SRzdENEfsYmRwa1pPd1NzZGtBaUFVO
        DE2aHpmMG5BMzJzQmx6an1USURyZXBHNUY1eEt1RmNnSE9aK3RML2ZRXHUwMDNkXHUwMDNkIiwiaW50ZXJtZWZpYX
        RlU21nbmluZ0tleSI6eyJzaWduZWRLZXkiOiJ7XCJrZX1lYWw1ZVwiOlwiTUZrd0V3WUhLb1pJemowQ0FRWU1Lb1p
        JemowREFRY0RRZ0FFOFdKSHVMOFVW9WWDNHV3dGVkJPcjh6L3lJdG10aW9neWhDeGpCRm5tS3pCcWs2K3lnVU5S
        UGF4THdaaWtILzBxV0s1QXhlc3BDNVhwN1NHUN1T1FcXHUwMDNkXFX1MDAzZFwiLFwia2V5RXhwaXJhdGlvb1wiOlwiM
        TYzMDUxNjYyODA0OVwifSI6eyJzaWduZWRLZXkiOiJ7XCJrZX1lYWw1ZVwiOlwiTUZrd0V3WUhLb1pJemowQ0FRWU1Lb1p
        UEPQUw3K1o5S3dJZ2FjWWp2YWJpTEUyWHFkNU1xNGphNStEVlidoREtVHpoMmk1RGlnb1lFQndcdTAWM2QiXX0sInByb
        3RvY29sVmVyc2lvbiI6IkdVdDjIiLCJzaWduZWRLZXkiOiJ7XCJrZX1lYWw1ZVwiOlwiTUZrd0V3WUhLb1pJemowQ0FRWU1Lb1p
        VEWWdRK3hwNEE5YUhsVGE1U21jdUJjac2w1L2NNRk1lc1BBY1RzaE4zRF1
        Ob1MvdEVkRkRYRzJRXBpV1cxVnV6OUprejNW
    }
  }
}
```

```

WgdpMzJrT21EVk9aakJNWTFvVhdTQnA5WG53ejlLYUtOekYvRFBSTy9jbStobW9iZ2dSdmxGSStOekN5U1VNWW1hbTJjZ
FUyZGRZWmZHck9nZWNSc3FrdW1tNm1Ma0xGQTFJcDFrNWFRV21EUElEdTh1SnNmbWs4bzMyMlpteVdMMVVWenE0W
HFkNTZScXZoL1VFeEp3RC9HZXU5SW00M0pmb1ZqckVkeDE0Ykx1OUpmMHJrcU5ONG5sM0NVZEFoMVNhZnBzdktVR
ML1Nmenk1ZGdDZ1RDcHJDdW85UVZPaXVva1BJNUdXR1BKSXVWVVU1cUZhcis3NXFBT2dvZ0tNRUZ3OFVxL1A0UjBDcXcz
cFl1Nnc2enlaVzdDV1YxRzRmc3BITTNRaE83bFZNnmRjSWZQWW00ZitubWI3UzgwY29KTXR1QjkkVEhjZzJmVXhwM2FrWE
hSdzNyN3BRZk9KWWFieU1URmtieDh0Yi9ieWl6VUZEVVU4S3EwTmVVCVTVrQng2L21qUDg4bWxoWkE2ZERrNWJVc2o4SD
BDSk9nWUtCbVgyR09vamRtTDd5Y1BnTU5vNnhsYjRtUzVkaTJjZUpFakFybEZFa3NWNTlsS2lodk5pckRZc1BTU21TRFVZNjB
MUXVuTEERyjfMSnpCMkpYelFcIixcImVwaGVtZXJhbFB1YmxpY0tleVwiOlwiQk84bmtEbE0ycVlCQmpQd00wbDdUTFY2Uy
tUbzZDTF10eXArWGM2cXpQYk1LTEgXvYtySGh3NUlwU2lqb11Tb3Vac1NuWU9LV21yRVAYymtLMk4rTWFZFX1MDAazZFwiL
FwidGFnXCI6XCJuVU5xUVlxcy9YRV1DMmg0WFlibnVpajFLb1NzUFpacEpqVGI4TVVZcUZNXFx1MDAazZFwifSJ9"
  }
},
"processingInformation": {
  "paymentSolution": "012"
},
"buyerInformation": {
  "merchantCustomerId": "334124572"
  "mobilePhone": "1245789632"
},
"consumerAuthenticationInformation": {
  "transactionMode": "MOTO"
}
}

```

Response to a Successful Request

```
{
  "clientReferenceInformation": {
    "code": "1726870134497"
  },
  "consumerAuthenticationInformation": {
    "accessToken":
      "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiI5MjZhZDAwYy0zMmEyLTQ5ODgtODRjNC1hYTcxMGF1Y2IiOGEiLCJpYXQiOiE2Mjk4MjY5NjAsImV4cCI6MTYyOTgzMDU2MCwiIT3JnVW5pdElkIjoiaWUi5YzRiYjNmZjYyNmIxMzQ0ODEwYTAtIiwiaWF0IjE5NDkzZjJiZi04NmIwLTI0ZmYtYmJjZS0wZjU1MjNlMWIzNGEifQ.FgVbwBw9_1wnlr4ovYR5VVPuVl6Ck1AVHHXS_5ODska",
    "deviceDataCollectionUrl": "https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect",
    "referenceId": "9493f2bf-86b0-44ff-bbce-0f5523e1b34a",
    "token": "AxizbwSTVW4Mj1fvsU27ABEBURxPZebOAE1IZNJMvRiuZhTA9AAA+QBf"
  },
  "id": "6298269599786696003003",
  "status": "COMPLETED",
  "submitTimeUtc": "2022-08-24T17:42:40Z"
}
```

Validating a Challenge Using Digital Payment (Google Pay)

Running the Validation service compares the customer's response to the challenge from the issuing bank to validate the customer identity.

Card-Specific Requirements

Some payment cards require additional information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard

This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc

This field is required when the card type is Cartes Bancaires.

consumerAuthenticationInformation.productCode

This field is required for American Express SafeKey (US) when the product code is **AIR** for an airline purchase).

merchantInformation.merchantDescriptor.name

This field is required for Visa Secure travel.

orderInformation.shipTo.address1

This field is required only for American Express SafeKey (US).

orderInformation.shipTo.address2

This field is required only for American Express SafeKey (US)

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore

This field is required for transactions processed in France.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.locality

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-results>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-results>

Required Fields for Validating Payer Authentication

These fields are the minimum fields required when requesting the Payer Authentication Validation service. Other fields to collect additional information during a transaction are available in the list of optional fields. Under certain circumstances, some of the fields that are normally optional may be required. The circumstances that make an optional field, a required field, are noted.

authenticationTransactionID

clientReferenceInformation.code

merchantID

orderInformation.amountDetails.currency

**orderInformation.amountDetails.total
Amount**

Required when the **orderInformation.lineItems.unitPrice** field is not used.

orderInformation.lineItems.unitPrice

Required when the **orderInformation.amountDetails.totalAmount** field is not used.

paymentInformation.card.number

paymentInformation.card.type

paymentInformation.card.expirationMonth

Required when **paymentInformation.card.number** is not included.

paymentInformation.card.expirationYear

Required when **paymentInformation.card.number** is included.

Related Information

- [API field reference guide for the REST API](#)

Optional Fields for Validating a Challenge

These fields are optional when validating a Payer Authentication transaction. In certain circumstances, the information provided by an optional field might be required before a transaction can proceed. Those optional fields that are sometimes required are listed in the required fields with the circumstance described.

**consumerAuthenticationInformation.
authenticationBrand**

This field is only used with mada cards.

[consumerAuthenticationInformation.credentialEncrypted](#)
[consumerAuthenticationInformation.responseAccessToken](#)
[consumerAuthenticationInformation.signedPares](#)

REST Example: Validating a Challenge When Using Google Pay

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "200.00"
    },
    "lineItems": [ {
      "unitPrice": "10",
      "quantity": "2",
      "taxAmount": "32.40"
    } ]
  }, "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2025",
      "number": "5200000000000007"
    },
    "fluidData": {
      "value": "XFx1MDAzZFwiLFwia2V5RXhwaXJhdGlvb1wiOlwiMTYzMdUxNjYyODA0OVwifSIsInNpZ25hdHVyZXMiOlwiTUUVQ01RRH1TQTV1T2t5UXQ5cFoyQ1EzaXBmcGNWT0F5ZmIzM2ozUEZPQUw3K1o5S3dJZ2FjWWp2YWJpTEUyWHFkNU1xNGphNStEVldoREttVHpoMmk1RGlnb1lFQndcdTAwM2QiXX0sInByb3RvY29sVmVyc2lubiI6IkVdDjIiLCJzaWduZW RNZXNzYWdlIjoie1wiZW5jcmlwdGVkTWVzc2FnZVwiOlwiWG5qOGxSSWhGMDVEWWdRK3hwNEE5YUhsVGE1U2ljdUJAc2w1L2NNRkJlclBBY1RzaE4zRF1Ob1MvdEVkRkRyRzZJRXBpV1cxVnV6OUprejNWWGdpMzJrT21EVk9aakJNWTFvVHdTQnA5WG53ejlLYUtOekYvRFBSTy9jbStobW9iZ2dSdmxGSStOekN5U1VNWW1hbTJjZFUyZGRZWmZHck9nZWNSc3FrdW1tNm1Ma0xGQTFJcDFrNWFRV21EUElEdTh1SnNmbWs4bzMyMlpteVdMMVVWenE0WHFkNTZScXZol1VFeEp3RC9HZXU5SW00M0pmb1ZqckVkeDE0Ykx1OUpm"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "PYffv9G3sa1e0CQr5fV0"
  }
}
```

Response to a Successful Request

```
{
  "clientReferenceInformation": {
    "code": "1675288043120"
  }
}
```

```
},
"consumerAuthenticationInformation": {
  "indicator": "internet",
  "ucafCollectionIndicator": "0",
  "strongAuthentication": {
    "OutageExemptionIndicator": "0"
  },
  "token": "AxjzbwSTbhMKrRswWTYSABECT9u+QBvfSB84gL2IZNJMvRiyubWAOAAA+Qxb"
},
"id": "6752880430346470503954",
"status": "AUTHENTICATION_SUCCESSFUL",
"submitTimeUtc": "2023-02-01T21:47:23Z"
}
```

Authentication Examples Using TMS Tokens

These examples list the API fields that are required for the Setup, Check Enrollment, and Validate Authentication services when using TMS tokens. An example of a request payload and a successful response that occurs with each service is provided.

Setting Up Device Data Collection with a TMS Token

Running the Setup service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. In this scenario, a TMS token is used instead of the card.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** if Egypt was not set as the country in merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea

This field is required for transactions in the US and Canada.

orderInformation.billTo.postalCode

This field is required when the **orderInformation.billTo.country** field value is **US** or **CA**.

merchantInformation.merchantDescriptor.country

For Meeza transactions, this value must be set to **EG** if Egypt was not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for Setting Up Data Collection When Using a TMS Token

These fields are the minimum fields required when you request the Payer Authentication Setup service. Other fields that can be used to collect additional information during a transaction are listed in the optional fields section. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

paymentInformation.card.expirationMonth

paymentInformation.card.expirationYear

customer.customerId

Related Information

- [API field reference guide for the REST API](#)

REST Example: Setting Up Device Data Collection When Using a TMS Token

Request

```
{
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029"
    },
    "customer": {
      "customerId": "1108590036500854"
    }
  }
}
```

```
{
  "consumerAuthenticationInformation": {
    "accessToken": "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiJxZmQ5ZWl5Ni1jOTY1LTRkZmEtYTM5Yy1hZDExMGU2NjQ3ZmMiLCJpYXQiOiJlMjUzNDcwNDksImVzcyI6IjVkdGZyYmYwMGU0MjNkMTQ5OGRjYmFjYSIsImV4cCI6MTcyNTM1MDY0OSwiTjNjVW5pdElkIjoiaW50MWRiMGZmOTRmNzI3ZjU0Y2RlOjQ2IiwiaWUmVmZlbnNlSWQlOiIzZGM2ZDhmZS1lM2I1LTQyMTItYWY5MC1jNDcxYjczMTYwMjAifQ.90_yhusiQL9Yq10221zB04vZAKaiGnQ2ryvakeyuk1k",
    "deviceDataCollectionUrl": "https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect",
    "referenceId": "3dc6d8fe-e3b5-4212-af90-c471b7316020",
    "token": "AxizbwStiTyf1D7m/jQkAG8BT34jOu4gAhLwyaSZejF9z2oA8AAA0gbV"
  },
  "id": "7253470490136808404004",
  "status": "COMPLETED",
  "submitTimeUtc": "2024-09-03T07:04:09Z"
}
```

Running the Check Enrollment service identifies the customer's bank and collects data about the device that the customer is using to place the order. This use case demonstrates this process while using a TMS token.

Some payment cards require additional information to be collected during a transaction.

<code>consumerAuthenticationInformation.defaultCard</code>	This field is recommended for Discover ProtectBuy.
<code>consumerAuthenticationInformation.mcc</code>	This field is required when the card type is Cartes Bancaires.
<code>consumerAuthenticationInformation.productCode</code>	This field is required for American Express SafeKey (US) when the product code is <code>AIR</code> for an airline purchase.
<code>merchantInformation.merchantDescriptor.name</code>	This field is required for Visa Secure travel.
<code>orderInformation.shipTo.address1</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.address2</code>	This field is required only for American Express SafeKey (US.)

<code>orderInformation.shipTo.administrativeArea</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.country</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.postalCode</code>	This field is required for American Express SafeKey (US).
<code>paymentInformation.card.type</code>	This field is required when the card type is Cartes Bancaires, JCB, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

<code>consumerAuthenticationInformation.merchantScore</code>	This field is required for transactions processed in France.
<code>consumerAuthenticationInformation.overrideCountryCode</code>	For Meeza transactions, this value must be set to <code>EG</code> when Egypt is not set as the country in the merchant configuration during merchant boarding.
<code>merchantInformation.merchantDescriptor.country</code>	For Meeza transactions, this value must be set to <code>EG</code> when Egypt is not set as the country in the merchant configuration during merchant boarding.
<code>orderInformation.billTo.administrativeArea</code>	This field is required for transactions in the US and Canada.
<code>orderInformation.billTo.locality</code>	This field is required for transactions in the US and Canada.
<code>orderInformation.billTo.postalCode</code>	This field is required when the <code>orderInformation.billTo.country</code> field value is <code>US</code> or <code>CA</code> .
<code>orderInformation.shipTo.administrativeArea</code>	This field is required when the <code>orderInformation.shipTo.country</code> field value is <code>CA</code> or <code>US</code> .
<code>orderInformation.shipTo.postalCode</code>	This field is required when the <code>orderInformation.shipTo.country</code> field value is <code>US</code> or <code>CA</code> .

Processor-Specific Requirements

These fields are required by specific processors for transactions.

processingInformation.authorizationOptions.transactionMode This field is required only for merchants in Saudi Arabia.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment in Payer Authentication While Using a TMS Token

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program. It doesn't matter if the enrollment check is frictionless or results in a challenge, the same fields are required in the request. The fields in the response will differ.

Required Fields

consumerAuthenticationInformation.deviceChannel

consumerAuthenticationInformation.referenceId

paymentInformation.customer.customerId

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

deviceInformation.httpBrowserJavaScriptEnabled

deviceInformation.httpBrowserLanguage

deviceInformation.httpBrowserScreenHeight

deviceInformation.httpBrowserScreenWidth

deviceInformation.httpBrowserTimeDifference

deviceInformation.ipAddress

deviceInformation.userAgentBrowserValue When the customer's browser provides this value, you must include that value in your request.

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

[orderInformation.billTo.address1](#)

[orderInformation.billTo.address2](#)

[orderInformation.billTo.administrativeArea](#) This field is required for the US and Canada.

[orderInformation.billTo.country](#) This field is required for the US and Canada.

[orderInformation.billTo.email](#)

[orderInformation.billTo.firstName](#)

[orderInformation.billTo.lastName](#)

[orderInformation.billTo.locality](#)

[orderInformation.billTo.phoneNumber](#)

[orderInformation.billTo.postalCode](#)

[paymentInformation.card.expirationYear](#)

[paymentInformation.card.expirationMonth](#)

[paymentInformation.card.type](#)

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment When Using a TMS Token

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "card": {
      "expirationMonth": "05",
      "expirationYear": "2029"
    }
  }
}
```

```

"customer": {
  "customerId": "1108590036500854"
},
"deviceInformation": {
  "httpAcceptBrowserValue": "data",
  "httpAcceptContent": "pa_http_user_accept_value",
  "httpBrowserLanguage": "en_us",
  "httpBrowserJavaEnabled": false,
  "httpBrowserJavaScriptEnabled": false,
  "httpBrowserColorDepth": "24",
  "httpBrowserScreenHeight": "864",
  "httpBrowserScreenWidth": "1536",
  "httpBrowserTimeDifference": "300",
  "userAgentBrowserValue": "123"
},
"consumerAuthenticationInformation": {
  "deviceChannel": "Browser",

  "referenceId": "CybsCruiseTester-6259e7e2"
}
}

```

Frictionless Response to Request

```

{
  "consumerAuthenticationInformation": {
    "eciRaw": "05",
    "authenticationTransactionId": "e2eInNP8zJ2J67lKcaX0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "eci": "05",
    "token": "AxjzbwSTiTY1lZBAC15FAG8BT34jOzxHSBcS0JeGTSTL0Yvue1AHgAAAxUk",
    "cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "3859eace-2a42-4bd7-9252-8507f02d5edd",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "932a3c41-880d-4791-a98f-c6beaef90b23",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "vbv",
    "specificationVersion": "2.1.0",
    "acsTransactionId": "54ef7fd4-e93d-42de-82ba-ad91dd21c94c"
  },
  "id": "7253472110066822504005",
  "paymentInformation": {
    "card": {
      "bin": "400009",
      "type": "VISA"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-03T07:06:51Z"
}

```

Challenge Response to Request

```
{
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "z7BruZ1qn416WGknmAX0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiTcMOWhjPANlAG8BT34jQMsnSBcS0JddrSTL0Yvue1AIAAAA+AWf",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "stepUpUrl": "https://centinelapistag.cardinalcommerce.com/V2/Cruise/StepUp",
    "pareq":
    "eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMS4wIiwidGhyZWVEU1NlcnZlclRyYW5zSUQiOiI0ZTUwZjU4N",
    "directoryServerTransactionId": "2f44602b-ce95-4a7e-9ad1-920e7ace0676",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "4e50f586-b15c-4c03-a186-eafb40d50b80",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.1.0",
    "acsTransactionId": "3888e153-6b97-4f43-afee-60527c2e0b91"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder before continuing with the transaction."
  },
  "id": "7253537031246871004005",
  "paymentInformation": {
    "card": {
      "bin": "400009",
      "type": "VISA"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-09-03T08:55:03Z"
}
```

Validating a Challenge When Using a TMS Token

Running the Validation service compares the customer's response to the challenge from the issuing bank to validate the customer identity.

Card-Specific Requirements

Some payment cards require additional information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard

This field is recommended for Discover ProtectBuy.

consumerAuthenticationInformation.mcc	This field is required when the card type is Cartes Bancaires.
consumerAuthenticationInformation.productCode	This field is required for American Express SafeKey (US) when the product code is AIR for an airline purchase).
merchantInformation.merchantDescriptor.name	This field is required for Visa Secure travel.
orderInformation.shipTo.address1	This field is required only for American Express SafeKey (US).
orderInformation.shipTo.address2	This field is required only for American Express SafeKey (US)

Country-Specific Requirements

These fields are required for transactions in specific countries.

consumerAuthenticationInformation.merchantScore	This field is required for transactions processed in France.
orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
orderInformation.billTo.locality	This field is required for transactions in the US and Canada.
orderInformation.billTo.postalCode	This field is required when the orderInformation.billTo.country field value is US or CA .

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-results>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-results>

Required Fields for Validating a Challenge When Using a TMS Token

These fields are the minimum fields required when you request the Payer Authentication Validation service. Other fields that can be used to collect additional information during a transaction are listed in the optional fields section. Under certain circumstances, a field that normally is optional might be required. The circumstance that makes an optional field required is noted.

Required Fields

consumerAuthenticationInformation.authenticationTransactionId

Related information

- [API Field Reference for the REST API](#)

REST Example: Validating a Challenge When Using a TMS Token

Request

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "z7BruZ1qn416WGknmAX0"
  }
}
```

Response to Successful Request

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "indicator": "vbw",
    "eciRaw": "05",
    "authenticationResult": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "authenticationStatusMsg": "Success",
    "eci": "05",
    "token": "AxijLwSTiTcQGTMCD521AG9PfiNA2ogCEvDJpJ16MX3PagAAmh21",
    "cavv": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
    "paresStatus": "Y",
    "xid": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
    "directoryServerTransactionId": "2f44602b-ce95-4a7e-9ad1-920e7ace0676",
    "threeDSServerTransactionId": "4e50f586-b15c-4c03-a186-eafb40d50b80",
    "specificationVersion": "2.1.0",
    "acsTransactionId": "3888e153-6b97-4f43-afee-60527c2e0b91"
  },
  "id": "7253538119946872004005",
  "paymentInformation": {
    "card": {
      "bin": "400009",
      "type": "VISA"
    }
  }
}
```

```
},  
"status": "AUTHENTICATION_SUCCESSFUL",  
"submitTimeUtc": "2024-09-03T08:56:52Z"  
}
```

Authentication Examples Using Flex Microform Tokens

These examples list the API fields that are required for the Setup, Check Enrollment, and Validate Authentication services when using a Flex Microform token. An example of a request payload and a successful response that occurs with each service is provided. A Flex Microform token is valid for 15 minutes. After 15 minutes, a new Flex Microform token is needed.

Setting Up Device Data Collection When Using a Flex Microform Token

Running the Setup service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. In this use case, a Flex Microform token is used instead of the payment card data. Flex Microform tokens are only valid for 15 minutes.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** if Egypt was not set as the country in merchant configuration during merchant boarding.

orderInformation.billTo.administrativeArea	This field is required for transactions in the US and Canada.
orderInformation.billTo.postalCode	This field is required when the orderInformation.billTo.country field value is US or CA .
merchantInformation.merchantDescriptor.country	For Meeza transactions, this value must be set to EG if Egypt was not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for Setting Up Device Data Collection When Using a Flex Microform Token

This field is required to use a Flex Microform token when you request the payer authentication Setup service.

Required Fields

tokenInformation.transientToken

Related Information

- [API field reference guide for the REST API](#)

REST Example: Setting Up Device Data Collection When Using a Flex Microform Token

Request

```
{
  "tokenInformation": {
    "transientToken": "1C0RNHMQBTATXFCFN5EXH3XNOP6359LGLL9J283ATABJ8Z11NL66D834239B51"
  }
}
```

Response to Successful Request

```
{
  "consumerAuthenticationInformation": {
    "accessToken":
      "eyJhbGciOiJIUzI1NiIsInR5cCI6IkpXVCJ9.eyJqdGkiOiIzOTRmNDJmYS0xNGUxLTQ1ODAtOGUyZi05ZTVkNzM0Y2ZjYmYiLCJpYXQ.
      F_8JFXI6LTQWo",
    "deviceDataCollectionUrl": "https://centinelapistag.cardinalcommerce.com/V1/Cruise/Collect",
  }
}
```

```

    "referenceId": "004ac0ad-f0a6-4800-9d7a-962de6eb446c",
    "token": "AxizbwSTiUOd9P85Jq6mABEBTyDYFkxkAhMQyaSZejFczCmBWAAAnxnb"
  },
  "id": "7254442740716751204006",
  "status": "COMPLETED",
  "submitTimeUtc": "2024-09-04T10:04:34Z"
}

```

Checking Enrollment When Using a Flex Microform Token

Running the Check Enrollment service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. In this use case, a Flex Microform token is used instead of the payment card data. Flex Microform tokens are only valid for 15 minutes.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

`paymentInformation.card.type`

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

`consumerAuthenticationInformation.overrideCountryCode`

For Meeza transactions, this value must be set to `EG` if Egypt was not set as the country in merchant configuration during merchant boarding.

`orderInformation.billTo.administrativeArea`

This field is required for transactions in the US and Canada.

`orderInformation.billTo.postalCode`

This field is required when the `orderInformation.billTo.country` field value is `US` or `CA`.

`merchantInformation.merchantDescriptor.country`

For Meeza transactions, this value must be set to `EG` if Egypt was not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST `https://api.cybersource.com/risk/v1/authentications`

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment When Using a Flex Microform Token

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program while using a Flex Microform token. It doesn't matter if the enrollment check is frictionless or results in a challenge, the same fields are required in the request. The fields in the response will differ.

Required Fields

consumerAuthenticationInformation.deviceChannel

consumerAuthenticationInformation.referenceId

paymentInformation.customer.customerId

deviceInformation.httpAcceptBrowserValue

deviceInformation.httpAcceptContent

deviceInformation.httpBrowserColorDepth

deviceInformation.httpBrowserJavaEnabled

**deviceInformation.httpBrowserJavaScript
Enabled**

deviceInformation.httpBrowserLanguage

deviceInformation.httpBrowserScreenHeight

deviceInformation.httpBrowserScreenWidth

**deviceInformation.httpBrowserTimeDif
ference**

deviceInformation.ipAddress

deviceInformation.userAgentBrowserValue When the customer's browser provides this value, you must include that value in your request.

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

orderInformation.billTo.address1

orderInformation.billTo.address2

orderInformation.billTo.administrativeArea This field is required for the US and Canada.

orderInformation.billTo.country This field is required for the US and Canada.

[orderInformation.billTo.email](#)
[orderInformation.billTo.firstName](#)
[orderInformation.billTo.lastName](#)
[orderInformation.billTo.locality](#)
[orderInformation.billTo.phoneNumber](#)
[orderInformation.billTo.postalCode](#)
[paymentInformation.card.expirationYear](#)
[paymentInformation.card.expirationMonth](#)
[paymentInformation.card.type](#)

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment When Using a Flex Microform Token (Challenge)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "buyerInformation": {
    "merchantCustomerId": "334124572",
    "mobilePhone": "1245789632"
  },
  "deviceInformation": {
    "ipAddress": "139.130.4.5",
    "httpAcceptContent": "test",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": "N",
    "httpBrowserJavaScriptEnabled": "Y",
```

```

    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "1000000",
    "httpBrowserScreenWidth": "1000000",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "GxKnLy8TFDUFxJP1t"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "BROWSER",
    "transactionMode": "eCommerce",
    "referenceId": "CybsCruiseTester-b767b4ea"
  },
  "tokenInformation": {
    "transientToken": "1C0RNHMQBTATXFCFNGR5EXH3XNOP6359LGLL9J283ATABJ8Z11NL66D834239B51"
  }
}

```

Response to Successful Request

```

{
  "clientReferenceInformation": {
    "code": "1725444594611"
  },
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "jzULqrneaqG5H3Jev780",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiUOpWHILxG5lABEBTyDYFlzPSBcS0JhdrSTL0YrmYUwKwAAAwQS",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "stepUpUrl": "https://centinelapistag.cardinalcommerce.com/V2/Cruise/StepUp",
    "pareq":
"eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMi4wIiwidGhyZWVlU1NlcnZlc1RyYW5zSUQiOiIxZDBjNzI1Ny",
    "directoryServerTransactionId": "231b97bd-2a3d-4500-b666-fda90334e5db",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "1d0c7257-9bd3-4fe9-b399-8c513c88d699",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "83c7e636-3af2-4a96-9e59-7c6754127d24"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder before continuing with the transaction."
  },
  "id": "7254445946286742204005",
  "paymentInformation": {
    "card": {
      "bin": "445653",
      "type": "VISA"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-09-04T10:09:55Z"
}

```

Validating a Challenge When Using a Flex Microform Token

Running the Validation service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. In this use case, a Flex Microform token is used instead of the payment card data.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

`paymentInformation.card.type`

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

`consumerAuthenticationInformation.overrideCountryCode`

For Meeza transactions, this value must be set to `EG` if Egypt was not set as the country in merchant configuration during merchant boarding.

`orderInformation.billTo.administrativeArea`

This field is required for transactions in the US and Canada.

`orderInformation.billTo.postalCode`

This field is required when the `orderInformation.billTo.country` field value is `US` or `CA`.

`merchantInformation.merchantDescriptor.country`

For Meeza transactions, this value must be set to `EG` if Egypt was not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST `https://api.cybersource.com/risk/v1/authentication-results`

Test: POST `https://apitest.cybersource.com/risk/v1/authentication-results`

Required Fields for Validating a Challenge When Using a Flex Microform Token

These are the minimum fields required to use a Flex Microform token when you validate a Payer Authentication challenge.

Required Fields

[consumerAuthenticationInformation.authenticationTransactionId](#)
[paymentInformation.card.type](#)

Related Information

- [API field reference guide for the REST API](#)

REST Example: Validating a Challenge When Using a Flex Microform Token

Request

```
{
  "paymentInformation": {
    "card": {
      "type": "001"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "jzULqrneaqG5H3Jev780"
  }
}
```

Response to Successful Request

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "indicator": "vbv",
    "eciRaw": "05",
    "authenticationResult": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    }
  },
  "authenticationStatusMsg": "Success",
  "eci": "05",
  "token": "AxizLwSTiUOsVuUwvt1DABEBTyDYFmPAAhMQyaSZeJFcZCmATUmo",
  "cavv": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
  "paresStatus": "Y",
  "xid": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
  "directoryServerTransactionId": "231b97bd-2a3d-4500-b666-fda90334e5db",
  "threeDSServerTransactionId": "1d0c7257-9bd3-4fe9-b399-8c513c88d699",
  "specificationVersion": "2.2.0",
  "acsTransactionId": "83c7e636-3af2-4a96-9e59-7c6754127d24"
},
```

```
{
  "id": "7254446789006754504003",
  "paymentInformation": {
    "card": {
      "bin": "445653",
      "type": "VISA"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-04T10:11:19Z"
}
```

Authentication Examples Using Network Token/ Tokenized Cards

These examples list the API fields that are required for the Setup, Check Enrollment, and Validate Authentication services when using network tokens or tokenized cards. An example of a request payload and a successful response that occurs with each service is provided.

Setting Up Device Data Collection with a Network Token/Tokenized Card

Running the Setup service identifies the customer's bank and prepares for collecting data about the device that the customer is using to place the order. In this instance, a tokenized card is used instead of the payment card data.

Card-Specific Requirements

Some payment cards require specific information to be collected during a transaction.

paymentInformation.card.type

This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

**consumerAuthenticationInformation.
overrideCountryCode**

For Meeza transactions, this value must be set to **EG** when Egypt is not set as the country in merchant configuration during merchant boarding.

<code>orderInformation.billTo.administrativeArea</code>	This field is required for transactions in the US and Canada.
<code>orderInformation.billTo.postalCode</code>	This field is required when the <code>orderInformation.billTo.country</code> field value is US or CA .
<code>merchantInformation.merchantDescriptor.country</code>	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in merchant configuration during merchant boarding.

Endpoint

Production: POST `https://api.cybersource.com/risk/v1/authentication-setups`

Test: POST `https://apitest.cybersource.com/risk/v1/authentication-setups`

Required Fields for Setting Up Device Data Collection with a Network Token/Tokenized Card

These fields are the minimum fields required when you request the Payer Authentication Setup service while using a tokenized card. Other fields that are required during Setup service are listed in [Required Fields for Collecting Device Data](#).

Required Fields

`paymentInformation.tokenizedCard.expirationMonth`

`paymentInformation.tokenizedCard.expirationYear`

`paymentInformation.tokenizedCard.number`

`paymentInformation.tokenizedCard.transactionType`

`paymentInformation.tokenizedCard.type`

Related Information

- [API field reference guide for the REST API](#)

REST Example: Setting Up Device Data Collection When Using a Network Token/Tokenized Card

Request

```
{
  "paymentInformation": {
    "tokenizedCard": {
      "transactionType": "1",
      "type": "001",
      "expirationMonth": "11",

```

```
"expirationYear": "2025",
"number": "4111111111111111"
}
}
}
```

Response to Successful Request

[illegible]

Checking Enrollment with a Network Token/ Tokenized Card

Running the Check Enrollment service identifies the customer's bank and collects data about the device that the customer is using to place the order. This instance demonstrates this process with a network token/tokenized card.

Card-Specific Requirements

Some payment cards require additional information to be collected during a transaction.

consumerAuthenticationInformation.defaultCard	This field is recommended for Discover ProtectBuy.
consumerAuthenticationInformation.mcc	This field is required when the card type is Cartes Bancaires.
consumerAuthenticationInformation.productCode	This field is required for American Express SafeKey (US) when the product code is AIR for an airline purchase.
merchantInformation.merchantDescriptor.name	This field is required for Visa Secure travel.
orderInformation.shipTo.address1	This field is required only for American Express SafeKey (US).

<code>orderInformation.shipTo.address2</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.administrativeArea</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.country</code>	This field is required only for American Express SafeKey (US).
<code>orderInformation.shipTo.postalCode</code>	This field is required for American Express SafeKey (US).
<code>paymentInformation.card.type</code>	This field is required when the card type is JCB, Cartes Bancaires, China UnionPay, or Meeza.

Country-Specific Requirements

These fields are required for transactions in specific countries.

<code>consumerAuthenticationInformation.merchantScore</code>	This field is required for transactions processed in France.
<code>consumerAuthenticationInformation.overrideCountryCode</code>	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during boarding.
<code>merchantInformation.merchantDescriptor.country</code>	For Meeza transactions, this value must be set to EG when Egypt is not set as the country in the merchant configuration during merchant boarding.
<code>orderInformation.billTo.administrativeArea</code>	This field is required for transactions in the US and Canada.
<code>orderInformation.billTo.locality</code>	This field is required for transactions in the US and Canada.
<code>orderInformation.billTo.postalCode</code>	This field is required when the orderInformation.billTo.country field value is US or CA .
<code>orderInformation.shipTo.administrativeArea</code>	This field is required when the orderInformation.shipTo.country field value is CA or US .
<code>orderInformation.shipTo.postalCode</code>	This field is required when the orderInformation.shipTo.country field value is US or CA .

Processor-Specific Requirements

These fields are required by specific processors for transactions.

processingInformation.authorizationOptions.transactionMode This field is required only for merchants in Saudi Arabia.

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentications>

Test: POST <https://apitest.cybersource.com/risk/v1/authentications>

Required Fields for Checking Enrollment When Using a Network Token/Tokenized Card

These fields are the minimum fields required for verifying that a customer is enrolled in a payer authentication program when using a tokenized card.

Required Fields

consumerAuthenticationInformation.deviceChannel

consumerAuthenticationInformation.referenceId

paymentInformation.customer.customerId

orderInformation.amountDetails.currency

orderInformation.amountDetails.totalAmount This field is required when the **orderInformation.lineItems.unitPrice** field is not used.

orderInformation.billTo.address1

orderInformation.billTo.address2

orderInformation.billTo.administrativeArea This field is required for the US and Canada.

orderInformation.billTo.country This field is required for the US and Canada.

orderInformation.billTo.email

orderInformation.billTo.firstName

orderInformation.billTo.lastName

orderInformation.billTo.locality

orderInformation.billTo.phoneNumber

orderInformation.billTo.postalCode

paymentInformation.tokenizedCard.expirationMonth

`paymentInformation.tokenizedCard.
expirationYear`

`paymentInformation.tokenizedCard.number`

`paymentInformation.tokenizedCard.
transactionType`

`paymentInformation.tokenizedCard.type`

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment When Using a Network Token/Tokenized Card (Frictionless)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "USD",
      "totalAmount": "10.99"
    },
    "billTo": {
      "address1": "1 Market St",
      "address2": "Address 2",
      "administrativeArea": "CA",
      "country": "US",
      "locality": "san francisco",
      "firstName": "John",
      "lastName": "Doe",
      "phoneNumber": "4158880000",
      "email": "test@email.com",
      "postalCode": "94105"
    }
  },
  "paymentInformation": {
    "tokenizedCard": {
      "transactionType": "1",
      "type": "001",
      "expirationMonth": "11",
      "expirationYear": "2025",
      "number": "4111111111111111"
    }
  },
  "deviceInformation": {
    "ipAddress": "139.130.4.5",
    "httpAcceptContent": "test",
    "httpBrowserLanguage": "en_us",
    "httpBrowserJavaEnabled": "N",
    "httpBrowserJavaScriptEnabled": "Y",
    "httpBrowserColorDepth": "24",
    "httpBrowserScreenHeight": "1000000",
```

```

    "httpBrowserScreenWidth": "100000",
    "httpBrowserTimeDifference": "300",
    "userAgentBrowserValue": "GxKnLy8TFDUFxJP1t"
  },
  "consumerAuthenticationInformation": {
    "deviceChannel": "BROWSER",
    "referenceId": "CybsCruiseTester-a8a8eeaf"
  }
}

```

Response to Successful Request

```

{
  "clientReferenceInformation": {
    "code": "1725450267324"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "05",
    "authenticationTransactionId": "o9spMK5vH7MK5lAPku60",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "eci": "05",
    "token": "AxjzbwSTiURy4Xhjhs+lABEBTyDYGCNvSBcS0JiGTSTL0YrmYUwEwAAASAVA",
    "cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "51a3b89b-10c4-4718-8300-4cdc779d1434",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "1a9c8944-6d0b-46d4-a964-5e986cff9c1b",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "vbv",
    "specificationVersion": "2.1.0",
    "acsTransactionId": "b022828d-7440-4815-a5f8-28cf3f568f02"
  },
  "id": "7254502673416960004005",
  "paymentInformation": {
    "card": {
      "bin": "411111",
      "type": "VISA"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-04T11:44:27Z"
}

```

Authentication Examples of Merchant-Initiated Transactions

A 3RI transaction is an EMV 3-D Secure transaction that is initiated by the merchant instead of the cardholder. The merchant keeps the payment data from the initial payment so that the cardholder does not have to be present for subsequent 3RI transactions. Having the payment details from a previous transaction enables the merchant to obtain a new Cardholder Authentication Verification Value (CAVV) to authenticate when authorizing future payments.

The authorization request contains the

consumerAuthenticationInformation.deviceChannel field. This process can be applied to these types of transactions:

- Recurring payments: payments occur at regular intervals for an indefinite interval like subscription services.
- Installment payments: payments occur at regular intervals for a fixed interval.
- Refunded purchases: the cost of an item is refunded before the item is received. Any charges for damage or missing items can be charged back to the customer using a 3RI transaction.
- Delayed shipments: an ordered item is out of stock delaying the shipment until the item is back in stock.
- Split payments: an order is fulfilled in split shipments rather than in a single shipment because one of multiple items in the order is temporarily out of stock.
- Multiple party commerce: a single entity or party makes multiple transactions with different merchants, for example, a travel agent booking flights, hotels, and tour excursions.
- Unknown final transaction amount: extra charges are made to the customer for items such as hotel services, driving citations, or tips.

Challenge Responses to 3RI Transactions

The directory server prohibits any challenge response from an issuer in 3RI transactions because the cardholder is not present for authentication. If an issuer does respond with a challenge, the directory server:

- Returns an ARes with a Transaction Status (transStatus) = **N** and a Transaction Status Reason (transStatusReason) = **87** (Transaction is excluded from Attempts Processing) to the 3-D Secure Server (merchant).
- Sends an error message (Erro) to the Access Control Server (ACS), with Error Code (errorCode) = **203** (Format of one or more data elements is invalid according to the specification.)

When you receive this response, you should find an alternate way of processing the transaction. Examples include going directly to authorization, or when the cardholder is present, resending the transaction. When you receive this response, contact your acquirer to raise the issue with customer support.

For Merchant Initiated Transactions which are expected to be frictionless, device details are not required in the MIT authentication transaction

Network-Specific Values for Multi-Party Commerce/Online Travel Agency (OTA)

When the request body requires a previous authentication reference ID (**consumerAuthenticationInformation.priorAuthenticationReferenceId**), use the network-specific value found in one of these fields in the original response.

- Visa: **consumerAuthenticationInformation.acsTransactionId**
- Mastercard: **consumerAuthenticationInformation.directoryServerTransactionId**

When the request body requires a value from the **consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator** field and the 3RI transaction type is multi-party commerce, use one of these network-specific values.

- Visa: **11** (Other payment)
- Mastercard: **85** (Agent payment)

Note that Mastercard uses the Electronic Commerce Indicator (ECI) value of **07** for 3RI transactions.

The network specific values for Multi Party Commerce / OTA are below.



Important

The test card numbers that are provided are formatted with Xs for zeroes in the card number. When testing with the card numbers, replace the Xs with a 0 (zero).

1a: Initial Recurring Transaction

In this instance, the merchant initiates a 3RI recurring transaction that is a fixed amount for a set of transactions with no established expiration, such as with a subscription purchase.

Card Type		Test Card Number
Mastercard	Card Type = 002	52XXXX XX XXXX 28X5

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 1a: Initial Recurring Transaction

Required Fields

consumerAuthenticationInformation.challengeCode	Set this field value to 03.
consumerAuthenticationInformation.deviceChannel	Set this field value to Browser.
consumerAuthenticationInformation.messageCategory	Set this field value to 01.
consumerAuthenticationInformation.strongAuthentication.authenticationIndicator	Set this field value to 02.
recurringPaymentInformation.endDate	
recurringPaymentInformation.frequency	
recurringPaymentInformation.numberOfPayments	
recurringPaymentInformation.originalPurchaseDate	
recurringPaymentInformation.sequenceNumber	

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for a 3RI Initial Recurring Transaction

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "52XXXXXXXXXX28X5"
    }
  },
  "deviceInformation": {
    "httpAcceptContent": "all",
    "httpBrowserLanguage": "en",
    "httpBrowserJavaEnabled": "y",
    "httpBrowserColorDepth": 1,
    "httpBrowserScreenHeight": 1,
    "httpBrowserScreenWidth": 1,
    "httpBrowserTimeDifference": 5,
    "userAgentBrowserValue": "chrome"
  },
  "recurringPaymentInformation": {
    "endDate": "20240906",
    "frequency": "31",
    "numberOfPayments": "1",
    "originalPurchaseDate": "2024080511243877",
    "sequenceNumber": "1"
  },
  "consumerAuthenticationInformation": {
    "strongAuthentication": {
      "authenticationIndicator": "02"
    }
  },
}
```

```

"challengeCode": "03",
"deviceChannel": "Browser",
"messageCategory": "01",
"referenceId": "CybsCruiseTester-ddb08174"
}
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "ZtO0mD5q7PmRUG4v2NZ0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiS4ZKSmMkFZDABECT34jGC2P0h04ghLLtaSZV0ekj0yAsAAAUgae",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "pareq":
"eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMi4wIiwidGhyZWV0U1NlcnZlc1RyYW5zSUQiOiJiMjQ3MWRmY",
    "directoryServerTransactionId": "bf67e7e6-c8cf-4b93-a211-3f4f60b07524",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "b2471dfa-3aad-479d-8b13-b86c5143979c",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "c925d73c-0cb0-4b3a-b3fa-2c4ca402d8b6"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder before continuing with the transaction."
  },
  "id": "7252892152426444904003",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-09-02T15:00:15Z"
}

```

REST Example: Validating the Challenge for a 3RI Initial Recurring Transaction

Request

```

{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",

```

```

    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "ZtO0mD5q7PmRUG4v2NZ0"
  }
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "indicator": "spa",
    "eciRaw": "07",
    "authenticationResult": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "authenticationStatusMsg": "Success",
    "eci": "07",
    "token": "AxijLwSTiS5mZJ9Q00xhABFPfiMZU1QCEtDJpJlXR6SPTIAA9Rdp",
    "cavv": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
    "paresStatus": "Y",
    "xid": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
    "directoryServerTransactionId": "bf67e7e6-c8cf-4b93-a211-3f4f60b07524",
    "threeDSServerTransactionId": "b2471dfa-3aad-479d-8b13-b86c5143979c",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "c925d73c-0cb0-4b3a-b3fa-2c4ca402d8b6"
  },
  "id": "7252913891376641404001",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-02T15:36:29Z"
}

```

1b: Recurring Payments – Subsequent Transaction (Mastercard)

In this instance, the merchant is running a subsequent 3RI recurring transaction that is a fixed amount for a set of payments with no established expiration such as a subscription purchase.

Card Type	Test Card Number
Mastercard	Card Type = 002 52XXXX XX XXXX 2235

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 1b: Recurring Payments – Subsequent Transaction (Mastercard)

Required Fields

<code>consumerAuthenticationInformation.deviceChannel</code>	Set this field value to 3RI .
<code>consumerAuthenticationInformation.messageCategory</code>	Set this field value to 01 .
<code>consumerAuthenticationInformation.priorAuthenticationData</code>	
<code>consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator</code>	Set this field value to 01 .
<code>consumerAuthenticationInformation.strongAuthentication.authenticationIndicator</code>	Set this field value to 02 .
<code>recurringPaymentInformation.endDate</code>	
<code>recurringPaymentInformation.frequency</code>	
<code>recurringPaymentInformation.numberOfPayments</code>	
<code>recurringPaymentInformation.originalPurchaseDate</code>	
<code>recurringPaymentInformation.sequenceNumber</code>	

Related Information

- [API field reference guide for the REST API](#)

REST Example: Validating the Challenge for 3RI Subsequent Installment Transactions

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "52XXXXXXXXXX2235"
    }
  },
  "deviceInformation": {
    "httpAcceptContent": "all",
    "httpBrowserLanguage": "en",
    "httpBrowserJavaEnabled": "y",
    "httpBrowserColorDepth": 1,
    "httpBrowserScreenHeight": 1,
    "httpBrowserScreenWidth": 1,
    "httpBrowserTimeDifference": 5,
    "userAgentBrowserValue": "chrome"
  },
  "recurringPaymentInformation": {
    "endDate": "20240906",
    "frequency": "31",
    "numberOfPayments": "1",
    "originalPurchaseDate": "2024080511243877",
    "sequenceNumber": "1"
  }
}
```

```

},
"consumerAuthenticationInformation": {
  "strongAuthentication": {
    "authenticationIndicator": "02"
  },
  "authenticationDate": "20190829154531",
  "deviceChannel": "3RI",
  "messageCategory": "01",
  "priorAuthenticationData": "bf67e7e6-c8cf-4b93-a211-3f4f60b07524",
  "requestorInitiatedAuthenticationIndicator": "01",
  "referenceId": "CybsCruiseTester-ddb08174"
}
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "02",
    "authenticationTransactionId": "cE217c8r101I71fwGU30",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiS6VNMwh1gIkABECT34jGdA30h04ghLQyaSZV0ekj0yAmAAAzwtj",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "ucafCollectionIndicator": "2",
    "ucafAuthenticationData": "AJkBBkhgQQAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "5791e23c-c10a-4dae-b2c9-4abc766fce2c",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "db112903-7d0e-4ad8-9cb8-31a0e634a24b",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "spa",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "f8a69dc8-2869-491b-b562-0fc7361333f0"
  },
  "id": "7252927068116474004004",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-02T15:58:27Z"
}

```

2a: Installment – Customer Initiated Transaction (Mastercard)

In this instance, the initial authentication is for the total amount for all of the future installments. Once the initial authentication is completed by the customer, the subsequent installments do not require authentication and go directly to authorization, which is Mastercard's preferred process.

Card Type	Test Card Number	
Mastercard	Card Type = 002	52XXXX XX XXXX 28X5

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 2a: Installment – Customer Initiated Transaction (Mastercard)

Required Fields

consumerAuthenticationInformation.challengeCode	Set this field value to 03 .
consumerAuthenticationInformation.deviceChannel	Set this field value to Browser .
consumerAuthenticationInformation.messageCategory	Set this field value to 01 .
consumerAuthenticationInformation.installmentTotalCount	Set this field value to 02 .
consumerAuthenticationInformation.strongAuthentication.authenticationIndicator	Set this field value to 03 .
recurringPaymentInformation.endDate	
recurringPaymentInformation.frequency	
recurringPaymentInformation.numberOfPayments	
recurringPaymentInformation.originalPurchaseDate	

**recurringPaymentInformation.
sequenceNumber**

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for a 3RI Customer Initiated Total Installments (Mastercard)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "52XXXXXXXXXX28X5"
    }
  },
  "deviceInformation": {
    "httpAcceptContent": "all",
    "httpBrowserLanguage": "en",
    "httpBrowserJavaEnabled": "y",
    "httpBrowserColorDepth": 1,
    "httpBrowserScreenHeight": 1,
    "httpBrowserScreenWidth": 1,
    "httpBrowserTimeDifference": 5,
    "userAgentBrowserValue": "chrome"
  },
  "recurringPaymentInformation": {
    "endDate": "20240906",
  }
}
```

```

    "frequency": "31",
    "numberOfPayments": "1",
    "originalPurchaseDate": "2024080511243877",
    "sequenceNumber": "1"
  },
  "consumerAuthenticationInformation": {
    "strongAuthentication": {
      "authenticationIndicator": "03"
    },
    "authenticationDate": "20190829154531",
    "deviceChannel": "Browser",
    "installmentTotalCount": "2",
    "messageCategory": "01",
    "referenceId": "CybsCruiseTester-2551acb2"
  }
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "RTk6DV9Nsv2I1d8BSh40",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiTXaKSxK9bBhABECT34jN2Sb0h04ghLLtaSZV0ekj0yAsAAAxQTL",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "pareq":
    "eyJtZXNzYWdlVHlwZSI6IkdNSZXEiLCJtZXNzYWdlVmVyc2lvbiI6IjIuMi4wIiwidGhyZWV0eU1NlcnZlc1RyYW5zSUQiOiIzYzVhMzExMS",
    "directoryServerTransactionId": "2a9df334-1fa9-4dfe-9b1d-f4a2f14ba003",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "3c5a3111-ebed-4c75-9d9a-43d2e10c92a7",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "15e46f5b-570e-49c0-92c6-bd217b7c1e91"
  },
  "errorInformation": {
    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder before continuing with the transaction."
  },
  "id": "7253450880266999804001",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-09-03T06:31:28Z"
}

```

REST Example: Validating the Challenge for a 3RI Customer Initiated Total Installments (Mastercard)

Request

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "RTk6DV9Nsv2I1d8BSh40"
  }
}
```

Response to a Successful Request

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "indicator": "spa",
    "eciRaw": "02",
    "authenticationResult": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    }
  },
  "authenticationStatusMsg": "Success",
  "token": "AxijLwSTiTXcdJ2PhbzFABFPfiM3dQgCEtDJpJ1XR6SPTIAAJRcM",
  "paresStatus": "Y",
  "ucafCollectionIndicator": "2",
  "ucafAuthenticationData": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
  "directoryServerTransactionId": "2a9df334-1fa9-4dfe-9b1d-f4a2f14ba003",
  "threeDSServerTransactionId": "3c5a3111-ebcd-4c75-9d9a-43d2e10c92a7",
  "specificationVersion": "2.2.0",
  "acsTransactionId": "15e46f5b-570e-49c0-92c6-bd217b7c1e91"
},
  "id": "7253451526166806904005",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-03T06:32:32Z"
}
```

3a: Split/Partial Shipment (Mastercard)

In this instance, the purchase includes multiple items that do not become available to the customer at different times. For example, the customer order has backordered or preordered items. During the initial purchase, the authentication should be for the full amount total (including products to be shipped at a later time).

Card Type	Test Card Number
Mastercard	Card Type = 002 52XXXX XX XXXX 2235

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 3a: Split/Partial Shipment (Mastercard)

Required Fields

consumerAuthenticationInformation.challengeCode	Set this field value to 03 .
consumerAuthenticationInformation.deviceChannel	Set this field value to 3RI .
consumerAuthenticationInformation.messageCategory	Set this field value to 01 .
consumerAuthenticationInformation.priorAuthenticationData	
consumerAuthenticationInformation.priorAuthenticationMethod	Set this field value to 02 .
consumerAuthenticationInformation.priorAuthenticationTime	
consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator	Set this field value to 06 .
consumerAuthenticationInformation.strongAuthentication.authenticationIndicator	Set this field value to 02 .

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for 3RI Split Shipment Transaction (Mastercard)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "52XXXXXXXXXX2235"
    }
  },
  "deviceInformation": {
    "httpAcceptContent": "all",
    "httpBrowserLanguage": "en",
    "httpBrowserJavaEnabled": "y",
    "httpBrowserColorDepth": 1,
    "httpBrowserScreenHeight": 1,
    "httpBrowserScreenWidth": 1,
    "httpBrowserTimeDifference": 5,
    "userAgentBrowserValue": "chrome"
  },
  "recurringPaymentInformation": {
    "endDate": "20240906",
    "frequency": "31",
    "numberOfPayments": "1",
    "originalPurchaseDate": "2024080511243877",
    "sequenceNumber": "1"
  },
  "consumerAuthenticationInformation": {
    "strongAuthentication": {
      "authenticationIndicator": "02"
    }
  }
}
```

```

},
"challengeCode": "03",
"deviceChannel": "3RI",
"messageCategory": "01",
"priorAuthenticationData": "bf67e7e6-c8cf-4b93-a211-3f4f60b07524",
"priorAuthenticationMethod": "02",
"priorAuthenticationTime": "202408051124",
"requestorInitiatedAuthenticationIndicator": "06",
"referenceId": "CybsCruiseTester-ddb08174"
}
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "02",
    "authenticationTransactionId": "dgHSe0WYJbcT51D8pTQ0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiS7CLi6JgeyFABECT34jGkKb0h04ghLQyaSZV0ekj0yAmAAAzwt1",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "ucafCollectionIndicator": "2",
    "ucafAuthenticationData": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "1740697e-f8bd-4fde-8a12-c95e398c2409",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "c9c607a1-a130-4226-8a22-376e1183a5ae",
    "acsOperatorID": "MerchantACS",
    "ecommerceIndicator": "spa",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "74fd3b64-5abb-4ac2-b090-1fba79996123"
  },
  "id": "7252939727216490704005",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-02T16:19:32Z"
}

```

3b: Split/Delayed Shipment (Mastercard)

In this instance, the purchase includes multiple items that do not become available to the customer at different times. For example, the customer order has backordered or

preordered items. During the initial purchase, the authentication should be for the full amount total (including products to be shipped at a later time).

Card Type		Test Card Number
Visa	Card Type = 002	52XXXX XX XXXX 2235

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 3b: Split/Delayed Shipment (Visa)

Required Fields

consumerAuthenticationInformation.deviceChannel	Set this field value to 3RI .
consumerAuthenticationInformation.messageCategory	Set this field value to 01 .
consumerAuthenticationInformation.priorAuthenticationMethod	Set this field value to 02 .
consumerAuthenticationInformation.priorAuthenticationReferenceId	
consumerAuthenticationInformation.priorAuthenticationTime	
consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator	Set this field value to 06 .
consumerAuthenticationInformation.strongAuthentication.authenticationIndicator	Set this field value to 02 .

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for 3RI Split Shipment Transaction (Mastercard)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    }
  }
}
```

```

},
"lineItems": [
  {
    "unitPrice": "120.00"
  }
],
"billTo": {
  "address1": "201 S. Division St.",
  "administrativeArea": "MI",
  "country": "US",
  "locality": "Ann Arbor",
  "firstName": "RTS",
  "lastName": "VDP",
  "email": "test@email.com",
  "postalCode": "48104-2201"
},
"paymentInformation": {
  "card": {
    "type": "001",
    "expirationMonth": "12",
    "expirationYear": "2027",
    "number": "52XXXXXXXXXX2235"
  }
},
"deviceInformation": {
  "httpAcceptContent": "all",
  "httpBrowserLanguage": "en",
  "httpBrowserJavaEnabled": "y",
  "httpBrowserColorDepth": 1,
  "httpBrowserScreenHeight": 1,
  "httpBrowserScreenWidth": 1,
  "httpBrowserTimeDifference": 5,
  "userAgentBrowserValue": "chrome"
},
"consumerAuthenticationInformation": {
  "strongAuthentication": {
    "authenticationIndicator": "01"
  },
  "deviceChannel": "3RI",
  "messageCategory": "01",
  "priorAuthenticationMethod": "02",
  "priorAuthenticationReferenceId": "74fd3b64-5abb-4ac2-b090-1fba79996123",
  "priorAuthenticationTime": "202408051124",
  "requestorInitiatedAuthenticationIndicator": "06",
  "referenceId": "CybsCruiseTester-ddb08174"
}
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {

```

```

"eciRaw": "05",
"authenticationTransactionId": "kvaz0784ZnNyUBg9U8t0",
"strongAuthentication": {
  "OutageExemptionIndicator": "0"
},
"eci": "05",
"token": "AxjzbwSTiS7a+V0I6DbGABEBT34jGnMj0h04ghLQyaSZV0ekj0yAcAAAsQar",
"cavv": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
"paresStatus": "Y",
"acsReferenceNumber": "Cardinal ACS",
"xid": "AJkBBkhgQAAAAE4gSEJydQAAAAA=",
"directoryServerTransactionId": "ebf656a8-c5da-412d-873f-9f4d3fa9a625",
"veresEnrolled": "Y",
"threeDSServerTransactionId": "4777bd69-fcef-4725-b41b-84a346d83d0a",
"acsOperatorID": "MerchantACS",
"ecommerceIndicator": "vbw",
"specificationVersion": "2.2.0",
"acsTransactionId": "4381f3b5-09b1-4248-992a-89f6514064d7"
},
"id": "7252946706016498104006",
"paymentInformation": {
  "card": {
    "bin": "400000",
    "type": "VISA"
  }
},
"status": "AUTHENTICATION_SUCCESSFUL",
"submitTimeUtc": "2024-09-02T16:31:10Z"
}

```

4a: Multi-Party Commerce or OTA (Visa)

In this test case, a travel booking merchant creates a multi-party transaction for the cardholder. The merchants participating in the multi-party transaction are required to authorize on flights, hotels, and car rentals etc. This test case focuses on what the participating merchants are required to send for a successful transaction. Note that each participating merchant must send their own CAVV.

Refer to the network specific values section for this use case.

Card Type	Test Card Number	
Visa	Card Type = 001	4XXXXX XX XXXX 27X1

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 4a: Multi-Party Commerce or OTA (Visa)

Required Fields

<code>consumerAuthenticationInformation.deviceChannel</code>	Set this field value to <code>3RI</code> .
<code>consumerAuthenticationInformation.messageCategory</code>	Set this field value to <code>01</code> .
<code>consumerAuthenticationInformation.priorAuthenticationMethod</code>	Set this field value to <code>02</code> .
<code>consumerAuthenticationInformation.priorAuthenticationReferenceId</code>	
<code>consumerAuthenticationInformation.priorAuthenticationTime</code>	
<code>consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator</code>	Set this field value to <code>11</code> .
<code>consumerAuthenticationInformation.strongAuthentication.authenticationIndicator</code>	Set this field value to <code>01</code> .

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Visa)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  }
}
```

```

    }
  },
  "paymentInformation": {
    "card": {
      "type": "001",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "4XXXXXXXXXX27X1"
    }
  },
  "deviceInformation": {
    "httpAcceptContent": "all",
    "httpBrowserLanguage": "en",
    "httpBrowserJavaEnabled": "y",
    "httpBrowserColorDepth": 1,
    "httpBrowserScreenHeight": 1,
    "httpBrowserScreenWidth": 1,
    "httpBrowserTimeDifference": 5,
    "userAgentBrowserValue": "chrome"
  },
  "consumerAuthenticationInformation": {
    "strongAuthentication": {
      "authenticationIndicator": "01"
    },
    "deviceChannel": "3RI",
    "messageCategory": "01",
    "priorAuthenticationMethod": "02",
    "priorAuthenticationReferenceId": "74fd3b64-5abb-4ac2-b090-1fba79996123",
    "priorAuthenticationTime": "202408051124",
    "requestorInitiatedAuthenticationIndicator": "11",
    "referenceId": "CybsCruiseTester-ddb08174"
  }
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "05",
    "authenticationTransactionId": "GLO987AF3GRfk4IAAO10",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "eci": "05",
    "token": "AxjzbwSTiS7hKm5H9W8jABEBT34jGnwr0h04ghLQyaSZV0ekj0yAcAAAtQax",
    "cavv": "AJkBBkhgQQAAAE4gSEJydQAAAAA=",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "xid": "AJkBBkhgQQAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "5c1ee075-b8d7-43f0-9525-51de793125a0",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "f7ddddc1-cd06-4fd1-b1e6-db37e0379451",
    "acsOperatorID": "MerchantACS",
  }
}

```

```

    "ecommerceIndicator": "vbv",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "1dd0c6ac-03fd-46dd-b6ea-54bb5d337db2"
  },
  "id": "7252948448816500404003",
  "paymentInformation": {
    "card": {
      "bin": "400000",
      "type": "VISA"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-02T16:34:05Z"
}

```

4b: Multi-Party Commerce or OTA (MasterCard)

In this test case, a travel booking merchant creates a multi-party transaction for the cardholder. The merchants participating in the multi-party transaction are required to authorize on flights, hotels, and car rentals etc. This test case focuses on what the participating merchants are required to send for a successful transaction. Note that each participating merchant must send their own CAVV.

Card Type		Test Card Number
Mastercard	Card Type = 002	52XXXX XX XXXX 28X5

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: POST <https://apitest.cybersource.com/risk/v1/authentication-setups>

Required Fields for 3RI 4b: Multi-Party Commerce or OTA (MasterCard)

Required Fields

[consumerAuthenticationInformation.challengeCode](#)

Set this field value to 03.

[consumerAuthenticationInformation.deviceChannel](#)

Set this field value to Browser.

[consumerAuthenticationInformation.messageCategory](#)

Set this field value to 01.

consumerAuthenticationInformation. Set this field value to **85**.
strongAuthentication.authenticationIndicator
recurringPaymentInformation.endDate
recurringPaymentInformation.frequency
recurringPaymentInformation.numberOfPayments
recurringPaymentInformation.originalPurchaseDate
recurringPaymentInformation.sequenceNumber

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Mastercard)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",
      "firstName": "RTS",
      "lastName": "VDP",
      "email": "test@email.com",
      "postalCode": "48104-2201"
    }
  },
  "paymentInformation": {
    "card": {
      "type": "002",
      "expirationMonth": "12",
      "expirationYear": "2027",
      "number": "52XXXXXXXXXX28X5"
    }
  }
}
```

```

"deviceInformation": {
  "httpAcceptContent": "all",
  "httpBrowserLanguage": "en",
  "httpBrowserJavaEnabled": "y",
  "httpBrowserColorDepth": 1,
  "httpBrowserScreenHeight": 1,
  "httpBrowserScreenWidth": 1,
  "httpBrowserTimeDifference": 5,
  "userAgentBrowserValue": "chrome"
},
"recurringPaymentInformation": {
  "endDate": "20240906",
  "frequency": "31",
  "numberOfPayments": "1",
  "originalPurchaseDate": "2024080511243877",
  "sequenceNumber": "1"
},
"consumerAuthenticationInformation": {
  "strongAuthentication": {
    "authenticationIndicator": "85"
  },
  "challengeCode": "03",
  "deviceChannel": "Browser",
  "messageCategory": "01",
  "priorAuthenticationMethod": "02",
  "priorAuthenticationReferenceId": "74fd3b64-5abb-4ac2-b090-1fba79996123",
  "priorAuthenticationTime": "202408051124",
  "referenceId": "CybsCruiseTester-500582d1"
}
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "challengeRequired": "N",
    "authenticationTransactionId": "UjGENvX5ALCk1Yov31m0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiS7ruvMgAiEDABECT34jGqAX0h04ghLLtaSZV0ekj0yAsAAAwQTD",
    "acsUrl": "https://0merchantacsstag.cardinalcommerce.com/MerchantACSWeb/creq.jsp",
    "acsReferenceNumber": "Cardinal ACS",
    "pareq":
    "eyJtZXNzYWdlVHlwZSI6IkNSZXElLCJtZXNzYWdlVmVyc2lvbiI6IjIuMi4wIiwidGhyZWV0U1NlcnZlc1RyYW5zSUQiOiI3ODc3MjhmN",
    "directoryServerTransactionId": "b25e6688-6b10-4942-a8a1-cc5b5f7ad9af",
    "veresEnrolled": "Y",
    "threeDSServerTransactionId": "787728f7-bc73-4470-a3e0-9d1524e7ca14",
    "acsOperatorID": "MerchantACS",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "06338682-af32-49a0-b85b-e5b22579ffbc"
  },
  "errorInformation": {

```

```

    "reason": "CONSUMER_AUTHENTICATION_REQUIRED",
    "message": "The cardholder is enrolled in Payer Authentication. Please authenticate the cardholder
before continuing with the transaction."
  },
  "id": "7252951422466502304003",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "PENDING_AUTHENTICATION",
  "submitTimeUtc": "2024-09-02T16:39:02Z"
}

```

Response to a Successful Request

```

{
  "clientReferenceInformation": {
    "code": "1675288043120"
  },
  "consumerAuthenticationInformation": {
    "indicator": "internet",
    "ucafCollectionIndicator": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTbhMKrRswWTYSABECT9u+QBvfSB84gL2IZNJMvRiyubWAOAAA+Qxb"
  },
  "id": "6752880430346470503954",
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2023-02-01T21:47:23Z"
}

```

REST Example: Validating the Challenge for 3RI Multi-Party Commerce Transaction (Mastercard)

Request

```

{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "authenticationTransactionId": "UjGENvX5ALCk1Yov31m0"
  }
}

```

Response to a Successful Request

```

{

```

```
{
  "clientReferenceInformation": {
    "code": "pavalidatecheck",
    "partner": {
      "developerId": "7891234",
      "solutionId": "89012345"
    }
  },
  "consumerAuthenticationInformation": {
    "indicator": "spa",
    "eciRaw": "02",
    "authenticationResult": "0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "authenticationStatusMsg": "Success",
    "token": "AxijLwSTiS7u/oVLPQ0mABFPfiMaqKgCEtDjpJlXR6SPTIAAkRY+",
    "paresStatus": "Y",
    "ucafCollectionIndicator": "2",
    "ucafAuthenticationData": "AAIBBYNoEwAAACcKhAJkdQAAAAA=",
    "directoryServerTransactionId": "b25e6688-6b10-4942-a8a1-cc5b5f7ad9af",
    "threeDSServerTransactionId": "787728f7-bc73-4470-a3e0-9d1524e7ca14",
    "specificationVersion": "2.2.0",
    "acsTransactionId": "06338682-af32-49a0-b85b-e5b22579ffbc"
  },
  "id": "7252952341186502004006",
  "paymentInformation": {
    "card": {
      "bin": "520000",
      "type": "MASTERCARD"
    }
  },
  "status": "AUTHENTICATION_SUCCESSFUL",
  "submitTimeUtc": "2024-09-02T16:40:34Z"
}
```

4c: Multi-Party Commerce or OTA (MasterCard)

The merchant initiates a (3RI) recurring transaction of a fixed amount for a specified number of transactions or with no set number of transactions such as occurs with subscription purchases. For more information, see [Requester Initiated Payments](#).

Card Type		Test Card Number
Mastercard	Card Type = 002	52XXXX XX XXXX 2235

Endpoint

Production: POST <https://api.cybersource.com/risk/v1/authentication-setups>

Test: `POST https://apitest.cybersource.com/risk/v1/authentication-setups`

Required Fields for 3RI 4c: Multi-Party Commerce or OTA (MasterCard)

Required Fields

<code>consumerAuthenticationInformation.deviceChannel</code>	Set this field value to <code>3RI</code> .
<code>consumerAuthenticationInformation.messageCategory</code>	Set this field value to <code>01</code> .
<code>consumerAuthenticationInformation.priorAuthenticationMethod</code>	Set this field value to <code>02</code> .
<code>consumerAuthenticationInformation.priorAuthenticationReferenceId</code>	
<code>consumerAuthenticationInformation.priorAuthenticationTime</code>	
<code>consumerAuthenticationInformation.requestorInitiatedAuthenticationIndicator</code>	Set this field value to <code>85</code> .
<code>consumerAuthenticationInformation.strongAuthentication.authenticationIndicator</code>	Set this field value to <code>85</code> .

Related Information

- [API field reference guide for the REST API](#)

REST Example: Checking Enrollment for 3RI Multi-Party Commerce Transaction (Mastercard)

Request

```
{
  "orderInformation": {
    "amountDetails": {
      "currency": "eur",
      "totalAmount": "100.00"
    },
    "lineItems": [
      {
        "unitPrice": "120.00"
      }
    ],
    "billTo": {
      "address1": "201 S. Division St.",
      "administrativeArea": "MI",
      "country": "US",
      "locality": "Ann Arbor",

```

```

    "firstName": "RTS",
    "lastName": "VDP",
    "email": "test@email.com",
    "postalCode": "48104-2201"
  }
},
"paymentInformation": {
  "card": {
    "type": "002",
    "expirationMonth": "12",
    "expirationYear": "2027",
    "number": "52XXXXXXXXXX2235"
  }
},
"deviceInformation": {
  "httpAcceptContent": "all",
  "httpBrowserLanguage": "en",
  "httpBrowserJavaEnabled": "y",
  "httpBrowserColorDepth": 1,
  "httpBrowserScreenHeight": 1,
  "httpBrowserScreenWidth": 1,
  "httpBrowserTimeDifference": 5,
  "userAgentBrowserValue": "chrome"
},
"consumerAuthenticationInformation": {
  "strongAuthentication": {
    "authenticationIndicator": "85"
  },
  "deviceChannel": "3RI",
  "messageCategory": "01",
  "priorAuthenticationMethod": "02",
  "priorAuthenticationReferenceId": "74fd3b64-5abb-4ac2-b090-1fba79996123",
  "priorAuthenticationTime": "202408051124",
  "requestorInitiatedAuthenticationIndicator": "85",
  "referenceId": "CybsCruiseTester-8e9d566d"
}
}

```

Response

```

{
  "clientReferenceInformation": {
    "code": "RTS-Auth"
  },
  "consumerAuthenticationInformation": {
    "eciRaw": "02",
    "authenticationTransactionId": "teQ1a9eI9B6hf96QMHJ0",
    "strongAuthentication": {
      "OutageExemptionIndicator": "0"
    },
    "token": "AxjzbwSTiUMNwN7oizBEABECT34jdm670h04ghMQyaSZV0ekj0yAmAAAzWtp",
    "paresStatus": "Y",
    "acsReferenceNumber": "Cardinal ACS",
    "ucafCollectionIndicator": "2",
    "ucafAuthenticationData": "AJkBBkhgQQAAAE4gSEJydQAAAAA=",
    "directoryServerTransactionId": "208c54bd-a067-4a45-a285-af22f02a5e07",

```

```
{
  "veresEnrolled": "Y",
  "threeDSServerTransactionId": "2a6f6351-58a8-4e7b-acbc-8fd3d5ab85f3",
  "acsOperatorID": "MerchantACS",
  "ecommerceIndicator": "spa",
  "specificationVersion": "2.2.0",
  "acsTransactionId": "932bc2de-6e7a-4b16-adfa-f6c8c1ce9628"
},
{id": "7254402151006708904004",
"paymentInformation": {
  "card": {
    "bin": "520000",
    "type": "MASTERCARD"
  }
},
"status": "AUTHENTICATION_SUCCESSFUL",
"submitTimeUtc": "2024-09-04T08:56:55Z"
}
```

Testing Payer Authentication

After you complete the necessary changes to your web and API integration, verify that all components are working correctly by performing all the tests for the cards that you support. Each test contains the specific input data and the most important result fields that you receive in the API response.

Testing Process

Use the card number specified in the test with the card’s expiration date set to the month of December and the current year plus three. For example, for 2025, use 2028. The test card numbers that are provided are formatted with Xs for zeroes in the card number. When testing with the card numbers, replace a X with a 0 (zero). You also need the minimum required fields for an order.

Enrollment Check Response Fields

This table lists the checking enrollment response fields used in the test cases.

Enrollment Check Response Fields

Name Used in Test Cases	API Field
ACS URL	consumerAuthenticationInformation.acsUrl
E-commerce indicator	consumerAuthenticationInformation.ecommerceIndicator
ECI	consumerAuthenticationInformation.eci
PAReq	consumerAuthenticationInformation.pareq
proofXML	consumerAuthenticationInformation.proofXml
VERes enrolled	consumerAuthenticationInformation.veresEnrolled

Name Used in Test Cases	API Field
XID	consumerAuthenticationInformation.xid

Authentication Validation Response Fields

This table lists only the response fields used in the test cases.

Response Fields Used in Authentication Validation Test Cases

Name Used in Test Cases	API Field
Authentication result	consumerAuthenticationInformation.authenticationResult
E-commerce indicator	consumerAuthenticationInformation.indicator
AAV (Mastercard only)	consumerAuthenticationInformation.ucafAuthenticationData
CAVV (all card types except Mastercard)	consumerAuthenticationInformation.cavv
Collection indicator	consumerAuthenticationInformation.ucafCollectionIndicator
ECI	consumerAuthenticationInformation.eci
PARes status	consumerAuthenticationInformation.paresStatus
Status	status
XID	consumerAuthenticationInformation.xid

Test Cases for 3-D Secure 2.x

Use the card number specified in the test with the card expiration date set to the month of January and the current year plus three. For example, for 2026, use 2029. You also need the minimum required fields for an order.

Be sure to remove spaces in card numbers when testing.



Important

The test card numbers that are provided are formatted with Xs for zeroes in the card number. When testing with the card numbers, replace the Xs with a 0 (zero).

While the usage of transaction ID (XID) values have declined in importance, they are still included in 3-D Secure 2.x test cases. Only Mastercard transactions do not return XIDs. While the 3-D Secure version and directory server transaction ID fields are returned for the Check Enrollment and Validate Authentication services, this data is not included in the 3-D Secure 2.x test cases.



Important

Mastercard requires that the 3-D Secure version and directory server transaction ID be included along with all pertinent data in your authorization request.

Card Specific Setup

The cards listed below require a specific merchant attribute or configuration during testing.

- eftpos: The merchant should request that customer support enable the preferred secondary brand attribute to enable the preferred routing for eftpos.
- mada: The merchant descriptor country should be set as **SA** and the card type should be set as **mada**.
- Meeza: The merchant descriptor country should be set as **EG** and the card type should be set as **Meeza**

2.1: Frictionless Authentication Is Successful

This test verifies that successful frictionless authentication of the cardholder by the card issuer works correctly.

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 27X8

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XX XXXX XXXX 3XX1	52XX XXXX XXXX 48X1

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXX XXXX XXXX 3XX6	4XXX XXXX XXXX 497X

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XX X1XX XX2X XXXX	81XXX1 XX XXXX X142 621XX3 82 3532 713X

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11 XXXX XXXX 2117

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11 XXXX XXXX 2117

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 517X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XXX1	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5126	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XXXX	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2XXX

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XXXX	557755 X1 22XX XXX9

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XXX5	4632X8 21 XXXX XXX4

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1XX1	669XX9 XX XXXX 2XX9

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X296

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 8XXX The merchant's country must be set to SA within the merchant profile, or the CountryCode Override field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 8X2X The merchant's country must be set to SA within the merchant profile, or the CountryCode Override field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXX 2235

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 19X5 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXXX XX XXXX 27X1



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = Y

PARes status = Y

CAVV = <CAVV value>

AVV = <AVV value> (Mastercard only)

XID = <XID value>

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	05	aesk
Cartes Bancaires Mastercard	02	spa
Cartes Bancaires Visa	05	vbv

Network	ECI Raw Value	ECI String Value
China UnionPay	05	up3ds
Diners Club	05	pb
Discover	05	dipb
eftpos	05	oci
Elo	05	cs
ITMX Mastercard	05	lss
ITMX Visa	05	lss
Jaywan	05	oci
JCB J/Secure	05	js
mada Mastercard	02	mada or spa
mada Visa	05	mada or vbv
Mastercard	02	spa
RuPay	05	oci
Visa	05	vbv

Results for the Validation Authentication Service

Validation does not apply to this test because no validation is needed when no challenge is issued during the transaction.

Action

If you request Check Enrollment and Authorization services separately, add the required payer authentication values to your authorization request. If you request the Check Enrollment and authorization services together, the process described above occurs automatically.

2.2: Frictionless Authentication Is Unsuccessful

This test verifies that cardholder authentication without a challenge by the card issuer will fail.

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2X96

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X19	52XXXX XX XXXX 4538

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X14	4XXXXX XX XXXX 4574

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX1X XX1X	81XXX1 XX XXXX X647 621XX3 77 X3X8 1377

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2364

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2364

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 522X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX19	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X19	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX18	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2X18

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX1X	557755 X1 22XX XX17

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX13	4632X8 22 XXXX XX12

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1X43	669XX9 XX XXXX 2X17

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X361

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 8X1X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 8X4X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2276

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1319 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2925



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 0067.

Results for the Check Enrollment Service

Status = **AUTHENTICATION_FAILED**

- User failed authentication.
- Payer cannot be authenticated.

VERes enrolled = **Y**

PARes status = **N**

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw value, and their respective string values. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	mada_failure or internet

Network	ECI Raw Value	ECI String Value
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet
RuPay	07	oci_failure
Visa	07	internet or vbv_failure

Results for the Validation Authentication Service

No results are returned.

Action

Even though the merchant can still authorize a failed 3-D Secure transaction as a non-authenticated transaction, it is not recommended to submit this transaction for authorization. Instead, ask the customer for another form of payment.

2.3: Stand-In Frictionless Authentication is Attempted

This test verifies how your system reacts when the cardholder is enrolled in 3-D Secure but the card issuer does not support 3-D Secure, requiring a stand-in authentication experience.

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2872

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X27	52XXXX XX XXXX 4587

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X22	4XXXXX XX XXXX 4111

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XXXX XX2X	62XXX1 XX XXXX XX2X 621XX3 35 3371 144X

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2646

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2646

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 5360	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX27	

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X27	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX26	

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2026

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX75	557755 X2 21XX XX74

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX7X	4632X8 22 XXXX XX79

6690090000002017

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1X68	669XX9 XX XXXX 21X8

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X585

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	—

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	—

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2482

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2719

**Important**

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = Y

PARes status = A

CAVV = <CAVV value>

AVV = <AVV value> (Mastercard only)

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	06	aesk_attempted
Cartes Bancaires Mastercard	01	spa
Cartes Bancaires Visa	06	vbv_attempted
China UnionPay	06	up3ds_attempted
Diners Club	06	pb_attempted
Discover	06	dipb_attempted
eftpos	06	oci_attempted
Elo	06	cs_attempted
ITMX Mastercard	06	lss_attempted
ITMX Visa	06	lss_attempted
Jaywan	06	oci_attempted
JCB J/Secure	06	js_attempted
Mastercard	01	spa
Visa	06	vbv_attempted

Results for the Validation Authentication Service

No results are returned.

Action

If you request Check Enrollment and Authorization services separately, add the required payer authentication values (CAVV and ECI) to your authorization request. If you request the Check Enrollment and Authorization services together, the process described above occurs automatically.

2.4: Frictionless Authentication Is Unavailable

This test verifies how your system behaves when authentication is unavailable at the time of the transaction.

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXXX XX XXXX 2922

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3035	52XXXX XX XXXX 4306

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X3X	4XXXXX XX XXXX 4160

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX40 XX3X	81XXX1 XX XXXX X894 621XX3 17 X75X 3X15

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2612

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2612

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 541X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX35	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X35	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X56 5X X1XX XXX34	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2X34

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX91	557755 X1 22XX XX9X

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX96	4632X8 22 XXXX XX79

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1126	669XX9 XX XXXX 2181

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X221

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXX X XXXX 8X5X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXX XX XXXX 8XX The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2268

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1624 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXXX XX XXXX 2313



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = Y

PARes status = U

AVV = <No value provided>

CAAV = <No value provided>

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure

Network	ECI Raw Value	ECI String Value
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet
RuPay	07	oci_failure
Visa	07	internet or vbv_failure

Results for the Validation Authentication Service

No results are returned.

Action

Submit your authorization request. There is no liability shift.

2.5: Frictionless Authentication Is Rejected

This test verifies how your system reacts when authentication rejects the cardholder without a challenge by the issuer.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2X62

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X43	52XXXX XX XXXX 4405

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X48	4XXXXX XX XXXX 4517

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX3X XX4X	81XXX1 XX XXXX X415 621XX3 X8 5745 X241

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2711

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2711

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 555X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX43	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X35	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
470565 XX 1XXX XX42	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2X83

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21X X125	557755 X1 22XX X1X8

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX X12X	4632X8 22 XXXX X1X3

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1159	669XX9 XX XXXX 22X7

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
3337XX XX XXXX X321	3338XX XX XXXX X734

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 8X8X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 813X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2185

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1913 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXXXXX XXXX 2537

Results for the Check Enrollment Service

Status = **AUTHENTICATION_FAILED**

- User failed authentication.
- Payer cannot be authenticated.

VERes enrolled = **Y**

PARes status = **R**

AVV = <No value provided>

CAAV = <No value provided>

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet

Network	ECI Raw Value	ECI String Value
RuPay	07	oci_failure
Visa	07	internet or vbv_failure



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type value for Meeza is 067.

Results for the Validation Authentication Service

No results are returned.

Action

You are not permitted to submit this transaction for authorization. Instead, ask the customer for another form of payment.

2.6: Authentication Is Not Available

This test verifies how your system reacts when a system error when checking enrollment prevents authentication.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2468

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X5X	52XXXXXX XXXX 4X9X

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X55	4XXXXX XX XXXX 4285

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX6X XX5X	81XXX1 XX XXXX X795 621XX3 1X 724X 3478

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XXXX XXXX 2836

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2836

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 556X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX5X	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X5X	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX59	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2X91

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX X141	557755 X1 22XX X124

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX138	4632X8 22 XXXX X145

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1126	669XX9 XX XXXX 2181

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X94X

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 8X9X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 814X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 24X9

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 299X



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = `AUTHENTICATION_SUCCESSFUL`

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = `U`

In the response, this error code and error description is returned:

directoryServerErrorCode: `101`

directoryServerErrorDescription: `Invalid Formatted Message`

E-Commerce Indicator (ECI) Values

This table lists the ECI raw value that must be passed within the authorization and its respective string value. Note that there is no raw ECI returned for these scenarios. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
eftpos	07	oci_failure
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure

Results for the Validation Authentication Service

No results are returned.

Action

Submit your authorization request. There is no liability shift.

2.7: Check Enrollment Error

This test verifies how your system reacts when an error occurs while verifying that the cardholder is part of an authentication program.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2732

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X68	52XXXX XX XXXX 4X58

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X63	4XXXXXXXXX XXXX 4194

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX5X XX6X	81XXX1 XX XXXX X662 621XX3 41 5762 1444

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2315

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2315

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 579X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX68	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X68	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX67	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 21X9

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX X174	557755 X1 22XX X132

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX153	4632X8 22 XXXX X152

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1159	669XX9 XX XXXX 2199

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X65X

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 811X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 817X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2X37

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1921 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2446



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = `AUTHENTICATION_SUCCESSFUL`

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = `U`

In the response, this error code and error description is returned:

directoryServerErrorCode: `101`

directoryServerErrorDescription: `Error Processing Message Request 1001`

E-Commerce Indicator (ECI) Values

This table lists the raw ECI value that must be passed within the authorization and its respective string value. Note that no raw ECI is returned for these scenarios. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
eftpos	07	oci_failure
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
RuPay	07	oci_failure

Results for the Validation Authentication Service

No results are returned.

While Mastercard would normally return the directory server transaction ID, in this test case, it is not returned.

Action

Proceed with the authorization request, and contact your support representative to resolve the issue. There is no liability shift. If you requested payer authentication and authorization together, the authorization is processed automatically.

2.8: Time Out

This test verifies how your system reacts when an error occurs while verifying that the cardholder is part of an authentication program.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2047

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X76	52XXXX XX XXXX 4694

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X71	4XXXXX XX XXXX 4277

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX9X X7X	81XXX1 XX XXXX X928 621XX3 X1 X451 71X7

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2869

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2869

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 584X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX76	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX76	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX75	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2125

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX X182	557755 X1 22XX X14X

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX187	4632X8 22 XXXX X178

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1175	669XX9 XX XXXX 22X7

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX 0577

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXXXX XXXX 813X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 82XX The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2326

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1939 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2354

This test verifies how your system reacts when it times out while checking enrollment, causing an error on the transaction.

**Important**

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = U

In the response, this error code and error description is returned:

directoryServerErrorCode: 402

directoryServerErrorDescription: Transaction Timed Out

E-Commerce Indicator (ECI) Values

This table lists the raw ECI value that would need to be passed within the authorization and its respective string value. Note that there is no raw ECI value returned for these scenarios. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
eftpos	07	oci_failure
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
RuPay	07	oci_failure

Results for the Validation Authentication Service

No results are returned.

Action

After 10-12 seconds, proceed with the authorization request. There is no liability shift.

2.9: Step-Up Authentication Is Successful

This test verifies how your system reacts to a successful step-up (or challenge) authentication transaction.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2534

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X92	52XXXX XX XXXX 4X74

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3139	4XXXXX XX XXXX 4855

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 99 998X XX19	81XXX1 XX XXXX X688 621XX3 25 7857 4424

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2265

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2265

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 5311	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX84	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 529X	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX83	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 219X

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX26	557755 X1 22XX XX25

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX21	4632X8 22 XXXX XX2X

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1233	669XX9 XX XXXX 2249

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X569

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 816X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 827X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2151

PayPak (Card Type = 068)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
22X543 XX XXXX 3XX2 PayPak transactions require a CurrencyCode = 586 and a CountryCodeOverride = PK on the Lookup Request.	—

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1XX4 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 25X3



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = PENDING_AUTHENTICATION

The cardholder is enrolled in payer authentication. Authenticate before proceeding with authorization.

VERes enrolled = **Y**

PARes status = **C**

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values from this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
mada Mastercard	00	spa or mada
mada Visa	07	vbv or mada
PayPak	07	oci_failure
RuPay	05	oci_failure

Results for the Validation Authentication Service

Status = AUTHENTICATION_SUCCESSFUL

Authentication is validated.

PARes status = Y

XID = <XID value>

CAVV = <CAVV value>

E-Commerce Indicator (ECI) Values

This table lists the expected raw ECI values and their respective string values from validating this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	05	aesk
Cartes Bancaires Mastercard	02	spa
Cartes Bancaires Visa	05	vbv
China UnionPay	05	up3ds
Diners Club	05	pb
Discover	05	dipb
eftpos	05	oci
Elo	05	cs
ITMX Mastercard	05	lss
ITMX Visa	05	lss
Jaywan	05	oci
JCB J/Secure	05	js
mada Mastercard	02	spa or mada
mada Visa	05	vbv or mada
Mastercard	02	spa
PayPak	05	oci
RuPay	05	oci
Visa	05	vbv

Action

If you request Validate Authentication and authorization services separately, add the required payer authentication values to your authorization request. If you request the Validate Authentication and authorization services together, the process described

above occurs automatically. The merchant should include the CAVV and ECI values in the authorization message.

2.10: Step-Up Authentication Is Unsuccessful

This test verifies that the step-up (challenge) authentication transaction fails whenever the cardholder challenge fails.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2237

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 31XX	52XXXX XX XXXX 4124

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X97	4XXXXX XX XXXX 4293

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 99 997X XX29	81XXX1 XX XXXX X8X3 621XX3 81 8186 8X38

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2695

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2695

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 5329	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX XX92	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5217	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX XX91	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 22X8

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX34	557755 X1 22XX XX33

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX39	4632X8 22 XXXX XX38

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1258	669XX9 XX XXXX 2298

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X874

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 817X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 828X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 249X

PayPak (Card Type = 068)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
22X543 XX XXXX 3X1X Pay Pak transactions require a CurrencyCode = 586 and a CountryCodeOverride = PK on the Lookup Request.	—

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1X12 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2370



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

= PENDING_AUTHENTICATIONThe cardholder is enrolled in payer authentication. Please authenticate before proceeding with authorization.

VERes enrolled = Y

PARes status = C

PAReq = <PAReq value>

ACS URL = <URL value>

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected raw ECI values and their respective string values from this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
PayPak	07	oci_failure
RuPay	07	oci_failure

Results for the Validation Authentication Service

= **AUTHENTICATION_FAILED**

- User failed authentication.
- Payer cannot be authenticated.

PARes status = **N**

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected raw ECI values and their respective string values from this transaction. These values indicate whether the payer was validated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
JCB J/Secure	07	internet
Jaywan	07	oci_failure
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet
PayPak	07	oci_failure
RuPay	07	oci_failure
Visa	07	internet or vbv_failure

Action

You are not permitted to submit this transaction for authorization. Instead, ask the customer for another form of payment.

2.11: Step-Up Authentication Is Unavailable

This test verifies that the correct response is returned when step-up authentication is unavailable.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2484

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3188	52XXXX XX XXXX 4124

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 31X5	4XXXXX XX XXXX 464X

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 99 997X XX39	81XXX1 XX XXXX X159

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 1129

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 1129

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 5337	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX X1XX	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5225	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX X1X9	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2257

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX42	557755 X1 22XX XX41

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX47	4632X8 22 XXXX XX46

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1274	669XX9 XX XXXX 2348

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X981

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 819X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 831X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2664

PayPak (Card Type = 068)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
22X543 XX XXXX 3X28 Pay Pak transactions require a CurrencyCode = 586 and a CountryCodeOverride = PK on the Lookup Request.	—

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1X2X When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXXX XX XXXX 242X



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = **PENDING_AUTHENTICATION**

The cardholder is enrolled in payer authentication. Authenticate before proceeding with authorization.

VERes enrolled = **Y**

PARes Status = **C**

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values from this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
PayPak	07	oci_failure
RuPay	07	oci_failure

Results for the Validation Authentication Service

Status = AUTHENTICATION_SUCCESSFUL Authentication is validated.

PARes status = U

XID = <XID value> (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values from this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet
PayPak	07	oci_failure
RuPay	07	oci_failure
Visa	07	internet or vbv_failure

Action

The merchant can retry authentication or process without the liability shift.

2.12: Error During Authentication

This test checks how your system reacts when authentication request errors occurs during processing.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXXX XX XXXX 2351

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3126	52XXXX XX XXXX 4611

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3113	4XXXXX XX XXXX 4913

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 99 994X XX59	81XXX1 XX XXXX X159 621XX3 32 7122 3145

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 257X

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 257X

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 5352	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX X118	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5241	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX X117	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2265

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX XX67	557755 X1 22XX XX66

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX XX62	4632X8 22 XXXX XX61

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1316	669XX9 XX XXXX 24X5

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X676

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 82XX The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 834X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 2656

PayPak (Card Type = 068)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
22X543 XX XXXX 3X69 Pay Pak transactions require a CurrencyCode = 586 and a CountryCodeOverride = PK on the Lookup Request.	—

RuPay (Card Type = 061)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	652267 XX XXXX 1X38 When checking enrollment, all transactions must set the CountryCodeOverride field to 356, and include the Card Type and Currency Code. For domestic transactions, you must also include values for the Token Requestor ID, Token Cryptogram, and the Token Status Indicator fields.

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 2644



Important

The Meeza card can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

= PENDING_AUTHENTICATIONThe cardholder is enrolled in payer authentication. Please authenticate before proceeding with authorization.

VERes enrolled = Y

PARes status = C

PAReq = <PAReq value>

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values from this transaction. These values indicate whether the payer was authenticated by the card network. These values should be passed under this test condition when a transaction is submitted for cardholder authentication.

Network	ECI Raw Value	ECI String Value
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
PayPak	07	oci_failure
RuPay	07	oci_failure

Results for the Validation Authentication Service

= **AUTHENTICATION_FAILED**

- User failed authentication.
- Payer cannot be authenticated.

PARes status = **U**

XID = **<XID value>** (American Express only)

E-Commerce Indicator (ECI) Values

This table lists the expected ECI raw values and their respective string values from this transaction. These values indicate whether the payer was validated by the card network. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet or vbv_failure
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	mada_failure or internet
mada Visa	07	mada_failure or vbv_failure
Mastercard	00	internet
PayPak	07	oci_failure
RuPay	07	oci_failure
Visa	07	internet or vbv_failure

Action

You can retain liability and submit this transaction for authorization as an unauthenticated transaction, or you can ask the customer for another form of payment.

2.13: Authentication Is Bypassed

This test verifies how your system reacts when the challenge requested by the issuer is bypassed for the transaction.

Card Numbers

American Express (Card Type = 003)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	34XXX XX XXXX 2948

Cartes Bancaires Mastercard (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 3X84	52XXXX XX XXXX 4991

Cartes Bancaires Visa (Card Type = 036)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 3X89	4XXXXX XX XXXX 44XX

China UnionPay (Card Type = 062)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
62XXX1 XX XX8X XX8X	81XXX1 XX XXXX X985 621XX3 26 X765 76X4

Diners Club (Card Type = 005)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2976

Discover (Card Type = 004)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	6X11XX XX XXXX 2976

eftpos Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
52XXXX XX XXXX 598X	—

eftpos Mastercard (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
516366 XX 1XXX X126	—

eftpos Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4XXXXX XX XXXX 5X84	—

eftpos Visa (Card Type = 070)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
47X565 XX 1XXX X125	—

Elo (Card Type = 054)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	65X529 XX XXXX 2166

ITMX Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
557755 X1 21XX X19X	557755 X1 22XX X157

ITMX Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
4632X8 21 XXXX X211	4632X8 22 XXXX X186

Jaywan (Card Type = 081)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
669XX9 XX XXXX 1373	669XX9 XX XXXX 2413

JCB J/Secure (Card Type = 007)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	3338XX XX XXXX X122

mada Mastercard (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 815X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

mada Visa (Card Type = 060)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 826X The merchant's country must be set to SA within the merchant profile, or the CountryCodeOverride field must be set to SA on the Lookup Request. The response will include the 3-D Secure operator ID, DS reference number, brand authentication, and the ACS reference number.

Mastercard (Card Type = 002)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	52XXXX XX XXXX 25X8

Visa (Card Type = 001)

3-D Secure 2.1.0 Test Card Number	3-D Secure 2.2.0 Test Card Number
—	4XXXXX XX XXXX 256X

**Important**

The Meeza card is supported in payer authentication and can be tested in the same manner as Mastercard using the same test card numbers. The only difference is that the card type for Meeza is 067.

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.

VERes enrolled = B

XID = <XID value>

E-Commerce Indicator (ECI) Values

This table lists the ECI raw value that would need to be passed within the authorization and its respective string value. Note that there is no raw ECI returned for these scenarios. These values should be passed under this test condition when a transaction is submitted for payment authorization.

Network	ECI Raw Value	ECI String Value
American Express	07	internet
Cartes Bancaires Mastercard	00	internet
Cartes Bancaires Visa	07	internet
China UnionPay	07	up3ds_failure
Diners Club	07	internet
Discover	07	internet
eftpos	07	oci_failure
Elo	07	internet
ITMX Mastercard	07	lss_failure
ITMX Visa	07	lss_failure
Jaywan	07	oci_failure
JCB J/Secure	07	internet
mada Mastercard	00	internet or mada_failure
mada Visa	07	internet or mada_failure
Mastercard	00	internet
Visa	07	internet

Results for the Validation Authentication Service

No results are returned.

Action

Submit your authorization request. There is no liability shift.

2.14: Require Method URL

This test ensures that the merchant is allowing sufficient time (10 seconds) for the issuer to complete device data collection.

Card Numbers

The Method URL process runs before the authentication request to ensure device data is collected properly. The enrollment check of the card account should not start until after the device data collection (DDC) response is received. This test verifies that there is enough time to collect the BIN of the issuer and to transmit it. This test attempts to collect the nine-digit BIN of the card number and verifies that the delay between the DDC request and the response is at least 7 seconds long. The test fails when fewer than nine digits of the BIN are collected or when the delay between the DDC request and response is too short in duration.

Do not run this test when your system does not collect device data. When device data is not collected, an older version of the EMV3-D Secure protocol is automatically used, and the transaction is automatically assessed as a higher risk.

Card Type	Test Card Number
Visa Card Type = 001	4XXX1X XX XXXX XXXX

Results for the Check Enrollment Service

VERes enrolled = **Y**

PAREs status = **Y**

CAVV = <CAVV value>

ECI value = **05**

E-Commerce Indicator (ECI) Values

The following table lists the expected ECI or Collection Indicator values for each network.

Network	ECI Raw Value
Visa	05

Action

If your device data collection method implements correctly and EMV 3-D Secure processing occurs, the test transaction produces a Frictionless Success result. A failure is indicated when PAREs status = **C**. With the failure, a warning message opens to explain the cause of the test failure.

Additional Test Cases

These test cases cover payer authentication scenarios that can occur outside of typical testing. These special use cases might require including additional API fields to accommodate different data that is necessary for that test.



Important

The test card numbers that are provided are formatted with Xs for zeroes in the card number. When testing with the card numbers, replace a X with a 0 (zero).

1a: First Recurring Transaction: Fixed Amount

The merchant initiates a 3RI recurring transaction of a fixed amount for a specified number of transactions or with no set number of transactions such as occurs with subscription purchases. For more information, see [Requester Initiated Payments](#).

Card Type	Test Card Number
Mastercard Card Type = 002	52XXXX XX XXXX 28X5

Required Fields for Check Enrollment

Message category = 01

Device channel = APP (01), BROWSER (02)

Three RI Indicator = 01

Challenge code = 03

Authentication code = 02

Purchase date = <yyyyMMDDHHMMSS>

Recurring frequency = <1 to 31>

Recurring end = <yyyyMMDD>

Results for the Check Enrollment Service

Status = PENDING_AUTHENTICATION

VERes enrolled = Y

PARes status = C

CAVV = (No value provided)

ECI = 00

Results for the Validation Authentication Service

Status = AUTHENTICATION_SUCCESSFUL Authentication is validated.

PARes status = Y

CAVV = <CAVV>

ECI = 07

Card Network and Version Specifications

Visa Secure 2.1 does not support this type of transaction. Visa Secure 2.2 test cards are in development.

For Mastercard Identity Check 2.1, 3RI is not supported for Payer Authentication. Only the initial transaction is supported for recurring payments.

If you attempt to run a Device Channel of 3RI within Mastercard Identity Check 2.1, you receive a transStatusReason=21 (3RI Transaction not supported) reason and a transaction status of **U** rather than **Y**.

In EMV 3-D Secure 2.2, Mastercard allocated a new ECI value, ECI 07, for 3RI transactions. It is present on a Mastercard response message for this particular 3RI scenario. For EMV 3-D Secure 2.1, Mastercard will continue to use ECI 02.

2a: Card Authentication Failed

This scenario tests how your system reacts to various Trans Status Reasons (failed, suspected fraud, and similar instances). When **PAResStatus** = N, the **CardholderInfo** field can be returned by the card issuer. When this cardholder information is returned, you must display this information within your checkout experience.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2X4X

Results for the Check Enrollment Service

Status = **AUTHENTICATION_FAILED**

VERes enrolled = **Y**

PARes status = **N**

CAVV = (No value provided)

Cardholder Info = <cardholder information>

ECI = **07**

Reason code = **01**

2b: Suspected Fraud

This test case scenario checks for suspected fraud.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2149

Results for the Check Enrollment Service

Status = **AUTHENTICATION_SUCCESSFUL**

VERes enrolled = **Y**

PARes status = **U**

CAVV = (No value provided)

ECI = 07

Reason code = 11

2c: Cardholder Not Enrolled in Service

This test case scenario verifies whether the cardholder is enrolled in the service.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2164

Results for the Check Enrollment Service

Status = AUTHENTICATION_FAILED

VERes enrolled = Y

PRes status = R

CAVV = (No value provided)

ECI = 07

Reason code = 13

2d: Transaction Timed Out at the ACS

This test case scenario verifies whether a transaction will time out at the Access Control Server (ACS). This test case is valid for both payer authentication and non-payer authentication transactions.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2172

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PRes status = U

CAVV = (No value provided)

ECI = 07

Reason code = 14

2e: Non-Payment Transaction Not Supported

This test case scenario checks whether a non-payment transaction can occur. This test case is valid for both payer authentication and non-payer authentication transactions.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 223X

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PARes status = U

CAVV = (No value provided)

ECI = 07

Reason code = 20

2f: 3RI Transaction Not Supported

This test case scenario verifies whether the merchant can initiate a recurring 3RI transaction, such as with subscriptions.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2248

Required Fields for Check Enrollment

Message category = 02

Device channel = 3RI (03)

Three RI Indicator = 01

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PARes status = U

CAVV = (No value provided)

ECI = 07

Reason code = 21

3a: TRA Exemption—Low Value: Mastercard EMV 3-D Secure 2.1 and 2.2

You have performed a proprietary risk assessment based on fraud thresholds established with the network. You are requesting an exemption from transaction risk analysis (TRA) because the Mastercard transaction is low risk or low value. Be sure to use the correct test card number for your version of EMV 3-D Secure. The PARes Status will differ between the EMV 3-D Secure versions.

Card Type	Test Card Number
Mastercard Card Type = 002	(version 2.1.0) 52XX XXXX XXXX 1161 (version 2.2.0) 52XX XX XX XXXX 2X52

Required Fields for Check Enrollment

Challenge code = 05

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

Version 2.1.0

VERes enrolled = Y

PARes status = N

CAVV = <CAVV value>

ECI = 06

Reason code = 81

For Mastercard Identity Check, the Challenge Indicator should be passed as 05.

Version 2.2.0

VERes enrolled = Y

PARes status = I

CAVV = <CAVV value>

ECI = 06

Action

Proceed to authorization.

You can also request the transaction risk analysis exemption directly during authorization if the region and your agreements with your acquirer and the networks support it.

3b: TRA—Low Value: Visa

The merchant has performed a proprietary risk assessment based on fraud thresholds established with the network. You are requesting an exemption for a low risk or low value Visa transaction.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2X24

Required Fields for Check Enrollment

Challenge code = 05 (no challenge requested)

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PARes status = I

CAVV = <CAVV value>

ECI = 07

Action

Proceed to authorization.

You can also request the transaction risk analysis exemption directly during authorization if the region and your agreements with your acquirer and the networks support it.

3c: TRA—Low Value: Discover

The merchant has performed a proprietary risk assessment based on fraud thresholds established with the network. You are requesting an exemption for a low risk or low value Discover transaction.

Card Type	Test Card Number
Discover Card Type = 004	6X11XX XX XXXX 1XX2

Required Fields for Check Enrollment

Challenge code = 04 (challenge requested)

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PARes status = Y

CAVV = <CAVV value>

ECI = 05

Action

Proceed to authorization.

You can also request the transaction risk analysis exemption directly during authorization if the region and your agreements with your acquirer and the networks support it.

3d: Acquirer TRA: Cartes Bancaires

The merchant has performed a proprietary risk assessment based on fraud thresholds established with the network. You are requesting an exemption for a low risk or low value Cartes Bancaires transaction.

Card Type	Test Card Number
Cartes Bancaires Visa Card Type = 036	4XXXXX XX XXXX 3XX6
Cartes Bancaires Mastercard Card Type = 036	52XXXX XX XXXX 3XX1

Required Fields for Check Enrollment

Challenge code = 05 (no challenge requested)

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

VERes enrolled = Y

PARes status = Y

CAVV = <CAVV value> (The CAVV value is not returned during testing but can be returned in production based on issuer rules surrounding co-branding with Visa or Mastercard BINs.)

ECI = (no value provided)

Action

Proceed to authorization.

You can also request the transaction risk analysis exemption directly during authorization if the region and your agreements with your acquirer and the networks support it.

4a: Trusted Beneficiary Prompt for Trustlist

You have a successful traditional step-up (challenge) authentication transaction with a prompt for the Trustlist and an accepted exemption result.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2XX8
Mastercard Card Type = 002	52XXXX XX XXXX 2XX3

Required Fields for Check Enrollment

Challenge code = 09 (challenge requested)

Results for the Check Enrollment Service

With the Direct API, the response also includes a StepUpUrl.

VERes enrolled = Y

PARes status = C

CAVV = (No value provided)

Results for the Authenticate Response

PARes status = Y

CAVV = <CAVV value>

ECI =

- Visa = 05
- Mastercard = 02

WhiteListStatus = <WhiteListStatus value>

WhiteListStatusSource = <WhiteListStatusSource value>

Action

You should append the CAVV and ECI values to the authorization message.

4b: Use Trusted Beneficiary Exemption

There is a successful frictionless authentication transaction with a pre-approved indication and an accepted exemption result.

Card Type	Test Card Number
Visa Card Type = 001	4XXXXX XX XXXX 2X16
Mastercard Card Type = 002	52XXXX XX XXXX 2X11

Required Fields for Check Enrollment

Challenge code = 08 (No challenge requested)

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

PARes status = Y

CAVV = <CAVV value>

ECI =

- Visa = 05
- Mastercard = 02

WhiteListStatus = <WhiteListStatus value>

WhiteListStatusSource = <WhiteListStatusSource value>

ThreeDSVersion = <ThreeDSVersion value>

Action

Append the CAVV and ECI values to the authorization message.

5a: Visa Data Only

This request is for Visa Data Only authentication. This is a frictionless authentication because it is for informational purposes. Using Payer Authentication to share additional data with issuers prior to authorization, 3-D Secure Data Only provides a frictionless experience with EMV 3-D Secure.

Card Type	Test Card Number
Visa Card Type = 001	Ca 4XXXXX XX XXXX 2X24

Required Fields for Check Enrollment

ChallengeIndicator = 06

Results for the Check Enrollment Service

PAResStatus = I

CAVV = <CAVV value>

ECI = 07

Status = AUTHENTICATION_SUCCESSFUL

Action

Append the ECI and Directory Server transaction ID values to the authorization message.

5b: Identity Check Insights (ScoreRequest = Y)

This request is for Mastercard Data Only authentication.

Card Type	Test Card Number
Mastercard Card Type = 002	52XXXX XX XXXX 1XX5

Required Fields for Check Enrollment

Message Category = 80

Optional Fields for Check Enrollment

Score Request = Y

Merchant Reason Code = A

Results for the Check Enrollment Service

Status = AUTHENTICATION_SUCCESSFUL

PAResStatus = U

CAVV = <CAVV value>

ECI = 04

StatusReason = 80

ThreeDSVersion = <ThreeDSVersion value>

Optional Results for the Check Enrollment Service (if ScoreRequest = Y)

IDCI_Score = 9

IDCI_Decisions = not low risk

IDCI_ReasonCode1 = A

IDCI_ReasonCode2 = GG

Results for the Authentication Result

Status = AUTHENTICATION_SUCCESSFUL

Action

Append the ECI and Directory Server transaction ID values to the authorization message.

Website Modification Reference

This section describes how to modify your website to integrate Payer Authentication services into your checkout process. It also provides links to payment card company websites where you can download the appropriate logos.

Website Modification Checklist

Modify web page buttons:

- Order submission button: Disable the final “buy” button until the customer completes all payment and authentication requirements.
- Browser back button: Plan for unexpected customer behavior. Check throughout the authentication process so you do not authenticate transactions twice. Avoid confusing messages, such as warnings about expired pages.

Add appropriate logos:

- Download the appropriate logos of the cards that you support. Place these logos next to the card information entry fields on your checkout pages. For more information about obtaining logos and using them, see [EMV 3-D Secure Service Logos](#) on page 271.

Add informational message:

- Add a message next to the final “buy” button and the card logo to inform your customers that they might be prompted to provide their authentication password. For examples of messages you can use, see [Informational Message Examples](#) on page 272.

EMV 3-D Secure Service Logos

This table contains links to payment card company websites from which you can download logos and information about how to incorporate them into your online checkout process.

3-D Secure Service Logos Download Location

EMV 3-D Secure Service	Download Location
Visa Secure	https://usa.visa.com/run-your-business/small-business-tools/payment-technology/visa-secure.html This website contains information about Visa Secure and links to logos for download. The page also contains links to a best practice guide for implementing Visa Secure and a link to a Merchant Toolkit.
Mastercard Identity Check and Maestro	https://brand.mastercard.com/brandcenter.html This website contains information about Identity Check, links to logos for download, and information about integrating the Identity Check information into your website checkout page. For information about Maestro logos, go to: http://www.mastercardbrandcenter.com/us/howtouse/bms_maestro.html
American Express SafeKey	https://network.americanexpress.com/uk/en/safekey/ This website contains information about SafeKey and links to logos for download.
JCB J/Secure	http://partner.jcbcard.com/security/jsecure/logo.html This website contains information about J/Secure and links to logos for download.
Diners Club ProtectBuy	https://www.dinersclubus.com/home/customer-service Contact Diners Club customer service for assistance.
Discover ProtectBuy	https://www.discovernetwork.com/en-us/business-resources/free-signage-logos This website contains information about Discover ProtectBuy and links to logos for download.

EMV 3-D Secure Service	Download Location
Elo Compra Segura	Contact Elo customer support to obtain logos.
China UnionPay	Contact China UnionPay customer support to obtain logos.

Informational Message Examples

Add a brief message next to the final buy button on your checkout page to inform customers that they might be prompted for their authentication password or to enroll in the authentication program for their card.

These examples might be used, but consult your specific card authentication program to make sure you conform to their messaging requirements.

Example

To help prevent unauthorized use of <card_type> cards online, <your_business_name> participates in <card_authentication_program>. When you submit your order, you might receive a <card_authentication_program> message from your <card_type> card issuer. If your card or issuer does not participate in the program, you are returned to our secure checkout to complete your order. Please wait while the transaction is processed. Do not click the **Back** button or close the browser window.

Example

Your card might be eligible for Visa Secure, Mastercard, Maestro, American Express SafeKey, JCB J/Secure, Diners Club ProtectBuy, or Discover ProtectBuy programs. After you submit your order, your card issuer might prompt you to authenticate yourself. This authentication can be done through a one-time pass code sent to your phone or email, by biometrics, or some other form of authentication.

Finding Payer Authentication Transaction Details in the Business Center

This section describes how to find the details of Payer Authentication transactions in the Business Center. You need certain information about a transaction to respond to a chargeback. For details about past transactions, from the left navigation pane, go to **Transaction Management > Transactions**. This detailed data about a past transaction is stored for 12 months.

Searching for Transactions

You can search for transactions that used the payer authentication and card authorization services by going to **Transactions Management > Transactions**. When searching for transactions, consider these things:

- Search options:
 - To find the details of a transaction, on the Transactions page enter its PA Transaction ID into the **Quick Search** field.
 - On the Transactions page, you can also create a payer authentication transaction ID filter by clicking **Add filter** and selecting **PA Transaction ID** as the filter. You can then enter the transaction ID as the filter criteria.
 - The list of applications is simplified to facilitate searching for the relevant service requests.
 - Payer authentication information is available for 12 months after the transaction date.
- Search results: the results options include the Payer Authentication transaction ID and the customer's account number (PAN). Use the Payer Authentication transaction ID to find all parts of the transaction.

- Payer authentication details: all transaction details are discussed under Searching for Payer Authentication Details. For more information, see [Searching for Payer Authentication Details](#) on page 274.

Storing Payer Authentication Data

Payment card companies permit only a certain number of days between the payer authentication and the authorization request. If you settle transactions that are older than the predetermined number of days, payment card companies might require that you send them the AAV, CAVV, or the XID when a chargeback occurs. The requirements depend on the card type and the region. For more information, refer to your agreement with your payment card company. You can get this type of information from the transaction details. The payer authentication transaction ID is listed in the transaction log. To access the transaction log, go to the Transaction Details page and in the Request Information section, click the **View** button. After your transactions are settled, you can also use this data to update the statistics of your business.

Searching for Payer Authentication Details

Search the payer authentication data returned in API response fields with the Transaction Search feature in the Business Center.

Interpret the result of an enrollment check using this color coding.

- If the application result appears in green, you do not need to authenticate the user. You can authorize the card immediately.
- If the application result appears in red, the authentication failed.
- If the application result appears in yellow, the transaction requires authentication.

Enrolling a Card

Enrolling a card consists of two steps:

1. Checking for enrollment.
2. Authenticating the customer.

Checking Enrollment

You can find payer authentication data on the Transaction Details page in these sections:

- Request Information section: The enrollment check service is shown in red when the card is enrolled. You receive the corresponding response. If the card authorization service was requested at the same time, it did not run and appears in black.
- Order Information section: When authentication is required, American Express SafeKey requires that you save the XID for later use. You do not receive an ECI, AAV, or CAVV because the authentication is not complete.

If the CAVV and ECI are not provided, and the enrollment transaction results in a challenge, authentication is required.

Authentication Validation

When an authentication is valid and the card authorization succeeds, payer authentication data appears in the Transaction Search Details window in these sections:

- Request Information section: The validation service succeeded. A reason code 100 was returned with the corresponding response. The necessary payer authentication information was passed to the card authorization service, which processed successfully. Both services are shown in green.
- Order Information section: You received a value for all three parameters because the validation was successful. You might not receive an ECI value when a system error prevents the card issuer from performing the validation or when the cardholder does not complete the process.

Card Not Enrolled

When a card is not enrolled, the result of the enrollment check service appears in green, and the card authorization request (if requested at the same time) proceeds normally.

Transaction Details

Enter the payer authentication transaction ID into the quick search feature to find all segments of a transaction. For a transaction in which the card is not enrolled, find payer authentication data in the Transaction Details window in these sections:

- Request Information section: The service appears in green. You can obtain additional information about related orders by clicking the link on the right.
- Order Information section:
 - For Mastercard, the ECI value is 00: authentication is not required because the customer's Mastercard card is not enrolled. Other cards have an ECI value of 07.
 - The AAV/CAVV area is empty because you receive a value only when the customer is authenticated.
 - The XID area is empty because the card is not enrolled.

You might encounter these reason codes:

465: DAUTHENTICATE	Encountered a Payer Authentication problem. Payer could not be authenticated. Authenticate the cardholder before continuing with the transaction.
475: DAUTHENTICATE	The cardholder is enrolled in Payer Authentication. Authenticate the cardholder before continuing with the transaction.
476: DAUTHENTICATIONFAILED	Encountered a Payer Authentication problem. Payer could not be authenticated.

261: DINVALIDDATA

Authenticate the cardholder before continuing with the transaction.

The merchant account set up is either invalid or missing on the acquirer's gateway. Check the currency, acquirer ID, merchant ID configuration. If these are configured as expected, contact the acquirer.

Payer Authentication Reports

This section describes the Payer Authentication reports that you can download from the Business Center.

All reports on the production servers are retained for 16 months, but the transaction history is kept in the database for only 12 months. All reports on the test servers are deleted after 60 days. Only transactions that were processed are reported. Those transactions that resulted in a system error or a time-out are not reported.

To get access to the reports, you must file a support ticket in the Support Center.

Payer Authentication Summary Report

This daily, weekly, and monthly summary report indicates the performance of the enrollment and validation services as a number of transactions and a total amount for groups of transactions. The report provides this information for each currency and type of card that you support. You can use this information to estimate how payer authentication screens your transactions: successful, attempted, and incomplete authentication. The cards reported are Visa, Mastercard, JCB, Maestro, China UnionPay, Elo, Diners Club, Discover, and American Express. This daily report is generally available by 7:00 a.m. EST. Data in this report remains available for 6 months.

Download the Report

Follow these steps to view the Payer Authentication Summary report:

1. In the left navigation panel, click the **Reports** icon.
2. Under Transaction Reports, click Payer Auth Summary. The Payer Auth Summary Report page appears.
3. In the search toolbar, select a date range to include in the report. Account-level users must select a merchant as well.

4. Based on the date range you selected, choose the specific day, week, or month you want to review.

Only months that have already occurred in the current year display in the Month list. To view all months of a previous year, select the year first, and then choose the month. To view results from before the selected period, click **Previous**. Click **Next** to see the next period.

Matching the Report to the Transaction Search Results

The image below shows the search results that contain the transactions that appear in the report. For more information on search results, see [Searching for Payer Authentication Details](#) on page 274.

Mar 30 2020				
ubcvp1_2 Mar 30 2020 03:42:16 PM	1437540121000167904064 1143754012100	PATRICK MCMAHON null@cybersource.com	1.00 USD 0771	Credit Card Authorization Payer Authentication Validation
ubcvp1_2 Mar 30 2020 03:41:17 PM	1437543646410167904065 1143754364636	P MAN null@cybersource.com	101.00 USD 0771	Credit Card Authorization Payer Authentication Validation
ubcvp1_2 Mar 30 2020 03:40:09 PM	1437538846880167904064 1143753884687	PATRICK MCMAHON null@cybersource.com	16.00 USD 0771	Credit Card Authorization Payer Authentication Validation

Payer Authentication Report Details

Interpreting the Report

The report is organized by card type. In each card type section, currencies are reported alphabetically. For each currency, a summary of your payer authentication validation results appear as a total amount and number of transactions.

Payer Authentication Report Interpretation

Card Type	Interpretation	Protected?	Commerce Indicat or	ECI
Visa, American Express, and JCB	No authentication	No	Internet	7
	Recorded attempt to authenticate	Yes	VbV, Desk, or JS Attempted	6
	Successful authentication	Yes	VbV, JS, or Aesk	5
Mastercard, Meeza, and Maestro	No authentication	No	Internet**	7*
	Recorded attempt to authenticate	Yes	SPA	1
	Successful authentication	Yes	SPA	2
Diners Club and Discover	No authentication	No	Internet	7
	Recorded attempt to authenticate	Yes	PB or DIPB Attempted	6

Card Type	Interpretation	Protected?	Commerce Indicator	ECI
	Successful authentication	Yes	PB or DIPB	5
China UnionPay and Elo	No authentication	No	Internet	7
	Recorded attempt to authenticate	Yes	CS or Up3ds Attempted	6
	Successful authentication	Yes	CS or Up3ds	5

* Although the report heading is 7, you receive a collection indicator value of 1, or the response field is empty.

** Although the report heading is Internet, you receive `spa_failure` in the commerce indicator response field.

Transactions are divided into two groups: those for which you are protected and those for which you are not protected:

- For Visa, China UnionPay, Elo, JCB, Diners Club, Discover, and American Express: liability shift for VbV and VbV attempted.
- For Mastercard and Maestro: liability shift only for SPA.
- For all other results: no liability shift.

Comparing Payer Authentication and Payment Reports

The Payer Authentication report and the payment reports might differ when an authenticated transaction is not authorized.

The values (amounts and counts) in the Payer Authentication report might not match your other sources of reconciliation. This report shows the transactions validated by payer authentication. A different number of transactions might have been authorized.

The amounts and numbers can be higher in the Payer Authentication report than in the payment reports. This example shows the results of the first two numbers in the Payer Authentication report and the last number in the payment reports.

To reconcile your reports more easily when using payer authentication, we recommend that you attempt to authenticate the same amount that you want to authorize.

Payer Authentication Reports Compared to Payment Reports

For 10,000 orders, you might receive these results:

- 9900 successful enrollment checks (Payer Authentication report)
- 9800 successful authentication checks (Payer Authentication report)
- 9500 successful authorization checks (Payment report)

Payer Authentication Detail Report

This section describes the elements of the Payer Authentication Detail report. Refer to the [Reporting User Guide](#) for instructions for downloading the report and additional report information.

Report Element

The `Report` element is the root element of the report.

```
<Report>
  <PayerAuthDetails>
    (PayerAuthDetail+)
  </PayerAuthDetails>
</Report>
```

Child Elements of Report

Element Name	Description
PayerAuthDetails	Contains the transaction in the report. For a list of child elements, see PayerAuthDetail .

PayerAuthDetails Element

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE Report SYSTEM "https://api.cybersource.com/reporting/v3/dtds/padr">
<PayerAuthDetails>
  <PayerAuthDetail>
    ...
  </PayerAuthDetail>
</PayerAuthDetails>
```

PayerAuthDetail Element

The `PayerAuthDetail` element contains information about a single transaction.

```
<PayerAuthDetail>
  (RequestID)
  (MerchantID)
  (RequestDate)
  (TransactionType)
  (PAREq)?
  (PARes)?
  (AuthInfo)?
</PayerAuthDetail>
```

Child Elements of PayerAuthDetail

Element Name	Description	Type & Length
RequestID	Unique identifier generated for the transaction. This field corresponds to the API field.	Numeric (26)
MerchantID	Merchant ID used for the transaction.	String (30)
RequestDate	Date on which the transaction was processed.	DateTime (25)
PAReq	The Payer Authentication Request message sent to the ACS through the payment card company. Corresponds to the consumerAuthenticationInformation.payerAuthEnrollReply_paReq API field. For a list of child elements, see PAReq.	
PARes	The Payer Authentication Response message sent by the ACS. For a list of child elements, see PARes .	
AuthInfo	Address and card verification data. For a list of child elements, see AuthInfo Element on page 285.	

PayerAuthDetail Element

```

<PayerAuthDetail>
  <RequestID>0004223530000167905139</RequestID>
  <MerchantID>example_merchant</MerchantID>
  <RequestDate>2020-02-09T08:00:09-08:00</RequestDate>
  <TransactionType>ics_pa_enroll</TransactionType>
  <PAReq>
    ...
  </PAReq>
  <PARes>
    ...
  </PARes>
</PayerAuthDetail>

```

PAReq Element

The **PAReq** element contains the payer authentication request message. This element corresponds to the **consumerAuthenticationInformation.pareq** API field.

```

<PAReq>
  (AcqBIN)
  (MerID)
  (Name)
  (Country)
  (URL)

```

```

(XID)
(Date)
(PurchaseAmount)
(AcctID)
(Expiry)
</PAREq>

```

Child Elements of PAREq

Element Name	Description	Type & Length
AcqBIN	First six digits of the acquiring bank's identification number.	Numeric (6)
MerID	Identifier provided by your acquirer to the merchant to log in to the ACS URL.	String (24)
Name	Merchant's company name.	String (25)
Country	Two-character code for the merchant's country of operation.	String (2)
URL	Merchant's business website.	String
XID	Unique transaction identifier generated for each Payment Authentication Request (PAREq) message. The PAREs sent back by the issuing bank contains the XID of the PAREq. To ensure that both XIDs are the same, compare it to the XID in the response. To find all requests related to a transaction, you can also search transactions for a specific XID.	String (28)
Date	Date and time of request. Differing time zones and the lack of synchronization between servers might prevent the date and time from appearing sequentially during all stages of processing.	DateTime (25)
Purchase Amount	Authorization amount and currency for the transaction. This element corresponds to the totals of the offer lines or from: orderInformation.amountDetails.totalAmount or purchaseTotals_grandTotalAmount from external data	Amount (15)
AcctID	Masked string used by the ACS.	String (28)
Expiry	Expiration month and year of the customer's card.	Number (4)

PAREq Element

```
<PAREq>
```

```

<AcqBIN>123456</AcqBIN>
<MerID>444444</MerID>
<Name>example</Name>
<Country>US</Country>
<URL>http://www.example.com</URL>
<XID>fr2VCDrbEdyC37MOPfIzMwAHBwE=</XID>
<Date>2020-02-09T08:00:34-08:00</Date>
<PurchaseAmount>1.00 USD</PurchaseAmount>
<AcctID>NDAxMjAwMTAxMTAwMDc3MQ==</AcctID>
<Expiry>2309</Expiry>
</PAREq>

```

PARes Element

The **PAREs** element contains the payer authentication response.

```

<PARes>
  (AcqBIN)
  (MerID)
  (XID)
  (Date)
  (PurchaseAmount)
  (PAN)
  (AuthDate)
  (Status)
  (CAVV)
  (ECI)
</PARes>

```

Child Elements of PARes

Element Name	Description	Type & Length
AcqBIN	First six digits of the acquiring bank's identification number.	Numeric (6)
MerID	Identifier provided by your acquirer; used to log in to the ACS URL.	String (24)
XID	XID value returned in the customer authentication response. This element corresponds to the consumerAuthenticationInformation.xid API fields.	String (28)
Date	Date and time of request. Differing time zones and the lack of synchronization between servers might prevent the date and time from appearing sequentially during all stages of processing.	DateTime (25)
PurchaseAmount	Authorization amount and currency for the transaction. This element corresponds to the totals of the offer lines or from the orderInformation.amountDetails.totalAmount	Amount (15)

Element Name	Description	Type & Length
PAN	Customer's masked account number. This element corresponds to the consumerAuthenticationInformation.proxyPan API field.	String (19)
AuthDate	Date and time of request. (Although the date and time should appear sequentially during all stages of the processing of an order, they may not because of differing time zones and synchronization between servers.)	DateTime (25)
Status	Result of the authentication check. This field contains one of these values: Y: Customer was successfully authenticated. N: Customer failed or cancelled authentication. Transaction denied. U: Authenticate not completed regardless of the reason. A: Proof of authentication attempt was generated.	String (1)
CAVV	CAVV (Visa, American Express, JCB, China UnionPay, Elo, Diners Club, and Discover cards) element corresponds to the consumerAuthenticationInformation.cavv field returned in the customer authentication response. The AAV (Mastercard, and Maestro cards) element corresponds to the consumerAuthenticationInformation.ucafAuthenticationData API field returned in the customer authentication response.	String (50)
ECI	Electronic Commerce Indicator returned in the customer authentication response. This element corresponds to the consumerAuthenticationInformation.eci and consumerAuthenticationInformation.ucafCollectionIndicator API fields.	Numeric (1)

PARes Element

```

<PARes>
  <AcqBIN>123456</AcqBIN>
  <MerID>4444444</MerID>
  <XID>Xe5DcjrQEdyC37MOPfIzMwAHBwE=</XID>
  <Date>2020-02-09T07:59:46-08:00</Date>
  <PurchaseAmount>1002.00 USD</PurchaseAmount>
  <PAN>0000000000000000771</PAN>
  <AuthDate>2020-02-09T07:59:46-08:00</AuthDate>
  <Status>Y</Status>
  <CAVV>AAAAAAAAAAAAAAAAAAAAAAAAAAAA=</CAVV>
  <ECI>5</ECI>

```

```
</PAREs>
```

AuthInfo Element

The **AuthInfo** element contains address and card verification information.

```
<AuthInfo>
  (AVSResult)
  (CVVResult)
</AuthInfo>
```

Child Elements of AuthInfo

Element Name	Description	Type & Length
AVSResult	Results of the address verification test.	String (1)
CVVResult	Results of the card verification number test	String (1)

AuthInfo Element

```
<AuthInfo>
  <AVSResult>Y</AVSResult>
  <CVVResult/>git
</AuthInfo>
```

Report Examples

These examples show a complete transaction: the failed enrollment check (enrolled card) and the subsequent successful authentication.

For transactions in India, use <https://ics2ws.in.ic3.com/commerce/1.x/transactionProcessor>.

Failed Enrollment Check

```
<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE Result SYSTEM "https://api.cybersource.com/reporting/v3/dtd/padr">
<Report>
  Name="Payer Authentication Detail"
  Version="1.0"
  xmlns="https://api.cybersource.com/reporting/v3/dtds/padr"
  MerchantID="sample_merchant_id"
  ReportStartDate="2022-02-09T08:00:00-08:00"
  ReportEndDate="2022-02-10T08:00:00-08:00"
  <PayerAuthDetails>
    <PayerAuthDetail>
      RequestID="18955494300000167904548"
      TransactionType="ics_pa_enroll"
      RequestDate="2022-02-09T08:00:02-08:00"
      <ProofXML>
        <Date>20220209 08:00:34</Date>
        <DSURL>https:123.456.789.01:234/DSMsgServlet</DSURL>
```

```

<PAN>XXXXXXXXXXXX0771</PAN>
<AcqBIN>123456</AcqBIN>
<MerID>4444444</MerID>
<Password />
<Enrolled>Y</Enrolled>
</ProofXML>
<VEReq>
  <PAN>XXXXXXXXXXXX0771</PAN>
  <AcqBIN>123456</AcqBIN>
  <MerID>example</MerID>
</VEReq>
<VERes>
  <Enrolled>Y</Enrolled>
  <AcctID>NDAXMjAwMTAwMTAwMDc3MQ==</AcctID>
  <URL>https://www.sample_url.com</URL>
</VERes>
<PAREq>
  <AcqBIN>123456</AcqBIN>
  <MerID>example</MerID>
  <Name>Merchant Name</Name>
  <Country>US</Country>
  <URL>http://www.merchant_url.com</URL>
  <XID>2YNANGDBEdydJ6WI6aFJWAHBwE=</XID>
  <Date>2022-02-09T08:00:34-08:00</Date>
  <PurchaseAmount>1.00 USD</PurchaseAmount>
  <AcctID>NDAXMjAwMTAwMTAwMDc3MQ==</AcctID>
  <Expiry>2309</Expiry>
</PAREq>
</PayerAuthDetail>
</PayerAuthDetails>
</Report>

```

Successful Authentication

```

<?xml version="1.0" encoding="utf-8"?>
<!DOCTYPE Result SYSTEM "https://api.cybersource.com/reporting/v3/dtd/padr">
<Report>
  <PayerAuthDetails>
    <PayerAuthDetail>
      RequestID="18955499000000167904548"
      TransactionType="ics_pa_validate"
      XID="2YNANGDBEdydJ6WI6aFJWAHBwE="
      RequestDate="2022-02-09T08:00:02-08:00"
    <PAREs>
      <AcqBIN>469216</AcqBIN>
      <MerID>6678516</MerID>
      <XID>2YNANGDBEdydJ6WI6aFJWAHBwE=</XID>
      <Date>2020-02-09T07:59:46-08:00</Date>
      <PurchaseAmount>1.00 USD</PurchaseAmount>
      <PAN>000000000000000771</PAN>
      <AuthDate>2022-02-09T07:59:46-08:00</AuthDate>
      <Status>Y</Status>
      <CAVV>AAAAAAAAAAAAAAAAAAAAAAAAAAAA=</CAVV>
      <ECI>5</ECI>
    </PAREs>
  </PayerAuthDetail>

```

```
</PayerAuthDetails>  
</Report>
```

HTTP Status Codes

These HTTP status codes can appear during payer authentication.

201: AUTHENTICATION_FAILED	Encountered a payer authentication problem. Payer could not be authenticated.
201: CONSUMER_AUTHENTICATIION_REQUIRED	Encountered a payer authentication problem. Payer could not be authenticated.
400: CONSUMER_AUTHENTICATIION_FAILED	Encountered a payer authentication problem. Payer could not be authenticated.
400: INVALID_DATA	Declined: One or more fields in the request contain invalid data.
400: INVALID_MERCHANT_CONFIGURATION	Declined: There is a problem with your merchant configuration.
400: MISSING_FIELD	Declined: The request is missing one or more fields.
502: SYSTEM_ERROR	Error: General system failure. A system error occurred.
502: SYSTEM_TIMEOUT	Error: The request was received but a server timeout occurred. This error does not include timeouts between the client and the server.
502: SYSTEM_TIMEOUT	Error: The request was received, but a service did not finish running in time.

Glossary

3RI Payment

The EMV 3-D Secure request for information. It is an EMVCo term for the EMV 3-D Secure service that can check a BIN without performing a complete authentication.

3-D Secure

Security protocol for online credit card and debit card transactions used by Visa Secure, Mastercard Identity Check, American Express SafeKey, China UnionPay, Elo, JCB JSecure, Diners Club ProtectBuy, and Discover ProtectBuy.

AAV

Account Authentication Value. A unique 32-character transaction token for a 3-D Secure transaction. For Mastercard Identity Check, the AAV is named the UCAF. For Visa Secure, the AAV is named the CAVV.

acquirer

The financial institution that accepts payments for products or services on behalf of a merchant. Also referred to as the acquiring bank. This bank accepts or acquires transactions that involve a credit card issued by a bank other than itself.

acquirer BIN

An eight-digit number that uniquely identifies the acquiring bank. Every participating acquirer has a different acquirer BIN. The Mastercard BIN starts with 5 and the Visa BIN starts with 4.

acquirer processor

Processor that provides credit card processing, settlement, and services to merchant banks.

ACS

Access Control Server. The card-issuing bank's host for the payer authentication data.

ACS URL

The URL of the Access Control Server of the card-issuing bank that is returned in the response to the request to check enrollment. You send the PAREq to this URL so that the customer can be authenticated.

American Express

A globally issued card type that starts with 3 and which is identified as card type 003. These cards participate in a card authentication service (SafeKey) provided by EMV 3-D Secure.

authentication result

Raw data sent by the card issuer that indicates the status of authentication. You do not need to pass this raw data into the authorization.

authorization

A request sent to the card issuing bank that ensures a cardholder has the funds available on their credit card for a specific purchase. A positive authorization generates an authorization code and puts a hold on the funds.

Base64

Standard encoding method for data transfer over the internet.

BIN

Bank Identification Number. The eight-digit number that identifies the card issuer.

CAVV

Cardholder Authentication Verification Value. A Base64-encoded string sent back with Visa Secure-enrolled cards that specifically identifies the transaction with the issuing bank and Visa. Standard for collecting and sending AAV data for Visa Secure transactions. See AAV.

CAVV algorithm

The method used to generate the CAAV value.

Compra Segura

Trademarked name for the Elo card authentication service.

CVV

Card Verification Value. Security feature for credit cards and debit cards. This feature consists of two values or codes: one that is encoded in the magnetic strip and one that is printed on the card. Usually, the CVV is a three-digit number on the back of the card. The CVV for American Express cards is a 4-digit number on the front of the card. CVVs are used as an extra level of validation by issuing banks.

Diners Club

A globally issued card type whose numbers start with a 3 or a 5. Diners Club cards are identified as card type 005. These cards participate in a card authentication service (ProtectBuy) provided by 3-D Secure.

Directory Servers

The Visa and Mastercard servers that are used to verify enrollment in a card authentication service.

Discover

Primarily, a U.S. card type starting with a 6. Discover cards are identified as card type 004. These cards participate in a card authentication service (ProtectBuy) provided by 3-D Secure.

ECI (ECI Raw)

The numeric commerce indicator that indicates to the bank the degree of liability shift achieved during payer authentication processing.

E-Commerce Indicator

Alpha character value that indicates the transaction type, such as MOTO or INTERNET.

Elo

A globally issued card type starting with a 5. Elo cards are identified as card type of 054. These cards participate in a card authentication service (Compra Segura) provided by 3-D Secure.

Enroll

A type of transaction used for verifying whether a card is enrolled in the Mastercard Identity Check or Visa Secure service.

HTTP

The Hypertext Transfer Protocol is an application protocol used for data transfer on the internet.

HTTP POST request

POST is one of the request methods supported by the HTTP protocol. The POST request method is used when the client sends data to the server as part of the request, such as when uploading a file or submitting a completed form.

HTTPS

Hypertext Transfer Protocol combines with SSL/TLS (Secure Sockets Layer/Transport Layer Security) to provide secure encryption of data transferred over the Internet.

issuer

The bank that issues the credit card.

J/Secure

The EMV 3-D Secure program of JCB.

JCB

Japan Credit Bureau. A globally issued card type starting with a 3. JCB cards are identified as a card type of 007. These cards participate in a card authentication service (J/Secure) provided by EMV 3-D Secure.

Maestro

A card brand owned by Mastercard that includes several debit card BINs within the U.K. and in Europe. Merchants who accept Maestro cards online are required to use Mastercard Identity Check, Mastercard's card authentication service. Maestro cards are identified as 024 and 042 card types. Note that many international Maestro cards are not set up for online acceptance and cannot be used even if they participate in a Mastercard Identity Check authentication program.

Mastercard

A globally issued card that includes credit and debit cards. These cards start with a 5. These cards are identified as card type 002 for both credit and debit cards. These cards participate in a card authentication service (Mastercard Identity Check) provided by 3-D Secure.

Mastercard Identity Check

Trademarked name for Mastercard's payer authentication service.

MD

Merchant-defined Data that is posted as a hidden field to the ACS URL. You can use this data to identify the transaction on its return. This data is used to match the response from the card-issuing bank to a customer's specific order. Although payment card companies recommend that you use the XID, you can also use data such as an order number. This field is required, but including a value is optional. The value has no meaning for the bank and is returned to the merchant as is.

Merchant ID

Data that must be uploaded for the Mastercard and Visa card authentication process for each participating merchant. The Merchant ID is usually the bank account number or it contains the bank account number. The data is stored on the Directory Servers to identify the merchant during the enrollment check.

MPI

Merchant Plug-In. The software used to connect to Directory Servers and to decrypt the PAREs.

PAN

Primary Account Number. Another term for the credit card number.

PAReq

Payer Authentication Request. Digitally signed Base64-encoded payer authentication request message, containing a unique transaction ID that a merchant sends to the card-issuing bank. Send this data without alteration or decoding. Note that the field name has a lowercase “a” (PaReq), but the message name has an uppercase “A” (PAReq).

PAREs

Payer Authentication Response. A compressed, Base64-encoded response from the card-issuing bank. This data is passed for validation.

PAREs status

Payer Authentication Response status. One-character length status passed back by Visa and Mastercard that is required data for Asia, Middle East, and Africa Gateway authorizations.

processor

Financial entity that processes payments. Also see acquiring processor.

ProofXML

This field contains the VEReq and VERes messages for merchant storage. Merchants can use this data for potential chargeback repudiation.

ProtectBuy

Trademarked name for the Diners Club and Discover card authentication services.

request ID

A 22- or 23-digit number that uniquely identifies each transaction. Merchants should store this number for future reference.

risk-based authentication

Risk-based authentication is provided by the card-issuing bank. The card-issuing bank gathers a cardholder’s transaction data or leverages whatever data they have to silently authenticate the cardholder based on the perceived degree of risk. They base their risk assessment on factors such as cardholder spending habits, order or product velocity, the device IP address, order amount, and so on.

SafeKey

Trademarked name for the American Express card authentication service.

SCMP API

A legacy name-value pair API that was superseded by the Simple Order API.

Simple Order API

An API, that provides three ways to access services: name-value pair (NVP), XML, and SOAP.

TermURL

Termination URL on a merchant's website where the card-issuing bank posts the payer authentication response (PAREs) message.

UCAF

Universal Cardholder Authentication Field. A Base64-encoded string sent back with Mastercard Identity Check enrolled cards specifically identifying the transaction with the issuing bank and Mastercard. Standard for collecting and sending AAV data for Mastercard Identity Check transactions. See also AAV.

UCAF collection indicator

Value of **1** or **2** that indicates whether a Mastercard cardholder has authenticated themselves.

validate

A service that decodes and decrypts the PAREs message to determine success. The validate service returns the needed values for authorization.

VEReq

Verify Enrollment Request. Request sent to the Directory Servers to verify that a card is enrolled in a card authentication service.

VERes

Verify Enrollment Response. Response from the Directory Servers to the VEReq.

VERes enrolled

Verify Enrollment Response enrolled. One-character length status passed back by Visa and Mastercard that is required data for Asia, Middle East, and Africa Gateway authorizations.

Visa

A globally issued card that includes credit and debit cards. These card numbers start with a 4. These cards are identified as card type 001 for both credit and debit cards. These

cards participate in a card authentication service (Visa Secure) provided by EMV 3-D Secure.

Visa Secure

Trademarked name for Visa's card authentication service.

XID

String used by both Visa and Mastercard, that identifies a specific transaction on the Directory Servers. This string value should remain consistent throughout a transaction's history.