



Operating System Practice– Final Project

Che-Wei Chang

chewei@mail.cgu.edu.tw

Department of Computer Science and Information
Engineering, Chang Gung University

Report

- ▶ Only four A4 pages
- ▶ 12 pt words
- ▶ Deadline is 23:59 2021/06/20
- ▶ File name: OSP-Project-GroupID.zip
- ▶ Required Files: The source code files and the report
- ▶ In the report, remember to provide your names, student IDs, and group ID.
- ▶ Send it to TA's email: 陳列德 <fred30125@gmail.com>
- ▶ Email title: OSP Project GroupID




The Requirements of Final Presentation

- ▶ Presentation is only for **6 minutes**
 - Quickly go through the implementation
 - Talk more about the problems you solved
 - Highlight your extra exercise
- ▶ Live demo is required
 - Bring your source code
- ▶ I will ask each of you a question
 - You have **30 seconds** to answer the question



The μ C/OS-II File Structure

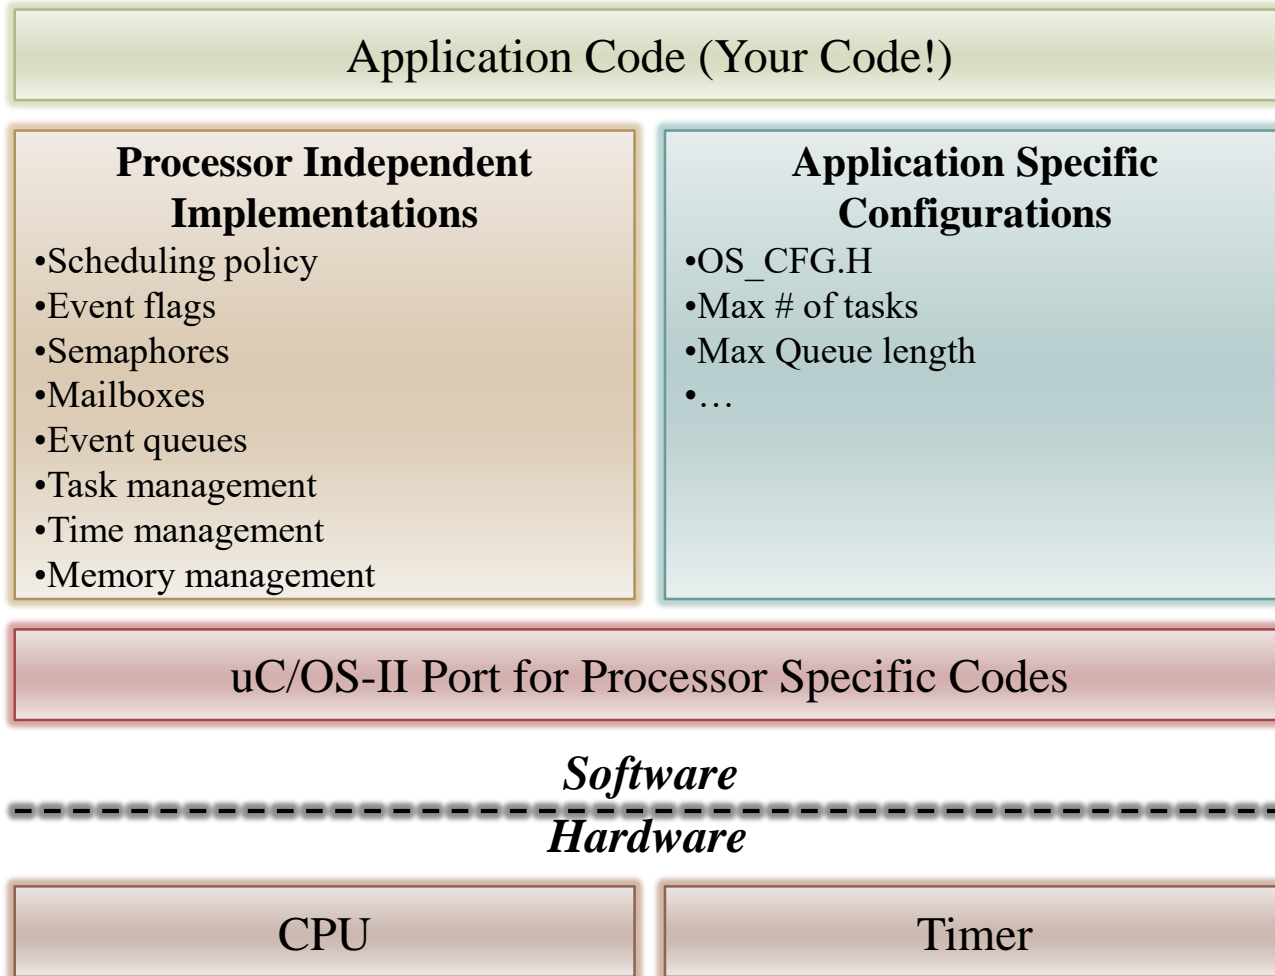

An Example on μ C/OS-II: Multitasking

```
C:\uCOS-II\EX1_x86L\BC45\TEST\TEST.EXE
uC/OS-II, The Real-Time Kernel
Jean J. Labrosse

EXAMPLE #1


89116946172338525924079161200809680987546685223383412430562925283669250986343296
98422567751237719507656726175432412646318347491404672986312193962508036750506500
04198306651530328553114431544122365187318809730898007032272399672715650027363877
57693215933181639000816383274172546796339696111557231414036618916971167518052446
87167977628059531803062385498234324352909549230869288780517833713356812324910844
96076151657952095287797253242289346735963213862384059119369240826117079207048124
50287066314799080679735361291095736391568112369038700652374490934441706826730486
61653657628409302678221532201608795402893009143966646754749821505618818172743185
69560935200252403260849523760678265258404164088907314547748669211659483772199335
93691897099525014271788073000297334093355784200017645649344251375360001363268941
18413755595752132896946275817959024606461504024548855195345717704064029146502579
39135305037668501128487345021325236456554775525487387983679011227017745698622484
30331999915088898309710170652257536915600865755306746584310036105462443846286550
39453956761639757584971051539474995717314131408143522623578458454231281632586097
18641620203503855873907334096429674516982716819162572865737179140288485548441608
97238519699005928503612250283693854016620169262553618397402481204447485872954996

#Tasks      : 13 CPU Usage: 0 % 80387 FPU
#Task switch/sec: 2191
<-PRESS 'ESC' TO QUIT-> V2.52
```

- ▶ Three system tasks
- ▶ Ten application tasks randomly prints its number



Multitasking: Workflow

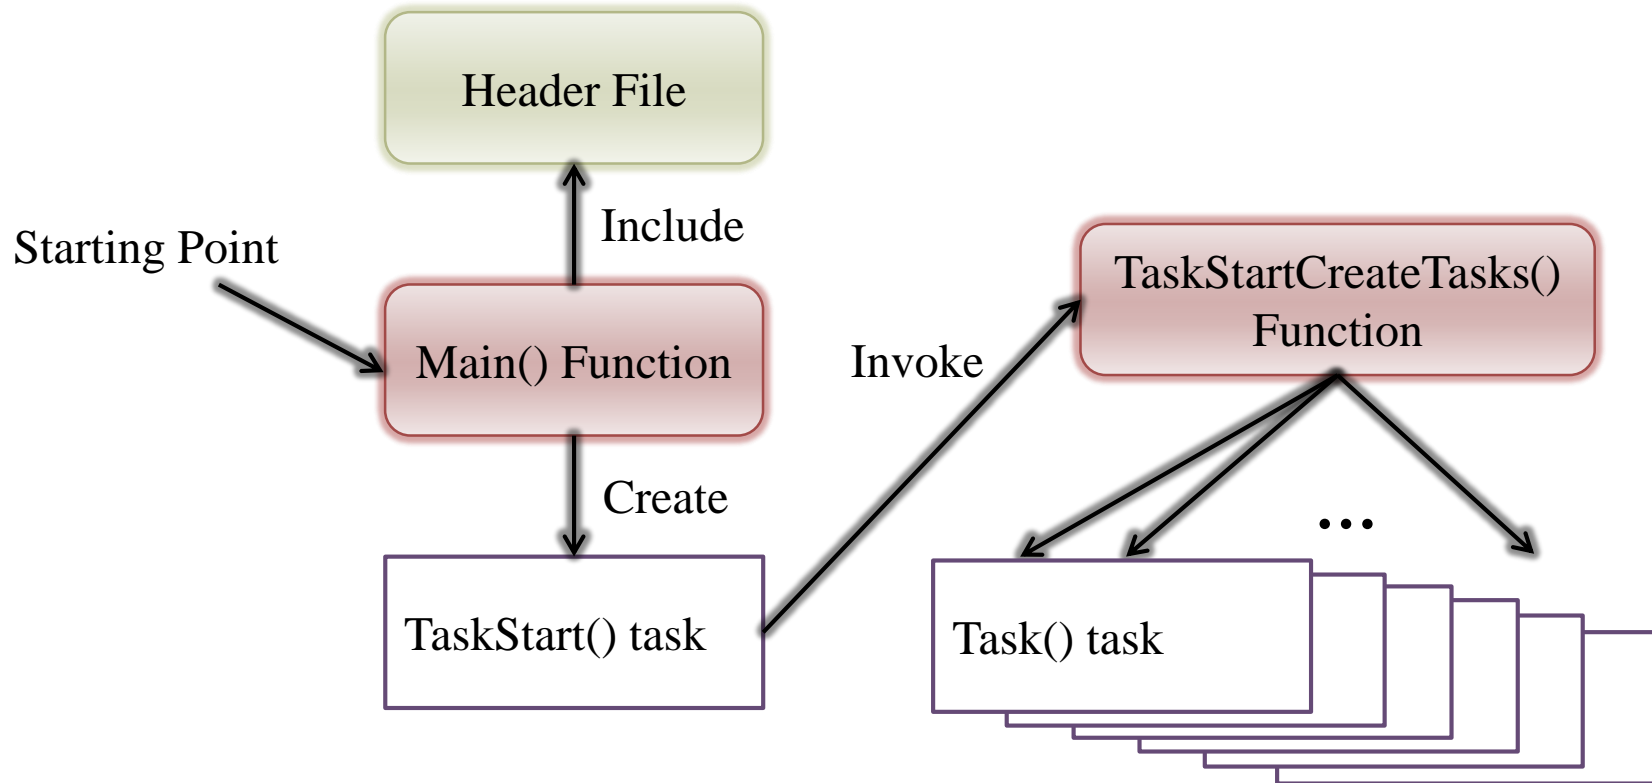

Multitasking: TEST.C

(\SOFTWARE\uCOS-II\EX1_x86L\BC45\SOURCE\TEST.C)

```
#include "includes.h"
```

```
/*
```

```
*****
```

```
CONSTANTS
```

```
*****
```

```
*/
```

```
#define TASK_STK_SIZE 512
```

```
#define N_TASKS 10
```

```
/*
```

```
*****
```

```
VARIABLES
```

```
*****
```

```
*/
```

```
OS_STK TaskStk[N_TASKS][TASK_STK_SIZE];
```

```
OS_STK TaskStartStk[TASK_STK_SIZE];
```

```
char TaskData[N_TASKS];
```

```
OS_EVENT *RandomSem;
```



Multitasking: Main()

```
void main (void)
```

```
{
```

```
    PC_DispClrScr(DISP_FGND_WHITE + ISP_BGND_BLACK);
```

```
    OSInit();
```

```
    PC_DOSSaveReturn();
```

```
    PC_VectSet(uCOS, OSCtxSw);
```

```
    RandomSem = OSSemCreate(1);
```

```
    OSTaskCreate( TaskStart,
```

Top of stack

```
    (void *)0,
```

Entry point of the task
(a pointer to a function)

User-specified data

Priority (0=highest)

```
    (void *)&TaskStartStk[TASK_STK_SIZE-1],
```

```
    0);
```

```
    OSStart();
```

```
}
```



Multitasking: TaskStart()

```
void TaskStart (void *pdata)
```

```
{
```

```
    /*skip the details of setting*/
```

```
    OSStatInit();
```

```
    TaskStartCreateTasks();
```

```
    for (;;) 
```

```
    {
```

```
        if (PC_GetKey(&key) == TRUE)
```

```
        {
```

```
            if (key == 0x1B) { PC_DOSReturn(); }
```

```
        }
```

```
        OSTimeDlyHMSM(0, 0, 1, 0);
```

```
    }
```

```
}
```

Call the function to
create the other tasks

See if the ESCAPE
key has been pressed

Wait one second



Multitasking:

TaskStartCreateTasks()

```
static void TaskStartCreateTasks (void)
```

```
{
```

```
    INT8U i;
```

```
    for (i = 0; i < N_TASKS; i++)
```

```
    {
```

```
        TaskData[i] = '0' + i;
```

```
        OSTaskCreate(
```

```
            Task,
```

```
            (void *)&TaskData[i],
```

```
            &TaskStk[i][TASK_STK_SIZE - 1],
```

```
            i + 1 );
```

```
    }
```

```
}
```

Entry point of the task
(a pointer to function)

Argument:
character to print

Top of stack

Priority



Multitasking: Task()

```
void Task (void *pdata)
```

```
{
```

```
    INT8U x;
```

```
    INT8U y;
```

```
    INT8U err;
```

```
    for (;;)
    {
```

```
        OSSemPend(RandomSem, 0, &err);
```

```
        /* Acquire semaphore to perform random numbers */
```

```
        x = random(80);
```

```
        /* Find X position where task number will appear */
```

```
        y = random(16);
```

```
        /* Find Y position where task number will appear */
```

```
        OSSemPost(RandomSem);
```

```
        /* Release semaphore */
```

```
        PC_DispChar(x, y + 5, *(char *)pdata, DISP_FGND_BLACK +DISP_BGND_LIGHT_GRAY);
```

```
        /* Display the task number on the screen */
```

```
        OSTimeDly(1);
```

```
        /* Delay 1 clock tick */
```

```
    }
```

```
}
```

Randomly pick up the position to print its data

Print & delay



OSinit()

(\SOFTWARE\uCOS-II\SOURCE\OS_CORE.C)

- ▶ Initialize the internal structures of μ C/OS-II and MUST be called before any services
- ▶ Internal structures of μ C/OS-2
 - Task ready list
 - Priority table
 - Task control blocks (TCB)
 - Free pool
- ▶ Create housekeeping tasks
 - The idle task
 - The statistics task



PC_DOSSaveReturn()

(\SOFTWARE\BLOCKS\PC\BC45\PC.C)

- ▶ Save the current status of DOS for the future restoration
 - Interrupt vectors and the RTC tick rate
- ▶ Set a global returning point by calling setjump()
 - μ C/OS-II can come back here when it terminates.
 - PC_DOSReturn()



PC_VectSet(uCOS,OSCtxSw)

(\SOFTWARE\BLOCKS\PC\BC45\PC.C)

- ▶ Install the context switch handler
- ▶ Interrupt 0x08 (timer) under 80x86 family
 - Invoked by INT instruction



OSStart()

(SOFTWARE\uCOS-II\EX1_x86L\BC45\SOURCE\CORE.C)

- ▶ Start multitasking of μ C/OS-II
- ▶ It never returns to main()
- ▶ μ C/OS-II is terminated if PC_DOSReturn() is called



Requirements

► Task Scheduling

- Adopt priority-driven scheduling
- The scheduler always schedules the highest priority ready task to run
- Modify the priority of each task
- Related code in uC/OS II
 - See OS_Sched() for scheduling policy
 - See OSTimeTick() for time management
 - See OSIntExit() for the interrupt management

► Provide the RM/EDF Scheduler

- Input: A task set, each task is with its execution time and period
- Output: The printed result of each task



Input

- ▶ The input format should be as follows
 - Your program should have the capability to create the assigned number of tasks and their corresponding period and execution time.
 - Example: taskset.txt

```
3 //number of task
1 3 // task 1: (execution time 1, period 1)
2 9 // task 2: (execution time 2, period 2)
4 12 // task 3: (execution time 3, period 3)
```
- ▶ The total utilization is no more than 65%
- ▶ The number of tasks is no more than 7



Input Example (1 / 2)

4

1 12

1 7

2 19

3 20



Input Example (2 / 2)

5

1 18

1 17

2 16

1 20

1 6



Output

- ▶ Your program output must show the following information
 - A sequence of the running task over time
 - The time when context switch occurred
- ▶ A report to describe your implementation
 - Relationship of each function
 - Implementation flow chart
 - Implementation details



Hints (1 / 2)

- ▶ You can read three other example in the document and refer to the source code.
- ▶ In order to implement a new scheduler, we might have to modify the `os_tcb` data structure to include some new attributes.
- ▶ The function `OSTaskCreateExt()` is used to create tasks, and we can modify this function to input the execution time and the period to each task.
- ▶ Each task executes an infinite loop and uses `OSTimeGet()` to get the execution time, where `OS_TICKS_PER_SEC` is the number of ticks for a second.
 - Note that a task might be preempted during its execution.
- ▶ Use `OSTimeDly()` when the task finish its execution.



Hints (2 / 2)

- ▶ Modify the deadline of a task before it call `OSTimeDly()` (ex: `OSTCBCur->deadline=OSTCBCur->deadline+TaskPeriod`)
- ▶ When the delay of a task is completed, the function `OSTaskResume()` is called to put the task back to ready queue and reschedule.
- ▶ Modify the function `OS_Sched()` to pick the task with the shortest period or the earliest deadline.
- ▶ `OSStart()` is used to start the execution of tasks.



Bonuses

- ▶ Implementation and discussion of both RM and EDF: 20%
- ▶ Implementation and discussion of PIP: 20%
- or
- ▶ Implementation and discussion of PCP: 30%
- ▶ Implementation and discussion of Deferrable Server: 30%
- or
- ▶ Implementation and discussion of Sporadic Server: 40%

