

# The ICPC Balloon Utility



An ICPC Tool

## Introduction

The ICPC Balloon Utility (BU) is a tool for keeping track of balloons earned by contest teams for successful run submissions. It receives submission information from one of several input sources, displays information about each submission (such as the problem, team, run ID, school, submission time, etc.) and optionally automatically prints “balloon notification” messages to assist runners in delivering balloons. It also provides runners with an interactive mechanism for tracking delivered balloons, and is even capable of printing maps showing runners where to go find the appropriate balloon and where on the contest floor the receiving team is located (although instructions for configuring it to do that are beyond the scope of this introductory guide).

The following shows a screen shot of the Balloon Utility main screen, after it has been loaded with run submission information from a Contest Control System:



## Using the Balloon Utility

### Installation

To install the Balloon Utility, download its distribution package from the [ICPCTools website](#) and unzip it to any convenient location. The BU is a Java program. The distribution is a self-contained package which contains all the Java libraries and other components necessary to run the Balloon Utility. (Note that Java, Version 1.8 or higher, must also be installed on the machine.)

### Execution

The Balloon Utility distribution includes a set of scripts which can be used to launch the program, balloon.bat for Windows platforms and balloon.sh for macOS and Linux. To start the BU, open a terminal window (command shell), change to the folder where you unzipped the distribution, and type the name of the appropriate script. The scripts do not require any parameters, although adding “-help” will generate a

mildly-useful message, and “–clean” will remove any saved balloon data. For more advanced use, you can enter a Contest API URL, user, and password to connect directly to a Contest API server upon startup.

## Input Data Sources

When the BU starts it displays a screen similar to the following:

The screenshot shows the 'ICPC Balloon Utility' window with the 'Print' tab selected. The window is divided into several sections:

- Contest Information:** Fields for 'Name:', 'Length:', 'Start time:', and 'Contest time:', along with a 'Connect...' button.
- Balloons:** A section with a 'Filter by group: All...' dropdown and a table of balloon data.
- Table:** A table with columns: '#', 'Run', 'Problem', 'Team', 'University', 'Time', 'Firsts', 'Printed', and 'Delivery'. The table is currently empty.
- Buttons:** 'Print Preview...', 'Print', and 'Toggle Delivery' buttons are located to the right of the table.
- Footer:** A checkbox for 'Automatically print new balloons', a status bar showing '0 of 0 balloons', and buttons for 'Print Selected Summary' and 'Print Full Summary'.

(If existing data was loaded it will be displayed in the screen; otherwise the screen will be unpopulated as shown above.)

In order to use the BU once it is started, it must be connected to the output of a *Contest Control System* (CCS). The Balloon Utility will work with any CCS or the CDS which is compliant with the [Contest API Specification](#). Tools known to produce compliant event feeds include [Contest Data Server](#), [DOMjudge](#), [PC-Squared](#), and [Kattis](#); other Contest Control Systems may also produce compatible event feeds and hence work with the Balloon Utility.

The BU is capable of operating with contest data obtained from one of two different sources: a Contest API source (e.g. CCS or CDS) or a local contest path. If you don't specify a source on the command line you will be prompted on startup.



The image shows a Windows-style dialog box titled "ICPC Tools Balloon Utility Connection". It has a blue title bar with a green balloon icon on the left and a red close button on the right. The main area is light gray and contains the question "How do you want to connect to a contest?". There are three radio button options: "Connect to CDS over HTTPS" (selected), "Connect to CCS via socket", and "Read local event feed". The "Connect to CDS over HTTPS" option has three text input fields: "URL:" with "https://localhost:443", "User:" with "balloon", and "Password:" with a masked password of 12 dots. The "Connect to CCS via socket" option has two text input fields: "Host:" with "10.1.1.20" and "Port:" with "4713". The "Read local event feed" option has a text input field for "File:" with "C:\Contest\events.xml" and a "Browse..." button to its right. At the bottom right, there are two buttons: "Connect" and "Cancel".

Connecting the BU directly to a running (compatible) CCS or CDS is done using the REST selection in the dialog and entering a valid Contest API URL, user, and password. The BU can be connected to a folder or event feed file using the Disk selection.

### Operating the Balloon Utility

Each time a successful-run notification arrives in the event feed the BU will display the run information in its grid. If the run represents special conditions, such as being the first solution for a Team (T), Problem (P), Region or Group (R), or in the entire Contest (C), corresponding flags are displayed in the “Firsts” column. The display grid can be sorted on any column by clicking in the corresponding column header.

One of the most common uses of the BU is for printing “Balloon Notification” messages for runners delivering balloons to teams. Balloon Notification printouts contain information identifying the team (by name and number), problem (by letter), the run submission that earned the balloon (by run ID and submission time) and the color of the balloon which should be delivered.


Balloon Notifications may also contain additional information such as how many other balloons the team has and any special award categories associated with the new balloon (such as an indication that it is the team’s *first* balloon or that the balloon represents the first solution (by any team) of the specified problem. Balloon Notifications can also be configured to print a map showing where the team is located on the contest floor, although the mechanism for configuring this map is not documented at this time.

A sample Balloon Notification is shown below:



button. This will insert a “Y” in the “Delivered” column, providing an easy way to keep track of delivered notifications. The “Y” notification can be removed if desired by selecting the row and clicking “Toggle Delivery” again. Note also that Balloon Notification printouts have a “Delivered By” signature space near the bottom to allow balloon runners to record that they delivered the corresponding balloon.

The *Filter by group* label (just above the main screen grid, on the left side) can be used to restrict the balloons which are processed by the BU. Clicking on the text next to the label (it shows as “All...” in the following screenshot) produces a drop-down list of the currently-defined “groups” (also called “regions”) defined in the contest, similar to the following:

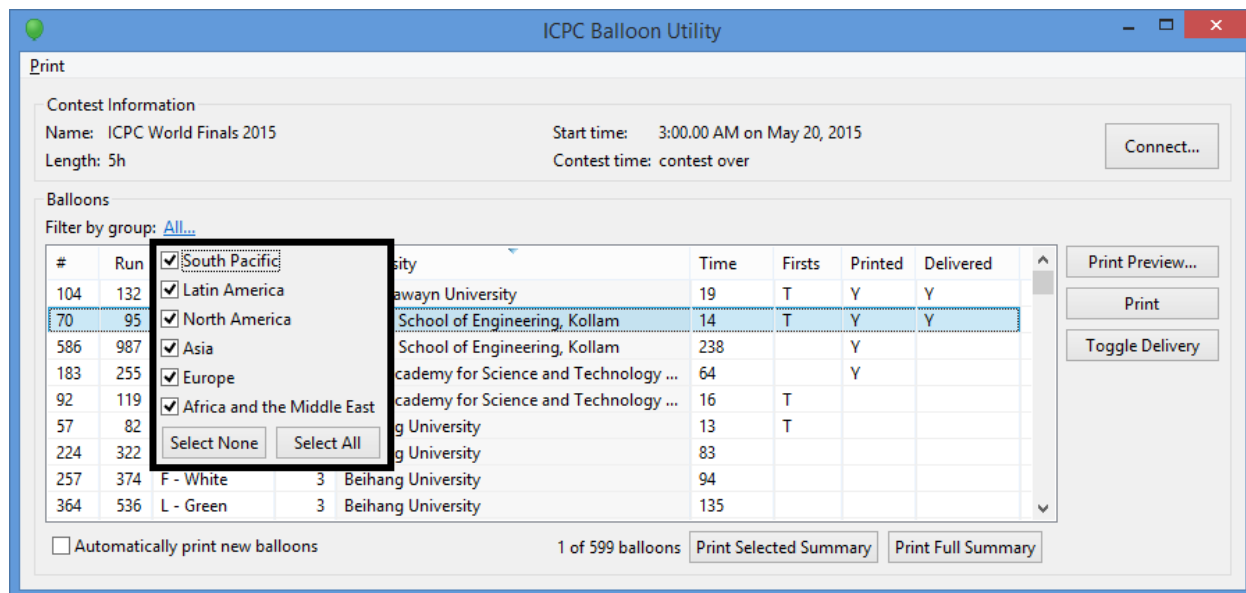

Disabling one or more groups (by unchecking the corresponding checkbox) suppresses the Balloon Utility’s processing of Balloon Notifications for the disabled group(s). This allows the balloon handling crew at contests taking place simultaneously at multiple sites to avoid having to deal with Balloon Notifications for teams which are not at their site.

Note that the definition of the groups in a contest comes from data in the event feed read by the BU; groups cannot be directly defined within the Balloon Utility itself.