

# The ICPC Balloon Utility




An ICPC Tool

## Introduction

The ICPC Balloon Utility (BU) is a tool for keeping track of balloons earned by contest teams for successful run submissions. It receives submission information from one of several input sources, displays information about each submission (such as the problem, team, run ID, school, submission time, etc.) and optionally automatically prints "balloon notification" messages to assist runners in delivering balloons. It also provides runners with an interactive mechanism for tracking delivered balloons, and is even capable of printing maps showing runners where to go find the appropriate balloon and where on the contest floor the receiving team is located (although instructions for configuring it to do that are beyond the scope of this introductory guide).

The following shows a screen shot of the Balloon Utility main screen, after it has been loaded with run submission information from a Contest Control System:

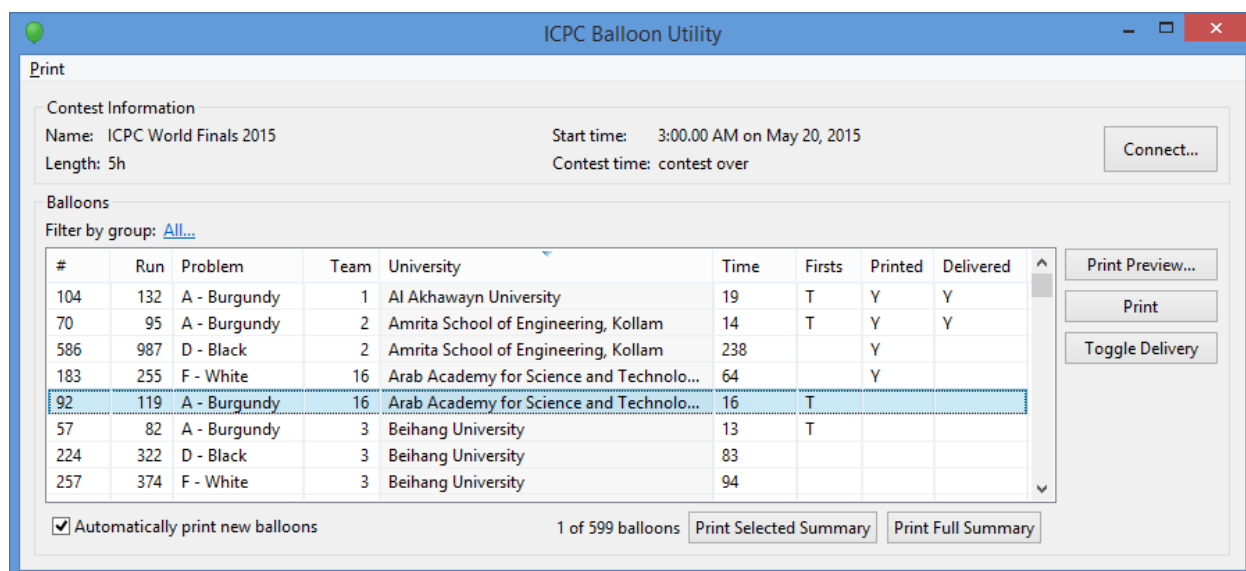

## Using the Balloon Utility

### Installation

To install the Balloon Utility, download its distribution package from the [ICPCTools website](#) and unzip it to any convenient location. The BU is a Java program. The distribution is a self-contained package which contains all the Java libraries and other components necessary to run the Balloon Utility. (Note that Java version 17 or higher must also be installed on the machine.)

### Execution

The Balloon Utility distribution includes a set of scripts which can be used to launch the program, `balloon.bat` for Windows platforms and `balloon.sh` for macOS and Linux. To start the BU, open a terminal window (command shell), change to the folder where you unzipped the distribution, and type the name of the appropriate script. The scripts do not require any parameters, although adding `--help` will generate a mildly-useful message, and `--clean` will remove any saved balloon data. For more advanced use, you can enter a Contest API URL, user, and password to connect directly to a Contest API server upon startup.

### Input Data Sources

When the BU starts it displays a screen similar to the following:



Connecting the BU directly to a running (compatible) CCS or CDS is done using the REST selection in the dialog and entering a valid Contest API URL, user, and password. The BU can be connected to a folder or event feed file using the Disk selection.

## Operating the Balloon Utility

Each time a successful-run notification arrives in the event feed the BU will display the run information in its grid. If the run represents special conditions, such as being the first solution for a Team (T), Problem (P), Region or Group (R), or in the entire Contest (C), corresponding flags are displayed in the "Firsts" column. The display grid can be sorted on any column by clicking in the corresponding column header.

One of the most common uses of the BU is for printing "Balloon Notification" messages for runners delivering balloons to teams. Balloon Notification printouts contain information identifying the team (by name and number), problem (by letter), the run submission that earned the balloon (by run ID and submission time) and the color of the balloon which should be delivered.

Balloon Notifications may also contain additional information such as how many other balloons the team has and any special award categories associated with the new balloon (such as an indication that it is the team's *first* balloon or that the balloon represents the first solution (by any team) of the specified problem. Balloon Notifications can also be configured to print a map showing where the team is located on the contest floor, although the mechanism for configuring this map is not documented at this time.

A sample Balloon Notification is shown below:

**Balloon Print Preview**

Team: **Peking University**

**62**  
A - Burgundy  
Run 20  
Time 5  
Balloon 1

Team has no existing balloons

**First balloon in contest!**  
Deliver additional gold foil balloon with dignitaries

**First solution to problem A!**  
Deliver burgundy foil balloon

**First balloon for this team**  
Escort photographers to team

Barcode: 0 0 0 0 0 1 0 0 0 2 0 7

Contest Floor Map:

Problem	A	B	C	D	E	F	G	H	I	J	K	L	M
A	1	2	3	4	5	6	7	8	9	10	11	12	13
B	14	15	16	17	18	19	20	21	22	23	24	25	26
C	27	28	29	30	31	32	33	34	35	36	37	38	39
D	40	41	42	43	44	45	46	47	48	49	50	51	52
E	53	54	55	56	57	58	59	60	61	62	63	64	65
F	66	67	68	69	70	71	72	73	74	75	76	77	78
G	79	80	81	82	83	84	85	86	87	88	89	90	91
H	92	93	94	95	96	97	98	99	100	101	102	103	104
I	105	106	107	108	109	110	111	112	113	114	115	116	117
J	118	119	120	121	122	123	124	125	126	127	128	129	130
K	131	132	133	134	135	136	137	138	139	140	141	142	143
L	144	145	146	147	148	149	150	151	152	153	154	155	156
M	157	158	159	160	161	162	163	164	165	166	167	168	169

Delivered

ICPC World Finals 2015

2015 World Finals Morocco  
acm International Collegiate Programming Contest  
IBM event sponsor

Printed 4/20/16 7:22 PM

To select the printer to be used for printing Balloon Notifications, pull down the "Print" menu in the upper left corner of the main screen and select "Configure Printer"; this will display a list of all printers known to

the underlying system and any of these can be selected for use by the BU.

The selected printer can be changed at any time (again, using the Print menu), and the same menu also allows for sending a "Test Message" to the printer to be sure it is working.


The *Automatically print new balloons* checkbox at the bottom of the main screen can be used to enable or disable automatic printing; if enabled, then whenever a new successful-run notification is received in the event feed the BU will automatically print a new Balloon Notification message to the currently-configured printer.

Selecting one or more rows in the grid (by clicking on them) and then pressing *Print Preview* will print an on-screen version of the Balloon Notification(s) for the selected row(s). Selecting one or more rows and pressing *Print* will send Balloon Notification(s) for the selected rows to the currently configured printer (even if the notifications have previously been printed). Whenever a notification has been printed (including as a result of "automatic printing"), the BU places a "Y" indication in the "Printed" column.

The *Print Summary* buttons allow you to print a complete list of balloons for verification, either a list for rows currently selected in the grid or a complete summary of all balloon notifications for the contest up to the moment. This can be used for example to verify that the balloons which should have been sent to a given team are actually present on the contest floor (by sorting on the Team column and then selecting all runs for that team followed by pressing *Print Selected Summary*), or to check that all of the balloons on the contest floor match what they should be.

The "Delivered" column is used to track when balloons have actually been delivered to teams. Each time a runner delivers a balloon, they should select the corresponding row in the grid and click the *Toggle Delivery* button. This will insert a "Y" in the "Delivered" column, providing an easy way to keep track of delivered notifications. The "Y" notification can be removed if desired by selecting the row and clicking "Toggle Delivery" again. Note also that Balloon Notification printouts have a "Delivered By" signature space near the bottom to allow balloon runners to record that they delivered the corresponding balloon.

The *Filter by group* label (just above the main screen grid, on the left side) can be used to restrict the balloons which are processed by the BU. Clicking on the text next to the label (it shows as "All..." in the following screenshot) produces a drop-down list of the currently-defined "groups" (also called "regions") defined in the contest, similar to the following:

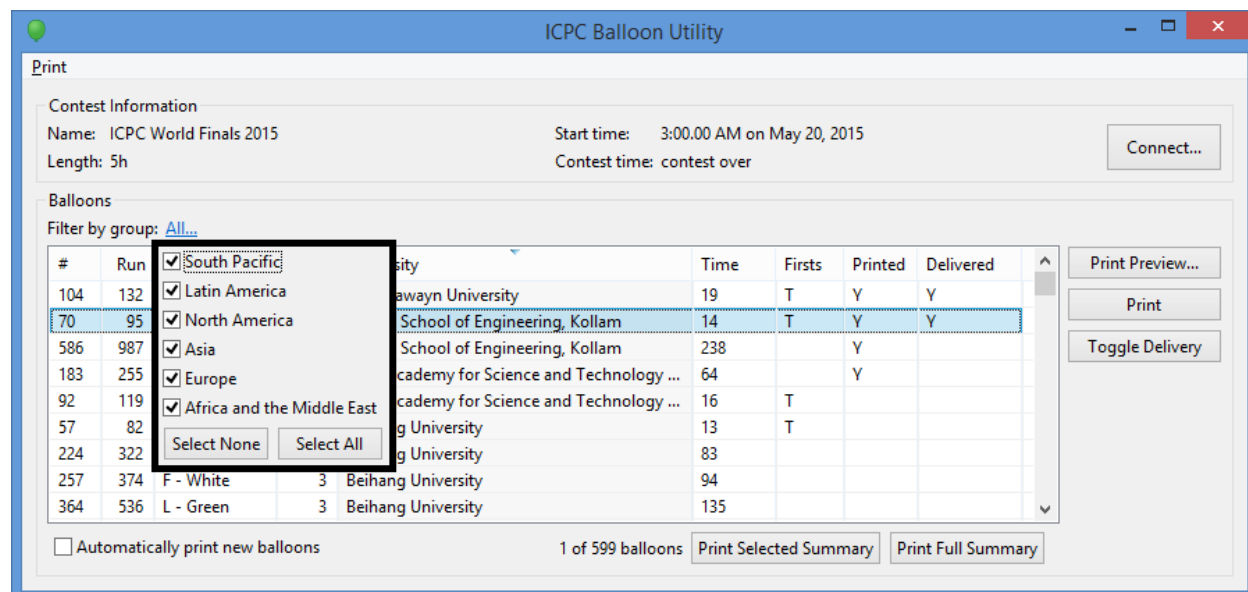

Disabling one or more groups (by unchecking the corresponding checkbox) suppresses the Balloon Utility's processing of Balloon Notifications for the disabled group(s). This allows the balloon handling crew at contests taking place simultaneously at multiple sites to avoid having to deal with Balloon Notifications for teams which are not at their site.

Note that the definition of the groups in a contest comes from data in the event feed read by the BU; groups cannot be defined within the Balloon Utility.

**Notes** Test or rehearsal contests often have multiple copies of the same problem, e.g. there are 6 problems A-F, but each pair of A and D, B and E, and C and F are identical. If these problems are marked as duplicates by the Contest Control System (by having the same problem UUID) then by default the balloon utility will only print a balloon for first solution (either A or D) from each pair. To disable this behaviour, enable the "Print balloons for problems with matching UUIDs" preference (and restart if there are existing submissions).