


1. Encoding the **position**
2. Extracting **query, key, value**
3. Compute **attention weighting**
4. Extract **features with high attention**

Last step: self-attend to extract features

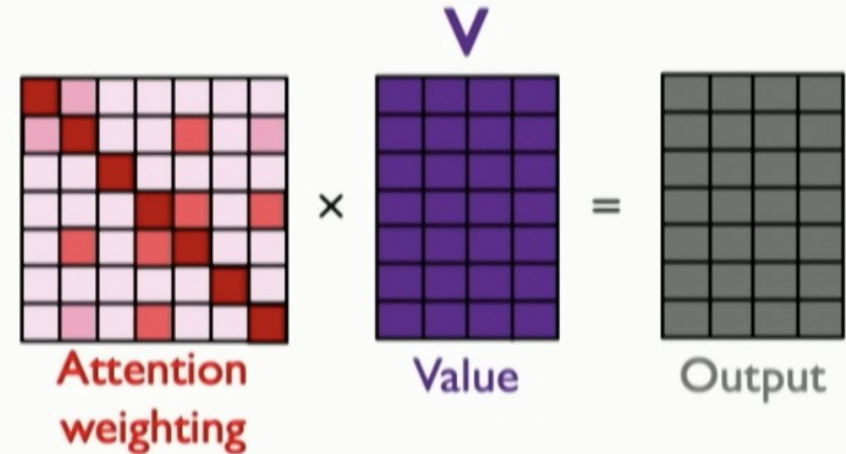

$$\underbrace{\text{softmax} \left(\frac{Q \cdot K^T}{\text{scaling}} \right)}_{\text{Attention weighting}} \cdot \underbrace{V}_{\text{Value}} = \underbrace{A(Q, K, V)}_{\text{Output}}$$