API / Endpoint Deployment

- Background
- How to use
- Features & Glossary
  - Thread
  - Response Types
  - Invoke Modes
  - Interrupts
  - Limitations
- Endpoints
  - Invoke Agent
  - Invoke with Files
  - Continue Interrupt
  - Get Messages
- Examples
  - cURL
- Frequently Asked Questions
  - How to use the Agent API endpoint
  - How to upload image / files in Agent API endpoint
  - How to get the Agent reply with image
  - How to invoke agents with End-User Tool Authentication enabled via endpoint deployment
- Best Practices

Background

The Endpoint Deployment feature allows you to expose your Smart Platform agent groups as REST API endpoints. This enables external applications and services to interact with your AI agents programmatically through HTTP requests.

The Endpoint Deployment channel is specifically designed for users who want to integrate our AI capabilities into their own applications, services, or workflows using standard HTTP API calls.

How to use

1. Enable Enable Deployment
   a. To start using the API, you need to enable endpoint deployment for your agent group through the Smart Platform

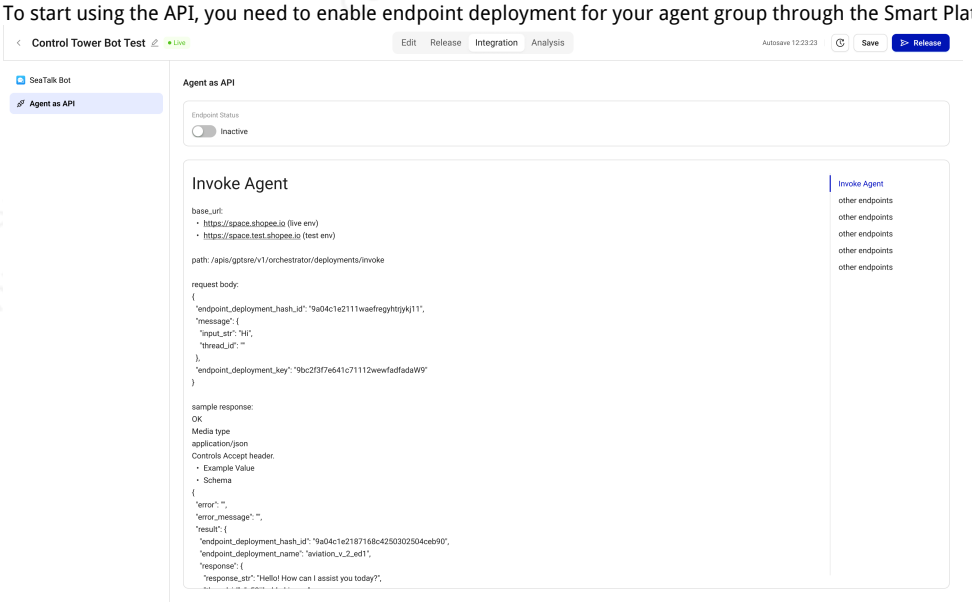

   b.
2. Get Your Credentials
   a. Once enabled, you will receive:

      i. **`Hash ID`** (`endpoint_deployment_hash_id`): A unique identifier for your deployment
      ii. **`API Key`** (`endpoint_deployment_key`): A secret key for authentication

    b. **Important**: Keep your API key secure and never expose it in client-side code or public repositories.
3. Start Making API Calls
    a. Use the provided Hash ID and API Key to authenticate your requests to the available endpoints.

Features & Glossary

Thread

A **thread** represents a conversation session with your agent. Each thread maintains conversation context and history.

- If you don't provide a `thread_id` in your request, a new thread will be created automatically
- Use the same `thread_id` to continue an existing conversation
- Each thread maintains its own conversation state and memory

Response Types

Choose how you want to receive responses from your agent:

- **Default** (`default`): Returns structured JSON response
- **Plain Text** (`plain_text`): Returns only the agent's text response as plain text
- **Force Serialize JSON** (`force_serialize_json`): Returns raw JSON dictionary that's generated by the agent

Invoke Modes

Control how your requests are processed:

- **Sync** (`sync`): Synchronous processing - wait for complete response before returning
- **Async** (`async`): Asynchronous processing - returns immediately, user need to use `get_messages` to retrieve results
    - **You can do polling here, and see the progress as the agent is running**

Interrupts

Interrupts occur when the agent needs human intervention or additional authorization:

- **Human in the Loop**: When the agent uses an "ask human" tool and needs user input
- **Tool Authorization**: When the agent needs permission to use certain tools **(Coming Soon)**

Important: If a thread is interrupted, you must use the `continue_interrupt` endpoint, not the regular `invoke` endpoint.

Limitations

Image Responses: In sync mode, agents cannot return images (such as images returned by KBs or Tools). Use async mode and retrieve images via `get_messages` endpoint

Endpoints

Invoke Agent

POST `https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke`

Send a text message to your agent and get a response.

Request Body:

Lemeng Shi / 2025-11-26 17:38:00 CONFIDENTIAL © Sea Limited

```
{
  "endpoint_deployment_hash_id": "your-hash-id",
  "endpoint_deployment_key": "your-api-key",
  "user_id": "unique-user-identifier",
  "message": {
    "input_str": "Your message to the agent",
    "thread_id": "optional-thread-id"
  },
  "user_credentials": {
        "token_inputs": [
            {
                "token": "your token"
                "ref": "confluence_token",
                "domain": "confluence.shopee.io"
            },
            {
                "token": "your",
                "ref": "google_refresh_token"
            }
        ]
    },
   "mode": "sync"
}
```

Notes:

thread id, user credentials and mode are optional.

If you don't give the thread id, it means that it's a new thread and we're going to generate the thread id.

If you don't give the mode, then by default it's going to be sync.

Response (Default mode):

```
{
  "data": {
    "endpoint_deployment_hash_id": "your-hash-id",
    "deployment_id": 123,
    "response": {
      "response_str": "Agent's response",
      "thread_id": "thread-123",
          "model_id_to_token_usage": {
        "gpt-4o-mini": {
                    "input_tokens": 146,
            "cached_input_tokens": 0,
            "output_tokens": 11,
            "model_name": "gpt-4o-mini-2024-07-18"
         }
       }
    },
    "is_interrupted": false
  }
}
```

Invoke with Files

POST `https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke_with_files`

Send a message with file attachments (including image/photo) to your agent.

Request (Form Data):
- `endpoint_deployment_hash_id`: Your hash ID
- `endpoint_deployment_key`: Your API key
- `user_id`: Unique user identifier
- `input_str`: Your message text
- `thread_id`: Optional thread ID
- `mode`: "sync" or "async"
- `files`: File attachments (multipart/form-data)
- `user_credentials`: JSON string of user credentials
  (e.g. {"token_inputs": [{"ref": "jira_token", "token": "my token", "domain": "jira.shopee.io"}]}

Notes:

thread id, mode, files, user credentials are optional.

If you don't give the thread id, it means that it's a new thread and we're going to generate the thread id.

If you don't give the mode, then by default it's going to be sync.

Example request with cURL, sending an image and a document:

```
curl -X POST "https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke_with_files" \
  -F "endpoint_deployment_hash_id=abc123" \
  -F "endpoint_deployment_key=secret-key" \
  -F "user_id=user-001" \
  -F "input_str=Please analyze these documents" \
  -F "thread_id=" \
  -F "mode=sync" \
  -F "files=@document.pdf" \
  -F "files=@image.png"
```

Response (Default mode):

```
{
  "data": {
    "endpoint_deployment_hash_id": "your-hash-id",
    "deployment_id": 123,
    "response": {
      "response_str": "Agent's response",
      "thread_id": "thread-123",
      "model_id_to_token_usage": {
        "gpt-4o-mini": {
                   "input_tokens": 146,
            "cached_input_tokens": 0,
            "output_tokens": 11,
            "model_name": "gpt-4o-mini-2024-07-18"
         }
      }
        },
    "is_interrupted": false
  }
}
```

Continue Interrupt

POST `https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/continue_interrupt`

Continue a conversation after an interrupt.

Request Body:

```
{
  "endpoint_deployment_hash_id": "your-hash-id",
  "endpoint_deployment_key": "your-api-key",
  "thread_id": "interrupted-thread-id",
  "interrupt_type": "human_in_loop",
  "interrupt_command": {
    "answer": "User's response to the interrupt"
  },
  "mode": "sync"
}
```

Notes:

mode is optional.

If you don't give the mode, then by default it's going to be sync.

Interrupt Types:

- `human_in_loop`: For human input requests, usually coming from **ask-human** tool
- `tool_authorization`: For tool permission requests (Coming Soon)

Interrupt Commands:

- For human_in_loop: `{"answer": "user input"}`
- For tool_authorization: (Coming Soon)

Response (Default mode):

```
{
  "data": {
    "endpoint_deployment_hash_id": "your-hash-id",
    "deployment_id": 123,
    "response": {
      "response_str": "Agent's response",
      "thread_id": "thread-123",
      "model_id_to_token_usage": {
        "gpt-4o-mini": {
                   "input_tokens": 146,
            "cached_input_tokens": 0,
            "output_tokens": 11,
            "model_name": "gpt-4o-mini-2024-07-18"
         }
       }
     },
    "is_interrupted": false
  }
}
```

Get Messages

POST `https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/get_messages`

Retrieve complete conversation history and debug information for a thread.

Request Body:

```
{
  "endpoint_deployment_hash_id": "your-hash-id",
  "endpoint_deployment_key": "your-api-key",
  "thread_id": "your-thread-id"
}
```

Response:


```
{
    "status": "success",
    "error": "",
    "error_message": "",
    "code": 0,
    "data": {
        "status": "idle",
        "debug_tree": {
            "root_agent_group_id": 345,
            "message_tree": [
                {
                    "id": "8a29a78d-b4e5-404b-a7d7-a448720f11e2",
                    "type": "human",
                    "model_id": "",
                    "attachments": [],
                    "node_name": "user",
                    "display_node_name": "User",
                    "agent_group_node_name": "",
                    "display_agent_group_node_name": "",
                    "input": "hi there",
                    "output": "Hello! How can I assist you today?",
                    "content": "hi there",
                    "tool_calls_name": [],
                    "input_args": {},
                    "token_usage": {
                        "input_tokens": 0,
                        "cached_input_tokens": 0,
                        "output_tokens": 0,
                        "model_name": ""
                    },
                    "created_at": 1749124783.516026,
                    "duration_ms": 2439.363956451416,
                    "start_at": 1749124783.516026,
                    "ended_at": 1749124785.95539,
                    "child_messages": [
                        {
                            "id": "run--76cb5012-e7b2-4880-b012-585300d2bdfc-0",
                            "type": "ai",
                            "model_id": "gpt-4o-mini",
                            "attachments": [],
                            "node_name": "test_hil_agent_348",
                            "display_node_name": "test HIL",
                            "agent_group_node_name": "test_hil_agent_group_345",
                            "display_agent_group_node_name": "",
                            "input": "",
                            "output": "",
                            "content": "Hello! How can I assist you today?",
                            "tool_calls_name": [],
                            "input_args": {},
                            "token_usage": {
                                "input_tokens": 127,
                                "cached_input_tokens": 0,
                                "output_tokens": 10,
                                "model_name": "gpt-4o-mini-2024-07-18"
                            },
                            "created_at": 1749124785.95539,
                            "duration_ms": 2439.363956451416,
```

```
                        "start_at": 1749124783.516026,
                        "ended_at": 1749124785.95539,
                        "child_messages": [],
                        "seatalk_id": "",
                        "seatalk_group_id": "",
                        "seatalk_email": "",
                        "user_id": "",
                        "parent_msg_id": "8a29a78d-b4e5-404b-a7d7-a448720f11e2"
                    }
                ],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com",
                "parent_msg_id": null
            },
            {
                "id": "6391454a-f70f-4e31-9676-327239b62ea0",
                "type": "human",
                "model_id": "",
                "attachments": [],
                "node_name": "user",
                "display_node_name": "User",
                "agent_group_node_name": "",
                "display_agent_group_node_name": "",
                "input": "im fine",
                "output": "Glad to hear that! If you have any questions or need assistance with something,
feel free to ask.",
                "content": "im fine",
                "tool_calls_name": [],
                "input_args": {},
                "token_usage": {
                    "input_tokens": 0,
                    "cached_input_tokens": 0,
                    "output_tokens": 0,
                    "model_name": ""
                },
                "created_at": 1749124972.476691,
                "duration_ms": 1359.234094619751,
                "start_at": 1749124972.476691,
                "ended_at": 1749124973.835925,
                "child_messages": [
                    {
                        "id": "run--e54e693a-f2ae-445c-b46e-59e859a30960-0",
                        "type": "ai",
                        "model_id": "gpt-4o-mini",
                        "attachments": [],
                        "node_name": "test_hil_agent_348",
                        "display_node_name": "test HIL",
                        "agent_group_node_name": "test_hil_agent_group_345",
                        "display_agent_group_node_name": "",
                        "input": "",
                        "output": "",
                        "content": "Glad to hear that! If you have any questions or need assistance with
something, feel free to ask.",
                        "tool_calls_name": [],
                        "input_args": {},
                        "token_usage": {
                            "input_tokens": 146,
                            "cached_input_tokens": 0,
                            "output_tokens": 22,
                            "model_name": "gpt-4o-mini-2024-07-18"
                        },
                        "created_at": 1749124973.835925,
                        "duration_ms": 1359.234094619751,
                        "start_at": 1749124972.476691,
                        "ended_at": 1749124973.835925,
                        "child_messages": [],
                        "seatalk_id": "",
                        "seatalk_group_id": "",
                        "seatalk_email": "",
```

```
                        "user_id": "",
                        "parent_msg_id": "6391454a-f70f-4e31-9676-327239b62ea0"
                    }
                ],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com",
                "parent_msg_id": null
            },
            {
                "id": "a5cd031f-bf9d-42e3-800d-7fd52b94baad",
                "type": "human",
                "model_id": "",
                "attachments": [
                    {
                        "name": "gsa-visa-order-form.pdf",
                        "type": "file",
                        "file_type": "pdf",
                        "content": "",
                        "size_kilobytes": 131.9248046875
                    }
                ],
                "node_name": "user",
                "display_node_name": "User",
                "agent_group_node_name": "",
                "display_agent_group_node_name": "",
                "input": "Got quoted File:\nfilename: gsa-visa-order-form.pdf\nfile_content:\n```\nGlobal
Singapore Associates Pte Ltd\n  The Riverwalk #B1-25\n  20 Upper Circular Road\n  Singapore, 058416\n  +65 8722
1482\n  +65 9387  7672\n  VISA ORDER FORM  info@globalsingapore.sg\n  www.globalsingapore.sg\n\n\nTraveller’s
details:\n\n  Applicant’s full name (as in the passport):  Original documents submitted:\n  Passport  Singapore
ID\n  Nationality:  Marriage certificate  Birth certificate\n\n  Other
_____\n\n\n\n  Contact person’s details:\nPlease provide contact details of the
person who will be contacted with regards to this application. This could be someone applying for a visa
either\nthemselves or on behalf of the applicant, such as a travel agent, secretary, PA, family member or a
friend.\n\nName  Phone number  E mail  Company name\n\n\n\nCountry  visa requested for:\n\nCountry  Entry date
Exit date  Type of visa  Multiplicity  Service\n  (dd/mm/yyyy)  (dd/mm/yyyy)  (business/tourist/transit)
(single/double/multiple)  (nor mal/urgent)\n  Business  Single  Normal\n  Tourist  Double  Express\n  Transit
Multiple  Urgent\n\n\n  Passport collection instructions:\n\n\n  Self-collection  Courier service  Delivery
address:\n  (extra charge applies)\n\n\n\n\n\n  I agree to the Glob  al Singapore Associates Pte Ltd Data
Protection Notice as stipulated on the Global Singapore website.\n  I can confirm acceptance of the Global
Singapore Associates Pte Ltd Terms and Conditions as stipulated on the Global Singapore website.\n\n  Date:
Signature:\n\n\n\nINTERNAL US  E ONLY\n\nDocuments received:  Passport returned on:\nInvoice No:  Signature on
collection:\nPayment received on:\nMethod of payment:\n\n\n  Copyright © 2012 · Global Singapore Associates
Pte. Ltd · All rights reserved\n\n```\n\nwhat is this file about",
                "output": "The file you quoted appears to be a visa order form from Global Singapore
Associates Pte Ltd. It includes sections for the applicant's details, a contact person's information, visa
request details (such as the country, entry and exit dates, type of visa, and service type), and passport
collection instructions. It also includes statements regarding data protection and terms and conditions, as
well as sections for internal use, such as document receipt confirmation and payment information. Essentially,
it's a form that individuals or organizations would fill out to apply for a visa through this agency.",
                "content": "Got quoted File:\nfilename: gsa-visa-order-form.pdf\nfile_content:\n```\nGlobal
Singapore Associates Pte Ltd\n  The Riverwalk #B1-25\n  20 Upper Circular Road\n  Singapore, 058416\n  +65 8722
1482\n  +65 9387  7672\n  VISA ORDER FORM  info@globalsingapore.sg\n  www.globalsingapore.sg\n\n\nTraveller’s
details:\n\n  Applicant’s full name (as in the passport):  Original documents submitted:\n  Passport  Singapore
ID\n  Nationality:  Marriage certificate  Birth certificate\n\n  Other
_____\n\n\n\n  Contact person’s details:\nPlease provide contact details of the
person who will be contacted with regards to this application. This could be someone applying for a visa
either\nthemselves or on behalf of the applicant, such as a travel agent, secretary, PA, family member or a
friend.\n\nName  Phone number  E mail  Company name\n\n\n\nCountry  visa requested for:\n\nCountry  Entry date
Exit date  Type of visa  Multiplicity  Service\n  (dd/mm/yyyy)  (dd/mm/yyyy)  (business/tourist/transit)
(single/double/multiple)  (nor mal/urgent)\n  Business  Single  Normal\n  Tourist  Double  Express\n  Transit
Multiple  Urgent\n\n\n  Passport collection instructions:\n\n\n  Self-collection  Courier service  Delivery
address:\n  (extra charge applies)\n\n\n\n\n\n  I agree to the Glob  al Singapore Associates Pte Ltd Data
Protection Notice as stipulated on the Global Singapore website.\n  I can confirm acceptance of the Global
Singapore Associates Pte Ltd Terms and Conditions as stipulated on the Global Singapore website.\n\n  Date:
Signature:\n\n\n\nINTERNAL US  E ONLY\n\nDocuments received:  Passport returned on:\nInvoice No:  Signature on
collection:\nPayment received on:\nMethod of payment:\n\n\n  Copyright © 2012 · Global Singapore Associates
Pte. Ltd · All rights reserved\n\n```\n\nwhat is this file about",
                "tool_calls_name": [],
                "input_args": {},
```

```
                "token_usage": {
                    "input_tokens": 0,
                    "cached_input_tokens": 0,
                    "output_tokens": 0,
                    "model_name": ""
                },
                "created_at": 1749125310.7560608,
                "duration_ms": 4531.801223754883,
                "start_at": 1749125310.7560608,
                "ended_at": 1749125315.287862,
                "child_messages": [
                    {
                        "id": "run--3deee805-efb0-444e-a8f6-a9c88f7c0830-0",
                        "type": "ai",
                        "model_id": "gpt-4o-mini",
                        "attachments": [],
                        "node_name": "test_hil_agent_348",
                        "display_node_name": "test HIL",
                        "agent_group_node_name": "test_hil_agent_group_345",
                        "display_agent_group_node_name": "",
                        "input": "",
                        "output": "",
                        "content": "The file you quoted appears to be a visa order form from Global
Singapore Associates Pte Ltd. It includes sections for the applicant's details, a contact person's information,
visa request details (such as the country, entry and exit dates, type of visa, and service type), and passport
collection instructions. It also includes statements regarding data protection and terms and conditions, as
well as sections for internal use, such as document receipt confirmation and payment information. Essentially,
it's a form that individuals or organizations would fill out to apply for a visa through this agency.",
                        "tool_calls_name": [],
                        "input_args": {},
                        "token_usage": {
                            "input_tokens": 595,
                            "cached_input_tokens": 0,
                            "output_tokens": 111,
                            "model_name": "gpt-4o-mini-2024-07-18"
                        },
                        "created_at": 1749125315.287862,
                        "duration_ms": 4531.801223754883,
                        "start_at": 1749125310.7560608,
                        "ended_at": 1749125315.287862,
                        "child_messages": [],
                        "seatalk_id": "",
                        "seatalk_group_id": "",
                        "seatalk_email": "",
                        "user_id": "",
                        "parent_msg_id": "a5cd031f-bf9d-42e3-800d-7fd52b94baad"
                    }
                ],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com",
                "parent_msg_id": null
            },
            {
                "id": "4a0144fc-e5bc-46e0-8e01-196c9100276d",
                "type": "human",
                "model_id": "",
                "attachments": [],
                "node_name": "user",
                "display_node_name": "User",
                "agent_group_node_name": "",
                "display_agent_group_node_name": "",
                "input": "who is the founder of garuda indonesia",
                "output": "Garuda Indonesia was founded by the Indonesian government and officially
established as a national airline on January 26, 1949. It started operations with a single Douglas DC-3
aircraft. The airline's founding is often attributed to the efforts of several key figures in the Indonesian
government and aviation sector, rather than a single individual. Would you like to know more about its history
or operations?",
                "content": "who is the founder of garuda indonesia",
                "tool_calls_name": [],
```

```
                "input_args": {},
                "token_usage": {
                    "input_tokens": 0,
                    "cached_input_tokens": 0,
                    "output_tokens": 0,
                    "model_name": ""
                },
                "created_at": 1749125480.756715,
                "duration_ms": 62162.98794746399,
                "start_at": 1749125480.756715,
                "ended_at": 1749125542.919703,
                "child_messages": [
                    {
                        "id": "run--0e74ac31-b69e-4c38-8adf-e7d1b89a7501-0",
                        "type": "ai_call_tool",
                        "model_id": "gpt-4o-mini",
                        "attachments": [],
                        "node_name": "test_hil_agent_348",
                        "display_node_name": "test HIL",
                        "agent_group_node_name": "test_hil_agent_group_345",
                        "display_agent_group_node_name": "",
                        "input": "",
                        "output": "call tools: ['ask_human_tool']",
                        "content": "",
                        "tool_calls_name": [
                            "ask_human_tool"
                        ],
                        "input_args": {},
                        "token_usage": {
                            "input_tokens": 721,
                            "cached_input_tokens": 0,
                            "output_tokens": 36,
                            "model_name": "gpt-4o-mini-2024-07-18"
                        },
                        "created_at": 1749125482.703103,
                        "duration_ms": 57852.72789001465,
                        "start_at": 1749125482.703103,
                        "ended_at": 1749125540.555831,
                        "child_messages": [
                            {
                                "id": "2551eda9-3ab9-4e4c-808b-d5e589677ac8",
                                "type": "tool",
                                "model_id": "",
                                "attachments": [],
                                "node_name": "ask_human_tool",
                                "display_node_name": "ask_human_tool",
                                "agent_group_node_name": "",
                                "display_agent_group_node_name": "",
                                "input": "",
                                "output": "",
                                "content": "yes",
                                "tool_calls_name": [],
                                "input_args": {
                                    "question": "Are you asking about the founder of Garuda Indonesia or
would you like more general information about the airline?"
                                },
                                "token_usage": {
                                    "input_tokens": 0,
                                    "cached_input_tokens": 0,
                                    "output_tokens": 0,
                                    "model_name": ""
                                },
                                "created_at": 1749125540.555831,
                                "duration_ms": 57852.72789001465,
                                "start_at": 1749125482.703103,
                                "ended_at": 1749125540.555831,
                                "child_messages": [],
                                "seatalk_id": "",
                                "seatalk_group_id": "",
                                "seatalk_email": "",
                                "user_id": "",
```

```
                                "parent_msg_id": null
                            }
                        ],
                        "seatalk_id": "",
                        "seatalk_group_id": "",
                        "seatalk_email": "",
                        "user_id": "",
                        "parent_msg_id": "4a0144fc-e5bc-46e0-8e01-196c9100276d"
                    },
                    {
                        "id": "run--d158216f-6471-4946-b782-99923c057f5b-0",
                        "type": "ai",
                        "model_id": "gpt-4o-mini",
                        "attachments": [],
                        "node_name": "test_hil_agent_348",
                        "display_node_name": "test HIL",
                        "agent_group_node_name": "test_hil_agent_group_345",
                        "display_agent_group_node_name": "",
                        "input": "",
                        "output": "",
                        "content": "Garuda Indonesia was founded by the Indonesian government and
officially established as a national airline on January 26, 1949. It started operations with a single Douglas
DC-3 aircraft. The airline's founding is often attributed to the efforts of several key figures in the
Indonesian government and aviation sector, rather than a single individual. Would you like to know more about
its history or operations?",
                        "tool_calls_name": [],
                        "input_args": {},
                        "token_usage": {
                            "input_tokens": 768,
                            "cached_input_tokens": 0,
                            "output_tokens": 78,
                            "model_name": "gpt-4o-mini-2024-07-18"
                        },
                        "created_at": 1749125542.919703,
                        "duration_ms": 62162.98794746399,
                        "start_at": 1749125480.756715,
                        "ended_at": 1749125542.919703,
                        "child_messages": [],
                        "seatalk_id": "",
                        "seatalk_group_id": "",
                        "seatalk_email": "",
                        "user_id": "",
                        "parent_msg_id": "4a0144fc-e5bc-46e0-8e01-196c9100276d"
                    }
                ],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com",
                "parent_msg_id": null
            }
        ],
        "input_output_messages": [
            {
                "id": "8a29a78d-b4e5-404b-a7d7-a448720f11e2",
                "input": "hi there",
                "early_output": "",
                "output": "Hello! How can I assist you today?",
                "started_at": 1749124783.516026,
                "early_output_at": 0.0,
                "ended_at": 1749124785.95539,
                "model_id_to_token_usage": {
                    "-": {
                        "input_tokens": 0,
                        "cached_input_tokens": 0,
                        "output_tokens": 0,
                        "model_name": ""
                    },
                    "gpt-4o-mini": {
                        "input_tokens": 127,
                        "cached_input_tokens": 0,
```

Lemeng Shi / 2025-11-26 17:38:00 CONFIDENTIAL © Shopee Limited


```
                        "output_tokens": 10,
                        "model_name": "gpt-4o-mini-2024-07-18"
                    }
                },
                "total_duration_ms": 2439.363956451416,
                "attachments": [],
                "output_attachments": [],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com"
            },
            {
                "id": "6391454a-f70f-4e31-9676-327239b62ea0",
                "input": "im fine",
                "early_output": "",
                "output": "Glad to hear that! If you have any questions or need assistance with something,
feel free to ask.",
                "started_at": 1749124972.476691,
                "early_output_at": 0.0,
                "ended_at": 1749124973.835925,
                "model_id_to_token_usage": {
                    "-": {
                        "input_tokens": 0,
                        "cached_input_tokens": 0,
                        "output_tokens": 0,
                        "model_name": ""
                    },
                    "gpt-4o-mini": {
                        "input_tokens": 146,
                        "cached_input_tokens": 0,
                        "output_tokens": 22,
                        "model_name": "gpt-4o-mini-2024-07-18"
                    }
                },
                "total_duration_ms": 1359.234094619751,
                "attachments": [],
                "output_attachments": [],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com"
            },
            {
                "id": "a5cd031f-bf9d-42e3-800d-7fd52b94baad",
                "input": "Got quoted File:\nfilename: gsa-visa-order-form.pdf\nfile_content:\n```\nGlobal
Singapore Associates Pte Ltd\n  The Riverwalk #B1-25\n  20 Upper Circular Road\n  Singapore, 058416\n  +65 8722
1482\n  +65 9387  7672\n  VISA ORDER FORM  info@globalsingapore.sg\n  www.globalsingapore.sg\n\n\nTraveller’s
details:\n\n  Applicant’s full name (as in the passport):  Original documents submitted:\n  Passport  Singapore
ID\n  Nationality:  Marriage certificate  Birth certificate\n\n  Other
_____\n\n\n\n  Contact person’s details:\nPlease provide contact details of the
person who will be contacted with regards to this application. This could be someone applying for a visa
either\nthemselves or on behalf of the applicant, such as a travel agent, secretary, PA, family member or a
friend.\n\nName  Phone number  E mail  Company name\n\n\n\nCountry  visa requested for:\n\nCountry  Entry date
Exit date  Type of visa  Multiplicity  Service\n  (dd/mm/yyyy)  (dd/mm/yyyy)  (business/tourist/transit)
(single/double/multiple)  (nor mal/urgent)\n  Business  Single  Normal\n  Tourist  Double  Express\n  Transit
Multiple  Urgent\n\n\n  Passport collection instructions:\n\n\n  Self-collection  Courier service  Delivery
address:\n  (extra charge applies)\n\n\n\n\n\n  I agree to the Glob  al Singapore Associates Pte Ltd Data
Protection Notice as stipulated on the Global Singapore website.\n  I can confirm acceptance of the Global
Singapore Associates Pte Ltd Terms and Conditions as stipulated on the Global Singapore website.\n\n  Date:
Signature:\n\n\n\nINTERNAL US  E ONLY\n\nDocuments received:  Passport returned on:\nInvoice No:  Signature on
collection:\nPayment received on:\nMethod of payment:\n\n\n  Copyright © 2012 · Global Singapore Associates
Pte. Ltd · All rights reserved\n\n```\n\nwhat is this file about",
                "early_output": "",
                "output": "The file you quoted appears to be a visa order form from Global Singapore
Associates Pte Ltd. It includes sections for the applicant's details, a contact person's information, visa
request details (such as the country, entry and exit dates, type of visa, and service type), and passport
collection instructions. It also includes statements regarding data protection and terms and conditions, as
well as sections for internal use, such as document receipt confirmation and payment information. Essentially,
it's a form that individuals or organizations would fill out to apply for a visa through this agency.",
                "started_at": 1749125310.7560608,
```

```
                "early_output_at": 0.0,
                "ended_at": 1749125315.287862,
                "model_id_to_token_usage": {
                    "-": {
                        "input_tokens": 0,
                        "cached_input_tokens": 0,
                        "output_tokens": 0,
                        "model_name": ""
                    },
                    "gpt-4o-mini": {
                        "input_tokens": 595,
                        "cached_input_tokens": 0,
                        "output_tokens": 111,
                        "model_name": "gpt-4o-mini-2024-07-18"
                    }
                },
                "total_duration_ms": 4531.801223754883,
                "attachments": [
                    {
                        "name": "gsa-visa-order-form.pdf",
                        "type": "file",
                        "file_type": "pdf",
                        "content": "",
                        "size_kilobytes": 131.9248046875
                    }
                ],
                "output_attachments": [],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com"
            },
            {
                "id": "4a0144fc-e5bc-46e0-8e01-196c9100276d",
                "input": "who is the founder of garuda indonesia",
                "early_output": "",
                "output": "Garuda Indonesia was founded by the Indonesian government and officially
established as a national airline on January 26, 1949. It started operations with a single Douglas DC-3
aircraft. The airline's founding is often attributed to the efforts of several key figures in the Indonesian
government and aviation sector, rather than a single individual. Would you like to know more about its history
or operations?",
                "started_at": 1749125480.756715,
                "early_output_at": 0.0,
                "ended_at": 1749125542.919703,
                "model_id_to_token_usage": {
                    "-": {
                        "input_tokens": 0,
                        "cached_input_tokens": 0,
                        "output_tokens": 0,
                        "model_name": ""
                    },
                    "gpt-4o-mini": {
                        "input_tokens": 1489,
                        "cached_input_tokens": 0,
                        "output_tokens": 114,
                        "model_name": "gpt-4o-mini-2024-07-18"
                    }
                },
                "total_duration_ms": 62162.98794746399,
                "attachments": [],
                "output_attachments": [],
                "seatalk_id": "",
                "seatalk_group_id": "",
                "seatalk_email": "",
                "user_id": "frederic.ronaldi@shopee.com"
            }
        ],
        "pending_interrupts": [],
        "last_error_data": {
            "error_message": "",
            "error_exception": "",
```

```
                "last_updated_at": 1749125543
            }
        }
    }
}
```

This endpoint returns:
- All messages in the conversation
- File attachments and images
- Debug information and execution tree
- Current thread status **`(idle, running, interrupted, error)`**

More detailed explanation of get_messages response (we will only explain the important ones):

- status **`(running, interrupted, error, idle) =`** shows what's the current thread status
  - **`running`**: Orchestrator is actively processing the message.
  - **`interrupted`**: Orchestrator is paused and **`waiting for user input`** to resume.
  - **`error`**: Orchestrator encountered an execution failure (provide **`error_code`** for programmatic handling).
  - **`idle`**: Orchestrator is not processing and is **`waiting for user input to start execution`**.
- root_agent_group_id = identifies the primary agent id responsible for the conversation
- message_tree = a hierarchical representation of all the tool calls, human messages, messages between agents, knowledge base retrievals, etc. (It's the same as debug tree you see in the platform)
- input_output_messages = a simplified, linear view of the conversation focusing on human inputs and AI outputs **`(most likely you will focus on this)`**
  - early_output = early message if any
  - input = human input
  - output = AI final output
  - started_at
  - ended_at
  - total_duration_ms
  - attachments = input attachment that you attached
    - name
    - type **`(image/file)`**
    - content = if image, the content here will be base64
    - size_kilobytes
  - output_attachments = attachment result from KB or tool
    - same as attachments above
  - model_id_to_token_usage = this is the total token used since start of the conversation to end, grouped by model id (such as gpt-4o-mini, etc)
- input_output_messages_with_hil (New!)
  - same as `input_output_messages` but it will also include `ask_human` Human In the Loop (question answer) as input output as well.
  - it useful when you have ask_human tool in your agent tools, and you also want to render this HIL interrupt as agent output.
- pending_interrupts = if the thread is interrupted, the interrupt value will be shown here
  - interrupt_type **`(human_in_the_loop/tool_authorization)`**
  - data = interrupt data, it depends on the interrupt type
  - message = this is the most important one, this one is the message to the user
- last_error_data = last error if any
  - error_message
  - error_exception
  - last_updated_at

Examples

cURL

Basic message

Lemeng Shi / 2025-11-26 17:38:00 CONFIDENTIAL © Sea Limited

```
curl -X POST "https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke" \
  -H "Content-Type: application/json" \
  -d '{
    "endpoint_deployment_hash_id": "abc123",
    "endpoint_deployment_key": "secret-key",
    "user_id": "user-001",
    "message": {
      "input_str": "Hello, can you help me?",
      "thread_id": ""
    },
    "mode": "sync"
  }'
```

With files:

```
curl -X POST "https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke_with_files" \
  -F "endpoint_deployment_hash_id=abc123" \
  -F "endpoint_deployment_key=secret-key" \
  -F "user_id=user-001" \
  -F "input_str=Please analyze this document" \
  -F "thread_id=" \
  -F "mode=sync" \
  -F "files=@document.pdf"
```

Continue interrupt:

```
curl -X POST "https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/continue_interrupt" \
  -H "Content-Type: application/json" \
  -d '{
    "endpoint_deployment_hash_id": "abc123",
    "endpoint_deployment_key": "secret-key",
    "thread_id": "thread-456",
    "interrupt_type": "human_in_loop",
    "interrupt_command": {
      "answer": "Yes, please proceed"
    },
    "mode": "sync"
  }'
```

Get messages:

```
curl --location 'http://smart.shopee.io/apis/smart/v1/orchestrator/deployments/get_messages' \
--header 'Content-Type: application/json' \
--data '{
    "endpoint_deployment_hash_id": "abc123",
    "endpoint_deployment_key": "secret-key",
    "thread_id": "thread-456"
}'
```

Frequently Asked Questions

How to use the Agent API endpoint

Generally for Agent API endpoint, there are two modes that user can use, **sync** and **async** (each having their own recommended flow)

1. **Sync**
    a. In this case, user just need to hit the invoke endpoint `/orchestrator/deployments/invoke` with mode sync

   b. User can get the response immediately after the endpoint finished
   c. Limitation: this mode only support text response, to get more complete response, user can use `orchestrator/deployments/get_messages` endpoint
2. **Async**
   a. In this case, user just need to hit the invoke endpoint `orchestrator/deployments/invoke` with mode async
   b. The endpoint will return immediately
   c. User need to do polling to get the messages from endpoint `orchestrator/deployments/get_messages` (you can check the details above)
      i. **`Please refrain to do the polling lower than 3 seconds interval`**
   d. This endpoint will return complete data including the image response from KB / Tools if any

How to upload image / files in Agent API endpoint

Use `/orchestrator/deployments/invoke_with_files` endpoint. Make sure you send the request in FormData format (`multipart/form-data`).

Example request with cURL, sending an image and a document:

```
curl -X POST "https://smart.shopee.io/apis/smart/v1/orchestrator/deployments/invoke_with_files" \
  -F "endpoint_deployment_hash_id=abc123" \
  -F "endpoint_deployment_key=secret-key" \
  -F "user_id=user-001" \
  -F "input_str=Please analyze these documents" \
  -F "thread_id=" \
  -F "mode=sync" \
  -F "files=@document.pdf" \
  -F "files=@image.png"
```

How to get the Agent reply with image

First, you need to make sure that your **`Knowledge Base`** *(you can check from the documents/chunks and validate if there are images there)* or **`Tool`** *(make sure that your tool return image in base64 format)* are returning image already.

Currently `/orchestrator/deployments/invoke` and `/orchestrator/deployments/invoke_with_files` can only reply in text.

So to get more complete response, including image from the Knowledge Base or Tool, you need to use `/orchestrator/deployments/get_messages` endpoint. (you can check the details above)

The image placement (placeholder) will be returned as Markdown Image style. with the url of ImageID.

ex: `![Image](image/980712)`

later you can get this `image/980712` file/image content from output_attachments field. The content will be base64.

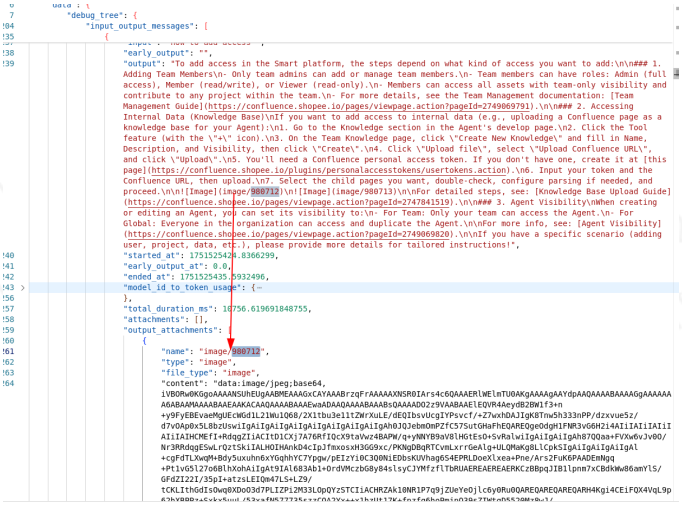

How to invoke agents with End-User Tool Authentication enabled via endpoint deployment

If end-user tool authentication is enabled for your agent, the tool call will fail unless credentials are supplied directly via the `user_credentials` argument as such:

```
"user_credentials": {
     "token_inputs": [
         {
             "token": "your token"
             "ref": "confluence_token",
             "domain": "confluence.shopee.io"
         },
         {
             "token": "your",
             "ref": "google_refresh_token"
         }
     ]
 }
```

For the `/invoke_with_files` endpoint, you have to provide an equivalent JSON string of the object instead

- e.g. `{"token_inputs": [{"ref": "jira_token", "token": "my token", "domain": "jira.shopee.io"}]}`

Currently `/continue_interrupt` does not support this argument – it will reuse `user_credentials` from original invocation

The tokens you may use are:

No	Linked Account Type	Token ref	Available domain values
1	Jira	`jira_token`	`jira.shopee.io` `jira.garenanow.com`

2	Confluence	`confluence_token`	`confluence.shopee.io`
			`confluence.garenanow.com`
			`confluence.fin.insea.io`

3	Grafana	`grafana_token`	`grafana.shopee.io` `grafana.idata.shopeemobile.com`
4	Log Platform	`log_platform_token`	
5	Google	`google_refresh_token`	

Note that end-user authentication is currently only enabled for official tools. For more information please refer to End User Auth for Tools

Best Practices

1. **Store thread IDs** to maintain conversation context
2. **Handle interrupts gracefully** by checking the `is_interrupted` field
3. **Use async mode** for long-running operations or when expecting image responses
4. **Validate file types and sizes** before uploading
5. **Keep API keys secure** and rotate them regularly