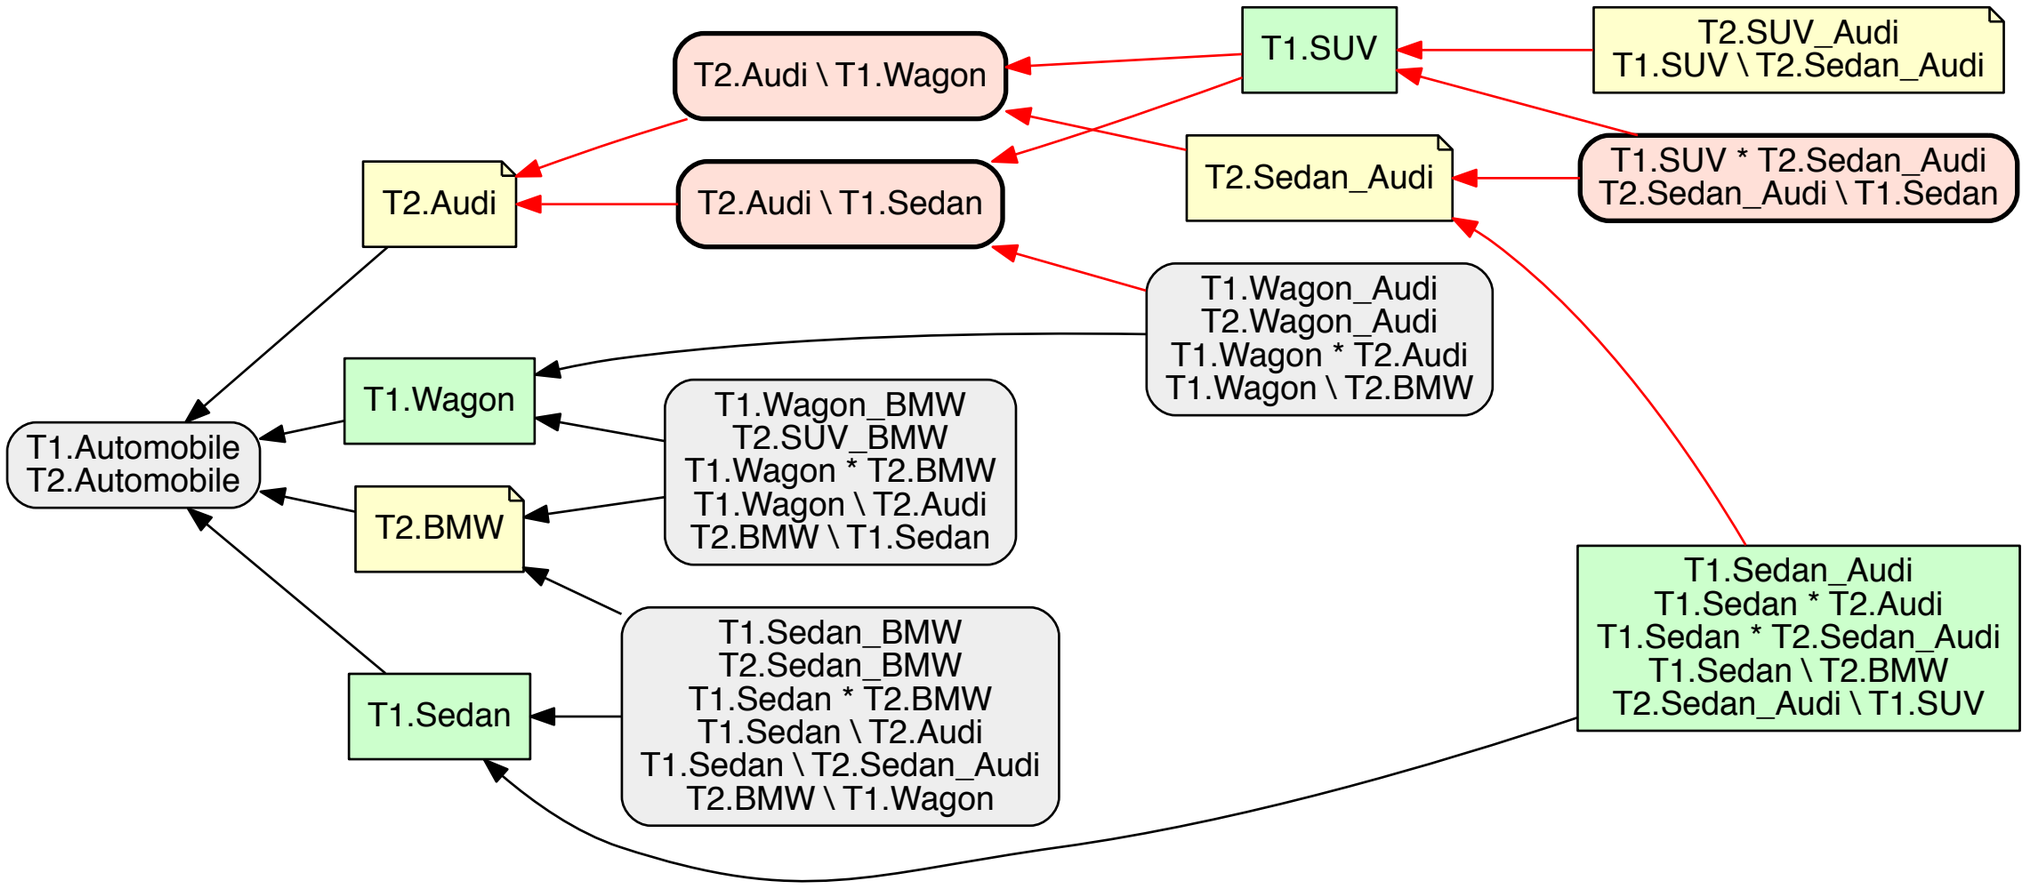

Nodes	
congruent	4
T1	4
T2	4
NEW	3
Edges	
is_a (inferred)	10
is_a (input)	10