


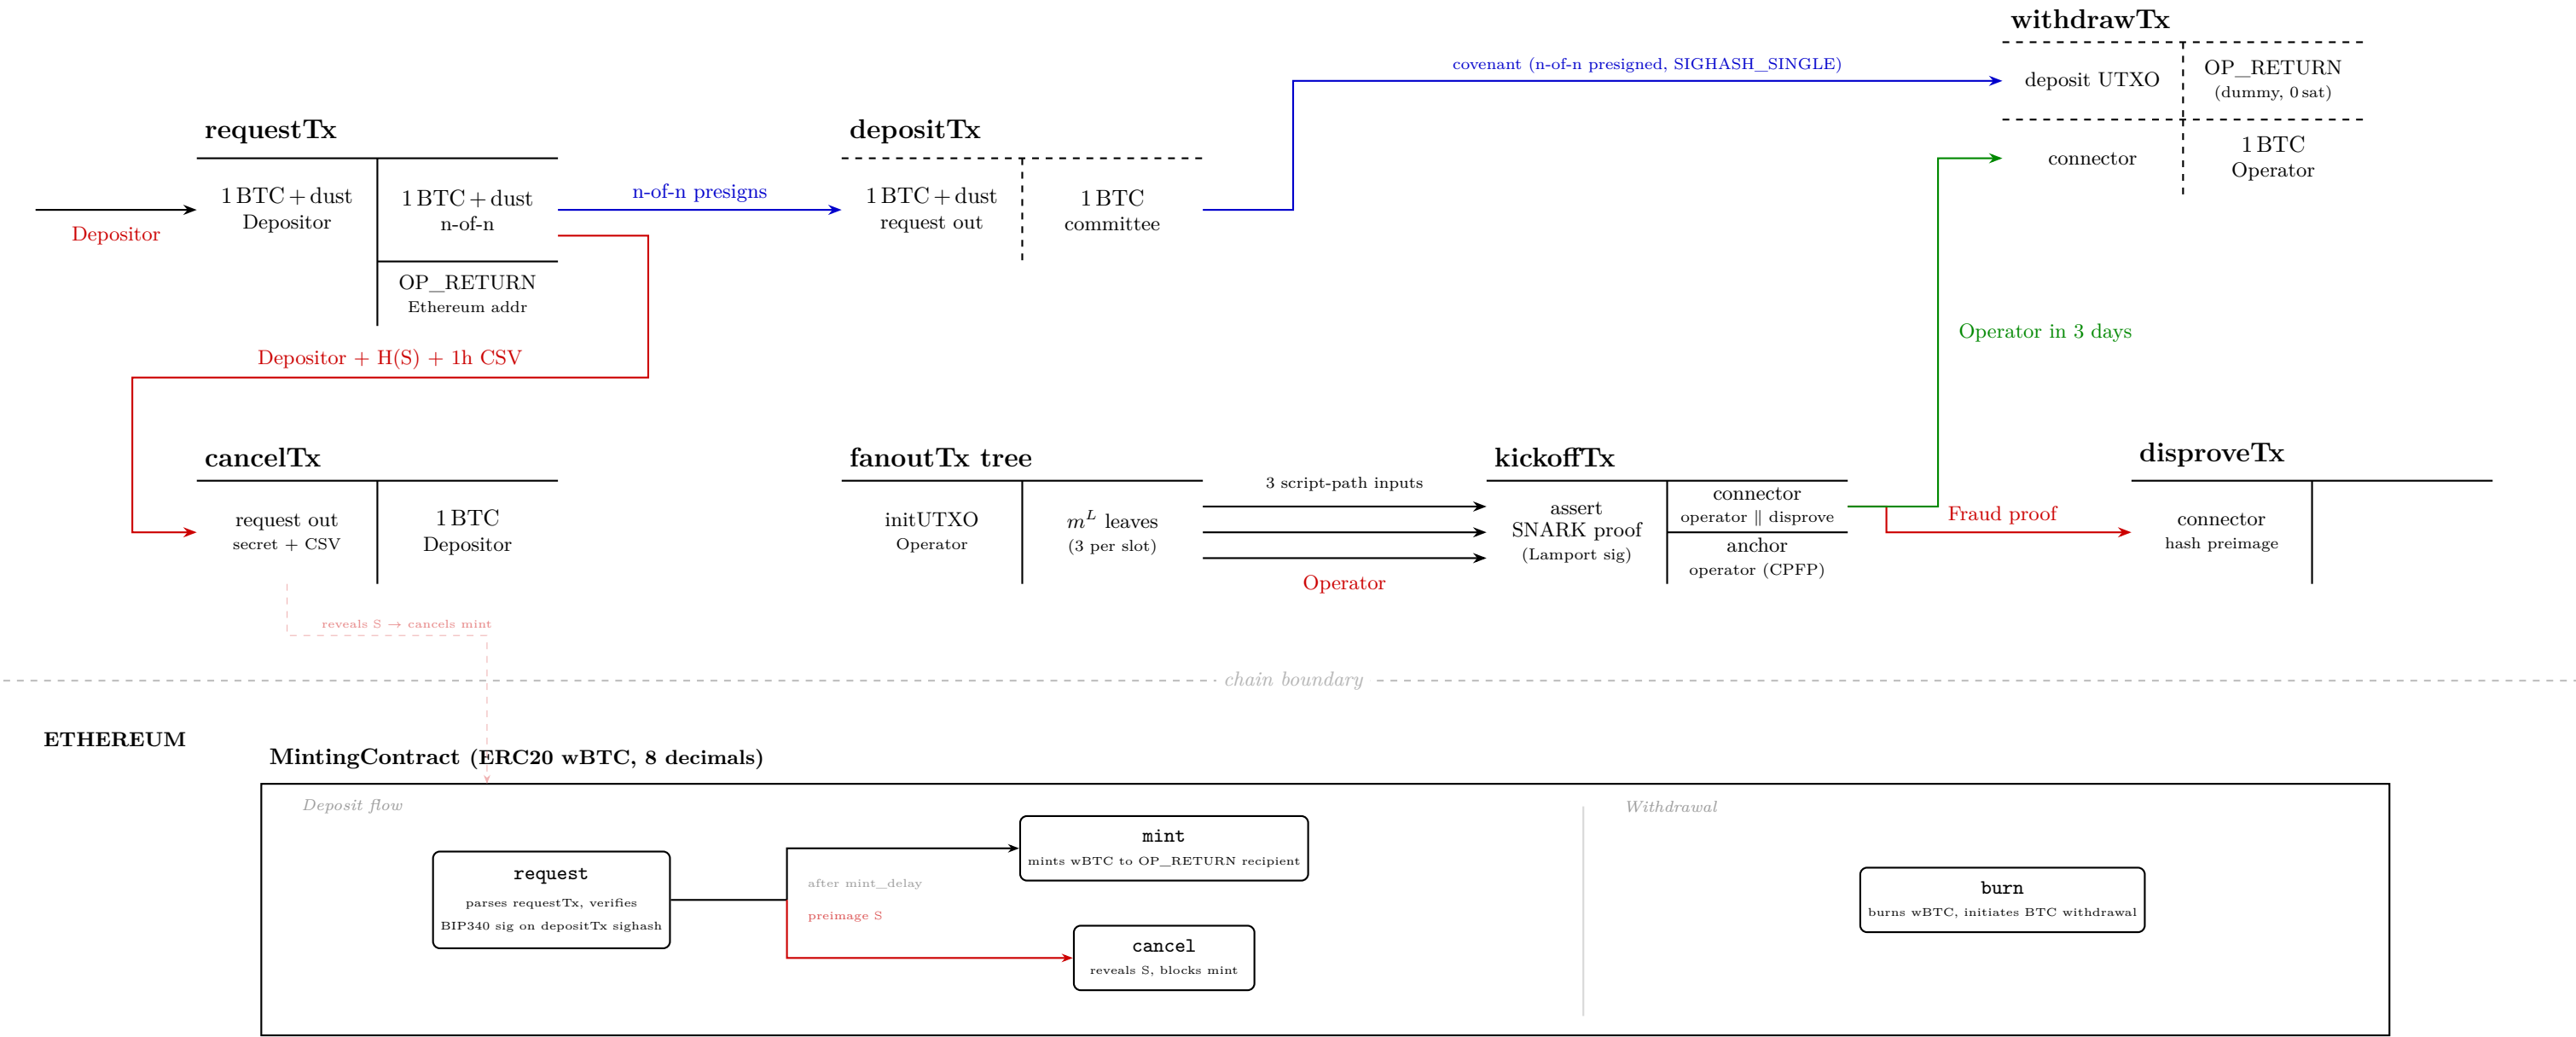

- Legend**
- Committee (n-of-n presigned)
 - Operator signs
 - Fraud proof / Cancel
 - Funding / general spend

Presigning

Tx	Signer	Spend
requestTx	Depositor	key-spend
depositTx	Committee	key-spend
cancelTx	Depositor	script-path
fanoutTx	Operator	key-spend
kickoffTx ×3	Operator	script-path
withdrawTx in0	Committee	SH_SINGLE
withdrawTx in1	Operator	key-spend
disproveTx	(none)	hash preimage

- Key Properties**
- All outputs Taproot (P2TR)
 - All hashes SHA-256 (32-byte)
 - kickoffTx txid is deterministic (Lamport sig is witness-only)
 - withdrawTx in[0]: SIGHASH_SINGLE commits to OP_RETURN out[0]; operator sets out[1] (payment/fees)
 - Timelock via nSequence committed in committee's presigned input

Parameters

DEPOSIT_SIZE = 1 BTC DUST = 546 sat
DEPOSIT_COUNT = 10 000 OPERATORS = 50
COMMITTEE = 10 (n-of-n) PROOF = 256 B
FANOUT: depth 4, branching 10, 3 chunks
KICKOFF_TIMEOUT ≈ 3 days DEPOSIT_TIMEOUT ≈ 1 h