

Name: Deepankar Sharma

course: BCA-6th

roll no: 2092014

Subject: Computer Graphics

Index

S. No.	Objective	Date	Signature
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			
13			

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-1

OBJECTIVE- DRAW A SMILEY FACE THOUGH GRAPHICS


SYNTAX :-

```
#include <graphics.h>

int main()
{
    int gr = DETECT, gm;
    initgraph(&gr, &gm, "C:\\\\Turbo3\\BGI");
    setcolor(YELLOW);
    circle(300, 100, 40);
    setfillstyle(SOLID_FILL, YELLOW);
    floodfill(300, 100, YELLOW);
    setcolor(BLACK);
    setfillstyle(SOLID_FILL, BLACK);
    fillellipse(310, 85, 2, 6);
    fillellipse(290, 85, 2, 6);
    ellipse(300, 100, 205, 335, 20, 9);
    ellipse(300, 100, 205, 335, 20, 10);
    ellipse(300, 100, 205, 335, 20, 11);
    getch();
    closegraph();

    return 0;
}}
```

OUTPUT:

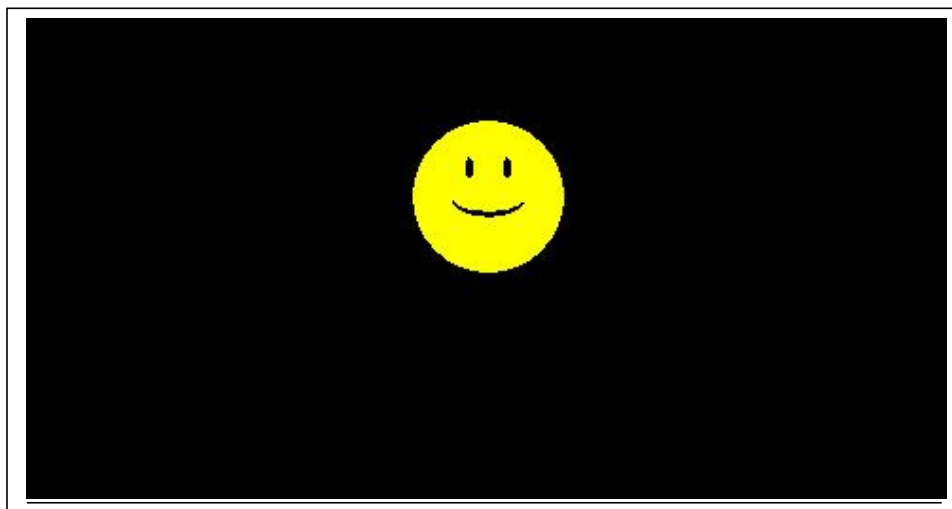

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-2

OBJECTIVE- To divide your screen into four region, draw circle, rectangle, ellipse ,square.

SYNTAX :-

```
#include<conio.h>
#include<graphics.h>
#include<stdio.h>
int main()
{
int gdriver = DETECT, gmode;
int xmax,ymax;
initgraph(&gdriver, &gmode,"c:\\\\turbo3\\bgi");
xmax = getmaxx();
ymax = getmaxy();
line(xmax/2,0,xmax/2,ymax);
line(0,ymax/2,xmax,ymax/2);
outtextxy (xmax/2,ymax/2,"(0,0)");

setcolor(GREEN);
setfillstyle(HATCH_FILL,RED);
circle(170,125,100);
outtextxy (160,135,"circle");
floodfill(170,125,GREEN);

setcolor(YELLOW);
setfillstyle(2,RED);
rectangle(58,251,304,392);
outtextxy (70,300,"Rectangle");
floodfill(70,351,YELLOW);


setcolor(BLUE);
setfillstyle(3,RED);
rectangle(400,50,500,150);
outtextxy (450,70,"square");
floodfill(450,80,BLUE);

setcolor(RED);
setfillstyle(4,RED);
ellipse(500,300,0,360,75,25);
outtextxy (500,300,"ellipse");
```

```
floodfill(500,300,RED);
```

```
getch();  
closegraph();  
return 0;  
}
```

OUTPUT:

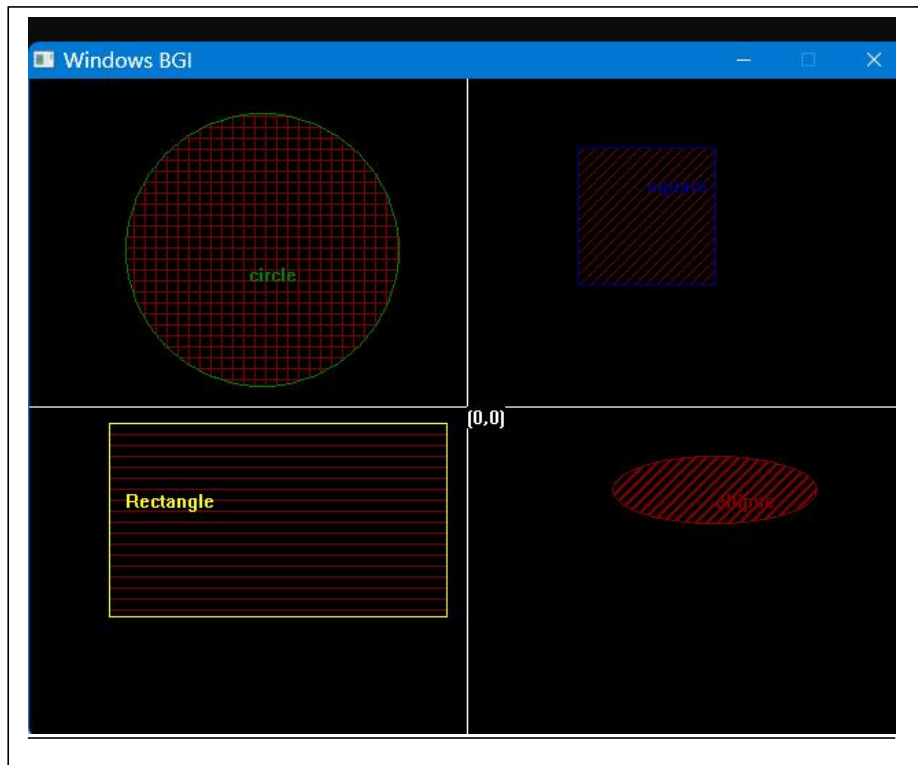

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE- 3

OBJECTIVE- DRAW A HOUSE THOUGH GRAPHICS

SYNTAX :-
#include <graphics.h>

```
int main() {  
    int gd = DETECT, gm;  
    initgraph(&gd, &gm, "");
```


```

rectangle(100, 200, 300, 400);
line(100, 200, 200, 100);
line(200, 100, 300, 200);
rectangle(120, 220, 180, 280);
rectangle(220, 220, 280, 280);
rectangle(160, 320, 240, 400);

getch();
closegraph();
return 0;
}

```

OUTPUT:

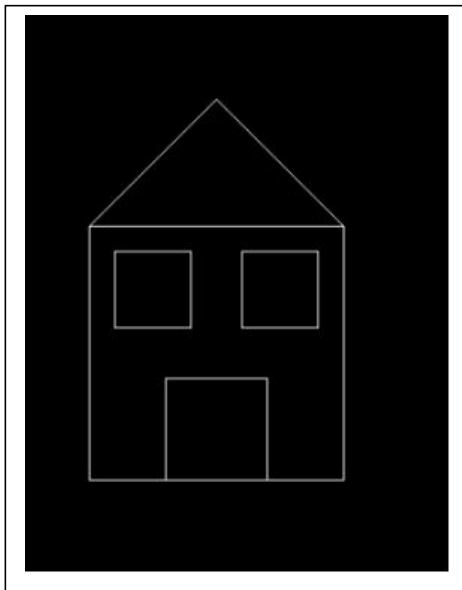

NAME- Deepankar Sharma
 COURSE- BCA
 ROLL NO- 2092014
 SUBJECT- Computer graphics lab

PRACTICLE-4

OBJECTIVE- TO IMPLEMENT THE DDA LINE GENERATION ALGORITHM THROUGH GRAPHICS

SYNTAX :-

```

#include<graphics.h>
#include<conio.h>
#include<stdio.h>
int main()
{
    int gd = DETECT ,gm, i;
    float x, y,dx,dy,steps;
    int x0, x1, y0, y1;
    initgraph(&gd, &gm, "C:\\\\TC\\\\BGI");


```

```

x0 = 200 , y0 = 300, x1 = 500, y1 = 100;
dx = (float)(x1 - x0);
dy = (float)(y1 - y0);
if(dx>=dy)
{
    steps = dx;
}
else
{
    steps = dy;
}
dx = dx/steps;
dy = dy/steps;
x = x0;
y = y0;
i = 1;
while(i<= steps)
{
    putpixel(x, y, WHITE);
    x += dx;
    y += dy;
    i=i+1;
}
getch();
closegraph();
}

```

OUTPUT:

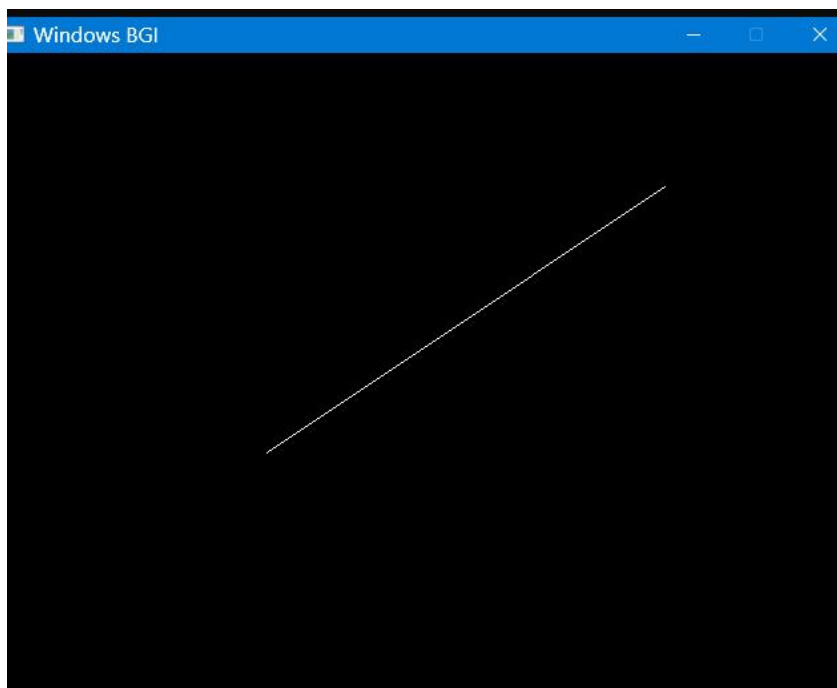

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-5

OBJECTIVE- TO IMPLEMENT THE Bresenham's Line Algorithm THROUGH GRAPHICS

SYNTAX :-

```
#include <iostream>
#include <graphics.h>
void bresenham(int x1, int y1, int x2, int y2) {
    int dx = x2 - x1;
    int dy = y2 - y1;
    int p = 2 * dy - dx;
    int twoDy = 2 * dy;
    int twoDyMinusDx = 2 * (dy - dx);
    int x = x1;
    int y = y1;

    if (x1 > x2) {
        x = x2;
        y = y2;
        x2 = x1;
    } else {
        x = x1;
        y = y1;
    }

    putpixel(x, y, WHITE);


    while (x < x2) {
        x++;
        if (p < 0) {
            p += twoDy;
        } else {
            y++;
            p += twoDyMinusDx;
        }
        putpixel(x, y, BLUE);
    }
}

int main() {
    int gd = DETECT, gm;
    initgraph(&gd, &gm, "");

    bresenham(100, 100, 300, 200);
    getch();
}
```

```
    closegraph();  
}
```

OUTPUT:

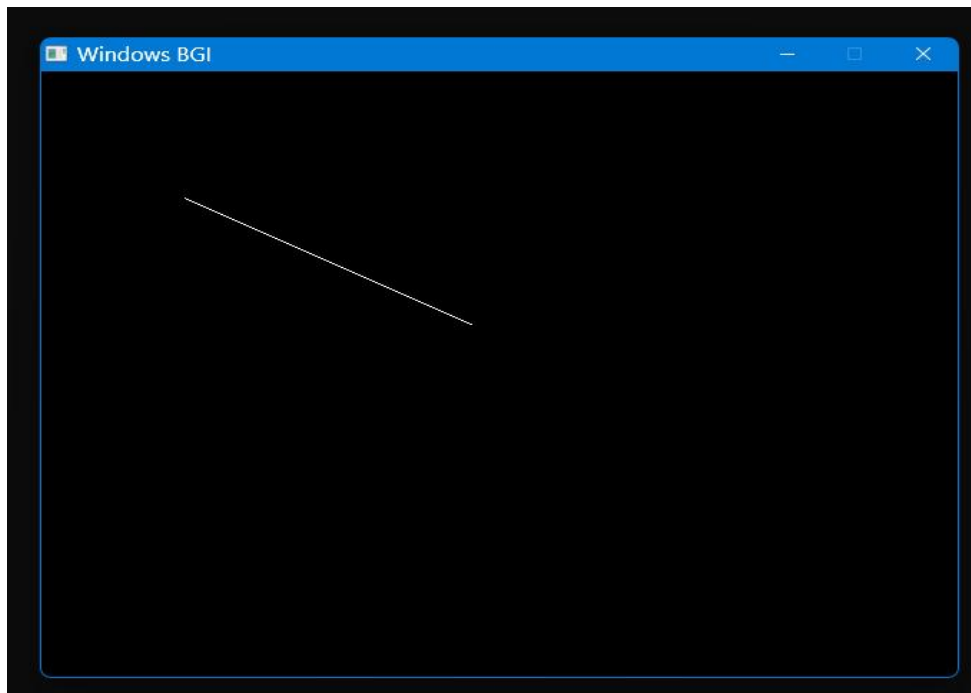

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-6

OBJECTIVE- To implement Mid Point Circle drawing Algorithm through graphics.

SYNTAX:-

```
#include<graphics.h>
#include<iostream>
using namespace std;

// Midpoint Circle drawing Algorithm
void drawMidPointCircle(int x0, int y0, int radius)
{
    int x = radius, y = 0;
    int decisionParam = 1 - radius;

    while (y <= x)
    {
        putpixel(x0 + x, y0 + y, 1);
        putpixel(x0 - x, y0 + y, 2);
        putpixel(x0 + x, y0 - y, 3);
        putpixel(x0 - x, y0 - y, 4);
        putpixel(x0 + y, y0 + x, 5);
        putpixel(x0 - y, y0 + x, 6);
        putpixel(x0 + y, y0 - x, 7);
        putpixel(x0 - y, y0 - x, 8);

        y++;

        if (decisionParam <= 0)
            decisionParam += 2 * y + 1;
        else
        {
            x--;
            decisionParam += 2 * (y - x) + 1;
        }
    }
}

int main()
{
    int gDrive = DETECT;

    int gMode;
```

```

initgraph(&gDrive, &gMode, NULL);

int X0 = 0, Y0 = 0, radius=0 ;

printf("The constraint on the X-axis are(0-%d)\n", getmaxx());
printf("The constraint on the Y-axis are(0-%d)\n", getmaxy());

cout<<("Enter the X0: ");
scanf("%d", &X0);
cout<<("Enter the Y0: ");
scanf("%d", &Y0);
cout<<("Enter the radius: ");
scanf("%d", &radius);

// Function call
// DDA(X0, Y0, X1, Y1);
drawMidPointCircle(X0, Y0, radius);
// DDA(2, 2, 14, 16);
getch();
closegraph();
return 0;
}


```

OUTPUT:-

```

The constraint on the X-axis are(0-639)
The constraint on the Y-axis are(0-479)
Enter the X0: 300
Enter the Y0: 200
Enter the radius: 100

```

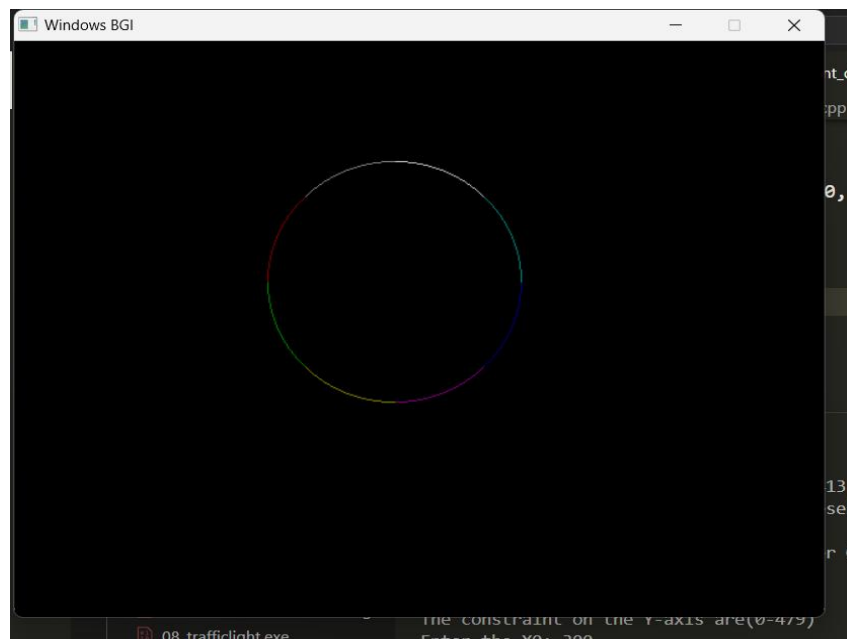

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-7

OBJECTIVE- To implement Bresenham's Circle drawing Algorithm through graphics.

SYNTAX:-

```
#include <graphics.h>
#include <iostream>
using namespace std;

// Midpoint Circle drawing Algorithm
void drawMidPointCircle(int x0, int y0, int radius)
{
    int x = radius, y = 0;
    int decisionParam = 1 - radius;

    while (y <= x)
    {
        putpixel(x0 + x, y0 + y, 1);
        putpixel(x0 - x, y0 + y, 2);
        putpixel(x0 + x, y0 - y, 3);
        putpixel(x0 - x, y0 - y, 4);
        putpixel(x0 + y, y0 + x, 5);
        putpixel(x0 - y, y0 + x, 6);
        putpixel(x0 + y, y0 - x, 7);
        putpixel(x0 - y, y0 - x, 8);

        y++;

        if (decisionParam <= 0)
            decisionParam += 2 * y + 1;
        else
        {
            x--;
            decisionParam += 2 * (y - x) + 1;
        }
    }
}

// Bresenham Circle drawing Algorithm

void drawBresenhamCircle(int x0, int y0, int radius)
{
    int x = 0, y = radius;
    int decisionParam = 3 - 2 * radius;
```

```

while (x <= y)
{
    putpixel(x0 + x, y0 + y, RED);
    putpixel(x0 + y, y0 + x, RED);
    putpixel(x0 - y, y0 + x, RED);
    putpixel(x0 - x, y0 + y, RED);
    putpixel(x0 - x, y0 - y, RED);
    putpixel(x0 - y, y0 - x, RED);
    putpixel(x0 + y, y0 - x, RED);
    putpixel(x0 + x, y0 - y, RED);

    if (decisionParam <= 0)
    {
        x++;
        decisionParam += 4 * x + 6;
    }
    else
    {
        x++;
        y--;
        decisionParam += 4 * (x - y) + 10;
    }
}
}

int main()
{
    int gDrive = DETECT;

    int gMode;

    initgraph(&gDrive, &gMode, NULL);

    int X0 = 0, Y0 = 0, radius = 0;

    printf("The constraint on the X-axis are(0-%d)\n", getmaxx());
    printf("The constraint on the Y-axis are(0-%d)\n", getmaxy());

    cout << ("Enter the X0: ");
    scanf("%d", &X0);
    cout << ("Enter the Y0: ");
    scanf("%d", &Y0);
    cout << ("Enter the radius: ");
    scanf("%d", &radius);


    // Function call
    // DDA(X0, Y0, X1, Y1);
    drawBresenhamCircle(X0, Y0, radius);
    // DDA(2, 2, 14, 16);
    getch();
    closegraph();
}

```

```
    return 0;  
}
```

OUTPUT:-

```
C:\Deepankar\06_semester\TBC 601 Computer  
Graphics\PracticalsVScode>"c:\Deepankar\06_semester\TBC 601 Computer  
Graphics\PracticalsVScode\Home\build\07_Bresenham_circleDrawing.exe"  
The constraint on the X-axis are(0-639)  
The constraint on the Y-axis are(0-479)  
Enter the X0: 200  
Enter the Y0: 300  
Enter the radius: 50
```

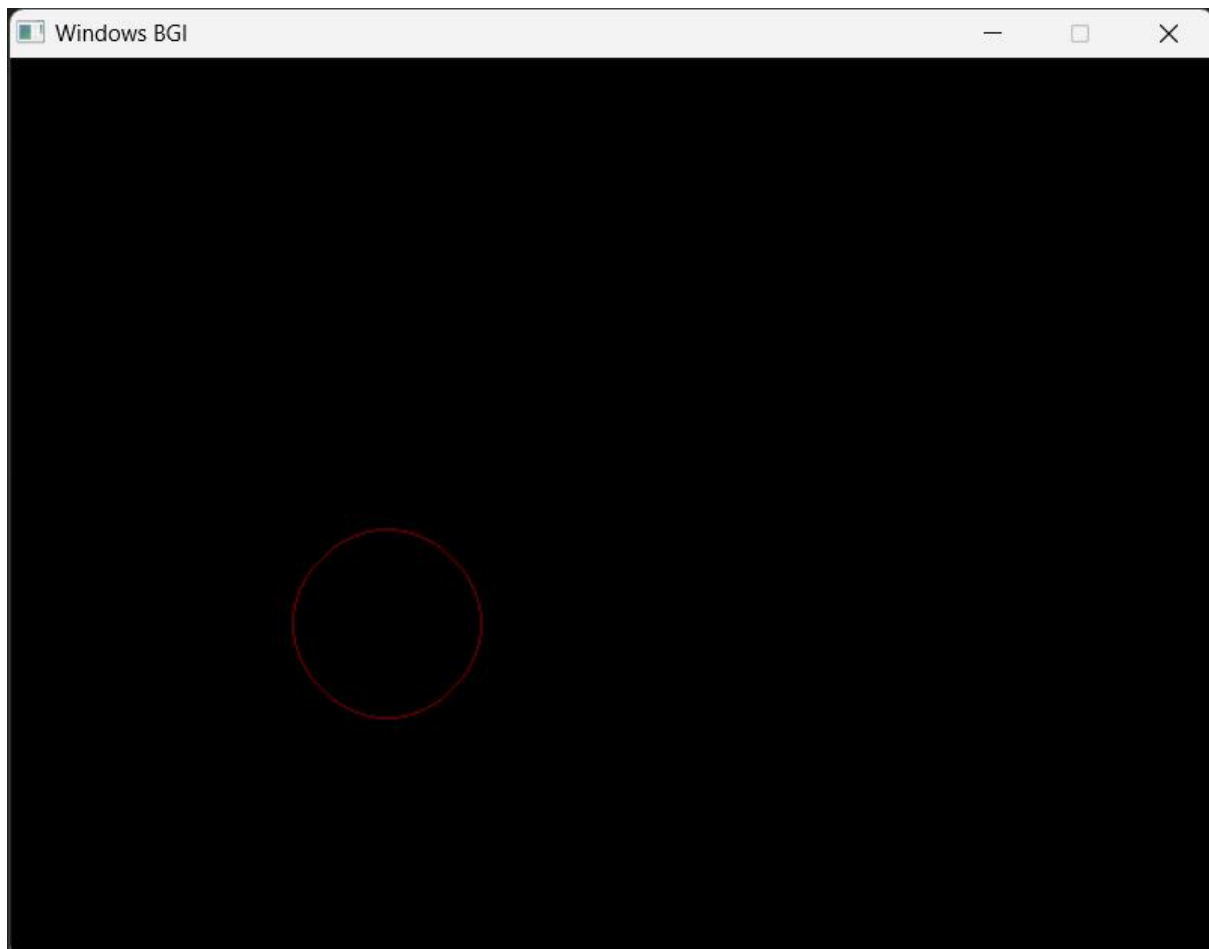

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-8

OBJECTIVE- To implement Blinking Traffic Light through graphics.

SYNTAX:-

```

#include <iostream>
#include <graphics.h>

using namespace std;

void drawTrafficLight(int x, int y, int lightSize, bool isRedOn,
bool isYellowOn, bool isGreenOn)
{
    // Draw black background
    setfillstyle(SOLID_FILL, BLACK);
    bar(x, y, x + lightSize, y + 3 * lightSize);

    // Draw red light
    setfillstyle(SOLID_FILL, isRedOn ? RED : DARKGRAY);
    circle(x + lightSize / 2, y + lightSize / 2, lightSize / 2);
    floodfill(x + lightSize / 2, y + lightSize / 2, WHITE);

    // Draw yellow light
    setfillstyle(SOLID_FILL, isYellowOn ? YELLOW : DARKGRAY);
    circle(x + lightSize / 2, y + lightSize + lightSize / 2,
lightSize / 2);
    floodfill(x + lightSize / 2, y + lightSize + lightSize / 2,
WHITE);

    // Draw green light
    setfillstyle(SOLID_FILL, isGreenOn ? GREEN : DARKGRAY);
    circle(x + lightSize / 2, y + 2 * lightSize + lightSize / 2,
lightSize / 2);
    floodfill(x + lightSize / 2, y + 2 * lightSize + lightSize / 2,
WHITE);
}

int main()
{
    int gd = DETECT, gm;
    initgraph(&gd, &gm, "");

    int lightSize = 100;
    int x = (getmaxx() - lightSize) / 2;
    int y = (getmaxy() - 3 * lightSize) / 2;

    while (true)
    {
        drawTrafficLight(x, y, lightSize, true, false, false);
        delay(400);
        drawTrafficLight(x, y, lightSize, true, true, false);
        delay(400);
        drawTrafficLight(x, y, lightSize, false, false, true);
        delay(400);
        drawTrafficLight(x, y, lightSize, false, true, false);
        delay(400);
    }
}


```

```

    getch();
    closegraph();
    return 0;
}

```

OUTPUT:-

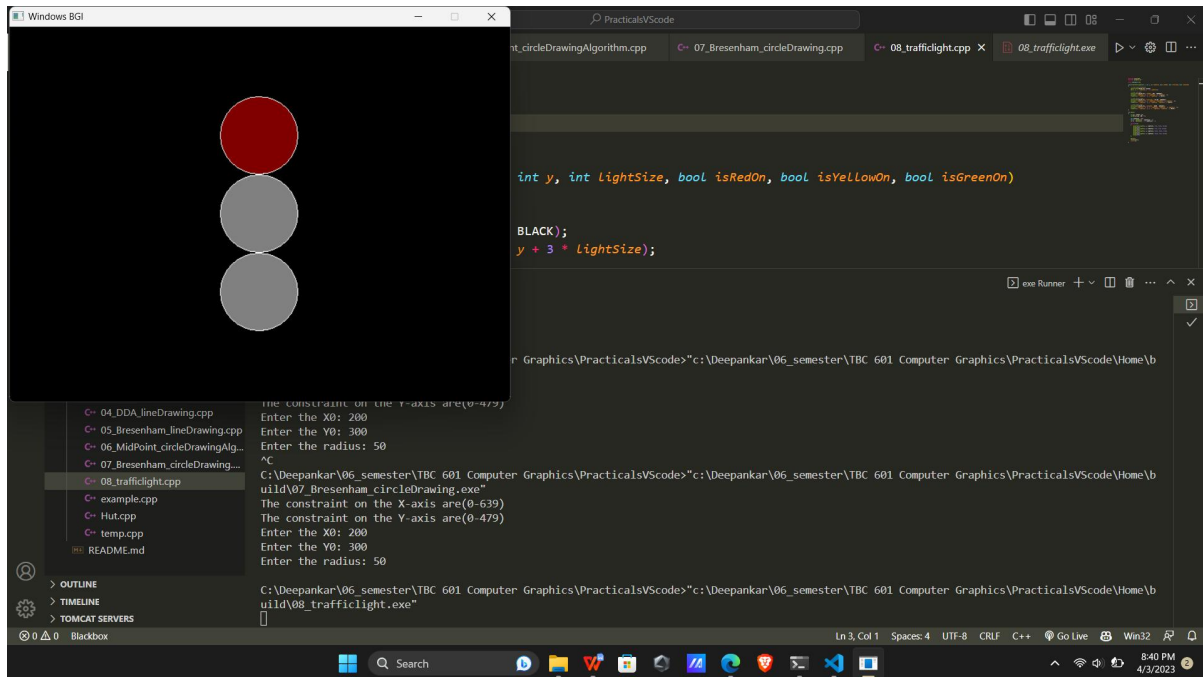

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-9

OBJECTIVE- To implement Point Clipping through graphics.

SYNTAX:-

```
#include <iostream>
#include <graphics.h>

using namespace std;

void clipPoint(int x, int y, int xmin, int ymin, int xmax, int ymax)
{
    if (x < xmin || x > xmax || y < ymin || y > ymax)
        {cout << "Point is outside the clipping window\n";
        putpixel(x, y, RED);}
    else
        {cout << "Point is inside the clipping window\n";
        putpixel(x, y, GREEN);
        outtextxy(x-1, y-1, "(x,y)");}
}

int main()
{
    int gd = DETECT, gm;
    initgraph(&gd, &gm, NULL);

    printf("The constraint on the X-axis are(0-%d)\n", getmaxx());
    printf("The constraint on the Y-axis are(0-%d)\n", getmaxy());

    int x, y, xmin, ymin, xmax, ymax;
    // take input for the clipping window
    cout << "Enter the coordinates of the clipping window (xmin): ";
    cin >> xmin;
    cout << "Enter the coordinates of the clipping window (ymin): ";
    cin >> ymin;
    cout << "Enter the coordinates of the clipping window (xmax): ";
    cin >> xmax ;
    cout << "Enter the coordinates of the clipping window (ymax): ";
    cin >> ymax;

    // draw the clipping window
    rectangle(xmin, ymin, xmax, ymax);
```



```

// take input for the point to be clipped
cout << "Enter the coordinates of the point to be clipped (x): ";
cin >> x;
cout << "Enter the coordinates of the point to be clipped (y): ";
cin >> y;

// draw the point
putpixel(x, y, WHITE);
delay(1000);
// clip the point
clipPoint(x, y, xmin, ymin, xmax, ymax);

getch();
closegraph();
return 0;
}


```

OUTPUT:-

```

C:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode>"c:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode\Home\build\09_PointClipping.exe"
The constraint on the X-axis are(0-639)
The constraint on the Y-axis are(0-479)
Enter the coordinates of the clipping window (xmin): 40
Enter the coordinates of the clipping window (ymin): 40
Enter the coordinates of the clipping window (xmax): 600
Enter the coordinates of the clipping window (ymax): 400
Enter the coordinates of the point to be clipped (x): 300
Enter the coordinates of the point to be clipped (y): 200
Point is inside the clipping window

```

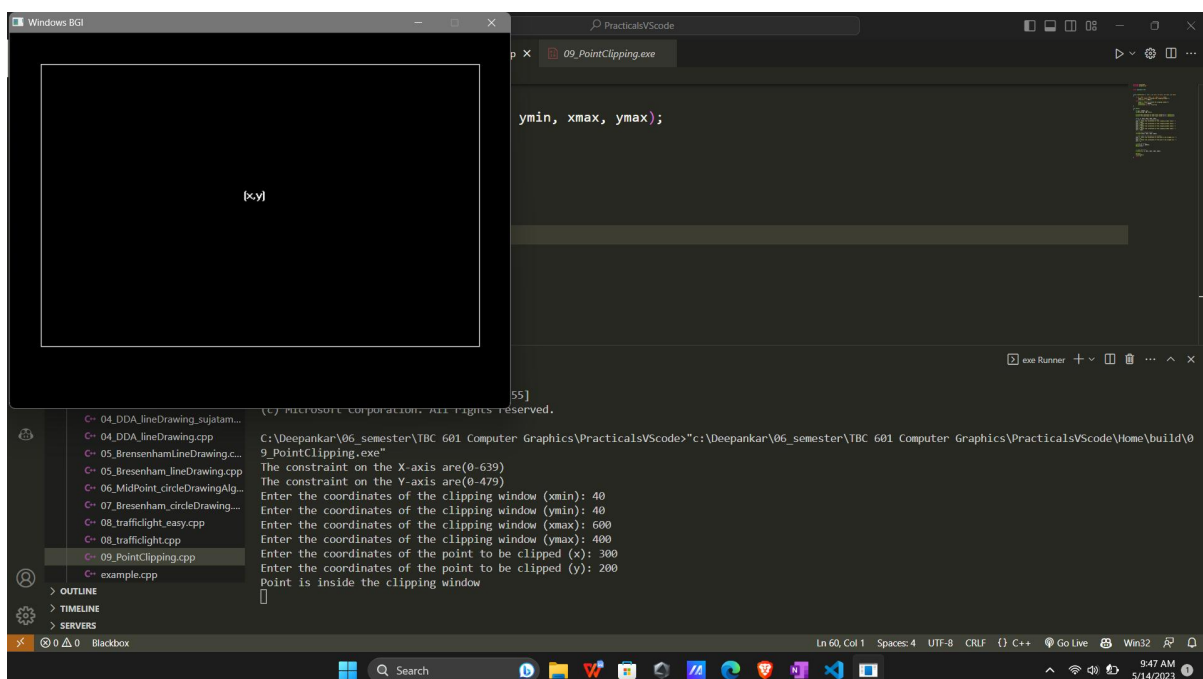

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-10

OBJECTIVE- To implement Cohen Sutherland Line Clipping Algorithm through graphics.

SYNTAX:-

```
#include <iostream>
#include <graphics.h>
```

```
using namespace std;
```

```
const int LEFT= 1; // 0001
const int RIGHT= 2; // 0010
const int BOTTOM= 4; // 0100
const int TOP= 8; // 1000
```

```
int xmin, xmax, ymin, ymax;
```

```
int getOutcode(int x, int y) {
    int code = 0;
    if (x < xmin) code |= LEFT;
    if (x > xmax) code |= RIGHT;
    if (y < ymin) code |= BOTTOM;
    if (y > ymax) code |= TOP;
    return code;
}
```

```
void cohenSutherlandClipLine(int x1, int y1, int x2, int y2) {
    int outcode1 = getOutcode(x1, y1);
    int outcode2 = getOutcode(x2, y2);
    bool accept = false;
    while (true) {
        if (!(outcode1 | outcode2)) { // trivially accepted -> line
            clipping window k andar h
            accept = true;
            break;
        }
        else if (outcode1 & outcode2) { // trivially rejected -> line
            is completely invisible
            break;
        }
        else {
            int x, y;
            int outcode = outcode1 ? outcode1 : outcode2;
```

```

        if (outcode & TOP) {
            x = x1 + (x2 - x1) * (ymax - y1) / (y2 - y1);
            y = ymax;
        }
        else if (outcode & BOTTOM) {
            x = x1 + (x2 - x1) * (ymin - y1) / (y2 - y1);
            y = ymin;
        }
        else if (outcode & RIGHT) {
            y = y1 + (y2 - y1) * (xmax - x1) / (x2 - x1);
            x = xmax;
        }
        else { // LEFT
            y = y1 + (y2 - y1) * (xmin - x1) / (x2 - x1);
            x = xmin;
        }
        if (outcode == outcode1) {
            x1 = x;
            y1 = y;
            outcode1 = getOutcode(x1, y1);
        }
        else {
            x2 = x;
            y2 = y;
            outcode2 = getOutcode(x2, y2);
        }
    }
}

if (accept) {
    setcolor(GREEN);
    line(x1, y1, x2, y2);
    outtextxy(x1, y1, "(x1', y1')");
    outtextxy(x2, y2, "(x2', y2')");
}
}

int main() {
    int gd = DETECT, gm;
    initgraph(&gd, &gm, NULL);
    printf("The constraint on the X-axis are(0-%d)\n", getmaxx());
    printf("The constraint on the Y-axis are(0-%d)\n", getmaxy());

    // take input for the clipping window
    cout << "Enter the coordinates of the clipping window (xmin): ";
    cin >> xmin;
    cout << "Enter the coordinates of the clipping window (ymin): ";
    cin >> ymin;
    cout << "Enter the coordinates of the clipping window (xmax): ";
    cin >> xmax;
}

```

```

cout << "Enter the coordinates of the clipping window (ymax): ";
cin >> ymax;

setcolor(YELLOW);
line(xmin, ymin, xmax, ymin);
line(xmax, ymin, xmax, ymax);
line(xmax, ymax, xmin, ymax);
line(xmin, ymax, xmin, ymin);

int x1 , y1 , x2 , y2 ;
cout << "Enter the coordinates of the line to be clipped (x1): ";
cin >> x1;
cout << "Enter the coordinates of the line to be clipped (y1): ";
cin >> y1;
cout << "Enter the coordinates of the line to be clipped (x2): ";
cin >> x2;
cout << "Enter the coordinates of the line to be clipped (y2): ";
cin >> y2;

cohenSutherlandClipLine(x1, y1, x2, y2);
setcolor(WHITE);
line(x1, y1, x2, y2);
outtextxy(x1, y1, "(x1, y1)");
outtextxy(x2, y2, "(x2, y2)");

getch();
closegraph();
return 0;
}


```

OUTPUT:-

```

C:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode>"c:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode\Home\build\10_cohensutherlandlineclipping.
exe"
The constraint on the X-axis are(0-639)
The constraint on the Y-axis are(0-479)
Enter the coordinates of the clipping window (xmin): 40
Enter the coordinates of the clipping window (ymin): 50
Enter the coordinates of the clipping window (xmax): 450
Enter the coordinates of the clipping window (ymax): 400
Enter the coordinates of the line to be clipped (x1): 10
Enter the coordinates of the line to be clipped (y1): 12
Enter the coordinates of the line to be clipped (x2): 500
Enter the coordinates of the line to be clipped (y2): 435

```

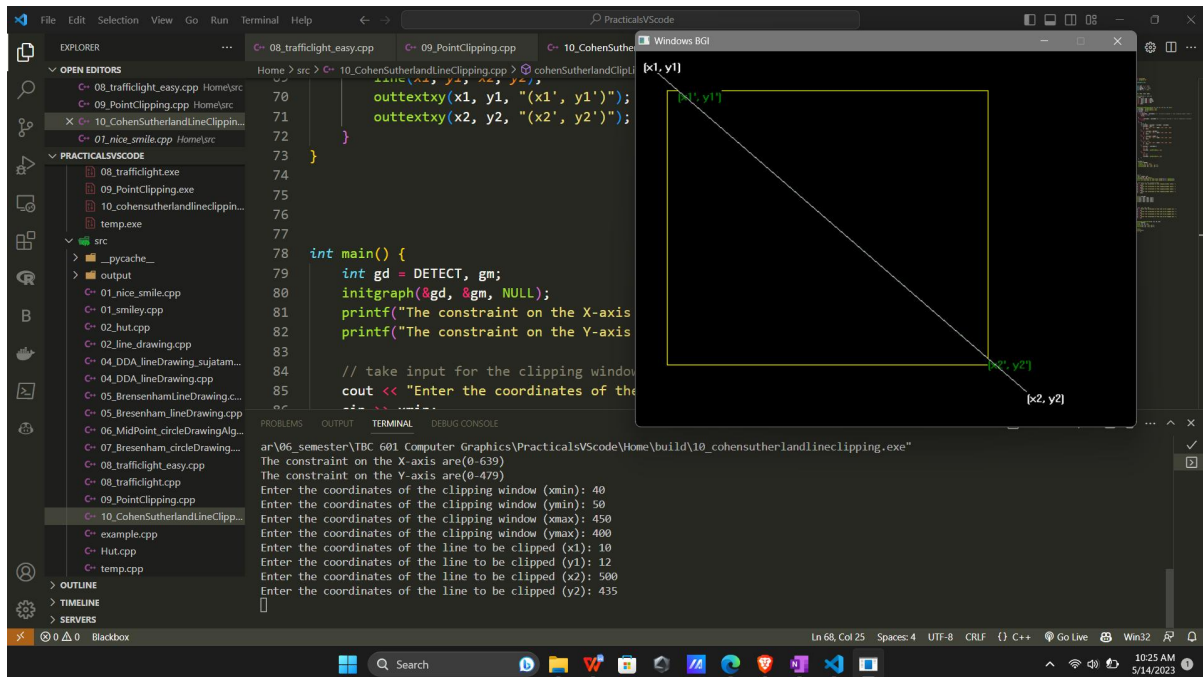

NAME- Deepankar Sharma
 COURSE- BCA
 ROLL NO- 2092014
 SUBJECT- Computer graphics lab

PRACTICLE-11

OBJECTIVE- To implement Liang Barsky Line Clipping Algorithm through graphics.

SYNTAX:-

```
#include <iostream>
#include <graphics.h>

using namespace std;

const int LEFT = 1;    // 0001
const int RIGHT = 2;   // 0010
const int BOTTOM = 4;   // 0100
const int TOP = 8;     // 1000

int xmin, xmax, ymin, ymax;

int getOutcode(int x, int y)
{
    int code = 0;
    if (x < xmin)
```

```

        code |= LEFT;
    if (x > xmax)
        code |= RIGHT;
    if (y < ymin)
        code |= BOTTOM;
    if (y > ymax)
        code |= TOP;
    return code;
}

void cohenSutherlandClipLine(int x1, int y1, int x2, int y2)
{
    int outcode1 = getOutcode(x1, y1);
    int outcode2 = getOutcode(x2, y2);
    bool accept = false;
    while (true)
    {
        if (!(outcode1 | outcode2))
        { // trivially accepted -> line clipping window k andar h
            accept = true;
            break;
        }
        else if (outcode1 & outcode2)
        { // trivially rejected -> line is completely invisible
            break;
        }
        else
        {
            int x, y;
            int outcode = outcode1 ? outcode1 : outcode2;
            if (outcode & TOP)
            {
                x = x1 + (x2 - x1) * (ymax - y1) / (y2 - y1);
                y = ymax;
            }
            else if (outcode & BOTTOM)
            {
                x = x1 + (x2 - x1) * (ymin - y1) / (y2 - y1);
                y = ymin;
            }
            else if (outcode & RIGHT)
            {
                y = y1 + (y2 - y1) * (xmax - x1) / (x2 - x1);
                x = xmax;
            }
            else
            { // LEFT
                y = y1 + (y2 - y1) * (xmin - x1) / (x2 - x1);
                x = xmin;
            }
            if (outcode == outcode1)
            {

```

```

        x1 = x;
        y1 = y;
        outcode1 = getOutcode(x1, y1);
    }
    else
    {
        x2 = x;
        y2 = y;
        outcode2 = getOutcode(x2, y2);
    }
}
}
if (accept)
{
    setcolor(GREEN);
    line(x1, y1, x2, y2);
    outtextxy(x1, y1, "(x1', y1')");
    outtextxy(x2, y2, "(x2', y2')");
}
}

```

```

// Function to implement Liang-Barsky algorithm
void LiangBarsky(int x1, int y1, int x2, int y2)
{
    int dx = x2 - x1, dy = y2 - y1, p[4], q[4];
    float t1 = 0, t2 = 1;

    // Calculating p and q values
    p[0] = -dx;
    p[1] = dx;
    p[2] = -dy;
    p[3] = dy;
    q[0] = x1 - xmin;
    q[1] = xmax - x1;
    q[2] = y1 - ymin;
    q[3] = ymax - y1;

    for (int i = 0; i < 4; i++) {
        if (p[i] == 0 && q[i] < 0) {
            // Line is parallel and outside the clipping window
            return;
        }
        else if (p[i] != 0) {
            float t = (float)q[i] / (float)p[i];
            if (p[i] < 0 && t > t1) {
                t1 = t;
            }
            else if (p[i] > 0 && t < t2) {
                t2 = t;
            }
        }
    }
}

```

```

    }
    if (t1 < t2) {
        // Line is partially inside the clipping window
        int x11 = x1 + t1 * dx;
        int y11 = y1 + t1 * dy;
        int x22 = x1 + t2 * dx;
        int y22 = y1 + t2 * dy;
        setcolor(GREEN);
        line(x11, y11, x22, y22);
        outtextxy(x11, y11, "(x11, y11)");
        outtextxy(x22, y22, "(x22, y22)");
    }
}

int main()
{
    int gd = DETECT, gm;
    initgraph(&gd, &gm, NULL);
    printf("The constraint on the X-axis are(0-%d)\n", getmaxx());
    printf("The constraint on the Y-axis are(0-%d)\n", getmaxy());

    // take input for the clipping window
    cout << "Enter the coordinates of the clipping window (xmin): ";
    cin >> xmin;
    cout << "Enter the coordinates of the clipping window (ymin): ";
    cin >> ymin;
    cout << "Enter the coordinates of the clipping window (xmax): ";
    cin >> xmax;
    cout << "Enter the coordinates of the clipping window (ymax): ";
    cin >> ymax;

    setcolor(YELLOW);
    rectangle(xmin, ymin, xmax, ymax);

    int x1, y1, x2, y2;
    cout << "Enter the coordinates of the line to be clipped (x1): ";
    cin >> x1;
    cout << "Enter the coordinates of the line to be clipped (y1): ";
    cin >> y1;
    cout << "Enter the coordinates of the line to be clipped (x2): ";
    cin >> x2;
    cout << "Enter the coordinates of the line to be clipped (y2): ";
    cin >> y2;

    setcolor(WHITE);
    line(x1, y1, x2, y2);
    outtextxy(x1, y1, "(x1, y1)");
    outtextxy(x2, y2, "(x2, y2)");

    LiangBarsky(x1, y1, x2, y2);
    getch();
    closegraph();
}

```



```

    return 0;
}


```

OUTPUT:-

```

C:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode>"c:\Deepankar\06_semester\TBC 601 Computer
Graphics\PracticalsVScode\Home\build\11_LiangBarskyLineClipping.exe"
The constraint on the X-axis are(0-639)
The constraint on the Y-axis are(0-479)
Enter the coordinates of the clipping window (xmin): 50
Enter the coordinates of the clipping window (ymin): 60
Enter the coordinates of the clipping window (xmax): 300
Enter the coordinates of the clipping window (ymax): 240
Enter the coordinates of the line to be clipped (x1): 20
Enter the coordinates of the line to be clipped (y1): 39
Enter the coordinates of the line to be clipped (x2): 550
Enter the coordinates of the line to be clipped (y2): 400

```

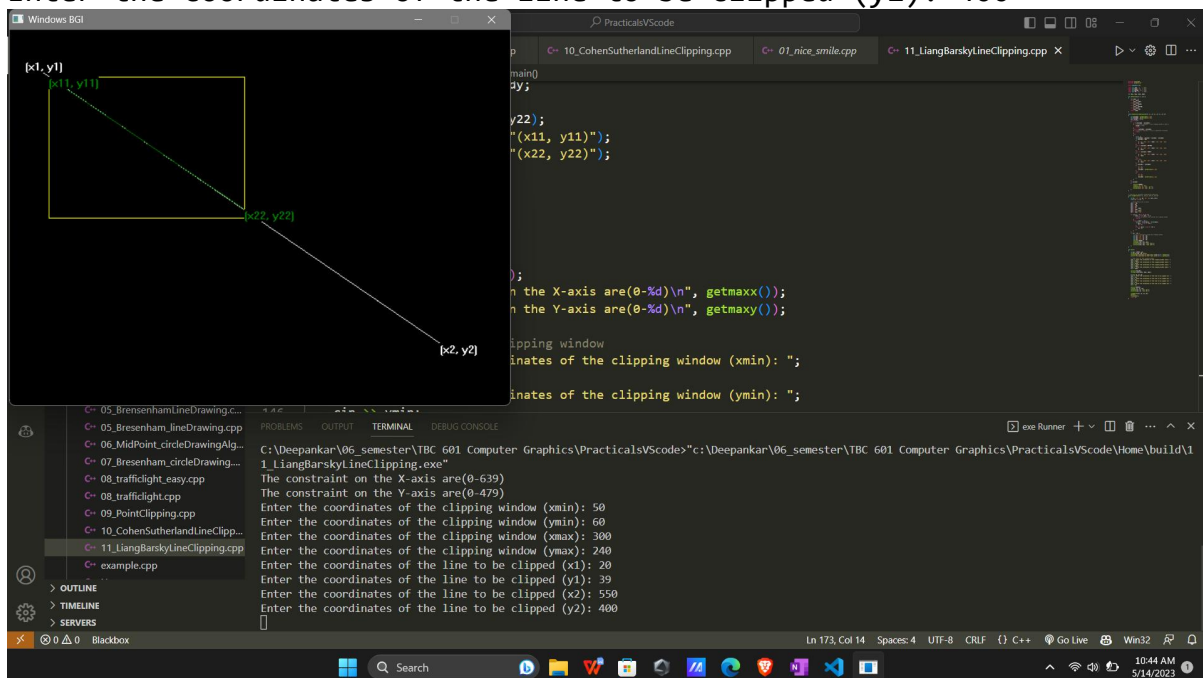

NAME- Deepankar Sharma
COURSE- BCA
ROLL NO- 2092014
SUBJECT- Computer graphics lab

PRACTICLE-12

OBJECTIVE- To implement Point Clipping through graphics.

SYNTAX:-

OUTPUT:-