


3. Project 3 - Call – Web – Map - Email

Android Studio

3. Project 3 - Call – Web – Map - Email

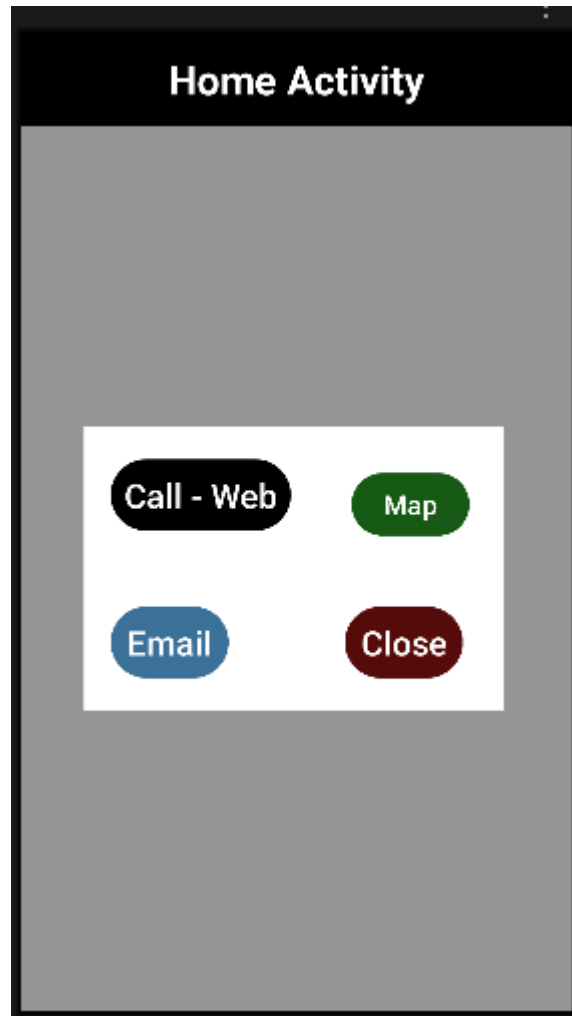

```
val call = findViewById<Button>(R.id.call)
val map = findViewById<Button>(R.id.map)
val email = findViewById<Button>(R.id.email)
val close = findViewById<Button>(R.id.close)


call.setOnClickListener {
    val iC = Intent( packageContext = this, cls = CallActivity::class.java)
    startActivity( intent = iC)
}

map.setOnClickListener {
    val iM = Intent( packageContext = this, cls = MapActivity::class.java)
    startActivity( intent = iM)
}

email.setOnClickListener {
    val iE = Intent( packageContext = this, cls = EmailActivity::class.java)
    startActivity( intent = iE)
}

close.setOnClickListener {
    exitProcess( status = -1)
}
```

Make Call & Open Webpage on Browser

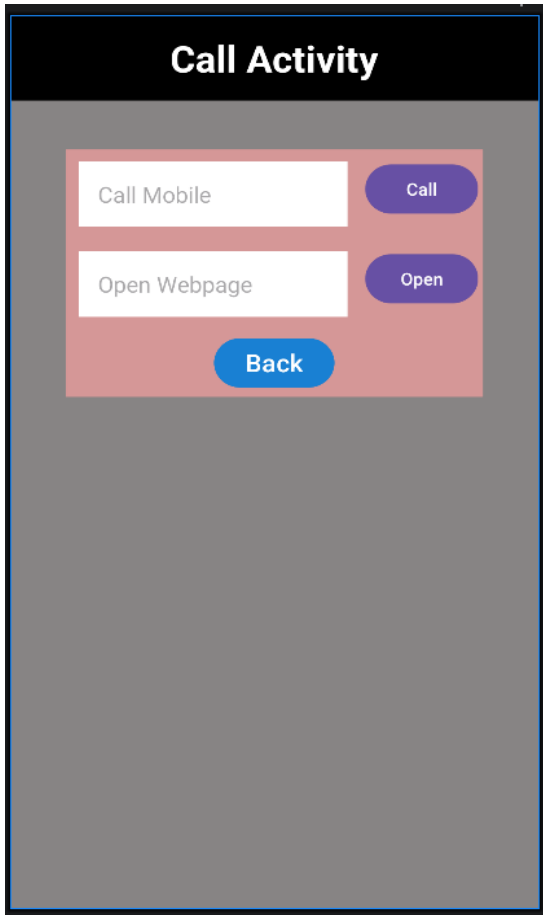


```
val mobile = findViewById<EditText>(R.id.mobile)
val call = findViewById<Button>(R.id.call)
val web = findViewById<EditText>(R.id.web)
val open = findViewById<Button>(R.id.open)
val back = findViewById<Button>(R.id.back)

call.setOnClickListener {
    val i = Intent( action = Intent.ACTION_CALL, Uri.parse( uriString = "tel:" + mobile.text.toString().trim()))
    startActivity( intent = i)
}





open.setOnClickListener {
    val ic = Intent( action = Intent.ACTION_VIEW, Uri.parse( uriString = web.text.toString().trim()))
    startActivity( intent = ic)
}

back.setOnClickListener {
    val i = Intent( packageContext = this, cls = HomeActivity::class.java)
    startActivity( intent = i)
}
```


Call Phone Permission

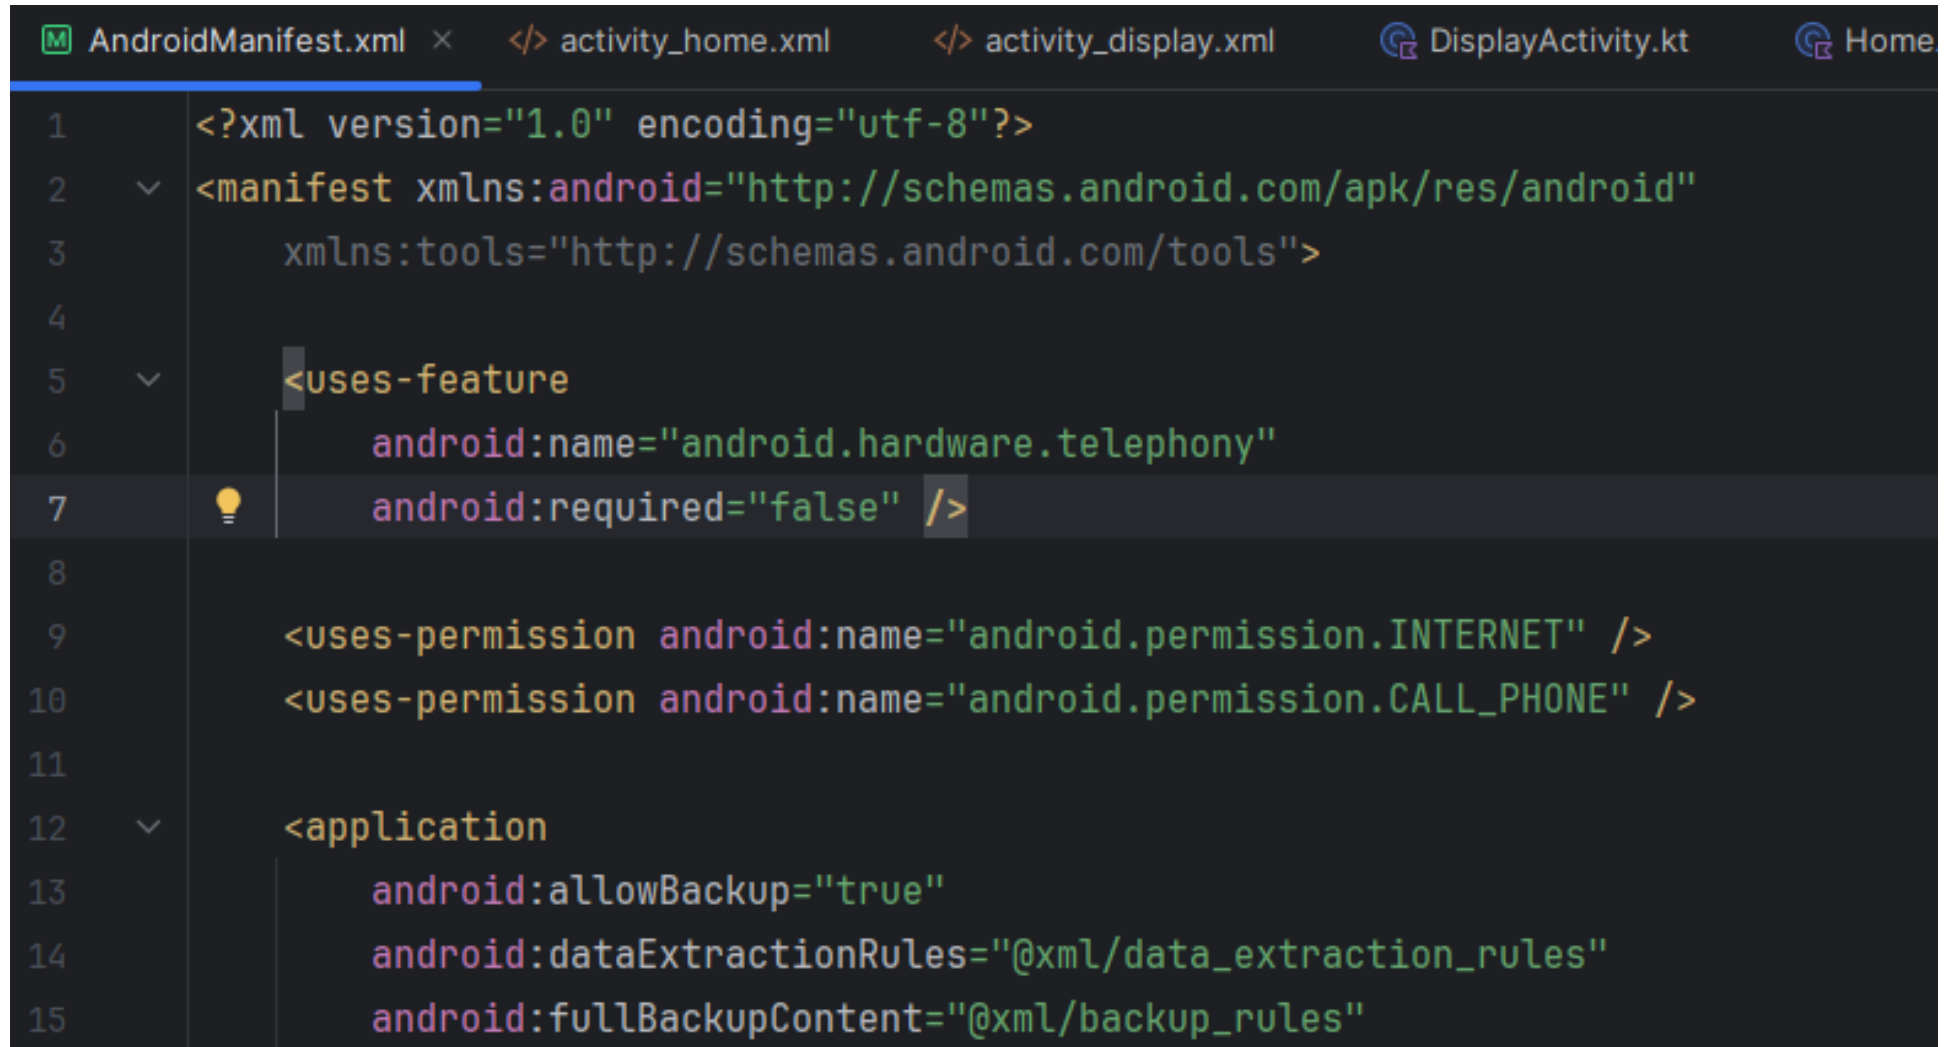

```
AndroidManifest.xml x </> activity_home.xml </> activity_display.xml DisplayActivity.kt Home
1 <?xml version="1.0" encoding="utf-8"?>
2 <manifest xmlns:android="http://schemas.android.com/apk/res/android"
3     xmlns:tools="http://schemas.android.com/tools">
4
5     <uses-feature
6         android:name="android.hardware.telephony"
7         android:required="false" />
8
9     <uses-permission android:name="android.permission.INTERNET" />
10    <uses-permission android:name="android.permission.CALL_PHONE" />
11
12    <application
13        android:allowBackup="true"
14        android:dataExtractionRules="@xml/data_extraction_rules"
15        android:fullBackupContent="@xml/backup_rules"
```

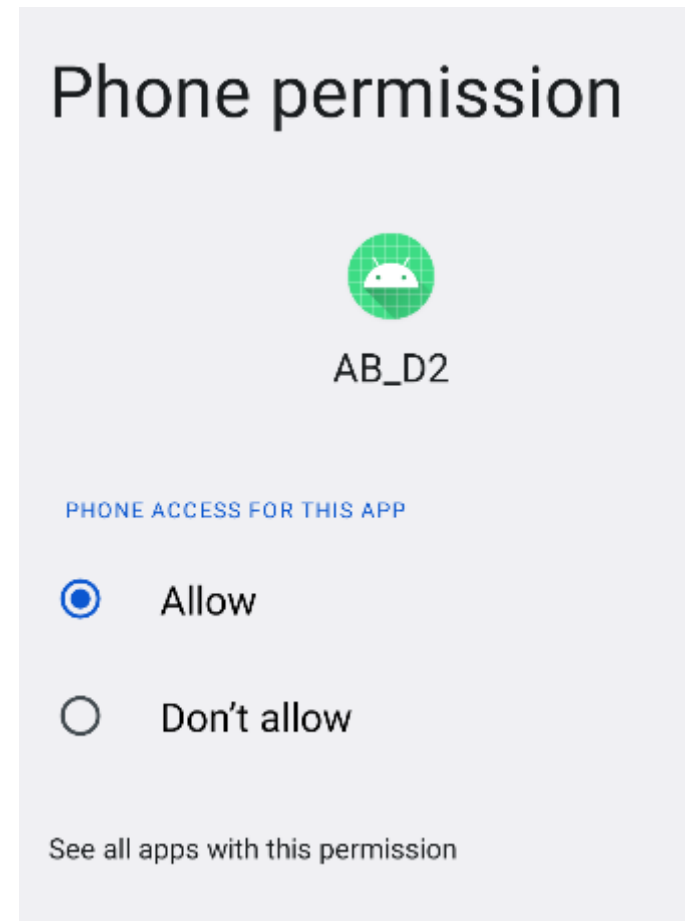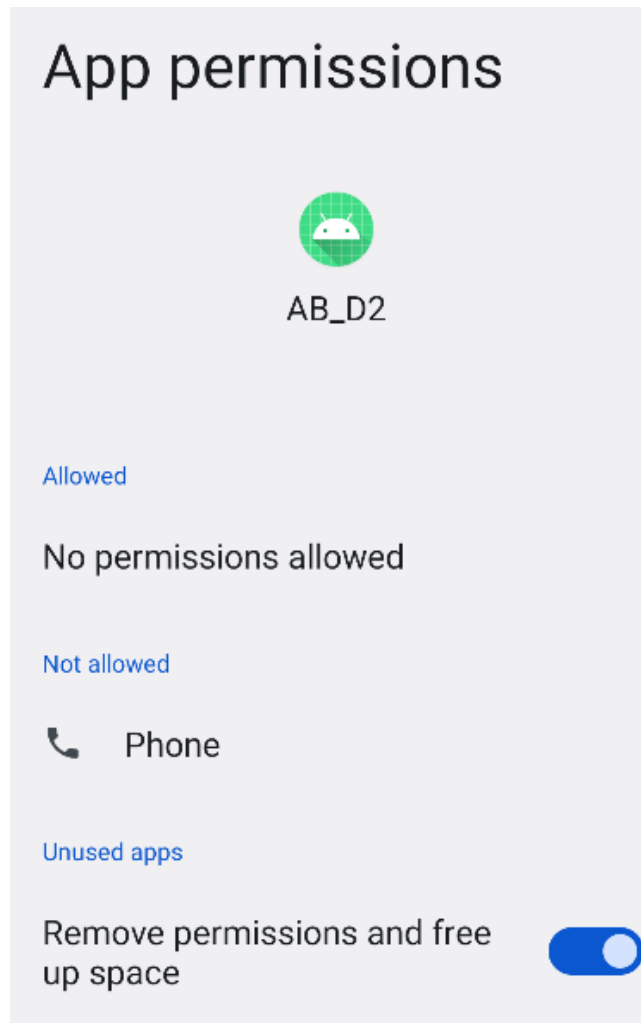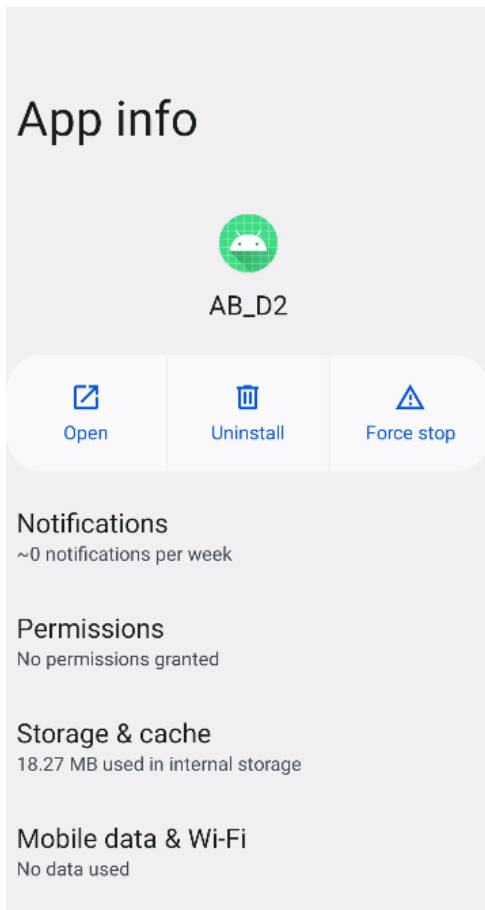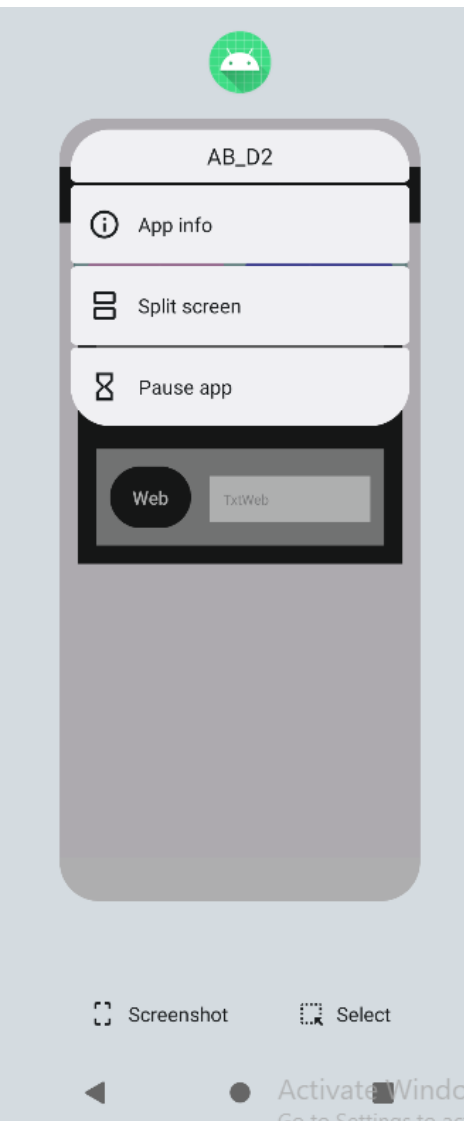

Open Google Map to display the location

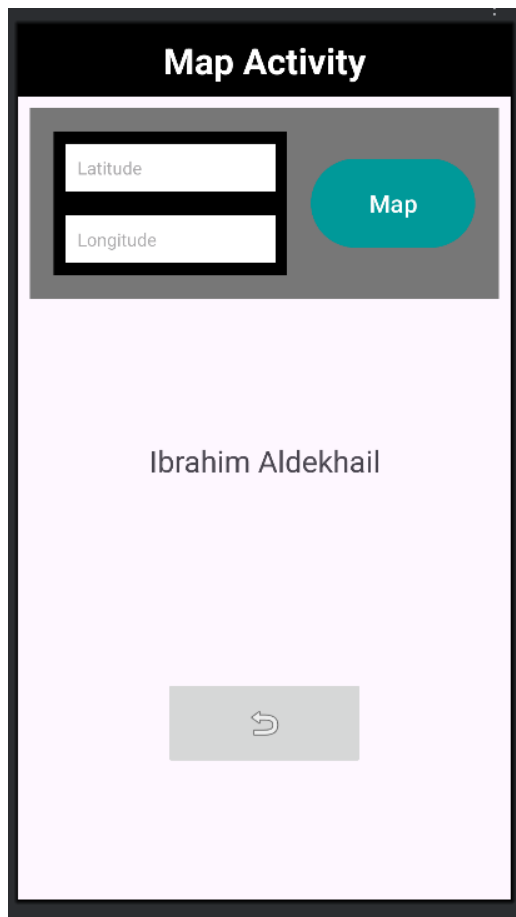

```
val longitude = findViewById<EditText>(R.id.longitude)
val latitude = findViewById<EditText>(R.id.latitude)
val map = findViewById<Button>(R.id.map)
val back = findViewById<Button>(R.id.back)

map.setOnClickListener {
    val i = Intent( action = Intent.ACTION_VIEW)
    i.data = Uri.parse( uriString = "geo:" + latitude.text.toString().trim() + longitude.text.toString().trim())
    val c = Intent.createChooser( target = i, title = "open map")
    startActivity( intent = c)
}

back.setOnClickListener {
    val i = Intent( packageContext = this, cls = HomeActivity::class.java)
    startActivity( intent = i)
}
```

```

14 ▶ </> class MapActivity : AppCompatActivity() {
    2 Usages
15     private lateinit var latitude: EditText
    2 Usages
16     private lateinit var longitude: EditText
17
18     @
19     override fun onCreate(savedInstanceState: Bundle?) {
19         super.onCreate(savedInstanceState)
20         setContentView(R.layout.activity_map)
21         latitude = findViewById<EditText>( id = R.id.latitude)
22         longitude = findViewById<EditText>( id = R.id.longitude)
23         val map = findViewById<Button>( id = R.id.map)
24         val back = findViewById<ImageButton>( id = R.id.back)
25         back.setOnClickListener {
26             var i = Intent( packageContext = this, cls = HomeActivity::class.java)
27             startActivity( intent = i)
28         }
29         map.setOnClickListener {
30             myMap()
31         }
32     }
    1 Usage
33     private fun myMap(){
34         var w = latitude.text.toString().trim()
35         var t = longitude.text.toString()
36         val i = Intent( action = Intent.ACTION_VIEW)
37         i.data = Uri.parse( uriString = "geo:$w,$t")
38         val chooser = Intent.createChooser( target = i, title = "open map")
39         startActivity( intent = chooser)
40     }
41 }

```

Open your Email on google then send email

Email Activitiy

mail from

mail to

Subject

msg

send Email

```
2 Usages
14 </> class EmailActivity : AppCompatActivity() {
15     @SuppressWarnings("MissingInflatedId")
16     override fun onCreate(savedInstanceState: Bundle?) {
17         super.onCreate(savedInstanceState)
18         enableEdgeToEdge()
19         setContentView(R.layout.activity_email)
20         ViewCompat.setOnApplyWindowInsetsListener(view = findViewById(id = R.id.main)) { v, insets ->
21             val systemBars = insets.getInsets(typeMask = WindowInsetsCompat.Type.systemBars())
22             v.setPadding(left = systemBars.left, top = systemBars.top, right = systemBars.right, bottom = systemBars.bottom)
23             insets
24         }
25
26         val mail_from = findViewById<EditText>(id = R.id.mail_from)
27         val mail_to = findViewById<EditText>(id = R.id.mail_to)
28         val subject = findViewById<EditText>(id = R.id.subject)
29         val msg = findViewById<EditText>(id = R.id.msg)
30
31         val sendEmail = findViewById<Button>(id = R.id.sendEmail)
32
33         sendEmail.setOnClickListener {
34             val i = Intent(action = Intent.ACTION_SEND)
35             i.data = Uri.parse(uriString = "mailto:")
36             var to = arrayOf(mail_from.text.toString(), mail_to.text.toString())
37             i.putExtra(name = Intent.EXTRA_EMAIL, value = to)
38             i.putExtra(name = Intent.EXTRA_SUBJECT, value = subject.text.toString())
39             i.putExtra(name = Intent.EXTRA_TEXT, value = msg.text.toString())
40             i.type = "message/rfc822"
41             val chooser = Intent.createChooser(target = i, title = "Send an Email")
42             startActivity(intent = chooser)
43         }
44     }
45 }
46 }
```