

Pure functional epidemics

An Agent-Based Approach

JONATHAN THALER, THORSTEN ALTENKIRCH, and PEER-OLAF SIEBERS, University of Nottingham, United Kingdom

TODO: fill in the right metainfo TODO: select the right copyright TODO: get DOI TODO: fill in paper history
TODO: generate CCSXML

TODO: find a way to deactivate pygmentize

Agent-Based Simulation (ABS) is a methodology in which a system is simulated in a bottom-up approach by modelling the micro interactions of its constituting parts, called agents, out of which the global macro system behaviour emerges. So far mainly object-oriented techniques and languages have been used in ABS. Using the SIR model of epidemiology as an example we show how to use Functional Reactive Programming to implement ABS. We claim that this representation is conceptually cleaner and opens the way to formally reason about ABS.

Additional Key Words and Phrases: Haskell, Functional Programming, Functional Reactive Programming, Agent-Based Simulation

ACM Reference Format:

Jonathan Thaler, Thorsten Altenkirch, and Peer-Olaf Siebers. 2018. Pure functional epidemics: An Agent-Based Approach. *Proc. ACM Program. Lang.* 9, 4, Article 39 (September 2018), 29 pages. <https://doi.org/0000001.0000001>

1 INTRODUCTION

The traditional approach to Agent-Based Simulation (ABS) has so far always been object-oriented techniques due to the influence of the seminal work of Epstein et al [15] in which the authors claim "[...] object-oriented programming to be a particularly natural development environment for Sugarscape specifically and artificial societies generally [...]" (p. 179). This work established the metaphor in the ABS community, that *agents map naturally to objects* [29] which still holds up today. In this paper we fundamentally challenge this metaphor and explore ways of approaching ABS in a pure functional way using Haskell. By doing this we expect to leverage the benefits of pure functional programming [18]: higher expressivity through declarative code, being polymorph and explicit about side-effects through monads, more robust and less susceptible for bugs due to explicit data flow and lack of implicit side-effects. As use-case we introduce the simple SIR model of epidemiology with which one can simulate epidemics in a realistic way and over the course of five steps we derive all necessary concepts required for a full agent-based implementation. We start from a very simple solution running in the Random Monad which has all general concepts already there and then refine it in various ways, making the transition to Functional Reactive Programming (FRP) [49] and to Monadic Stream Functions (MSF) [33]. The aim of this paper is to show how ABS can be done in *pure* Haskell and what the benefits and drawbacks are. By doing this we give the

Authors' address: Jonathan Thaler, jonathan.thaler@nottingham.ac.uk; Thorsten Altenkirch, thorsten.altenkirch@nottingham.ac.uk; Peer-Olaf Siebers, University of Nottingham, 7301 Wollaton Rd, Nottingham, NG8 1BB, United Kingdom, peer-olaf.siebers@nottingham.ac.uk.

Permission to make digital or hard copies of part or all of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for third-party components of this work must be honored. For all other uses, contact the owner/author(s).

© 2018 Copyright held by the owner/author(s).

2475-1421/2018/9-ART39

<https://doi.org/0000001.0000001>

reader a good understanding of what ABS is, what the challenges are when implementing it and how we solve these in our approach. The contributions of this paper are:

- We are the first to *systematically* introduce the concepts of ABS to the *pure* functional programming paradigm in a step-by-step approach. It is also the first paper to show how to apply arrowized FRP to ABS on a technical level, presenting a new field of application to FRP. Although there exists some work on ABS in Haskell it is not of the conceptual nature this paper exhibits, barely scratches the surface, sacrifices purity and focuses on different problems.
- Our approach shows how robustness can be achieved through purity which guarantees reproducibility at compile time, something not possible with traditional object-oriented approaches.
- The result of using arrowized FRP is a unique, hybrid approach to ABS because FRP allows expressing continuous time-semantics not possible with the traditional imperative object-oriented approaches.

Section 2 discusses related work. In section 3 we introduce functional reactive programming, arrowized programming and monadic stream functions because our approach builds heavily on these concepts. Section 4 defines agent-based simulation and discusses the ideas behind it. In section 5 we introduce the SIR model of epidemiology as an example model to explain the concepts of ABS. The heart of the paper is section 6 in which we derive the concepts of a pure functional approach to ABS in five steps, using the SIR model. Finally we draw conclusions and discuss issues in section 7 and point to further research 8.

2 RELATED WORK

The amount of research on using pure functional programming with Haskell in the field of ABS has been moderate so far. Most of the papers are more related to the field of Multi Agent Systems (MAS) and look into how agents can be specified using the belief-desire-intention paradigm [11], [43], [21]. A library for Discrete Event Simulation (DES) and System Dynamics (SD) in Haskell called *Aivika 3* is described in the technical report [42]. It is not pure as it uses the IO Monad under the hood and only comes with very basic features for event-driven ABS which allows to specify simple state-based agents with timed transitions. The authors of [21] discuss using functional programming for DES and explicitly mention the paradigm of FRP to be very suitable to DES. In his talk [44], Tim Sweeney CTO of Epic Games discussed programming languages in the development of game engines and scripting of game logic. Although the fields of games and ABS seem to be very different, Gregory [16] defines computer-games as "[...] *soft real-time interactive agent-based computer simulations*" (p. 9) and in the end they have also very important similarities: both are simulations which perform numerical computations and update objects in a loop either concurrently or sequential. In games these objects are called *game-objects* and in ABS they are called *agents* but they are conceptually the same thing. The two main points Sweeney made were that dependent types could solve most of the run-time failures and that parallelism is the future for performance improvement in games. He distinguishes between pure functional algorithms which can be parallelized easily in a pure functional language and updating game-objects concurrently using software transactional memory (STM).

The thesis of [5] constructs two frameworks: an agent-modelling framework and a DES framework, both written in Haskell. They put special emphasis on parallel and concurrency in their work. The author develops two programs with strong emphasis on parallelism: HLogo which is a clone of the NetLogo agent-modelling framework and HDES, a framework for discrete event simulation.

The authors of [38] and [47] present a domain-specific language for developing functional reactive agent-based simulations. This language called FRABJOUS is human readable and easily understandable by domain-experts. It is not directly implemented in FRP/Haskell but is compiled to Yampa code which they claim is also readable. This supports that FRP is a suitable approach to implement ABS in Haskell. Unfortunately the authors do not discuss their mapping of ABS to FRP on a technical level, which would be of most interest to functional programmers.

3 BACKGROUND

3.1 Functional Reactive Programming

Functional Reactive Programming (FRP) is a way to implement systems with continuous and discrete time-semantics in pure functional languages. There are many different approaches and implementations but in our approach we use *arrowized* [19], [20] FRP as implemented in the library Yampa [17], [9], [27]. The central concept in arrowized FRP is the Signal Function (SF) which can be understood as a *process over time* which maps an input- to an output-signal. A signal can be understood as a value which varies over time.

$$\begin{aligned} \text{Signal } \alpha &\approx \text{Time} \rightarrow a \\ \text{SF } \alpha \beta &\approx \text{Signal } \alpha \rightarrow \text{Signal } \beta \end{aligned}$$

Signal functions are implemented as continuations which don't take a Δt at $t = 0$ but then change their signature into one which takes a Δt for $t > 0$. This allows to hide Δt completely from the types which makes them much more suitable for declarative programming. Yampa provides a number of combinators for expressing time-semantics, events and state-changes of the system. They allow us to change system behaviour in case of events, run signal functions and generate stochastic events and random-number streams. We shortly discuss the relevant combinators and concepts we use throughout the paper. For a more in-depth discussion we refer to the papers [17], [9], [27].

Event. Yampa represents events through the *Event* type which is the same as the *Maybe* type.

Dynamic behaviour. To change the behaviour of a signal function at an occurrence of an event during run-time, the combinator `switch :: SF a (b, Event c) -> (c -> SF a b) -> SF a b` is provided. It takes a signal function which is run until it generates an event. When this event occurs, the function in the second argument is evaluated which receives the data of the event and has to return the new signal function which will then replace the previous one.

Sometimes one needs to run a collection of signal functions in parallel and collect all of their outputs in a list. Yampa provides the combinator `dpSwitch` for it. It is quite involved and has the following type-signature:

```
dpSwitch :: Functor col
=> (forall sf. a -> col sf -> col (b, sf)) -- routing function
-> col (SF b c) -- SF collection
-> SF (a, col c) (Event d) -- SF generating switching event
-> (col (SF b c) -> d -> SF a (col c)) -- continuation to invoke upon event
-> SF a (col c)
```

Its first argument is the pairing-function which pairs up the input to the signal functions - it has to preserve the structure of the signal function collection. The second argument is the collection of signal functions to run. The third argument is a signal function generating the switching event. The last argument is a function which generates the continuation after the switching event has occurred. `dpSwitch` returns a new signal function which runs all the signal functions in parallel

(thus the p) and switches into the continuation when the switching event occurs. The d in *dpSwitch* stands for delayed which guarantees that it delays the switching until the next time e.g. the function into which we switch is only applied in the next step which prevents an infinite loop if we switch into a recursive continuation.

Randomness. In ABS one often needs to generate stochastic events which occur based on an exponential distribution. Yampa provides the combinator *occasionally* $:: RandomGen\ g \Rightarrow g \rightarrow Time \rightarrow b \rightarrow SF\ a\ (Event\ b)$ for this. It takes a random-number generator, a rate and a value the stochastic event will carry. It generates events on average with the given rate. Note that at most one event will be generated and no 'backlog' is kept. This means that when this function is not sampled with a sufficiently high frequency, depending on the rate, it will lose events.

Yampa also provides the combinator *noise* $:: (RandomGen\ g, Random\ b) \Rightarrow g \rightarrow SF\ a\ b$ which generates a stream of noise by returning a random number in the default range for the type b .

Running signal functions. To purely run a signal function Yampa provides the function *embed* $:: SF\ a\ b \rightarrow (a, [(DTime, Maybe\ a)]) \rightarrow [b]$ which allows to run a SF for a given number of steps where in each step one provides the Δt and an input a . The function then returns the output of the signal function for each step. Note that the input is optional, indicated by *Maybe*. In the first step at $t = 0$, the initial a is applied and whenever the input is *Nothing* in subsequent steps, the last a which was not *Nothing* is re-used.

3.2 Arrowized programming

Yampa's signal functions are arrows, requiring us to program with arrows, which is a bit different than programming with monads, so we will introduce the concept of arrows and programming with them shortly. Arrows are a generalisation of monads which, in addition to the already familiar parameterisation over the output type, allow parameterisation over their input type as well [19], [20]. In general arrows can be understood to be computations that represent processes, which have an input of a specific type, process it and output a new type. This is the reason why Yampa is using arrows to represent their signal functions: the concept of processes, which signal functions are, maps naturally to arrows. There exists a number of arrow combinators which allow arrowized programming in a point-free style but due to lack of space we will not discuss them here. Instead we make use of Paterson's *do*-notation for arrows [30] which makes the code much more readable as it allows us to program with points instead of using only the point-free arrow combinators. To show how arrowized programming works we implement a simple signal function which calculates the acceleration of a falling mass on its vertical axis as an example [34].

```
fallingMass :: Double -> Double -> SF () Double
fallingMass p0 v0 = proc _ -> do
  v <- arr (+v0) <<< integral -< (-9.8)
  p <- arr (+p0) <<< integral -< v
  returnA -< p
```

The keyword *proc* is the same as introducing a lambda abstraction but for arrows. After it the arguments to the process follow, which in this case we ignore as it is just the unit type. Using the signal function *integral* $:: SF\ v\ v$ of Yampa which integrates the input value over time using the rectangle rule, we calculate the current velocity and the position based on the initial position $p0$ and velocity $v0$. The $\ll\ll$ is one of the arrow combinators which composes two arrow computations and *arr* simply lifts a pure function into an arrow. To pass an input to an arrow, $-<$ is used and $-<$ to assign the result of an arrow computation to a variable. Finally to return a value in an arrow the function *returnA* is used which is itself an arrow - the identity function lifted.

3.3 Monadic Stream Functions

Monadic Stream Functions (MSF) are a generalisation of Yampas signal functions with additional combinators to control and stack side effects. A MSF is a polymorphic type and an evaluation function which applies an MSF to an input and returns an output and a continuation, both in a monadic context [33], [32]:

```
newtype MSF m a b = unMSF :: Monad m => MSF m a b -> a -> m (b, MSF m a b)
```

MSFs are also arrows which means we can apply arrowized programming with Patersons notation as well. The authors [33] implement the library *Dunai*, which is available on Hackage. It allows us to run monadic computations within a signal function by providing the combinators $arrM :: Monad\ m \Rightarrow (a \rightarrow m\ b) \rightarrow MSF\ m\ a\ b$ and $arrM_ :: Monad\ m \Rightarrow m\ b \rightarrow MSF\ m\ a\ b$.

4 DEFINING AGENT-BASED SIMULATION

Agent-Based Simulation (ABS) is a methodology to model and simulate a system where the global behaviour may be unknown but the behaviour and interactions of the parts making up the system is of knowledge. Those parts, called agents, are modelled and simulated out of which then the aggregate global behaviour of the whole system emerges. So the central aspect of ABS is the concept of an agent which can be understood as a metaphor for a pro-active unit, situated in an environment, able to spawn new agents and interacting with other agents in some neighbourhood by exchange of messages. We informally assume the following about our agents [40], [51], [41], [10], [25]:

- They are uniquely addressable entities with some internal state over which they have full, exclusive control.
- They are pro-active which means they can initiate actions on their own e.g. change their internal state, send messages, create new agents, terminate themselves.
- They are situated in an environment and can interact with it.
- They can interact with other agents which are situated in the same environment by means of messaging.

Epstein [13] identifies ABS to be especially applicable for analysing *"spatially distributed systems of heterogeneous autonomous actors with bounded information and computing capacity"*. It exhibits the following properties:

- Linearity & Non-Linearity - actions of agents can lead to non-linear behaviour of the system.
- Time - agents act over time which is also the source of their pro-activity.
- States - agents encapsulate some state which can be accessed and changed during the simulation.
- Feedback-Loops - because agents act continuously and their actions influence each other and themselves in subsequent time-steps, feedback-loops are the norm in ABS.
- Heterogeneity - although agents can have same properties like height, sex,... the actual values can vary arbitrarily between agents.
- Interactions - agents can be modelled after interactions with an environment or other agents.
- Spatiality & Networks - agents can be situated within e.g. a spatial (discrete 2D, continuous 3D,...) or complex network environment.

TODO: maybe this is of no importance in this paper Note that there doesn't exist a commonly agreed technical definition of ABS but the field draws inspiration from the closely related field of Multi-Agent Systems (MAS) [51], [50]. It is important to understand that MAS and ABS are two different fields where in MAS the focus is much more on technical details, implementing a system



Fig. 1. States and transitions in the SIR compartment model.

of interacting intelligent agents within a highly complex environment with the focus primarily on solving AI problems.

5 THE SIR MODEL

To explain the concepts of ABS and of our pure functional approach to it, we introduce the SIR model as a motivating example and use-case for our implementation. It is a very well studied and understood compartment model from epidemiology [23] which allows to simulate the dynamics of an infectious disease like influenza, tuberculosis, chicken pox, rubella and measles [12] spreading through a population. In this model, people in a population of size N can be in either one of three states *Susceptible*, *Infected* or *Recovered* at a particular time, where it is assumed that initially there is at least one infected person in the population. People interact *on average* with a given rate of β other people per time-unit and become infected with a given probability γ when interacting with an infected person. When infected, a person recovers *on average* after δ time-units and is then immune to further infections. An interaction between infected persons does not lead to re-infection, thus these interactions are ignored in this model. This definition gives rise to three compartments with the transitions as seen in Figure 1.

Before looking into how one can simulate this model in an agent-based approach we first explain how to formalize it using System Dynamics (SD) [35]. In SD one models a system through differential equations, allowing to conveniently express continuous systems which change over time. The advantage of a SD solution is that one has an analytically tractable solution against which e.g. agent-based solutions can be validated. The problem is that the more complex a system, the more difficult it is to derive differential equations describing the global system, to a point where it simply becomes impossible. This is the strength of an agent-based approach over SD, which allows to model a system when only the constituting parts and their interactions are known but not the macro behaviour of the whole system. As will be shown later, the agent-based approach exhibits further benefits over SD.

The dynamics of the SIR model can be formalized in SD with the following equations:

TODO: there seems to be an unnerving space after the f letters, can we get rid of them?

$$\frac{dS}{dt} = -infectionRate \quad (1)$$

$$\frac{dI}{dt} = infectionRate - recoveryRate \quad (2)$$

$$\frac{dR}{dt} = recoveryRate \quad (3)$$

$$infectionRate = \frac{I\beta S\gamma}{N} \quad (4)$$

$$recoveryRate = \frac{I}{\delta} \quad (5)$$

Solving these equations is done by integrating over time. In the SD terminology, the integrals are called *Stocks* and the values over which is integrated over time are called *Flows*. At $t = 0$ a single

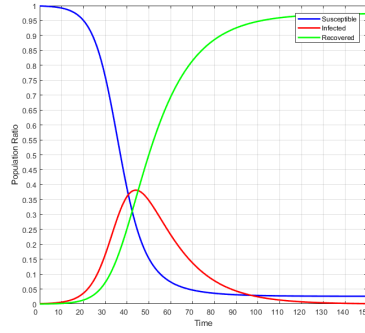


Fig. 2. Dynamics of the SIR compartment model using the System Dynamics approach. Population Size $N = 1,000$, contact rate $\beta = \frac{1}{5}$, infection probability $\gamma = 0.05$, illness duration $\delta = 15$ with initially 1 infected agent. Simulation run for 150 time-steps.

agent is infected because if there wouldn't be any infected agents, the system would immediately reach equilibrium - this is also the formal definition of the steady state of the system: as soon as $I(t) = 0$ the system won't change any more.

TODO: there seems to be an unnerving space after the f letters, can we get rid of them?

$$S(t) = N - I(0) + \int_0^t -infectionRate \, dt \quad (6)$$

$$I(0) = 1 \quad (7)$$

$$I(t) = \int_0^t infectionRate - recoveryRate \, dt \quad (8)$$

$$R(t) = \int_0^t recoveryRate \, dt \quad (9)$$

Running the SD simulation over time results in the dynamics as shown in Figure 2 with the given variables.

An Agent-Based approach

The SD approach is inherently top-down because the behaviour of the system is formalized in differential equations. This requires that the macro behaviour of the system is known a priori which may not always be the case. In the case of the SIR model we have already a top-down description of the system in the form of the differential equations from SD. We want now to derive an agent-based approach which exhibits the same dynamics as shown in 2. The questions are whether such top-down dynamics can be achieved using ABS as well and whether there are fundamental drawbacks or benefits when doing so. Such questions were asked before and modelling the SIR model using an agent-based approach is indeed possible [24]. The fundamental difference is that SD is operating on averages, treating the population completely continuous which results in non-discrete values of stocks e.g. 3.1415 infected persons. The approach of mapping the SIR model to an ABS is to discretize the population and model each person in the population as an individual agent. The transitions between the states are no longer happening according to continuous differential equations but due to discrete events caused both by interactions amongst the agents and time-outs. Besides the already mentioned differences, the true advantage of ABS becomes now apparent: with it we

can incorporate spatiality as shown in section 6.5 and simulate heterogeneity of population e.g. different sex, age,... Note that the latter is theoretically possible in SD as well but with increasing number of population properties, it quickly becomes intractable. According to the model, every agent makes *on average* contact with β random other agents per time unit. In ABS we can only contact discrete agents thus we model this by generating a random event on average every β time units. We need to sample from an exponential distribution because the rate is proportional to the size of the population [6]. Note that an agent does not know the other agents' state when making contact with it, thus we need a mechanism in which agents reveal their state in which they are in *at the moment of making contact*. This mechanism is an implementation detail which we will derive in our implementation steps. For now we only assume that agents can make contact with each other somehow. Although in the model all agents make contact with each other, we can reduce the contacts to a few cases which have an influence on the dynamics. Contacts between agents with the same state as well as contacts with recovered agents have no influence, thus we need only to focus on contacts between susceptible and infected agents. In the agent-based approach we implement the following behaviour:

- *Susceptible*: A susceptible agent makes contact *on average* with β other random agents. For every *infected* agent it gets into contact with, it becomes infected with a probability of γ . If an infection happens, it makes the transition to the *Infected* state.
- *Infected*: An infected agent recovers *on average* after δ time units ¹. This is implemented by drawing the duration from an exponential distribution [6] with $\lambda = \frac{1}{\delta}$ and making the transition to the *Recovered* state after this duration.
- *Recovered*: These agents do nothing because this state is a terminating state from which there is no escape: recovered agents stay immune and can not get infected again in this model ².

For a more in-depth introduction of how to approximate an SD model by ABS see [24] who discusses a general approach and how to compare dynamics and [6] which explain the need to draw the illness-duration from an exponential-distribution. For comparing the dynamics of the SD and ABS approach to real-world epidemics see [2].

6 DERIVING A PURE FUNCTIONAL APPROACH

We presented a high-level agent-based approach to the SIR model in the previous section, which focused only on the states and the transitions, but we haven't talked about technical implementation details on how to actually implement such a state-machine. The authors of [45] discuss two fundamental problems of implementing an agent-based simulation from a programming language agnostic point of view. The first problem is how agents can be pro-active and the second how interactions and communication between agents can happen. For agents to be pro-active they must be able to perceive the passing of time, which means there must be a concept of an agent-process which executes over time. Interactions between agents can be reduced to the problem of how an agent can expose information about its internal state which can be perceived by other agents. In this section we will derive a pure functional approach for an agent-based simulation of the SIR model in which we will pose solutions to the previously mentioned problems. We will start out with

¹Note that these agents do *not* pro-actively contact other agents. The rationale behind it is, that according to the theory of epidemiology, β is defined as a *contact which would be sufficient to lead to infection, were it to occur between a susceptible and an infected individual* [1]. In this theory it wouldn't make sense to work out the β value for someone who is already infected - the contact structure of the infected agents is implicit. Would we add pro-active contact making to the infected agents as well we would get very different results, not matching the SD dynamics which were validated in the past against real world epidemics [2].

²There exists an extended SIR model, called SIRS which adds a cycle to the state transitions by introducing a transition from recovered back to susceptible but we don't consider that here.

a very naive approach and show its limitations which we overcome by adding FRP. Then in further steps we will add more concepts and generalisations, ending up at the final approach which utilises monadic stream functions (MSF), a generalisation of FRP ³.

6.1 Naive beginnings

We start by modelling the states of the agents:

```
data SIRState = Susceptible | Infected | Recovered
```

Agents are ill for some duration, meaning we need to keep track when a potentially infected agent recovers. Also a simulation is stepped in discrete or continuous time-steps thus we introduce a notion of *time* and Δt by defining:

```
type Time      = Double
type TimeDelta = Double
```

Now we can represent every agent simply as a tuple of its SIR state and its potential recovery time. We hold all our agents in a list:

```
type SIRAgent = (SIRState, Time)
type Agents   = [SIRAgent]
```

Next we need to think about how to actually step our simulation. For this we define a function which advances our simulation with a fixed Δt until a given time t where in each step the agents are processed and the output is fed back into the next step. This is the source of pro-activity as agents are executed in every time step and can thus initiate actions based on the passing of time. As already mentioned in previous sections, the agent-based implementation of the SIR model is inherently stochastic which means we need access to a random-number generator. We decided to use the Random Monad at this point as threading a generator through the simulation and the agents is very cumbersome. Thus our simulation stepping runs in the Random Monad:

```
runSimulation :: RandomGen g => Time -> TimeDelta -> Agents -> Rand g [Agents]
runSimulation tEnd dt as = runSimulationAux 0 as []
  where
    runSimulationAux :: RandomGen g => Time -> Agents -> [Agents] -> Rand g [Agents]
    runSimulationAux t as acc
      | t >= tEnd = return (reverse (as : acc))
      | otherwise = do
        as' <- stepSimulation dt as
        runSimulationAux (t + dt) as' (as : acc)
```

```
stepSimulation :: RandomGen g => TimeDelta -> Agents -> Rand g Agents
stepSimulation dt as = mapM (runAgent dt as) as
```

Now we can implement the behaviour of an individual agent. First we need to distinguish between the agents SIR states:

```
runAgent :: RandomGen g => TimeDelta -> Agents -> SIRAgent -> Rand g SIRAgent
runAgent _ as (Susceptible, _) = susceptibleAgent as
runAgent dt _ a@(Infected, _) = return (infectedAgent dt a)
runAgent _ _ a@(Recovered, _) = return a
```

An agent gets fed the states of all agents in the system from the previous time-step so it can draw random contacts - this is one, very naive way of implementing the interactions between agents. Note that the list of states includes also the agent itself thus we would need to omit it to prevent making contact with itself. We decided against that as it complicates the solution and for a larger number of agents the probability for an agent to make contact with itself is so small that it can be

³The code of all steps can be accessed freely through the following URL: <https://github.com/thalerjonathan/phd/tree/master/public/purefunctionalepidemics/code>

neglected. Also making contact with the same SIR state never leads to a state change so it really makes no big difference.

From our implementation it becomes apparent that only the behaviour of a susceptible agent involves randomness and that a recovered agent is simply a sink - it does nothing and stays constant.

Lets look how we can implement the behaviour of a susceptible agent. It simply makes contact on average with a number of other agents and gets infected with a given probability if an agent it has contact with is infected. When the agent gets infected it calculates also its time of recovery by drawing a random number from the exponential distribution meaning it is ill on average for *illnessDuration*.

```
susceptibleAgent :: RandomGen g => Agents -> Rand g SIRAgent
susceptibleAgent as = do
  rc <- randomExpM (1 / contactRate) -- draws from exponential distribution
  cs <- forM ([0..floor rc - 1] :: [Int]) (const (makeContact as))
  if elem True cs
  then infect
  else return (Susceptible, 0)
where
  makeContact :: RandomGen g => Agents -> Rand g Bool
  makeContact as = do
    randContact <- randomElem as
    case fst randContact of
      Infected -> randomBoolM infectivity -- returns True with given probability
      _         -> return False

  infect :: RandomGen g => Rand g SIRAgent
  infect = randomExpM (1 / illnessDuration) >>= \rd -> return (Infected, rd)
```

The infected agent is trivial. It simply recovers after the given illness duration which is implemented as follows:

```
infectedAgent :: TimeDelta -> SIRAgent -> SIRAgent
infectedAgent dt (_, t)
  | t' <= 0 = (Recovered, 0)
  | otherwise = (Infected, t')
where
  t' = t - dt
```

6.1.1 Results. When running our naive implementation with increasing population sizes we get the dynamics as seen in Figure 3. With increasing number of agents [24] our solution becomes increasingly smoother and approaches the SD dynamics from Figure 2 but doesn't quite match them because we are under-sampling the contact-rate. We will address this problem in the next section.

6.1.2 Discussion. Reflecting on our first naive approach we can conclude that it already introduced most of the fundamental concepts of ABS

- Time - the simulation occurs over virtual time which is modelled explicitly divided into *fixed* Δt where at each step all agents are executed.
- Agents - we implement each agent as an individual, with the behaviour depending on its state.
- Feedback - the output state of the agent in the current time-step t is the input state for the next time-step $t + \Delta t$.
- Environment - as environment we implicitly assume a fully-connected network (complete graph) where every agent 'knows' every other agents, including itself and thus can make contact with all of them.

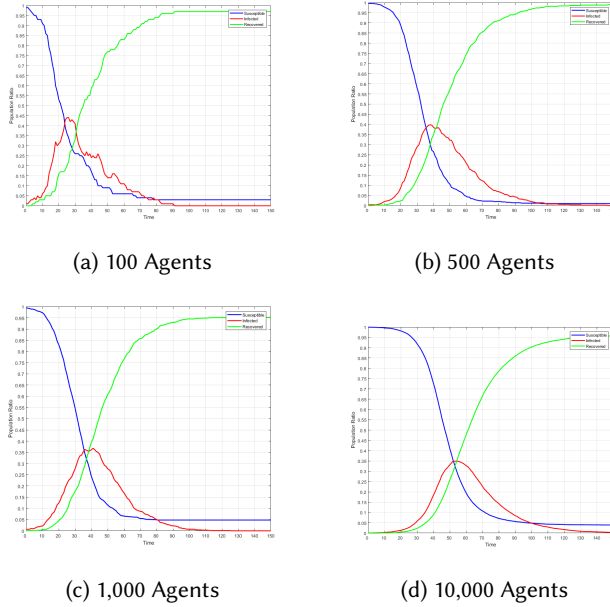


Fig. 3. Naive simulation of SIR using the agent-based approach. Varying population size, contact rate $\beta = \frac{1}{5}$, infection probability $\gamma = 0.05$, illness duration $\delta = 15$ with initially 1 infected agent. Simulation run for 150 time-steps with fixed $\Delta t = 1.0$.

- Stochasticity - it is an inherently stochastic simulation, which is indicated by the Random Monad type and the usage of *randomBoolM* and *randomExpM*.
- Deterministic - repeated runs with the same initial random-number generator result in same dynamics. This may not come as a surprise but in Haskell we can guarantee that property statically already at compile time because our simulation runs in the Random Monad and *not* in the IO Monad. This guarantees that no external, uncontrollable sources of randomness can interfere with the simulation.
- Dynamics - with increasing number of agents the dynamics smooth out [24].

Nonetheless our approach has also weaknesses and dangers:

- (1) Δt is passed explicitly as argument to the agent and needs to be dealt with explicitly. This is not very elegant and a potential source of errors - can we do better and find a more elegant solution?
- (2) The way our agents are represented is not very modular. The state of the agent is explicitly encoded in an ADT and when processing the agent, the function needs always first distinguish between the states. Can we express it in a more modular way e.g. continuations?
- (3) The states of all agents of the current step are fed back into every agent in the next step so that an agent can pick its contacts. Although agents cannot change the states of others, this reveals too much information e.g. the illness duration is of no interest to the other agents. Although we could just feed in the *SIRState* without the illness duration, the problem is more of conceptual nature - it should be the agent which decides to whom it reveals what of its internal state.

We now move on to the next section in which we will address points 1, 2 and the under-sampling issue. Point 3 will be addressed in section 6.3.

6.2 Adding Functional Reactive Programming

As shown in the first step, the need to handle Δt explicitly can be quite messy, is inelegant and a potential source of errors, also the explicit handling of the state of an agent and its behavioural function is not very modular. We can solve both these weaknesses by switching to the functional reactive programming paradigm (FRP), because it allows to express systems with discrete and continuous time-semantics. In this step we are focusing on arrowized [19] FRP using the library Yampa [17]. In it, time is handled implicit, meaning it cannot be messed with, which is achieved by building the whole system on the concept of signal functions (SF). A SF can be understood as a process over time and is technically a continuation which allows to capture state using closures. Both these fundamental features allow us to tackle the weaknesses of our first step and push our approach further towards a truly functional approach.

6.2.1 Implementation. We start by defining our agents now as a SF which receives the states of all agents as input and outputs the state of the agent:

```
type SIRAgent = SF [SIRState] SIRState
```

Now we can define the behaviour of an agent to be the following:

```
sirAgent :: RandomGen g => g -> SIRState -> SIRAgent
sirAgent g Susceptible = susceptibleAgent g
sirAgent g Infected    = infectedAgent g
sirAgent _ Recovered   = recoveredAgent
```

Depending on the initial state we return the corresponding behaviour. Most notably is the difference that we are now passing a random-number generator instead of running in the Random Monad because signal functions as implemented in Yampa are not capable of being monadic. We see that the recovered agent ignores the random-number generator which is in accordance with the implementation in the previous step where it acts as a sink which returns constantly the same state:

```
recoveredAgent :: SIRAgent
recoveredAgent = arr (const Recovered)
```

By using the Yampa combinator *switch* we can change the behaviour of an agent when an event occurs which is much more elegant then the initial approach and much more expressive as it makes the change of behaviour at the occurrence of an event explicit. Thus a susceptible agent behaves as susceptible until it becomes infected. Upon infection an *Event* is returned which results in switching into the *infectedAgent* SF, which causes the agent to behave as an infected agent from that moment on. Instead of randomly drawing the number of contacts to make, we now follow a fundamentally different approach by using Yampas *occasionally* function. This requires a fundamental different approach in selecting the right Δt and sampling the system as will be shown in results.

```
susceptibleAgent :: RandomGen g => g -> SIRAgent
susceptibleAgent g = switch (susceptible g) (const (infectedAgent g))
  where
    susceptible :: RandomGen g => g -> SF [SIRState] (SIRState, Event ())
    susceptible g = proc as -> do
      makeContact <- occasionally g (1 / contactRate) () -< ()
      if isEvent makeContact
      then (do
        a <- drawRandomElemSF g -< as
        case a of
          Infected -> do
```

```

i <- randomBoolSF g infectivity <- ()
if i
  then returnA <- (Infected, Event ())
  else returnA <- (Susceptible, NoEvent)
-      -> returnA <- (Susceptible, NoEvent))
else returnA <- (Susceptible, NoEvent)

```

We deal with randomness differently now and implement signal functions built on the *noiseR* function provided by Yampa. This is another example of the stream character and statefulness of a signal function as it needs to keep track of the changed random-number generator internally through the use of continuations and closures. Here we provide the implementation of *randomBoolSF*, *drawRandomElemSF* works similar but takes a list as input and returns a randomly chosen element from it:

```

randomBoolSF :: RandomGen g => g -> Double -> SF () Bool
randomBoolSF g p = proc _ -> do
  r <- noiseR ((0, 1) :: (Double, Double)) g <- ()
  returnA <- (r <= p)

```

The infected agent behaves as infected until it recovers on average after the illness duration after which it behaves as a recovered agent by switching into *recoveredAgent*. As in the case of the susceptible agent, we use the *occasionally* function to generate the event when the agent recovers. Note that the infected agent ignores the states of the other agents as its behaviour is completely independent of them.

```

infectedAgent :: RandomGen g => g -> SIRAgent
infectedAgent g = switch infected (const recoveredAgent)
  where
    infected :: SF [SIRState] (SIRState, Event ())
    infected = proc _ -> do
      recEvt <- occasionally g illnessDuration () <- ()
      let a = event Infected (const Recovered) recEvt
      returnA <- (a, recEvt)

```

Running and stepping the simulation works now a bit differently, using Yampas function *embed*:

```

runSimulation :: RandomGen g => g -> Time -> DTime -> [SIRState] -> [[SIRState]]
runSimulation g t dt as = embed (stepSimulation sfs as) ((), dts)
  where
    steps      = floor (t / dt)
    dts        = replicate steps (dt, Nothing)
    n          = length as
    (rngs, _)  = rngSplits g n [] -- creates unique RandomGens for each agent
    sfs        = map (\ (g', a) -> sirAgent g' a) (zip rngs as)

```

What need to implement next is a closed feedback-loop. Fortunately, [27], [9] discusses implementing this in Yampa. The function *stepSimulation* is an implementation of such a closed feedback-loop. It takes the current signal functions and states of all agents, runs them all in parallel and returns the new agent states of this step. Yampa provides the *dpSwitch* combinator for running signal functions in parallel, which is quite involved and discussed more in-depth in section 3. It allows us to recursively switch back into the *stepSimulation* with the continuations and new states of all the agents after they were run in parallel. Note the use of *notYet* which is required because in Yampa switching occurs immediately at $t = 0$.

```

stepSimulation :: [SIRAgent] -> [SIRState] -> SF () [SIRState]
stepSimulation sfs as =
  dpSwitch
    (\_ sfs' -> (map (\sf -> (as, sf)) sfs')) -- feeding the agent states to each SF
    sfs -- the signal functions

```

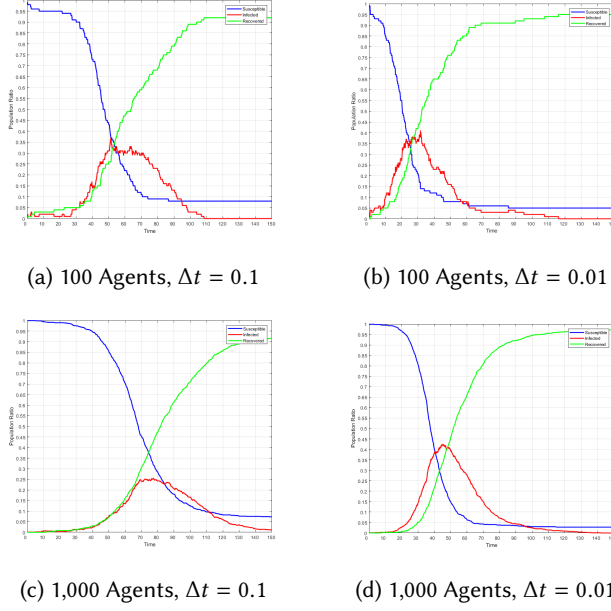


Fig. 4. FRP simulation of SIR using agent-based approach. Population size of 100 and 1,000 with contact rate $\beta = \frac{1}{5}$, infection probability $\gamma = 0.05$, illness duration $\delta = 15$ with initially 1 infected agent. Simulation run for 150 time-steps with various Δt .

```
(switchingEvt >>> notYet)           -- switching event, ignored at t = 0
stepSimulation                       -- recursively switch back into stepSimulation
where
switchingEvt :: SF ((), [SIRState]) (Event [SIRState])
switchingEvt = arr (\ (_, newAs) -> Event newAs)
```

6.2.2 Results. The function which drives the dynamics of our simulation is *occasionally*, which randomly generates an event on average with a given rate following the exponential distribution. To arrive at the correct dynamics, this requires us to sample *occasionally*, and thus the whole system, with small enough Δt which matches the rate. If we choose a too large Δt , we loose events which will result in dynamics which do not approach the SD dynamics sufficiently enough, see Figure 4.

Clearly by keeping the population size constant and just increasing the Δt results in a closer approximation to the SD dynamics. Although the dynamics of Figure 4d with 1000 agents and $\Delta t = 0.01$ look pretty close to SD, we are still not yet there. We would need to both increase the sampling rate and the number of agents. Unfortunately at this point we are running into severe performance and memory problems because the whole system has to be sampled at an even finer Δt whereas we only need to sample *occasionally* with higher frequency. A possible solution would be to implement super-sampling which would allow us to run the whole simulation with $\Delta t = 1.0$ and only sample the *occasionally* function with a much higher frequency. An approach would be to introduce a new combinator to Yampa which allows to super-sample other signal functions.

```
superSampling :: Int -> SF a b -> SF a [b]
```

It evaluates sf for n times, each with $\Delta t = \frac{\Delta t}{n}$ and the same input argument a for all n evaluations. At time 0 no super-sampling is performed and just a single output of sf is calculated. A list of b is

returned with length of n containing the result of the n evaluations of sf . If 0 or less super samples are requested exactly one is calculated. We could then wrap the `occasionally` function which would then generate a list of events. We have investigated super-sampling more in-depth but have to leave this due to lack of space.

6.2.3 Discussion. By moving on to FRP using Yampa we made a huge improvement in clarity, expressivity and robustness of our implementation. State is now implicitly encoded, depending on which signal function is active. Also by using explicit time-semantics with *occasionally* we can achieve extremely fine grained stochastics. Compared to drawing a random number of events we create only a single event or none at all. This requires to sample the system with a much smaller Δt : we are treating it as a truly continuous system, resulting in a hybrid SD/ABS approach. Still we are not too happy about our approach as we feed back all agents states into every agent, something we want to omit in an agent-based simulation. We now move on to the next section in which we introduce a more general and much more controlled mechanism for feeding back agent-states.

6.3 Adding arbitrary data-flow

As already mentioned previously, by revealing the state of every agent to all other agents makes the interactions implicit and deprives the agent of its control over which internal state it wants to reveal to the other agents. As a remedy we introduce data-flows which allow an agent to send arbitrary data to other agents which makes the communication and feedback amongst agents explicit. We cannot express this directly with Yampa combinators as data-flow in Yampa is hard-wired at compile-time so we need to implement our own mechanism because agent interaction is random. The data will be collected from the sending agents and distributed to the receivers after each step, which means that we have a delay of one Δt and a round-trip takes $2\Delta t$ - which is exactly the feedback behaviour we had before. This change requires a different approach of how the agents interact with each other: a susceptible agent then sends to a random agent a data-flow indicating a contact. Only infected agents need to reply to such contact requests by revealing that they are infected. The susceptible agents then need to check for incoming replies which means they were in contact with an infected agent. The deeper motivation behind this data-flow mechanism is the need of an ABS to provide some means to allow agents to interact and communicate with each other. In object-oriented approaches this is rather trivial because agents can call methods of other agents directly and implicitly mutate the other agents state. When following a *pure* approach in Haskell this becomes much more difficult and the data-flow mechanism is our ad-hoc solution for this problem.

6.3.1 Implementation. First we need a way of addressing agents, which we do by introducing unique agent ids. Also we need a data-package which identifies the receiver and carries the data:

```
type AgentId    = Int
type DataFlow d = (AgentId, d)
```

Next we need more general input and output types of our agents signal functions. We introduce a new input type which holds both the agent id of the agent and the incoming data-flows from other agents:

```
data AgentIn d = AgentIn
  { aiId    :: AgentId
  , aiData  :: [DataFlow d] }
```

We also introduce a new output type which holds both the outgoing data-flows to other agents and the observable state the agent wants to reveal to the outside world:

```
data AgentOut o d = AgentOut
  { aoData      :: [DataFlow d]
  , aoObservable :: o }
```

Note that by making the observable state explicit in the types we give the agent further control of what it can reveal to the outside world which allows an even stronger separation between the agents internal state and what the agent wants the world to see.

Now we can then generalise the agents signal function to the following type:

```
type Agent o d = SF (AgentIn d) (AgentOut o d)
```

For our SIR implementation we need concrete types, so we need to define what the type parameters o and d are. For d we use an ADT as contact-message. As type of the observable state we use the existing SIR state. Now we can define the type synonyms for our SIR implementation:

```
data SIRMMsg      = Contact SIRState deriving Eq
type SIRAgentIn  = AgentIn SIRMMsg
type SIRAgentOut = AgentOut SIRState SIRMMsg
type SIRAgent     = Agent SIRState SIRMMsg
```

Next we are going to re-implement the agent-behaviour:

```
sirAgent :: RandomGen g => g -> [AgentId] -> SIRState -> SIRAgent
sirAgent g ais Susceptible = susceptibleAgent g ais
sirAgent g _   Infected   = infectedAgent g
sirAgent _ _   Recovered  = recoveredAgent
```

The initial behaviour is the same as previously but it now takes a list of agent ids as additional parameter. With data-flow we need to know the ids of the agents we are communicating with - we need to know our neighbourhood, or seen differently: we need to have access to the environment we are situated in. In our case our environment is a fully connected read-only network in which all agents know all other agents. The easiest way of representing a fully connected network (complete graph) is simply using a list. The implementation of the recovered agent is still the same, its just a sink which ignores the environment and the random-number generator.

```
recoveredAgent :: SIRAgent
recoveredAgent = arr (const (agentOut Recovered))
```

Note that instead of returning just a SIR state now the output of an agents signal function is of type *AgentOut*:

```
agentOut :: o -> AgentOut o d
agentOut o = AgentOut {
  aoData      = []
  , aoObservable = o }
```

The behaviour of the infected agent now explicitly ignores the environment which was not apparent previously on this level:

```
infectedAgent :: RandomGen g => g -> SIRAgent
infectedAgent g = switch infected (const recoveredAgent)
  where
    infected :: SF SIRAgentIn (SIRAgentOut, Event ())
    infected = proc ain -> do
      recEvt <- occasionally g illnessDuration () -< ()
      let a   = event Infected (const Recovered) recEvt
          ao  = respondToContactWith Infected ain (agentOut a)
      returnA -< (ao, recEvt)
```

The implementation of the infected agent is essentially the same as previously but it now needs to reply to incoming contact data-flows with an "Infected" reply. This makes the difference to the previous step very explicit: in the data-flow approach agents now make explicit contact with each other which means that the susceptible agent sends out contact data-flows to which only infected

agents need to reply. Note that at the moment of recovery the agent can still infect others because it will still reply with *Infected*. The response mechanism is implemented in *respondToContactWith*:

```
respondToContactWith :: SIRState -> SIRAgentIn -> SIRAgentOut -> SIRAgentOut
respondToContactWith state = onData respondToContactWithAux
  where
    respondToContactWithAux :: DataFlow SIRMsg -> SIRAgentOut -> SIRAgentOut
    respondToContactWithAux (senderId, Contact _) = dataFlow (senderId, Contact state)

onData :: (DataFlow d -> acc -> acc) -> AgentIn d -> acc -> acc
onData df ai a = foldr df a (aiData ai)
```

```
dataFlow :: DataFlow d -> AgentOut o d -> AgentOut o d
dataFlow df ao = ao { aoData = df : aoData ao }
```

Note that the order of data-packages in a data-flow is not specified and must not matter as it happens virtually at the same time, thus we always append at the front of the outgoing data-flow list.

Lets look at the susceptible agent behaviour. Again the implementation is very similar to the previous step with the fundamental difference being how contacts are made and how infections occur. First the agent checks if it got infected. This happens if an infected agent replies to the susceptible agents contact *and* the susceptible agent got infected with the given probability. Note that *gotInfected* runs in the Random Monad which we run using *runRand* and the random-number generator. To update our random-number generator to the changed one, we use the *rec* keyword of the Arrow notation [30], which allows us to refer to a variable before it is defined. In combination with *iPre* we introduced a local state - the random-number generator - which changes in every step. The function *iPre :: a -> SF a a* delays the input by one time-step, returns it in the next time-step and is initialized with an initial value. If the agent got infected, it simply returns an AgentOut with *Infected* as observable state and a switching event which indicates the switch to infected behaviour. If the agent is not infected it draws from *occasionally* to determine if it should make contact with a random agent. In case it should make contact it simply sends a data-package with the contact susceptible data to the receiver - note that only an infected agent will reply.

```
susceptibleAgent :: RandomGen g => g -> [AgentId] -> SIRAgent
susceptibleAgent g ais = switch (susceptible g) (const (infectedAgent g))
  where
    susceptible :: RandomGen g => g -> SF SIRAgentIn (SIRAgentOut, Event ())
    susceptible g0 = proc ain -> do
      rec
        g <- iPre g0 -< g'
        let (infected, g') = runRand (gotInfected infectivity ain) g

    if infected
    then returnA -< (agentOut Infected, Event ())
    else (do
      makeContact <- occasionally g (1 / contactRate) () -< ()
      contactId <- drawRandomElemSF g -< ais
      let ao = agentOut Susceptible
      if isEvent makeContact
      then returnA -< (dataFlow (contactId, Contact Susceptible) ao, NoEvent)
      else returnA -< (ao, NoEvent))

gotInfected :: RandomGen g => Double -> SIRAgentIn -> Rand g Bool
gotInfected p ain = onDataM gotInfectedAux ain False
  where
    gotInfectedAux :: RandomGen g => Bool -> DataFlow SIRMsg -> Rand g Bool
```

```

gotInfectedAux False (_, Contact Infected) = randomBoolM p
gotInfectedAux x _ = return x

onDataM :: Monad m => (acc -> DataFlow d -> m acc) -> AgentIn d -> acc -> m acc
onDataM df ai acc = foldM df acc (aiData ai)

```

Stepping the simulation now works a little bit different as the input/output types have changed and we need to collect and distribute the data-flow amongst the agents:

```

stepSimulation :: [SIRAgent] -> [SIRAgentIn] -> SF () [SIRAgentOut]
stepSimulation sfs ains =
  dpSwitch
    (\_ sfs' -> (zip ains sfs')) -- pairing up the AgentIn to the corresponding SF
    sfs                          -- the signal functions
    (switchingEvt >>> notYet)     -- switching event, ignored at t = 0
    stepSimulation               -- recursively switch back into stepSimulation
  where
    switchingEvt :: SF (), [SIRAgentOut] (Event [SIRAgentIn])
    switchingEvt = proc (_, aos) -> do
      let ais      = map aiId ains -- collect all AgentIds
          aios     = zip ais aos   -- pair up AgentIns with their AgentOuts
          nextAins = distributeData aios -- distribute the data-flows to receivers
      returnA -< Event nextAins

```

The distribution of the data-flows happens in the *distributeData* function of *switchingEvt* and is then passed on to the continuation-generation function as previously. Note that due to lack of space we can't give an implementation of *distributeData* but we provide the type.

```

distributeData :: [(AgentId, AgentOut o d)] -> [AgentIn d]

```

6.3.2 Discussion. It seems that by introducing the data-flow mechanism we have increased complexity but we have gained a lot as well. Data-flows make the feedback between agents explicit and give the agents full control over the data which is revealed to other agents. This also makes the fact even more explicit, that we cannot fix the connections between the agents already at compile time e.g. by connecting SFs which is done in many Yampa applications [27], [9], [28] because agents interact with each other randomly. One can look at the data-flow mechanism as a kind of messaging but there are fundamental differences. Messaging almost always comes up as an approach to managing concurrency and involves stateful message-boxes which can be checked and emptied by the receivers - this is not the case with the data-flow mechanism which behaves indeed as a flow where data is not stored in a message box but is only present in the current simulation-step and if ignored by the agent, it will be gone in the next step. Also by distinguishing between the internal and the observable state of the agent, we give the agent even more control of what is visible to the outside world. So far we have an acceptable implementation of an agent-based SIR approach. The next steps focus on introducing more concepts and generalising our implementation so far. What we are lacking at the moment is a general treatment of an environment. To conveniently introduce it we want to make use of monads which is not possible using Yampa. In the next step we make the transition to Monadic Stream Functions (MSF) as introduced in Dunai [33] which allows to do FRP within a monadic context.

6.4 Generalising to Monadic Stream Functions

A part of the library Dunai is BearRiver, a wrapper which re-implements Yampa on top of Dunai, which should allow us to easily replace Yampa with MSFs. This will enable us to run arbitrary monadic computations in a signal function, which we will need in the next step when adding an environment.

6.4.1 Identity Monad. We start by making the transition to BearRiver by simply replacing Yampas signal function by BearRivers which is the same but takes an additional type parameter m indicating the monadic context. If we replace this type-parameter with the Identity Monad we should be able to keep the code exactly the same, except from a few type-declarations, because BearRiver re-implements all necessary functions we are using from Yampa⁴. We start by re-defining our general agent signal function, introducing the monad (stack) our SIR implementation runs in and the agents signal function:

```
type Agent m o d = SF m (AgentIn d) (AgentOut o d)
type SIRMonad    = Identity
type SIRAgent    = Agent SIRMonad SIRState SIRMsg
```

We also have to add the *SIRMonad* to the existing *stepSimulation* type-declarations and we are nearly done. The function *embed* for running the simulation is not provided by BearRiver but by Dunai which has important implications. Dunai does not know about time in MSFs, which is exactly what BearRiver builds on top of MSFs. It does so by adding a ReaderT Double which carries the Δt . This means that *embed* returns a computation in the ReaderT Double Monad which we need to run explicitly using *runReaderT*. This then results in an identity computation which we simply peel away using *runIdentity*. Here is the complete code of *runSimulation*:

```
runSimulation :: RandomGen g => g -> Time -> DTime -> [(AgentId, SIRState)] -> [[SIRState]]
runSimulation g t dt as = map (map aoObservable) aoss
  where
    steps      = floor (t / dt)
    dts        = replicate steps ()
    n          = length as
    (rngs, _)   = rngSplits g n [] -- rngs for each agent
    ais        = map fst as
    sfs        = map (\(g', (_, s)) -> sirAgent g' ais s) (zip rngs as) -- SF for each agent
    ains       = map (\(aid, _) -> agentIn aid) as -- initial AgentIns
    aossReader = embed (stepSimulation sfs ains) dts -- running simulation
    aossIdentity = runReaderT aossReader dt -- running ReaderT
    aoss       = runIdentity aossIdentity -- running Identity
```

Note that *embed* does not take a list of Δt any more but simply a list of inputs for each step to the top level signal function.

6.4.2 Random Monad. Using the Identity Monad does not gain us anything but it was a first step towards a more general solution. Our next step is to replace the Identity Monad by the Random Monad which will allow us to get rid of the RandomGen arguments to our functions and run the whole simulation within the Random Monad *again* just as we started but now with the full features functional reactive programming. We start by re-defining the *SIRMonad* and *SIRAgent*:

```
type SIRMonad g = Rand g
type SIRAgent g = Agent (SIRMonad g) SIRState SIRMsg
```

The question is now how to access this Random Monad functionality within the MSF context. For the function *occasionally*, there exists a monadic pendant *occasionallyM* which requires a MonadRandom type-class. Because we are now running within a MonadRandom instance we simply replace *occasionally* with *occasionallyM*. Running *gotInfected* is now much easier by using the function *arrM* of Dunai which allows us to run a monadic action in the stack as an arrow. We can then directly run *gotInfected* by lifting it into the Random Monad. The implementation of the infected agent is the same as previously except we can omit the handling of the random-number generator and directly lift into the Random Monad

⁴This was not quite true at the time of writing this paper, where *occasionally*, *noiseR* and *dpSwitch* were missing. We simply forked the project from GitHub and implemented these functions in our own repository.

```

susceptibleAgent :: RandomGen g => [AgentId] -> SIRAgent g
susceptibleAgent ais = switch susceptible(const (infectedAgent))
  where
    susceptible :: RandomGen g => SF (SIRMonad g) SIRAgentIn (SIRAgentOut, Event ())
    susceptible = proc ain -> do
      infected <- arrM (lift . gotInfected infectivity) -< ain -- lift into Random Monad
      if infected
      then returnA -< (agentOut Infected, Event ())
      else (do
        makeContact <- occasionallyM (1 / contactRate) () -< ()
        contactId <- drawRandomElemSF -< ais
        let ao = agentOut Susceptible
        if isEvent makeContact
        then returnA -< (dataFlow (contactId, Contact Susceptible) ao, NoEvent)
        else returnA -< (ao, NoEvent))

```

Note also that *drawRandomElemSF* doesn't take a random number generator as well as it has been reimplemented to make full use of the *MonadRandom* in the stack:

```

drawRandomElemS :: MonadRandom m => SF m [a] a
drawRandomElemS = proc as -> do
  r <- getRandomRS ((0, 1) :: (Double, Double)) -< ()
  let len = length as
  let idx = fromIntegral len * r
  let a = as !! floor idx
  returnA -< a

```

Instead of *noiseR* which requires a *RandomGen*, it makes use of Dunai *getRandomRS* stream function which simply runs *getRandomR* in the *MonadRandom*.

Finally because our innermost monad is now the *Random Monad* instead of the *Identity* we run it by *evalRand*:

```

aossReader = embed (stepSimulation sfs ains) dts
aossRand = runReaderT aossReader dt
aoss = evalRand aossRand g

```

6.4.3 Discussion. By making the transition to MSFs we can now stack arbitrary number of monads. As an example we could add a *StateT* monad on the type of *AgentOut* which would allow to conveniently manipulate the *AgentOut* e.g. in case where one sends more than one message or the construction of the final *AgentOut* is spread across multiple functions which allows easy composition. When implementing this, one needs to replace the *dpSwitch* with an individual implementation in which one runs the state monad isolated for each agent. We could even add the *IO* monad if our agents require arbitrary *IO* e.g. reading/writing from files or communicating over *TCP/IP*. Although one could run in the *IO Monad*, one should not do so as one would loose all static guarantees about the reproducibility of the simulation. In *ABS* we need deterministic behaviour under all circumstances where repeated runs with the same initial conditions, including the random-number generator, should result in the same dynamics. If we allow the use of the *IO Monad* we loose the ability to guarantee the reproducibility at compile-time even if the agents never use *IO* facilities and just run in the *IO* for printing debug messages. So far making the transition to MSFs does not seem as compelling as making the move from the *Random Monad* to *FRP* in the beginning. Running in the *Random Monad* within *FRP* is convenient but we could achieve the same with passing *RandomGen* around as we already demonstrated. In the next step we introduce the concept of a read/write environment which we realise using a *StateT* monad. This will show the real benefit of the transition to MSFs as without it, implementing a general environment access would be quite cumbersome.

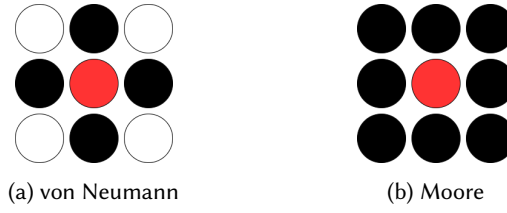


Fig. 5. Common neighbourhoods in discrete 2D environments of Agent-Based Simulation.

6.5 Adding an environment

In this step we will add an environment in which the agents exist and through which they interact with each other. This is a fundamental different approach to agent interaction but is as valid as the approaches in the previous steps. In ABS agents are often situated within a discrete 2D environment [37], [15], [14] which is simply a finite $N \times M$ grid with either a Moore or von Neumann neighbourhood (see Figure 5). Agents are either static or can move freely around with cells allowing either single or multiple occupants.

We can directly map the SIR model to a discrete 2D environment by placing the agents on a corresponding 2D grid with an unrestricted neighbourhood. The behaviour of the agents is the same but they select their interactions directly from the environment. Also instead of using data-flow to communicate, agents now communicate through the environment by revealing their current state to their neighbours by placing it on their cell. Agents can read the states of all their neighbours which tells them if a neighbour is infected or not. This allows us to implement the infection mechanism as in the beginning. For purposes of a more interesting and real approach, we restrict the neighbourhood to Moore (Figure 5b).

6.5.1 Implementation. We start by defining our discrete 2D environment for which we use an indexed two dimensional array. In each cell the agents will store their current state, thus we use the *SIRState* as type for our array data:

```
type Disc2dCoord = (Int, Int)
type SIREnv      = Array Disc2dCoord SIRState
```

Next we redefine our monad stack and agent signal function. We use a *StateT* transformer on top of our *Random Monad* from step 4 with the previously defined *SIREnv* as type for the state. Our agent signal function now has only unit input and output type as we removed the data-flow mechanism for reasons of clarity. This also indicates by the types that the actions of the agents are only visible in side-effects through the monad stack they are running in.

```
type SIRMonad g = StateT SIREnv (Rand g)
type SIRAgent g = SF (SIRMonad g) () ()
```

Instead of having a unique agent id an agent is now initialised through its coordinates in the environment and its initial state.

```
sirAgent :: RandomGen g => Disc2dCoord -> SIRState -> SIRAgent g
sirAgent c Susceptible = susceptibleAgent c
sirAgent c Infected    = infectedAgent c
sirAgent _ Recovered   = recoveredAgent
```

Again the recovered agent behaviour is the shortest one:

```
recoveredAgent :: RandomGen g => SIRAgent g
recoveredAgent = returnA
```

The implementation of a susceptible agent is now a bit different and a mix between previous steps. Instead of using data-flows the agent directly queries the environment for its neighbours and randomly selects one of them. The remaining behaviour is similar:

```
susceptibleAgent :: RandomGen g => Disc2dCoord -> SIRAgent g
susceptibleAgent coord = switch susceptible (const (infectedAgent coord))
  where
    susceptible :: RandomGen g => SF (SIRMonad g) () ((), Event ())
    susceptible = proc _ -> do
      makeContact <- occasionallyM (1 / contactRate) () -< ()
      if not (isEvent makeContact)
      then returnA -< ((), NoEvent)
      else (do
        env <- arrM_ (lift get) -< ()
        let ns = neighbours env coord agentGridSize moore
        s <- drawRandomElemS -< ns
        case s of
          Infected -> do
            infected <- arrM_ (lift $ lift $ randomBoolM infectivity) -< ()
            if infected
            then (do
                  arrM (put . changeCell coord Infected) -< env
                  returnA -< ((), Event ()))
            else returnA -< ((), NoEvent)
          _ -> returnA -< ((), NoEvent))
```

Querying the neighbourhood is done using the *neighbours* function. It takes the environment, the coordinate for which to query the neighbours for, the dimensions of the 2D grid and the neighbourhood information and returns the data of all neighbours it could find. Note that on the edge of the environment, it could be the case that fewer neighbours than provided in the neighbourhood information will be found due to clipping.

```
neighbours :: SIREnv -> Disc2dCoord -> Disc2dCoord -> [Disc2dCoord] -> [SIRState]
neighbours e (x, y) (dx, dy) n = map (e !) nCoords'
  where
    nCoords = map (\ (x', y') -> (x + x', y + y')) n
    nCoords' = filter (\ (x, y) -> x >= 0 && y >= 0 &&
      x <= (dx - 1) && y <= (dy - 1)) nCoords

neumann :: [Disc2dCoord]
neumann = [ top, left, right, bottom ]

moore :: [Disc2dCoord]
moore = [ topLeft, top, topRight,
          left, right,
          bottomLeft, bottom, bottomRight ]

topLeft :: Disc2dCoord
topLeft = (-1, -1)
top = ( 0, -1)
topRight = ( 1, -1)
...

```

The behaviour of an infected agent is nearly the same with the difference that upon recovery the infected agent updates its state in the environment from Infected to Recovered.

```
infectedAgent :: RandomGen g => Disc2dCoord -> SIRAgent g
infectedAgent coord = switch infected (const recoveredAgent)
  where
```

```

infected :: RandomGen g => SF (SIRMonad g) () ((), Event ())
infected = proc _ -> do
  recovered <- occasionallyM illnessDuration () -< ()
  if isEvent recovered
  then (do
    env <- arrM_ (lift get) -< ()
    arrM (\env -> put (changeCell coord Recovered env)) -< env
    returnA -< ((), Event ()))
  else returnA -< ((), NoEvent)

```

Running the simulation is now slightly different as we have an initial environment and also need to peel away the StateT transformer:

```

runSimulation :: RandomGen g => g -> Time -> DTime -> SIREnv -> [(Disc2dCoord, SIRState)] -> [SIREnv]
runSimulation g t dt env as = evalRand esRand g
  where
    steps      = floor (t / dt)
    dts        = replicate steps ()
    sfs        = map (uncurry sirAgent) as      -- initial SFs of all agents
    esReader    = embed (stepSimulation sfs) dts -- running the simulation
    esState     = runReaderT esReader dt        -- removing ReaderT
    esRand      = evalStateT esState env        -- removing StateT

```

As initial state we use the initial environment and instead of returning agent states we simply return a list of environments, one for each step. The agent states can then be extracted from each environment.

Due to the different approach of returning the SIREnv in every step, we implemented our own MSF:

```

stepSimulation :: RandomGen g => [SIRAgent g] -> SF (SIRMonad g) () SIREnv
stepSimulation sfs = MSF (\_ -> do
  res <- mapM (\unMSF' () ) sfs -- running all SFs with unit input
  let sfs' = fmap snd res       -- extracting continuations, ignore output
  env <- get                    -- getting environment of current step
  let ct = stepSimulation sfs' -- recursive continuation
  return (env, ct))

```

6.5.2 Results. We implemented rendering of the environments using the gloss library which allows us to cycle arbitrarily through the steps and inspect the spreading of the disease over time visually as in Figure 6.

Note that the dynamics of the spatial SIR simulation which are seen in Figure 6d look quite different from the SD dynamics of Figure 2. This is due to a much more restricted neighbourhood which results in far fewer infected agents at a time and a lower number of recovered agents at the end of the epidemic, meaning that fewer agents got infected overall.

6.5.3 Discussion. At first the environment approach might seem a bit overcomplicated and one might ask what we have gained by using an unrestricted neighbourhood where all agents can contact all others. The real win is that we can introduce arbitrary restrictions on the neighbourhood as shown using the Moore neighbourhood. Of course the environment is not restricted to a discrete 2D grid and can be anything from a continuous N-dimensional space to a complex network - one only needs to change the type of the StateT monad and provide corresponding neighbourhood querying functions. The ability to place the heterogeneous agents in a generic environment is also the fundamental advantage of an agent-based over the SD approach and allows to simulate much more realistic scenarios. Note that for reasons of clarity we have removed the data-flow approach from this implementation which results in the unit-types of input and output. In a full blown agent-based simulation library we would combine both approaches.

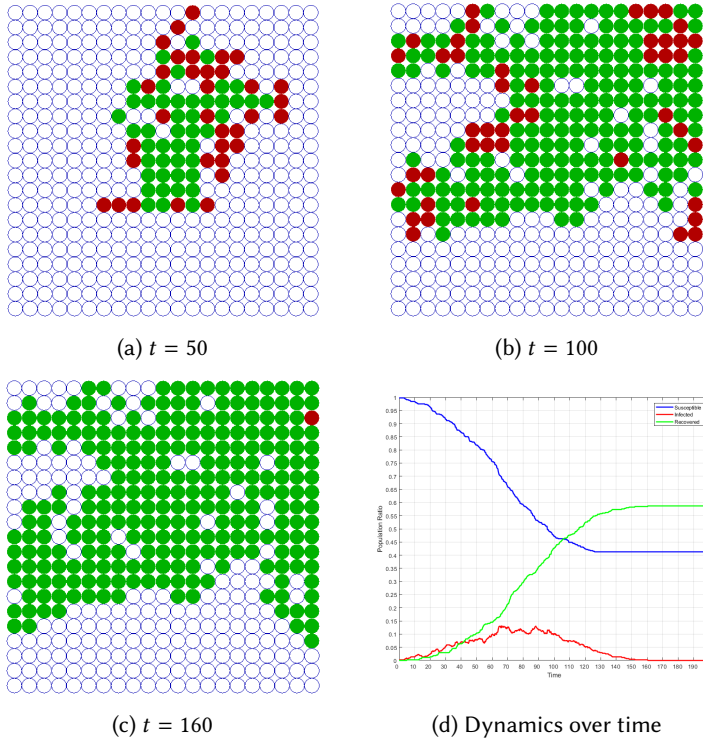


Fig. 6. Simulating the agent-based SIR model on a 21x21 2D grid with Moore neighbourhood (Figure 5b), a single infected agent at the center and same SIR parameters as in Figure 2. Simulation run until $t = 200$ with fixed $\Delta t = 0.1$. Last infected agent recovers shortly after $t = 160$. The susceptible agents are rendered as blue hollow circles for better contrast.

Generally, there exist four different types of environments in agent-based simulation:

- (1) Passive read-only - implemented in the previous steps, where the environment never changes and is passed as static information, e.g. list of neighbours, to each agent.
- (2) Passive read/write - implemented in this step. The environment itself is not modelled as an active process but just as shared data which can be accessed and manipulated by the agents.
- (3) Active read-only - can be implemented by adding an environment agent which broadcasts changes in the environment to all agents using the data-flow mechanism.
- (4) Active read/write - can be implemented as in this step plus adding an environment agent which reads/writes the environment e.g. regrowing some resources.

Attempting to introduce an active/passive read/write environment to the Yampa implementation would be quite cumbersome. A possible solution could be to add a type-parameter e which captures the type of the environment and then pass it in through the input and allow it to be returned in the output of an agent signal function. We would then end up with n copies of the environment - one for each agent - which we need to fold back into a single environment. Having an active environment complicates things even further. All these problems are not an issue when using MSFs with a StateT which is a compelling example for making the transition to the more general MSFs. The convenient thing is that although conceptually all agents act at the same time, technically by

using *mapM* in *stepSimulation* they are run after another, serialising the environment access which gives every agent exclusive read/write access while it is active.

6.6 Further Steps

6.6.1 Agent-Transactions. We have implemented synchronous interactions, which we termed agent-transactions in an additional step which we had to omit due to lack of space. Agent-transactions are necessary when an arbitrary number of interactions between two agents need to happen instantaneously without time-lag. The use-case for this are price negotiations between multiple agents where each pair of agents needs to come to an agreement in the same time-step [15]. In object-oriented programming, the concept of synchronous communication between agents is implemented directly with method calls. We solved it pure functionally by running the signal functions of the transacting agent pair as often as their protocol requires but with $\Delta t = 0$, which indicates the instantaneous character of agent-transactions.

6.6.2 Dynamic Agent creation. In the SIR model, the agent population stays constant - agents don't die and no agents are created during simulation - but some simulations [15] require dynamic agent destruction and creation. We can easily add and remove agents signal functions in the recursive switch after each time-step. The only problem is that creating new agents requires unique agent ids but with the transition to MSFs we can add a monadic context which allows agents to draw the next unique agent id when they create a new agent.

7 CONCLUSIONS

Our approach is radically different from traditional approaches in the ABS community. First it builds on the already quite involved FRP paradigm. Second, due to our hybrid approach, it forces one to think properly of time-semantics of the model, how small Δt should be, whether one needs super-sampling or not and how many samples one should take. Third it requires to think about agent-interactions in a new way instead of being just method-calls. Also due to the underlying nature and motivation of FRP and Yampa, agents can be seen as signals which are generated and consumed by a signal function. If an agent does not change, the output signal should stay constant and if the agent changes e.g. by sending a message or changing its state, the output signal should change as well. A dead agent then should have no signal at all. In all but the very first step of our approach, the agents are completely time-dependent which means they will not act when time does not advance. Thus when running our simulation with $\Delta t = 0$ the dynamics stay constant and won't change.

Because no part of the simulation runs in the IO Monad and we do not use *unsafePerformIO* we can rule out a serious class of bugs caused by implicit data-dependencies and side-effects which can occur in traditional imperative implementations. Also we can statically guarantee the reproducibility of the simulation. Within the agents there are no side effects possible which could result in differences between same runs (e.g. file access, networking, threading, random-number re-seeding from current system time). Every agent has access to its own random-number generator or the Random Monad, allowing randomness to occur in the simulation but the random-generator seed is fixed in the beginning and can never be changed within an agent to come from e.g. the current system time, which would require to run within the IO Monad. This means that after initialising the agents, which *could* run in the IO Monad, the simulation itself runs completely deterministically. This is also ensured through fixing the Δt and not making it dependent on the performance of e.g. a rendering-loop or other system-dependent sources of non-determinism as described by [34]. Also by using FRP we gain all the benefits from it and can use research on testing, debugging and exploring FRP systems [34], [31].

Our approach is inherently time-driven where the system is sampled with fixed Δt . The other fundamental way to implement an ABS in general, is to follow an event-driven approach [26] which is based on the theory of discrete-event simulation [52]. In such an approach the system is not sampled in fixed Δt but advanced as events occur where the system stays constant in between events. Depending on the model, an event-driven approach may be more suitable and is more natural to express the requirements of the model. How to derive a purely functional approach to event-driven ABS we leave for further research.

Also we have built a full blown library for implementing pure agent-based simulations which implements and combines all the presented techniques including agent-transactions. As examples we implemented a number of well known agent-based models with various complexity, including the seminal and highly complex Sugarscape model [15] and Schelling Segregation [37]⁵. Compared to object-oriented implementations, the pure functional ones are quite concise and highly expressive. This shows that from an engineering point-of-view a pure functional approach to ABS is as well suited as object-oriented techniques and we plan on releasing it on Hackage in the future.

Issues

Unfortunately, the hybrid approach of SD/ABS amplifies the performance issues of agent-based approaches, which requires much more processing power compared to SD, because each agent is modelled individually in contrast to aggregates in SD [24]. With the need to sample the system with high frequency, this issue gets worse. The reason for this is that we don't have in-place updates of data structures and make no use of references. This results in lots of copying which is simply not necessary in the imperative languages with implicit effects. Also it is much more difficult to reason about time and space in our approach.

Despite the strengths and benefits we get by leveraging on FRP, there are also weakness to it which show up in our approach as well. The authors [39] show that the type-system of Yampa does not prevent one from run-time errors and infinite loops, as FRP is sacrificing the safety of FP for sake of expressiveness. Amongst others they showed that well-formed feedback does depend on the programmer and cannot be guaranteed at compile time through the type system. Feedback is an inherent feature of ABS where agents update their state at time $t + \Delta t$ depending on time t . This is only visible in Section 6.2 where we use feedback to update the random-number generator (rec/iPre makes the inherently feedback nature of ABS very explicit) but in more complex ABS models with a more complex state than in the SIR model, feedback is the core feature to keep and update the state of an agent. Also a chain of switches could result in an infinite loop - this cannot be checked at compile time and needs to be carefully designed by the programmer and results sometimes in popping up of operational details (e.g. the need to use `>>> notYet` in parallel switches for stepping the simulation). The authors of [39] proposed dependent types as a remedy for these shortcomings and discuss a dependently typed implementation of the core of Yampa in Agda.

Also having a two layer (arrows and pure functions) language in Yampa [22] and three a layer (arrows, monadic and pure functions) language in Dunai / BearRiver adds expressivity and power but can make things quite complex already in the simple SIR example. Fortunately with a more complex model the complexity in this context does not increase - in the end it is the price we need to pay for the high expressivity which functions like *occasionally* provide.

We can conclude that the main difficulty of a pure functional approach evolves around the communication and interaction between agents. This is straight-forward in object-oriented programming where it is achieved using method-calls mutating the internal state of the agent. Due to the lack of mutable state and method calls this is naturally much more difficult to achieve in

⁵The code is freely available at <https://github.com/thalerjonathan/chimera>

pure functional programming. Our current solution to the problem is the data-flow mechanism as implemented in section 6.3. We have to admit that it is rather ad-hoc and may need some refinement and generalisation, also it is unclear if there are not better/more flexible mechanisms of agent communication and interaction in pure functional programming. We leave this for further research.

We started with high hopes for the pure functional approach and hypothesized that it will be truly superior to existing traditional object-oriented approaches but we come to the conclusion that this is not so. The single real benefit is the lack of implicit side-effects and reproducibility guaranteed at compile time. Still, our research was not in vain as we see it as an intermediary step towards using dependent types. Moving to dependent types would pose a unique benefit over the object-oriented approach and should allow us to express and guarantee properties at compile time which is not possible with imperative approaches. We leave this for further research.

8 FURTHER RESEARCH

We see this paper as an intermediary and necessary step towards dependent types for which we first needed to understand the potentials and limitations of a non-dependently typed pure functional approach in Haskell. Dependent types are extremely promising in functional programming as they allow us to express stronger guarantees about the correctness of programs and go as far as allowing to formulate programs and types as constructive proofs [48] which must be total by definition [46], [4], [3], [36]. So far no research using dependent types in agent-based simulation exists at all and it is not clear whether dependent types make sense in this context. In our next paper we want to explore this for the first time and ask more specifically how we can add dependent types to our pure functional approach, which conceptual implications this has for ABS and what we gain from doing so. We plan on using Idris [7], [8] as the language of choice as it is very close to Haskell with focus on real-world application and running programs as opposed to other languages with dependent types e.g. Agda and Coq which serve primarily as proof assistants. It would be of immense interest whether we could apply dependent types to the model meta-level or not - this boils down to the question if we can encode our model specification in a dependent type way. This would allow the ABS community for the first time to reason about a proper formalisation of a model. We plan to implement a total and terminating implementation of our approach which would be a formal proof-by-construction that the agent-based approach of the SIR model terminates after a finite number of steps.

ACKNOWLEDGMENTS

The authors would like to thank I. Perez, H. Nilsson, H. Vollbrecht, J. Greensmith, S. Venkatesan and J. Hey for constructive comments and valuable discussions.

REFERENCES

- [1] Helen Abbey. 1952. An Examination of the Reed-Frost Theory of Epidemics. *Human Biology* 24, 3 (Sept. 1952), 201. <http://ezproxy.nottingham.ac.uk/login?url=https://search.proquest.com/docview/1301828990?accountid=8018>
- [2] Aslam Ahmed, Julie Greensmith, and Uwe Aickelin. 2013. Variance in System Dynamics and Agent Based Modelling Using the SIR Model of Infectious Disease. *arXiv:1307.2001 [cs]* (July 2013). <http://arxiv.org/abs/1307.2001> arXiv: 1307.2001.
- [3] Thorsten Altenkirch, Nils Anders Danielsson, Andres Loeh, and Nicolas Oury. 2010. Pi Sigma: Dependent Types Without the Sugar. In *Proceedings of the 10th International Conference on Functional and Logic Programming (FLOPS'10)*. Springer-Verlag, Berlin, Heidelberg, 40–55. https://doi.org/10.1007/978-3-642-12251-4_5
- [4] Thorsten Altenkirch, Conor McBride, and James Mckinna. 2005. Why dependent types matter. In *In preparation*, <http://www.e-pig.org/downloads/ydtm.pdf>.
- [5] Nikolaos Bezirgiannis. 2013. *Improving Performance of Simulation Software Using Haskell's Concurrency & Parallelism*. Ph.D. Dissertation. Utrecht University - Dept. of Information and Computing Sciences.

- [6] Andrei Borshchev and Alexei Filippov. 2004. *From System Dynamics and Discrete Event to Practical Agent Based Modeling: Reasons, Techniques, Tools*. Oxford.
- [7] Edwin Brady. 2013. Idris, a general-purpose dependently typed programming language: Design and implementation. *Journal of Functional Programming* 23, 05 (2013), 552–593. <https://doi.org/10.1017/S095679681300018X>
- [8] Edwin Brady. 2017. *Type-Driven Development with Idris*. Manning Publications Company. Google-Books-ID: eWzEjwEACAAJ.
- [9] Antony Courtney, Henrik Nilsson, and John Peterson. 2003. The Yampa Arcade. In *Proceedings of the 2003 ACM SIGPLAN Workshop on Haskell (Haskell '03)*. ACM, New York, NY, USA, 7–18. <https://doi.org/10.1145/871895.871897>
- [10] D. Dawson, P. O. Siebers, and Tuong Manh Vu. 2014. Opening pandora's box: Some insight into the inner workings of an Agent-Based Simulation environment. In *2014 Federated Conference on Computer Science and Information Systems*. 1453–1460. <https://doi.org/10.15439/2014F335>
- [11] Tanja De Jong. 2014. *Suitability of Haskell for Multi-Agent Systems*. Technical Report. University of Twente.
- [12] Richard H. Enns. 2010. *It's a Nonlinear World* (1st ed.). Springer Publishing Company, Incorporated.
- [13] Joshua M. Epstein. 2012. *Generative Social Science: Studies in Agent-Based Computational Modeling*. Princeton University Press. Google-Books-ID: 6jPiuMbKKJ4C.
- [14] Joshua M. Epstein. 2014. *Agent_Zero: Toward Neurocognitive Foundations for Generative Social Science*. Princeton University Press. Google-Books-ID: VJEpAgAAQBAJ.
- [15] Joshua M. Epstein and Robert Axtell. 1996. *Growing Artificial Societies: Social Science from the Bottom Up*. The Brookings Institution, Washington, DC, USA.
- [16] Jason Gregory. 2018. *Game Engine Architecture, Third Edition*. Taylor & Francis.
- [17] Paul Hudak, Antony Courtney, Henrik Nilsson, and John Peterson. 2003. Arrows, Robots, and Functional Reactive Programming. In *Advanced Functional Programming*, Johan Jeuring and Simon L. Peyton Jones (Eds.). Number 2638 in *Lecture Notes in Computer Science*. Springer Berlin Heidelberg, 159–187. http://link.springer.com/chapter/10.1007/978-3-540-44833-4_6 DOI: 10.1007/978-3-540-44833-4_6.
- [18] Paul Hudak, John Hughes, Simon Peyton Jones, and Philip Wadler. 2007. A History of Haskell: Being Lazy with Class. In *Proceedings of the Third ACM SIGPLAN Conference on History of Programming Languages (HOPL III)*. ACM, New York, NY, USA, 12–1–12–55. <https://doi.org/10.1145/1238844.1238856>
- [19] John Hughes. 2000. Generalising Monads to Arrows. *Sci. Comput. Program.* 37, 1-3 (May 2000), 67–111. [https://doi.org/10.1016/S0167-6423\(99\)00023-4](https://doi.org/10.1016/S0167-6423(99)00023-4)
- [20] John Hughes. 2005. Programming with Arrows. In *Proceedings of the 5th International Conference on Advanced Functional Programming (AFP'04)*. Springer-Verlag, Berlin, Heidelberg, 73–129. https://doi.org/10.1007/11546382_2
- [21] Peter Jankovic and Ondrej Such. 2007. *Functional Programming and Discrete Simulation*. Technical Report.
- [22] Alan Jeffrey. 2013. Causality for Free!: Parametricity Implies Causality for Functional Reactive Programs. In *Proceedings of the 7th Workshop on Programming Languages Meets Program Verification (PLPV '13)*. ACM, New York, NY, USA, 57–68. <https://doi.org/10.1145/2428116.2428127>
- [23] W. O. Kermack and A. G. McKendrick. 1927. A Contribution to the Mathematical Theory of Epidemics. *Proceedings of the Royal Society of London A: Mathematical, Physical and Engineering Sciences* 115, 772 (Aug. 1927), 700–721. <https://doi.org/10.1098/rspa.1927.0118>
- [24] Charles M. Macal. 2010. To Agent-based Simulation from System Dynamics. In *Proceedings of the Winter Simulation Conference (WSC '10)*. Winter Simulation Conference, Baltimore, Maryland, 371–382. <http://dl.acm.org/citation.cfm?id=2433508.2433551>
- [25] C. M. Macal. 2016. Everything you need to know about agent-based modelling and simulation. *Journal of Simulation* 10, 2 (May 2016), 144–156. <https://doi.org/10.1057/jos.2016.7>
- [26] Ruth Meyer. 2014. Event-Driven Multi-agent Simulation. In *Multi-Agent-Based Simulation XV (Lecture Notes in Computer Science)*. Springer, Cham, 3–16. https://doi.org/10.1007/978-3-319-14627-0_1
- [27] Henrik Nilsson, Antony Courtney, and John Peterson. 2002. Functional Reactive Programming, Continued. In *Proceedings of the 2002 ACM SIGPLAN Workshop on Haskell (Haskell '02)*. ACM, New York, NY, USA, 51–64. <https://doi.org/10.1145/581690.581695>
- [28] Henrik Nilsson and Ivan Perez. 2014. Declarative Game Programming: Distilled Tutorial. In *Proceedings of the 16th International Symposium on Principles and Practice of Declarative Programming (PPDP '14)*. ACM, New York, NY, USA, 159–160. <https://doi.org/10.1145/2643135.2643160>
- [29] Michael J. North and Charles M. Macal. 2007. *Managing Business Complexity: Discovering Strategic Solutions with Agent-Based Modeling and Simulation*. Oxford University Press, USA. Google-Books-ID: gRATDAAQBAJ.
- [30] Ross Paterson. 2001. A New Notation for Arrows. In *Proceedings of the Sixth ACM SIGPLAN International Conference on Functional Programming (ICFP '01)*. ACM, New York, NY, USA, 229–240. <https://doi.org/10.1145/507635.507664>
- [31] Ivan Perez. 2017. Back to the Future: Time Travel in FRP. In *Proceedings of the 10th ACM SIGPLAN International Symposium on Haskell (Haskell 2017)*. ACM, New York, NY, USA, 105–116. <https://doi.org/10.1145/3122955.3122957>

- [32] Ivan Perez. 2017. *Extensible and Robust Functional Reactive Programming*. Doctoral Thesis. University Of Nottingham, Nottingham.
- [33] Ivan Perez, Manuel Baerenz, and Henrik Nilsson. 2016. Functional Reactive Programming, Refactored. In *Proceedings of the 9th International Symposium on Haskell (Haskell 2016)*. ACM, New York, NY, USA, 33–44. <https://doi.org/10.1145/2976002.2976010>
- [34] Ivan Perez and Henrik Nilsson. 2017. Testing and Debugging Functional Reactive Programming. *Proc. ACM Program. Lang.* 1, ICFP (Aug. 2017), 2:1–2:27. <https://doi.org/10.1145/3110246>
- [35] Donald E. Porter. 1962. Industrial Dynamics. Jay Forrester. M.I.T. Press, Cambridge, Mass.; Wiley, New York, 1961. xv + 464 pp. Illus. \$18. *Science* 135, 3502 (Feb. 1962), 426–427. <https://doi.org/10.1126/science.135.3502.426-a>
- [36] The Univalent Foundations Program. 2013. *Homotopy Type Theory: Univalent Foundations of Mathematics*. <https://homotopytypetheory.org/book>, Institute for Advanced Study.
- [37] Thomas Schelling. 1971. Dynamic models of segregation. *Journal of Mathematical Sociology* 1 (1971).
- [38] Oliver Schneider, Christopher Dutchyn, and Nathaniel Osgood. 2012. Towards Frabjous: A Two-level System for Functional Reactive Agent-based Epidemic Simulation. In *Proceedings of the 2Nd ACM SIGHIT International Health Informatics Symposium (IHI '12)*. ACM, New York, NY, USA, 785–790. <https://doi.org/10.1145/2110363.2110458>
- [39] Neil Sculthorpe and Henrik Nilsson. 2009. Safe Functional Reactive Programming Through Dependent Types. In *Proceedings of the 14th ACM SIGPLAN International Conference on Functional Programming (ICFP '09)*. ACM, New York, NY, USA, 23–34. <https://doi.org/10.1145/1596550.1596558>
- [40] Peer-Olaf Siebers and Uwe Aickelin. 2008. Introduction to Multi-Agent Simulation. *arXiv:0803.3905 [cs]* (March 2008). <http://arxiv.org/abs/0803.3905> arXiv: 0803.3905.
- [41] P. O. Siebers, C. M. Macal, J. Garnett, D. Buxton, and M. Pidd. 2010. Discrete-event simulation is dead, long live agent-based simulation! *Journal of Simulation* 4, 3 (Sept. 2010), 204–210. <https://doi.org/10.1057/jos.2010.14>
- [42] David Sorokin. 2015. *Aivika 3: Creating a Simulation Library based on Functional Programming*.
- [43] Martin Sulzmann and Edmund Lam. 2007. *Specifying and Controlling Agents in Haskell*. Technical Report.
- [44] Tim Sweeney. 2006. The Next Mainstream Programming Language: A Game Developer’s Perspective. In *Conference Record of the 33rd ACM SIGPLAN-SIGACT Symposium on Principles of Programming Languages (POPL '06)*. ACM, New York, NY, USA, 269–269. <https://doi.org/10.1145/1111037.1111061>
- [45] Jonathan Thaler and Peer-Olaf Siebers. 2017. *The Art Of Iterating: Update-Strategies in Agent-Based Simulation*. Dublin.
- [46] Simon Thompson. 1991. *Type Theory and Functional Programming*. Addison Wesley Longman Publishing Co., Inc., Redwood City, CA, USA.
- [47] Ivan Vendrov, Christopher Dutchyn, and Nathaniel D. Osgood. 2014. Frabjous: A Declarative Domain-Specific Language for Agent-Based Modeling. In *Social Computing, Behavioral-Cultural Modeling and Prediction*, William G. Kennedy, Nitin Agarwal, and Shanchieh Jay Yang (Eds.). Number 8393 in Lecture Notes in Computer Science. Springer International Publishing, 385–392. http://link.springer.com/chapter/10.1007/978-3-319-05579-4_47 DOI: 10.1007/978-3-319-05579-4_47.
- [48] Philip Wadler. 2015. Propositions As Types. *Commun. ACM* 58, 12 (Nov. 2015), 75–84. <https://doi.org/10.1145/2699407>
- [49] Zhanyong Wan and Paul Hudak. 2000. Functional Reactive Programming from First Principles. In *Proceedings of the ACM SIGPLAN 2000 Conference on Programming Language Design and Implementation (PLDI '00)*. ACM, New York, NY, USA, 242–252. <https://doi.org/10.1145/349299.349331>
- [50] Gerhard Weiss. 2013. *Multiagent Systems*. MIT Press. Google-Books-ID: WY36AQAQBAJ.
- [51] Michael Wooldridge. 2009. *An Introduction to MultiAgent Systems* (2nd ed.). Wiley Publishing.
- [52] Bernard P. Zeigler, Herbert Praehofer, and Tag Gon Kim. 2000. *Theory of Modeling and Simulation: Integrating Discrete Event and Continuous Complex Dynamic Systems*. Academic Press. Google-Books-ID: REzmYOQmHuQC.

Received March 2018