

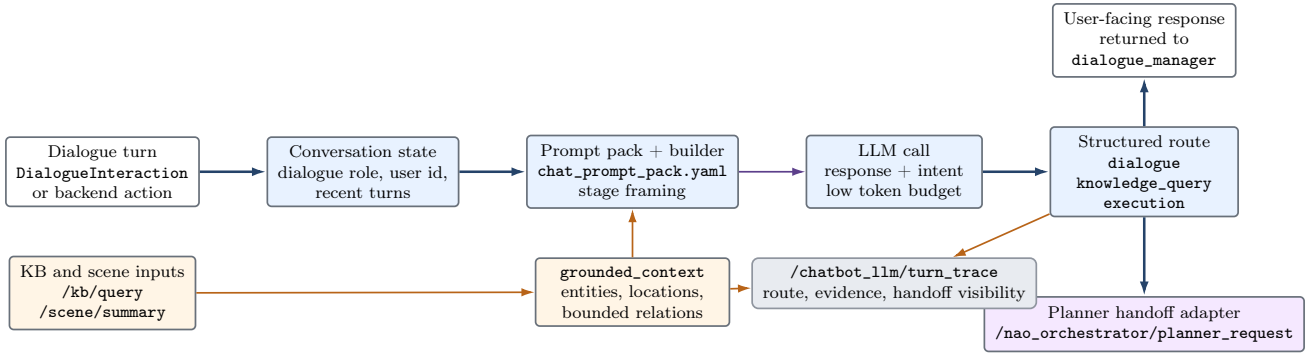


Figure 1: `chatbot_llm` node-level view. The node owns semantic turn interpretation and planner ingress metadata, but it does not create executable plans or dispatch robot skills.

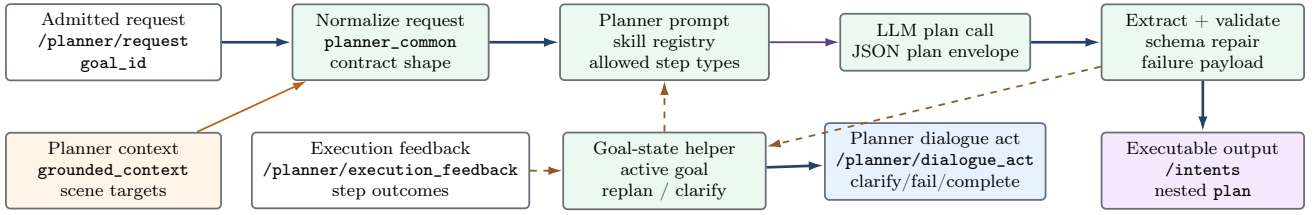


Figure 2: `planner_llm` node-level view. The planner generates structured plan envelopes and maintains feedback-driven goal state; execution and speech remain downstream responsibilities.

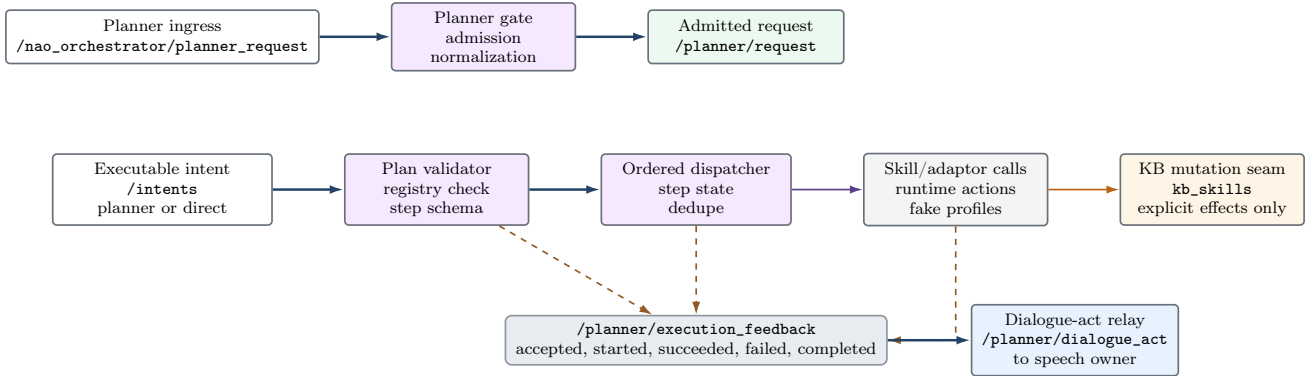


Figure 3: `nao_orchestrator` node-level view. The orchestrator is the deterministic boundary for admission, validation, dispatch, feedback, and explicit KB mutation routing. It does not plan or produce LLM dialogue policy.

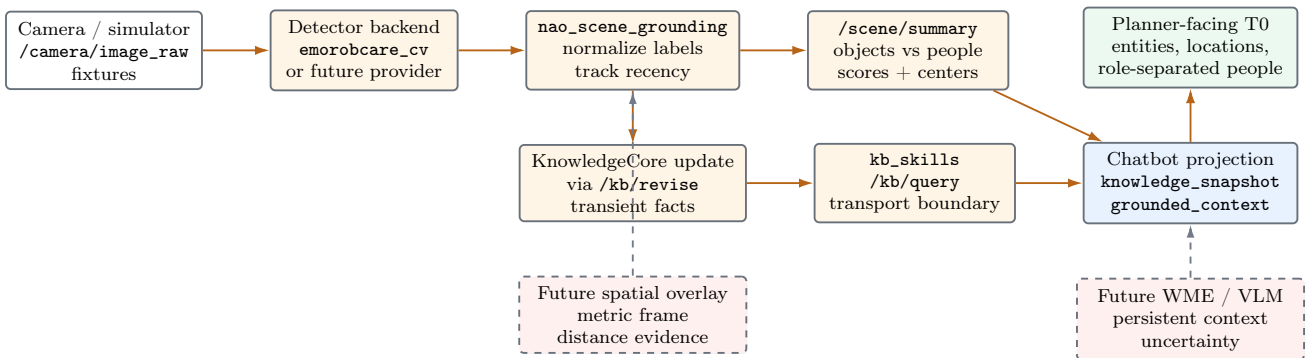


Figure 4: Combined perception and grounding pipeline. Raw detector and KB evidence stays at its owning seams; chatbot and planner consume compact symbolic projections instead of raw perception streams.