

SFCC Dispatch Cartridge Installation Guide

24.0.0

Table Of Contents

SFCC Dispatch Cartridge Installation Guide	1
Table Of Contents	2
About Dispatch	4
1. Implementation Overview	4
2. Component Overview	5
2.1 Supported Features	5
2.1.1 Sync Products	5
2.1.2 Payment Hook	5
2.1.3 Download Settings	5
2.1.4 Test Connection	5
2.2 Limitations and Constraints	5
2.3 Compatibility	5
2.4 Privacy	6
3. What is SCAPI	6
3.1 Overview	6
3.2 How Is SCAPI used?	6
4. Implementation Guide	6
4.1 Overview	6
4.2 Installation	7
4.2.1 Import metadata archive	7
4.2.2 Upload Dispatch Cartridges	7
4.2.3 Add Dispatch Cartridges to Path	8
4.2.4 Dispatch Business Manager module installation	8
4.3 Salesforce Commerce API Setup	9
4.3.1 Setup SCAPI Admin API Access	9
4.3.2 Setup SCAPI Shopper API Access	11
4.3.3 Enable SCAPI Hooks	11
4.3.4 Add API Credentials to Dispatch Services	12
4.4 Configuring Dispatch for Payments	13
4.4.1 Update Dispatch Settings in Business Manager extension	13
4.4.2 Configuring Dispatch Cartridge for Adyen	14
4.4.3 Configuring Dispatch Cartridge for Stripe	14

4.5	Testing	15
5	Operations and Maintenance	15
5.1	HTTP Service Availability	15
5.2	Support	16
5.3	Billing	16
6	User Guide	16
6.1	Roles and Responsibilities	16
	Refer to Business Manager extension setup instructions.	16
6.2	Business Manager	16
7	Release History	16

About Dispatch

Dispatch enables merchants using Salesforce Commerce Cloud B2C to engage and sell products to customers directly through various sales and marketing channels. Read more about Dispatch at <https://dispatch.co>.

1. Implementation Overview

If you have not done so already, go to <https://connect.dispatch.co> and register your account. If someone else in your organization has already created an account for your business, ask them to invite you to the organization's team. The connect.dispatch.co onboarding tool will walk you through each step of the installation process and allow you to securely save your organization's preferences and credentials.

This guide describes how to integrate the included **int_dispatch** and optional **bm_dispatch** cartridges version 23.7.0 into your SFCC site. It also details how to generate the necessary keys Dispatch needs in order to access the SCAPI APIs necessary to read Product information and post Orders on your behalf.

Dispatch uses [SCAPI Shopper](#) Basket, Order, and Payment API to place an order in your SFCC instance. To get product and catalog data Dispatch uses [SCAPI Admin](#).

Only the **int_dispatch** cartridge is necessary and installation varies depending on your Payment Service Provider. The **bm_dispatch** cartridge simply places the <https://connect.dispatch.co> widget within the Business Manager for easier access.

Dispatch tokenizes all payment information via its secure, PCI compliant servers before sharing with your SFCC instance. Your SFCC only ever deals with tokenized card data which is submitted via the SCAPI authorizeCreditCard hook.

2. Implementation Guide

2.1 (Optional) Import metadata archive

Dispatch requires you generate two API keys as part of the onboarding process detailed in section X.X.X

1. SCAPI Shopper
2. SCAPI Admin

This optional step makes it easy to save those details in your Business Manager for easier reference outside of <https://connect.dispatch.co>.

Instructions

1. Zip the content of metadata folder (site-import-dispatch) into a file named site-import-dispatch.zip
2. Go to **Business Manager > Administration > Site Development > Site Import & Export**.
3. Upload archive using Local option in the Upload Archive section.
4. After uploading, choose site-import-dispatch.zip in the list and click on import button.

Administration > Site Development > Site Import & Export

Site Import & Export

This page allows you to export the current configuration of your organization including all of its sites. To download an archive, just click its file name.

Import

You can delete a file only if it's a local file or if you're logged into the instance where the file was created.

Upload Archive:
☒ Local ☐ Remote

No file selected.

Select	Name ▲	Location	Delete Allowed?	File Size	Last Modified
☒	instance/site-import-dispatch.zip	local	Yes	4.72 KB	7/16/23 12:43:37 pm
☐	SiteGenesis Demo Site				
☐	Storefront Reference Architecture Demo Sites				

Figure 1. site-import-dispatch.zip archive import

2.2 (Required) Setup SCAPI Admin API Access

Dispatch service requires access to SCAPI Admin credentials. Create API client with the following allowed scopes in the [Account Manager](#). See Figure 8 below

Account Manager

Account Information

Account Details

Password

API Client

Add API Client

Create a new API Client

General Settings

Display Name*

Description

Password*

Confirm Password*

Figure 8. Account Manager

Settings To Change:


Display Name: Chosen name for API Client key

Password: Chosen password for client

Roles:

Sandbox API User -> Select all desired instances

Salesforce Commerce API -> Select all desired instances

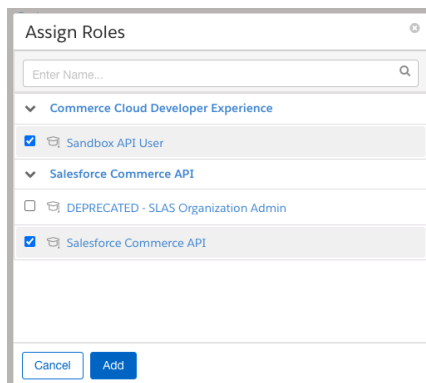

Default Scopes

mail
roles
tenantFilter
profile
openid

Allowed Scopes

sfcc.catalogs.rw
sfcc.catalogs
sfcc.products.rw
sfcc.products
sfcc.orders
sfcc.shopper-products

Token Endpoint Auth Method: client_secret_post

For more information on how to create API client for SCAPI Admin API [check documentation](#)

2.2 (Required) Setup SCAPI Shopper API Access

In new browser tab, go to <https://<Short Code>.api.commercecloud.salesforce.com/shopper/auth-admin/v1/ui>

Login and then go to **Clients > Add Client** (See figure 10)

Copy the Copy the API Client ID created for SCAPI Admin API from section 4.3.1 and set it as the **Client Id**.

NOTE: If it is not the same Client ID for both SCAPI Admin and Shopper APIs, the integration will not work.

Once created, enter edit mode for the new client

For Production and Development instances you **MUST** configure the redirect URL which matches your alias (see [docs](#)) which matches this format:

- a. https://{REALM_ID}.dx.commercecloud.salesforce.com/on/demandware.store/Sites-{{SITE_NAME}}-Site/default/SLASCallback-RetrieveCode
- Save changes via Submit button.

The screenshot shows the 'Add Client' form in the SLAS Admin UI. The top navigation bar includes 'SLAS Admin UI', 'Clients', 'Idps', 'Token', 'Audit', 'Integrations', 'Logout', and 'Samson Peter'. Below this is a yellow banner for 'Production System - prd - us-east-1'. The form title is 'Add Client'. A message states: 'Add Client will create or update the selected Tenant and additionally will create a new client based on the options chosen.' The form contains five sections: 1. 'What tenant will be used?' with a dropdown 'Choose Tenant...' and a 'Tenant' label. 2. 'What site will be used?' with a text input 'SiteGenesis RefArch RefArchGlobal' and a note 'Keep or replace with your sites'. 3. 'Which App Type will be used?' with a dropdown 'PWA Kit or SFRA or Mobile'. 4. 'Client Id' with a text input and a note 'Keep or replace with your UUID'. 5. 'Secret' with a masked input '*****' and a note 'for private (BFF/WebApps) - SLAS will set automatically'.

Figure 10. SLAS Admin UI

2.2.1 (Required) Enable SCAPI Hooks

Navigate to **Administration > Global Preferences > Feature Switches** and check the **Enable Salesforce Commerce Cloud API hook execution** feature switch. See figure below.

[Administration](#) > [Global Preferences](#) > Feature Switches

Feature Switches

Use the following feature switches to activate or deactivate features for this instance.

Note that feature switch values are cached and can take about 10 minutes to refresh after the change for clustered deployments (e.g. STG, PRD).

Enable case-insensitive matching for suggested brands	☒ Enable case-insensitive matching for suggested brands. Default Value: true
Enable promotion refinement	☐ Enable this toggle to add search refinements of type promotion to the product listing pages. Promotions t refinements. Default Value: false
Enable Salesforce Commerce API hook execution	☒ Enable the execution of hooks in Salesforce Commerce API requests. Default Value: false

2.3 (Required) Add API Credentials to Connect Onboarding App

Go to <https://connect.dispatch.co> and securely share the previously generated SCAPI Admin and SCAPI Shopper credential details with Dispatch.

2.3.1 (Optional) Add API Credentials to SFCC Services

If you uploaded the Metadata Archive (4.2.1), you can save your generated credentials for easier reference from within your Business Manager service credentials.

To access service credentials, go to **Business Manager > Administration > Operations > Services > Credentials**

[Administration](#) > [Operations](#) > [Services](#)

[Services](#) Profiles Credentials

Services

Select All	Name	Type	Profile	Credentials	Status
☐	dispatch.http.scapi	HTTP	DispatchProfile	DispatchSCAPIHost	Live
☐	dispatch.http.service	HTTP	DispatchProfile	DispatchServiceCredentials	Live
☐	dispatch.http.slasauth	HTTP	DispatchProfile	DispatchOAuth	Live
☐	dispatch.http.testservice	HTTP	DispatchProfile	DispatchTestServiceCredentials	Live
☐	stripe.http.service	HTTP	StripeProfile	StripeCredentials	Live

[New](#) [Delete](#)

Figure 4. Services

Dispatch Services:

- **dispatch.http.scapi** – is used for fetching SFCC data via SCAPI
- **dispatch.http.slasauth** – is used for authenticating and fetching access token

Update the following services as such:

- **DispatchSCAPIHost**
URL: `https://<Short Code>.api.commercecloud.salesforce.com`
User: <OrganizationID> (refer to Figure 5)
- **DispatchOAuth**
User: SCAPI Admin Client ID (generated in section 4.3.1)
Pass: SCAPI Admin Password (generated in section 4.3.1)

[Administration](#) > [Site Development](#) > [Salesforce Commerce API Settings](#)

Salesforce Commerce API Settings

The Salesforce Commerce Cloud API requires an organization ID and an active short code. Use these values for your environment.

Short Code: [Request Short Code](#)

Organization ID: [Copy to Clipboard](#)

Figure 5. Short Code


2.4 (Required) Setup AuthorizeCreditCard Hook

Dispatch posts tokenized payment details to your Payment Service Provider via SCAPI Hooks (activated in 4.2.4). This code is provided for you via the [Dispatch SFCC B2C Cartridge Github Repository](#). You only need to upload the hook(s) which correspond to your Payment Service Provider configuration.

Note that Stripe has a preexisting hook “dw.order.payment.authorizeCreditCard” hook included in the **int_stripe_core** cartridge. This needs to be removed or replaced with Dispatch’s provided code. The reason this is needed is that Stripe does not accept tokenized card information via the provided hook in **int_stripe_core** by default.

Initial Setup

1. Go to the [Dispatch SFCC B2C Cartridge Github Repository](#) and clone down into your local SFRA folder.
2. Rename the cloned repo/folder from step 1 to “link_dispatch”. (see example folder structure)

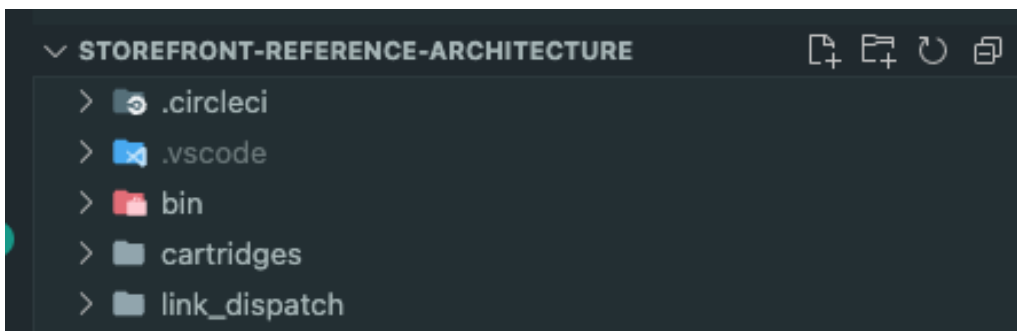

3. Open the “link_dispatch/cartridges/int_dispatch/cartridge/scripts/hooks.json” file. Remove any irrelevant scripts / hooks depending on your configured Payment Service Provider (e.g., Stripe only needs the ./hooks/payments/stripe uploaded to your instance). Your file should look like this:

```
// If using Stripe
{
  "hooks": [
    {
      "name": "dw.order.payment.authorizeCreditCard",
      "script": "./hooks/payments/stripe"
    }
  ]
}
// If using Adyen
{
  "hooks": [
    {
      "name": "dw.order.payment.authorizeCreditCard",
      "script": "./hooks/payments/adyen"
    }
  ]
}
```

```

]
}

// If using Braintree

{
  "hooks": [
    {
      "name": "dw.order.payment.authorizeCreditCard",
      "script": "/hooks/payment/processor/creditFormProcessor"
    }
  ]
}

```

4. If you are using Stripe as your Payment Service Provider, disable the preexisting SCAPI hooks provided in

[your_project]/cartridges/int_stripe_core/cartridge/scripts/stripe/hooks.json

// Delete these or replace the authorizeCSC code with the Dispatch provided /hooks/payments/stripe code

```

{
  "hooks": [
    {
      "name": "dw.order.payment.authorizeCreditCard",
      "script": "/hooks/authorizeCSC.js"
    },
    {
      "name": "dw.order.payment.authorize",
      "script": "/hooks/authorizeCSC.js"
    }
  ]
}

```

4. Upload the “link_dispatch” cartridge to your instance via cli (npm run uploadCartridge) or use 3rd party tool.

5. Promote the uploaded cartridge using the version control system in

Administration > Site Development > Code Deployment. See screenshot below.

Administration > Site Development > Code Deployment

Manage Code Versions

A code version is a folder containing custom cartridges. The currently active code version is used by the instance. Custom cartridges need to be assigned to sites in the module “Manage Sites”. Additional code versions can be uploaded to the server via WebDAV or UX Studio. These may be new code versions that will be activated later, or old ones to allow for code rollbacks. You can delete inactive code versions. It's also possible to create a new empty version using the Add button on this page.

If multiple code versions are listed, you can activate an existing version from the list by selecting the **Activate** link next to it. Selecting **Roll Back** will automatically activate the previous version, if this code version is still installed.

A compatibility mode can be assigned to each code version and this compatibility mode is activated when the code version is activated. Code versions that haven't been explicitly assigned to a compatibility mode are marked with an asterisk (*), and assume the current active compatibility mode. At any time the compatibility modes selectable are those newer than the active mode in addition to the previously active compatibility mode. It's not possible to select a compatibility mode older than the previously active one.

Select All	Active	Code Version	Compatibility Mode	Modification Time	Activation Time	Actions
☒	✓	5.3.0	22.1 *	8/2/23 4:16:22 pm	8/2/23 10:23:59 am	
☐		SPBA_WPC_11_17_2022	22.1 *	8/1/23 5:47:59 pm	8/1/23 5:47:59 pm	Rename Activate
☐		version1	22.1 *	8/1/23 5:19:53 pm		Rename Activate

[Roll Back](#) [Delete](#) [Add](#)

Code Version Retention

2.4.1 (Required) Add Dispatch Cartridges to Path

1. Go to **Business Manager > Administration > Sites > Manage Sites > Your Target Site > Settings**

2. Append “int_dispatch” to cartridges list. See example figure 2 below.

3. Click apply.

Administration > Sites > Manage Sites > RefArch - Settings

General **Settings** Cache Site Status Page Meta Tag Rules

RefArch - Settings

Click Apply to save the details. Click Reset to revert to the last saved state.

Instance Type: Sandbox/Development

Deprecated. The preferred way of configuring HTTP and HTTPS hostnames is by using new features of the site aliases configuration ("SEO > Aliases Configuration"). The HTTP/HTTPS hostname values set in this section will be used if hostnames are defined by aliases configuration and are intended only to support an older configuration style.

HTTP Hostname:

HTTPS Hostname:

Instance Type: All

Cartridges: int_dispatch_sfra:int_dispatch:app_storefront_base

Effective Cartridge Path: int_dispatch_sfra:int_dispatch:app_storefront_base:plugin_apple_pay:plugin_facebook:plugin_payments:plugin_pinterest_commerce:plugin_web_payments:bc_content:

Apply Reset

2.4.2 (Optional) Dispatch Business Manager module installation

You can embed <https://connect.dispatch.co> within your Salesforce Business Manager via the provided **bm_dispatch** cartridge for easier access. It provides the same functionality from within SFCC as a convenience.

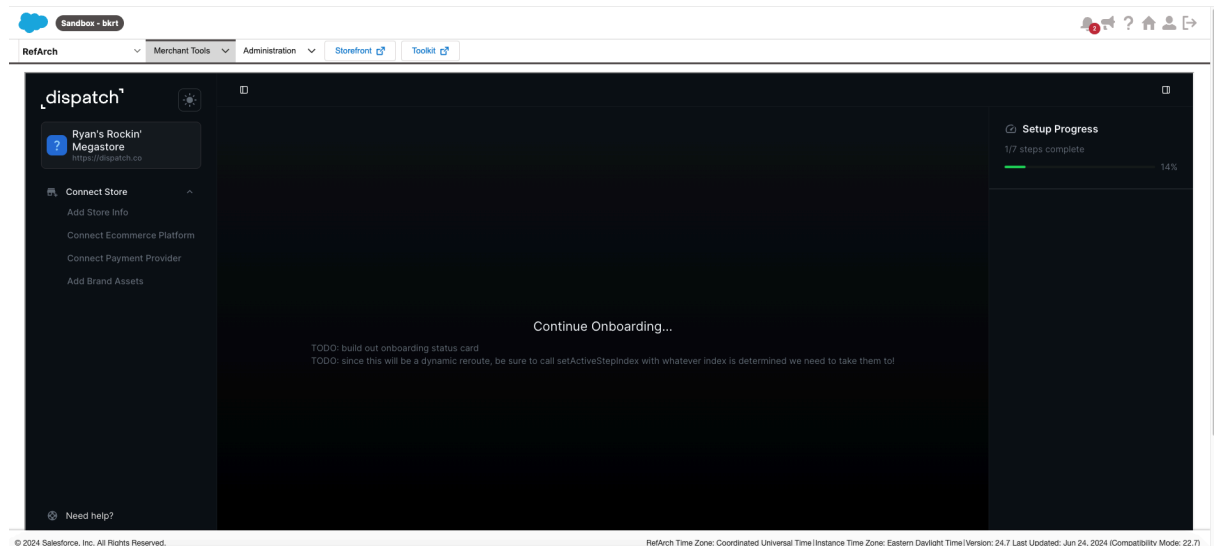


Figure 2. Embedded Connect App within the Business Manager

1. Go to **Business Manager > Administration > Sites > Manage Sites > Business Manager Site**.
2. Append "bm_dispatch:int_dispatch" to cartridges list. See figure 3 below.

Figure 3. Business Manager Cartridge Path

3. Click apply.
4. Grant access to Business Manager module:
 - 4a. Go to **Business Manager > Administration > Organization > Roles & Permissions** and select the target role(s) that needs to have access to Dispatch Settings.
 - 4b. Select the **Business Manager Modules** tab in the drop-down list on top. You must select your target site as the active context.
 - 4c. Scroll to the Dispatch Settings module. Grant access to it by selecting the checkbox and clicking Update.

Once you do this, every Business Manager user with that role can manage Dispatch Settings by selecting **Business Manager > Merchant Tools > Dispatch Plugin > Dispatch Settings**.

3 Operations and Maintenance

3.1 Support

If you require assistance on integration or with anything else, please contact us at support@dispatch.co

3.2 Limitations and Constraints

At this time Dispatch can only be used by merchants who use Stripe, Adyen and Braintree for payment processing. If you use another payment processor, please contact us at support@dispatch.co to request support for your payment processor.

3.3 Privacy

- This integration requires access to the following customer data elements: Email Address, Shipping Address, Order Details, Customer Email and Name.
- The only personal data stored by Dispatch is the customer's email address as an identifier, along with their IP address.

- Dispatch is GDPR Compliant and will comply with data requests made by your business or the data subject.
- Dispatch is PCI compliant and only ever passes tokenized payment details to your SFCC instance (hooks) for submission to your Payment Service Provider.

Release History

Version	Date	Changes
23.7.0	2023.08.14	Initial release
24.0.0	2024.08.01	Replace most cartridge functionality with connect.dispatch.co onboarding tool