

1. Initial Viewer Group Membership

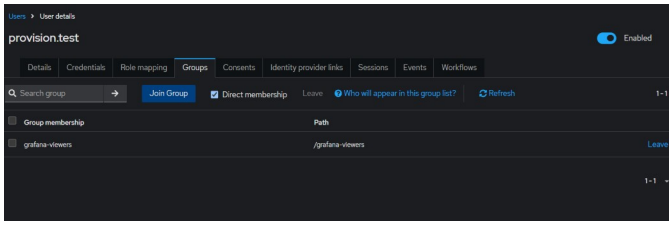


The test user's group membership was checked to confirm that only the `grafana-viewers` group provided Grafana access. This established the baseline before temporary privilege elevation.

2. Initial Token with Viewer Role

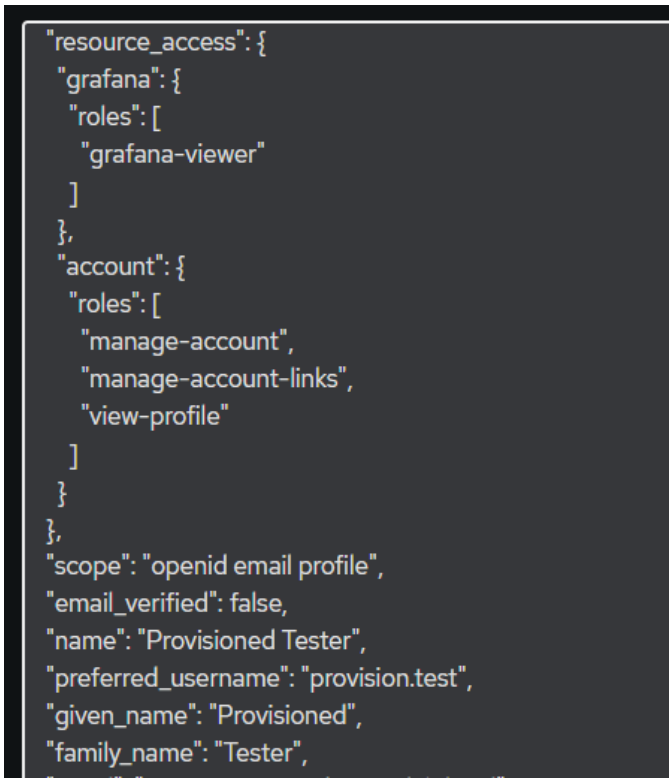

Keycloak's Evaluate feature was used to generate an example access token for the test user. The Grafana role list contained only `grafana-viewer`, confirming the initial permissions.

3. Initial Viewer Role in Grafana

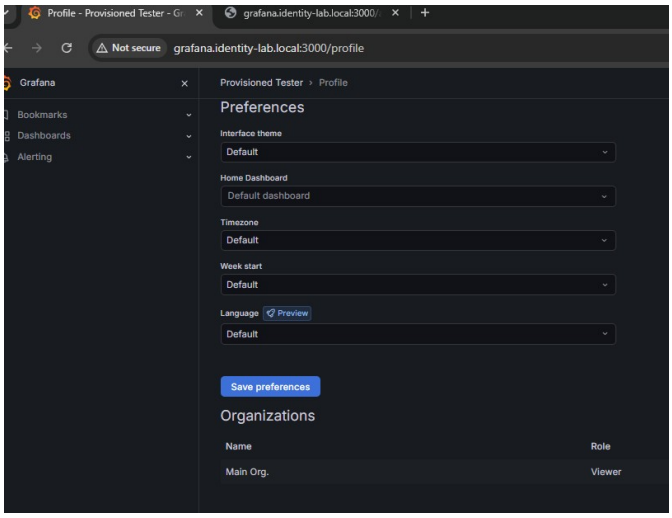


The test user signed in to Grafana through Keycloak. The profile displayed the Viewer role, confirming that the baseline role mapping worked correctly.

4. JIT Client Scope Configuration


An OpenID Connect client scope named `jit-access` was created for temporary Grafana access. No Hardcoded Role mapper was added, ensuring

that the scope would not grant administrative privileges automatically.

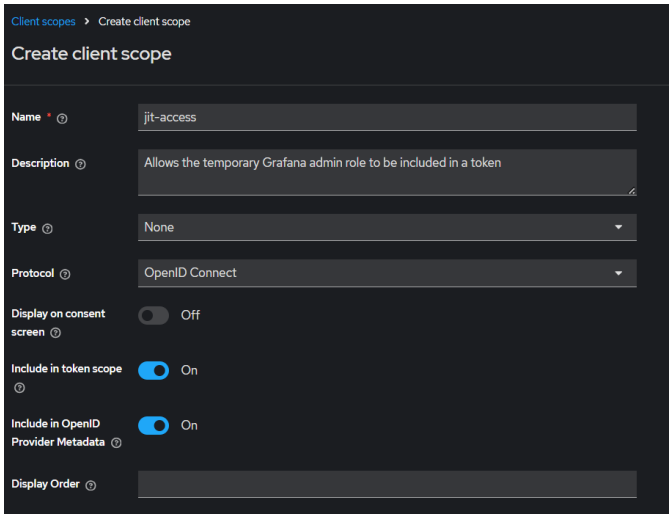


5. Optional JIT Scope Assignment

The `jit-access` client scope was assigned to the Grafana client as Optional. This allows Grafana to request the scope during authentication.

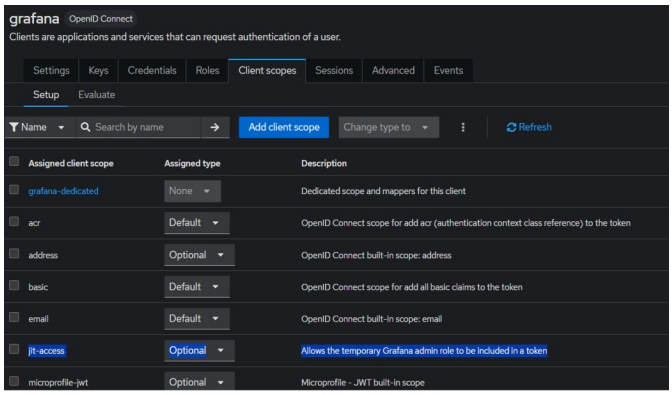


6. Token and Client Session Lifetimes

The Grafana client's access token lifespan was set to two minutes, with a five-minute client session idle timeout and a fifteen-minute maximum session lifetime. These settings limit token and Keycloak client session duration during the demonstration.

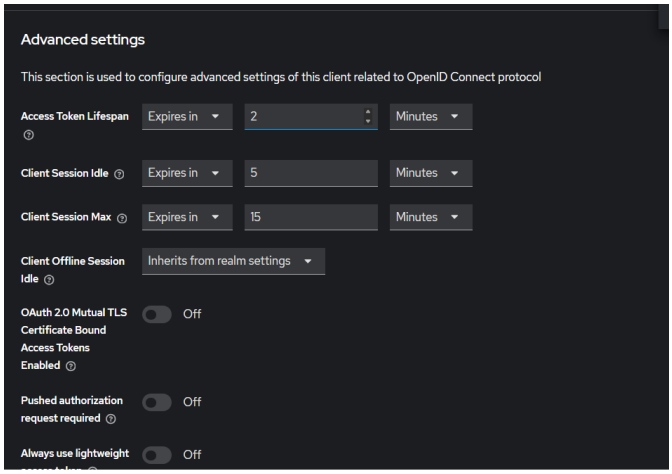


7. JIT Administrator Group

A separate group named `grafana-jit-admins` was created in Keycloak. This group distinguishes temporary administrative access from permanent group membership.

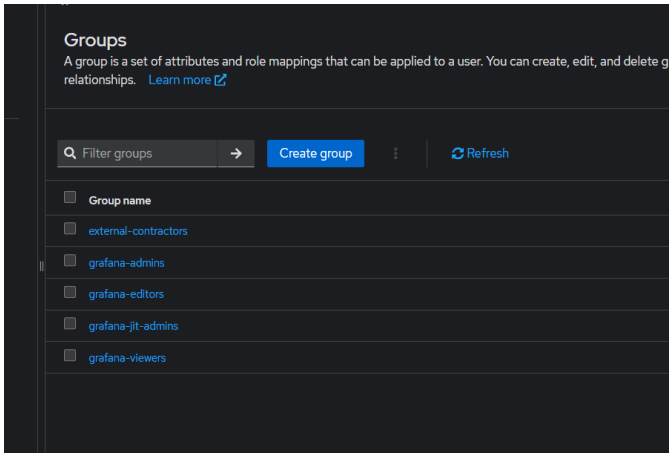


8. Administrator Role Assigned to the JIT Group

The Grafana client role `grafana-admin` was assigned to `grafana-jit-admins`. Members of this group inherit the administrative role for as long as their membership remains active.

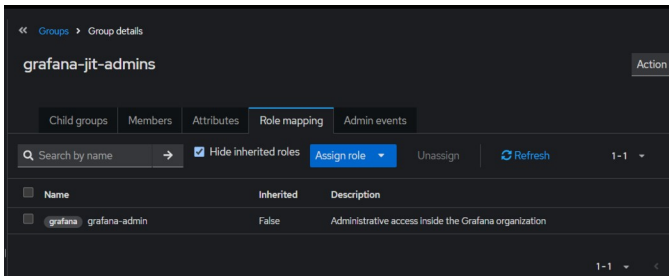


9. Temporary Access Request

A JIT access request was documented with the target user, requested role, reason, approval, and a ten-minute access window. The request specified manual removal from the JIT group when the approved period ended.

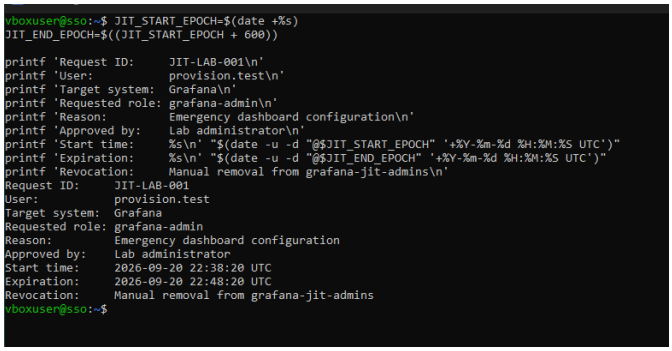


10. Temporary JIT Group Membership

The test user was added to `grafana-jit-admins` while retaining membership in `grafana-viewers`. This provided temporary administrative privileges while preserving the baseline Viewer access.

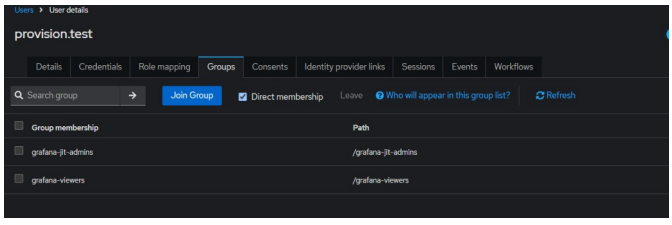


11. Token with Viewer and Administrator Roles

An example access token was generated with the `jit-access` optional scope selected. The token contained both `grafana-viewer` and `grafana-admin`, confirming that the user inherited the temporary role.

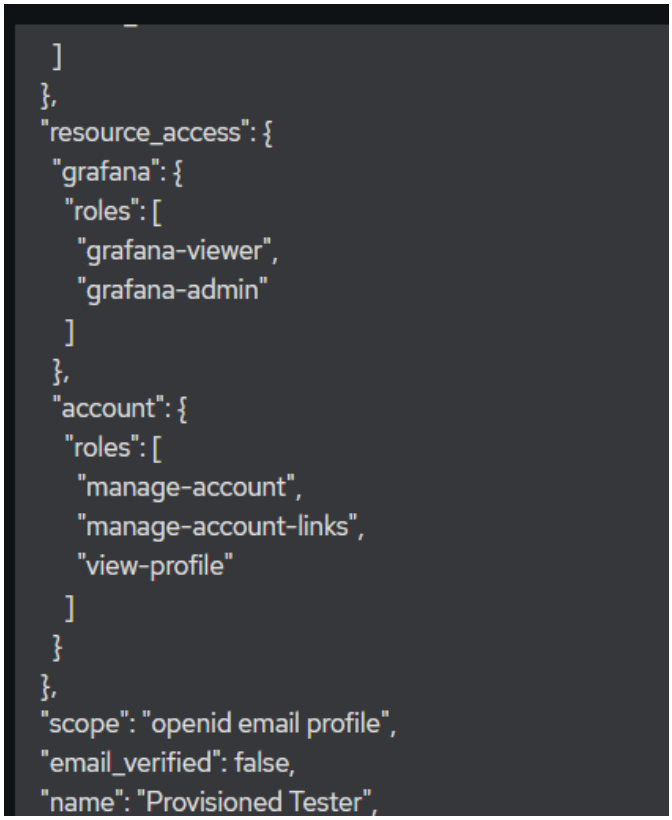


12. Token Issue and Expiration Times

The token's `iat` and `exp` claims were inspected to verify its validity period. The difference was approximately 120 seconds, matching the configured two-minute access token lifespan.

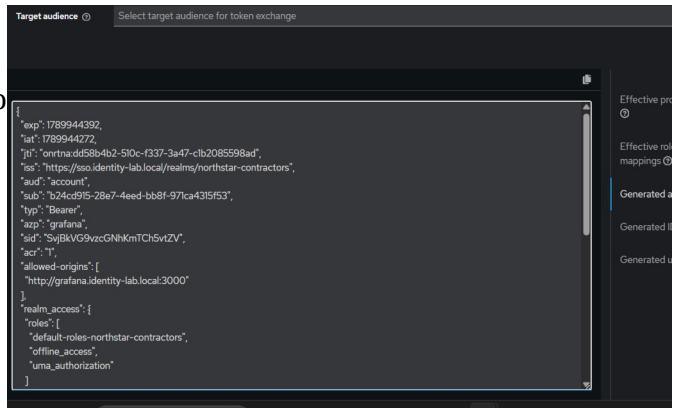


13. Temporary Administrator Access in Grafana

After signing out and authenticating again through Keycloak, the test user's Grafana profile displayed Admin. This confirmed temporary administrative access within the current Grafana organization.

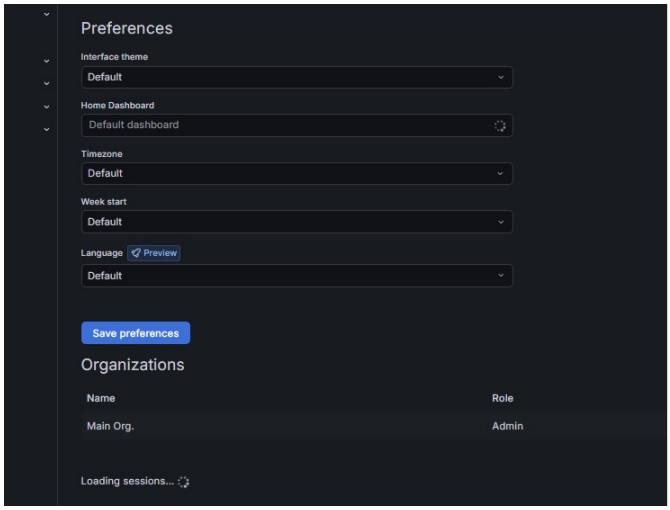


14. Removal of Temporary Group Membership

At the end of the approved access window, the user was removed from `grafana-jit-admins`. Membership in `grafana-viewers` was retained to preserve basic access.

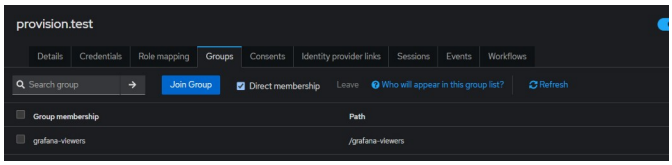


15. Token After JIT Revocation

A new example access token was generated after the temporary group membership was removed. The Grafana role list contained `grafana-viewer` and no longer included `grafana-admin`.

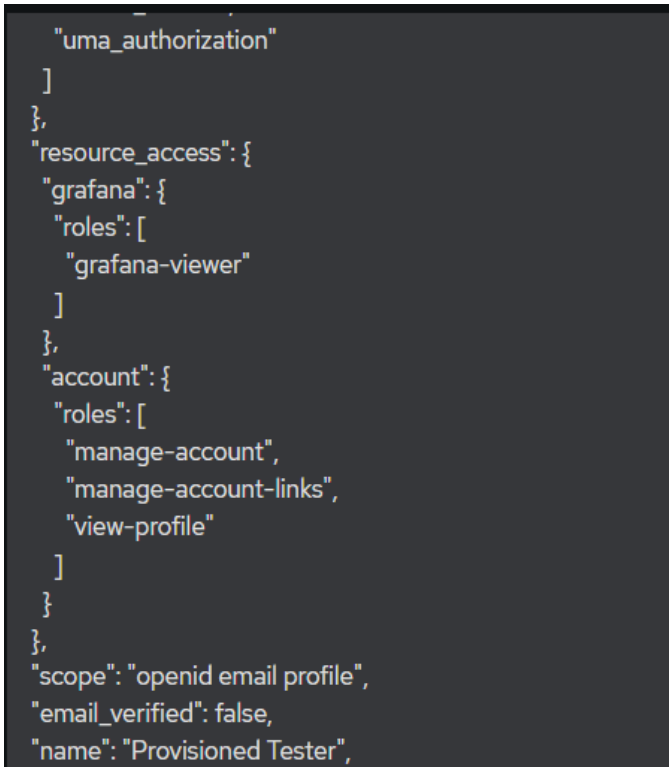

16. Return to Viewer in Grafana

After the Keycloak and Grafana sessions were ended, the test user signed in again. Grafana displayed the Viewer role, confirming that

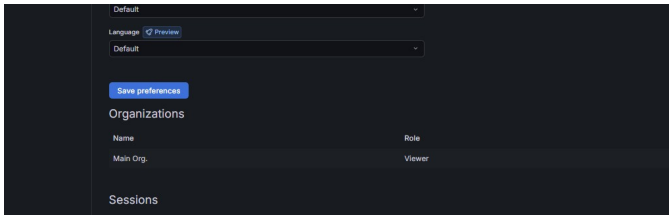

temporary administrative access had been removed.