

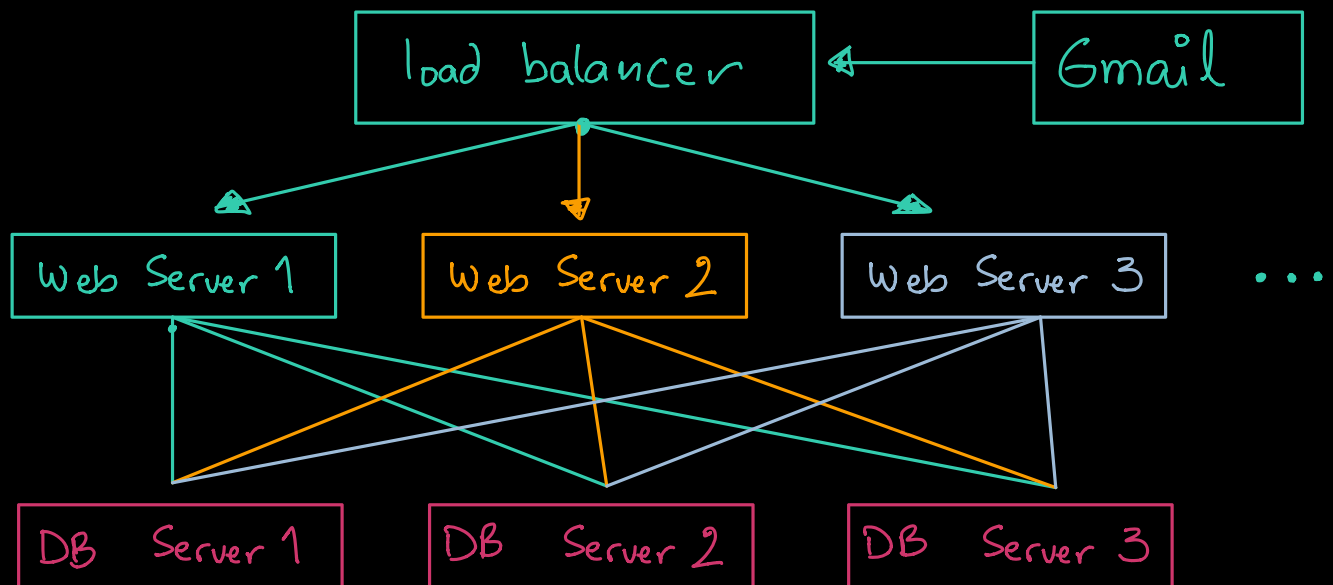



# System Administration:

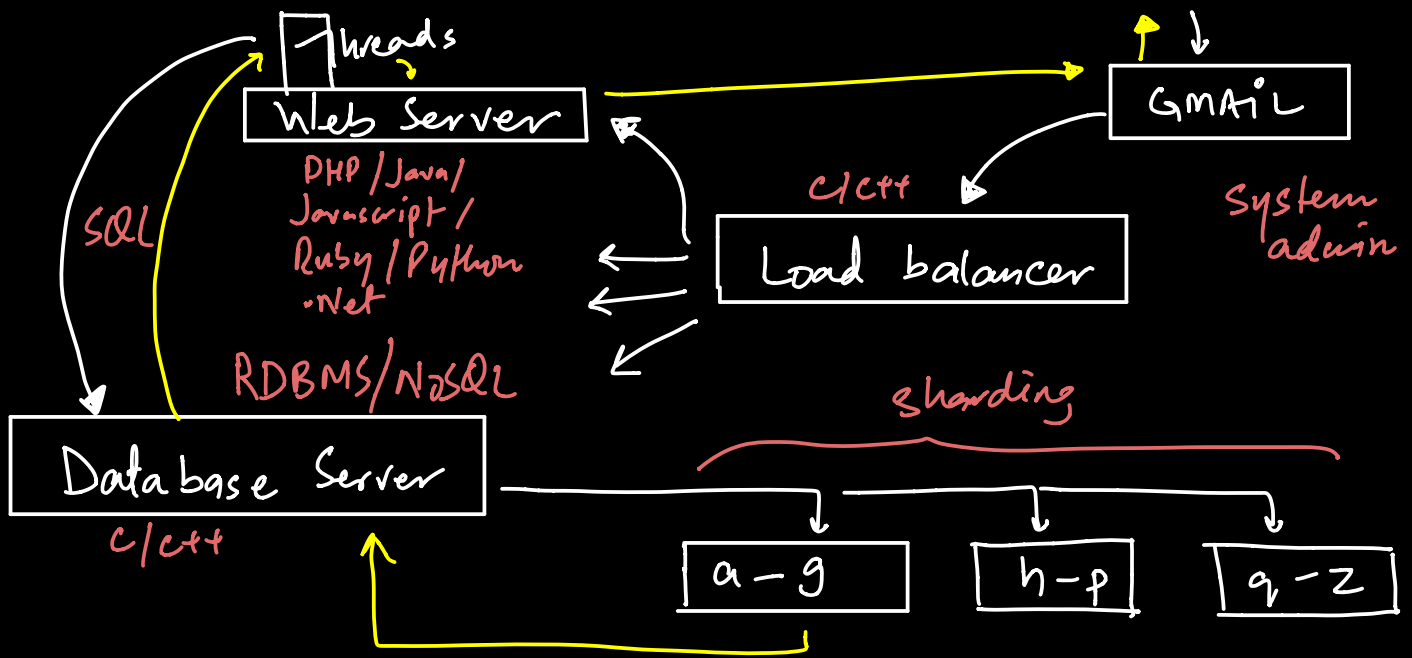


— How do we, as a developer, create this scenario on our local machine?

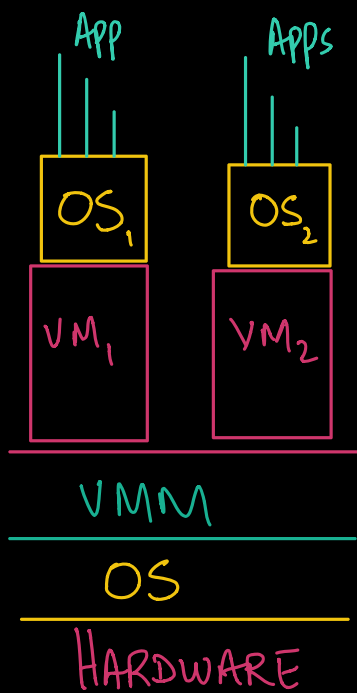

Virtual Machine Architecture

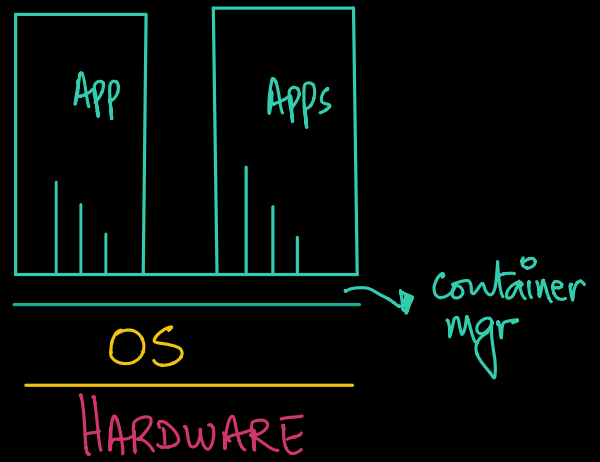

Container Arch.

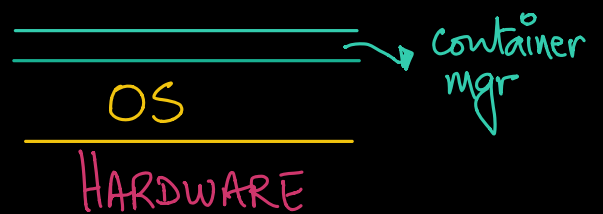

Remote server


## Ubuntu Host


- Docker  
- image

- Containers

- Commands

- run
- exec
- start
- stop
- ps

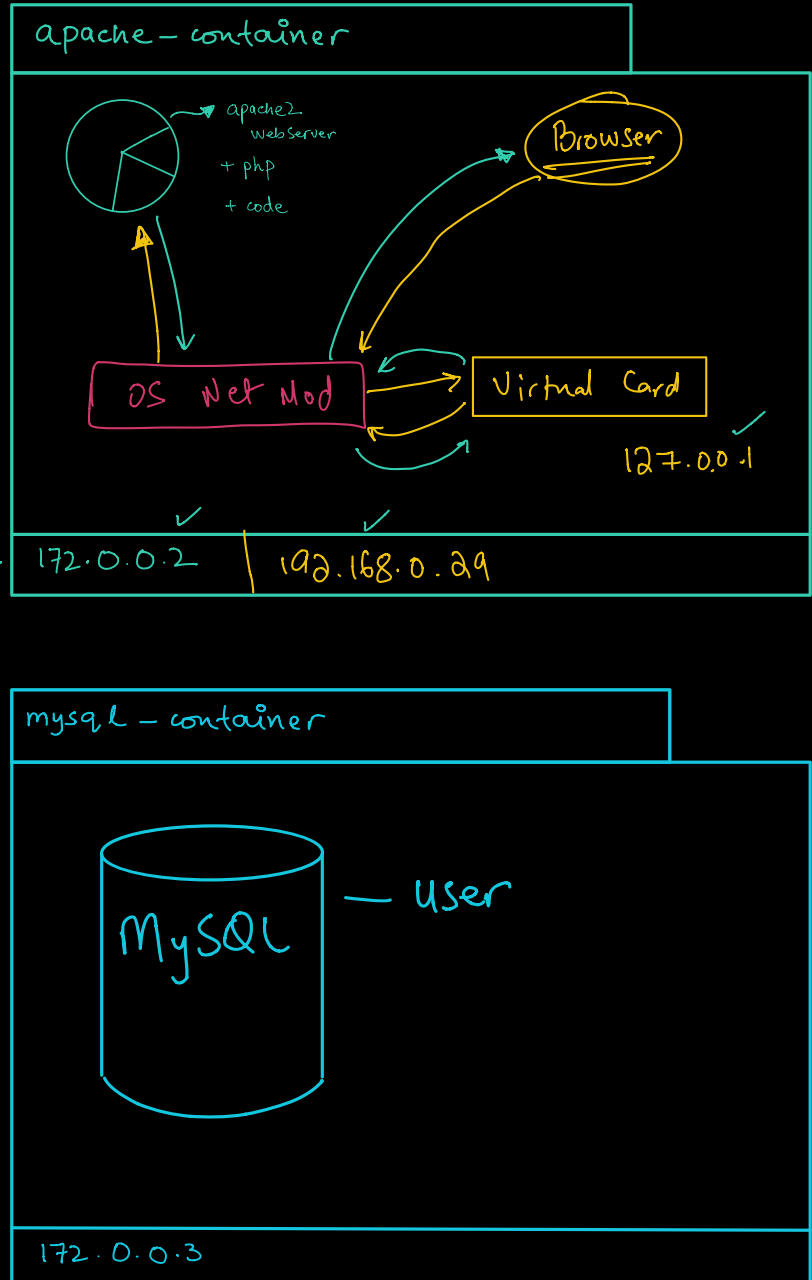

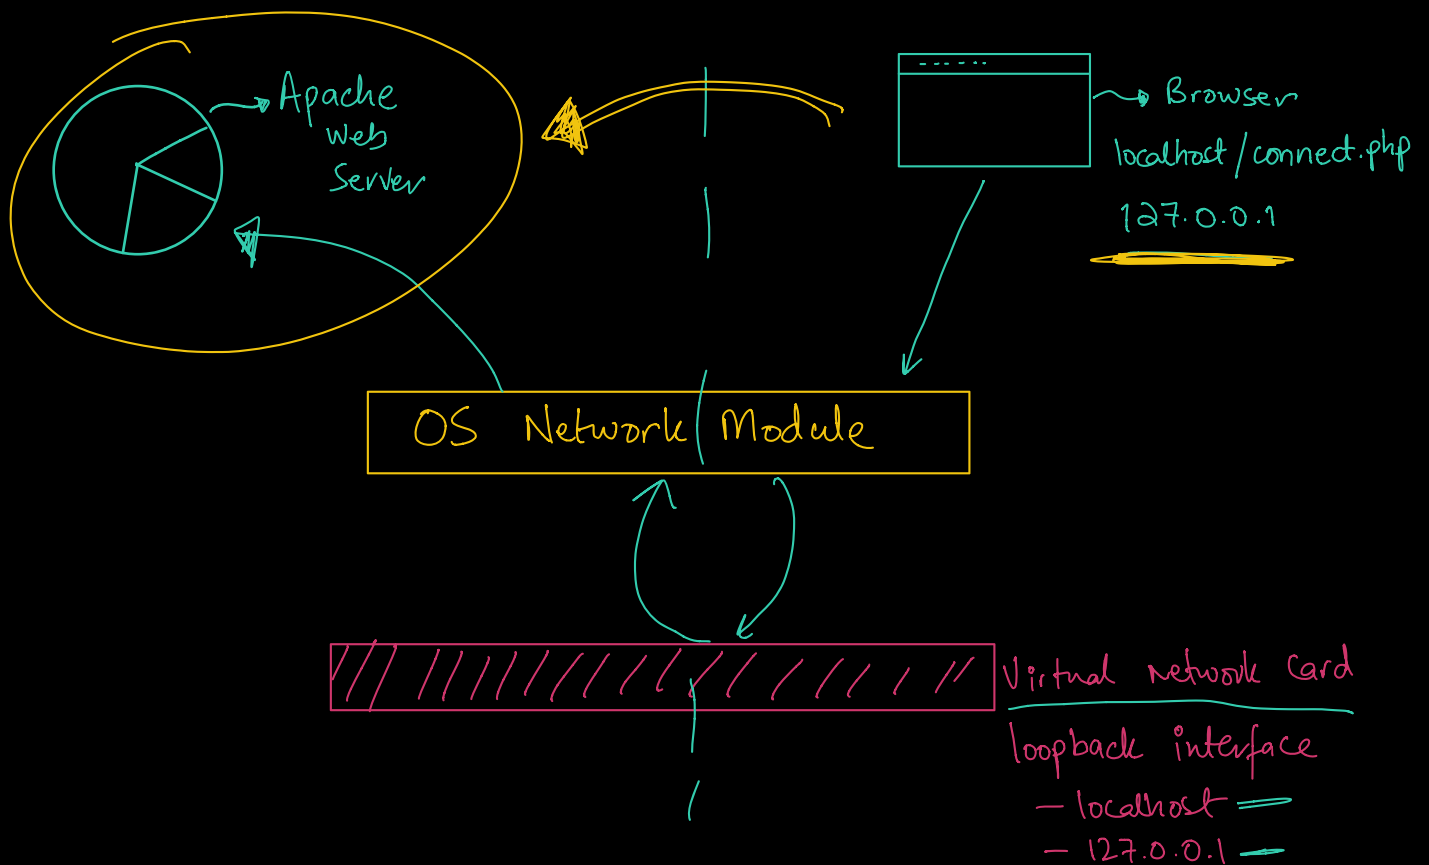

Apache: "Whatever network interface sees a packet on port 80, send it to me".

- Bind to / listen on all interfaces