
Maintenance kiosk user handbook

iForge • University of Sheffield

Learn the daily tasks. Record the work. Check the result.

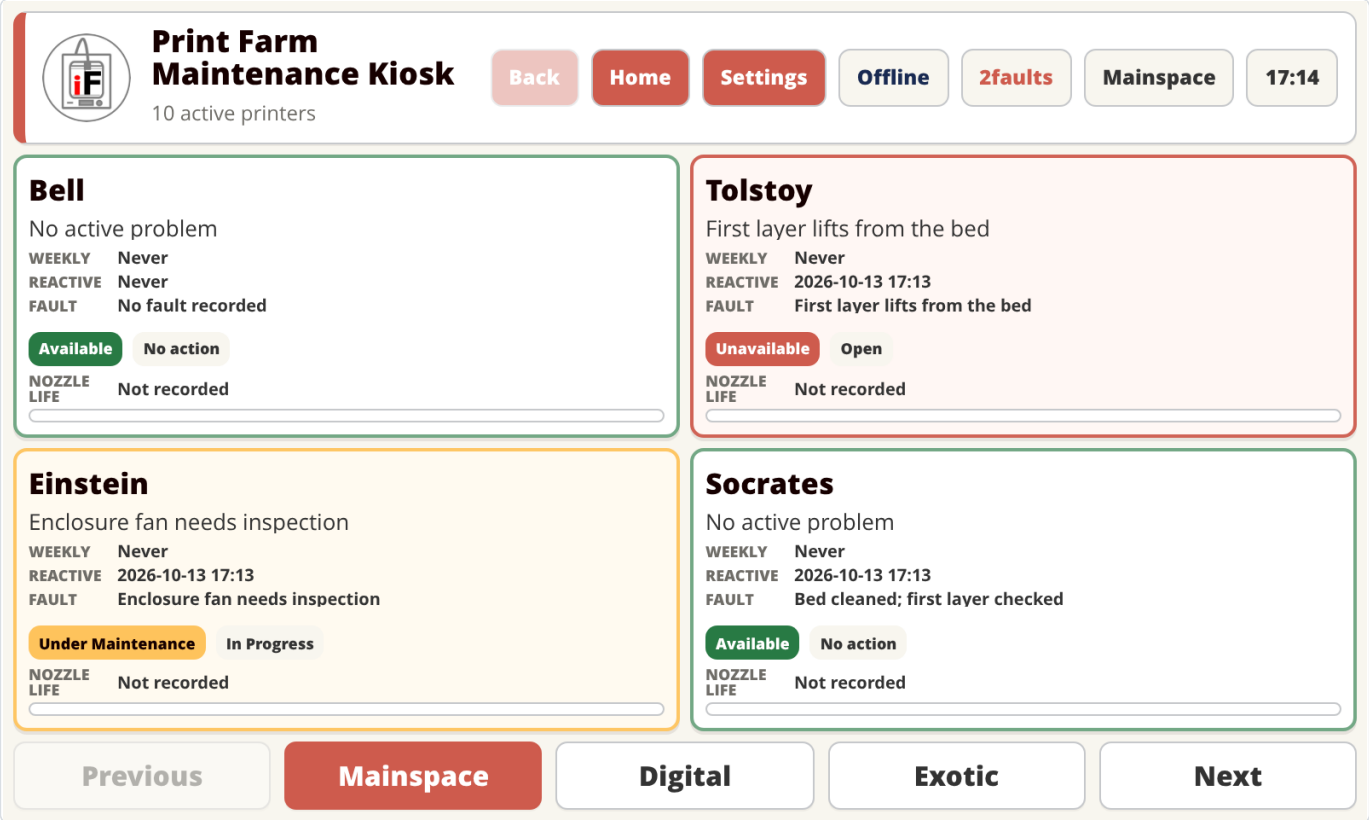

The original 800 × 480 screen. All pictures in this handbook use sample records.

> **New user? Start on page 3.**
> Learn the controls in five minutes. Use page 28 as a short reference.

For operators: weekly maintenance, faults, repairs and history.
For administrators: Google Sheets, Discord, email, physical controls and tests.

Edition 1.1 • 13 October 2026
Includes the Home, Back and panel colour update.
Written using ASD-STE100 Simplified Technical English principles.

Use this handbook

Start with the operator pages. Use the administrator pages when you change the system.

Learn the controls 3

Understand the system 4

Read the dashboard and choose an action 5–6

Record weekly maintenance 7–8

Record a fault or repair 9–12

Use procedures and history 13–14

Change settings and maintenance forms 15–16

Connect Google Sheets 17–19

Set Discord and email notifications 20–21

Set physical controls and run tests 22–23

Operate the Pi and make backups 24–25

Find a problem 26

Read technical terms 27

Use the short reference 28


> **How to read the instructions**
> **Select** means touch a control on the screen. With a mouse, click the control.
> Bold text identifies an exact screen label. A path shows which screens to open.

An **operator** records maintenance. An **administrator** changes settings and external connections. These names describe tasks. The kiosk has no separate user accounts.

Pictures show sample data. Do not copy sample readings into real records. Your printer names and settings can be different.

Learn the controls in five minutes

Use this exercise before you record real work. The exercise does not require a save.

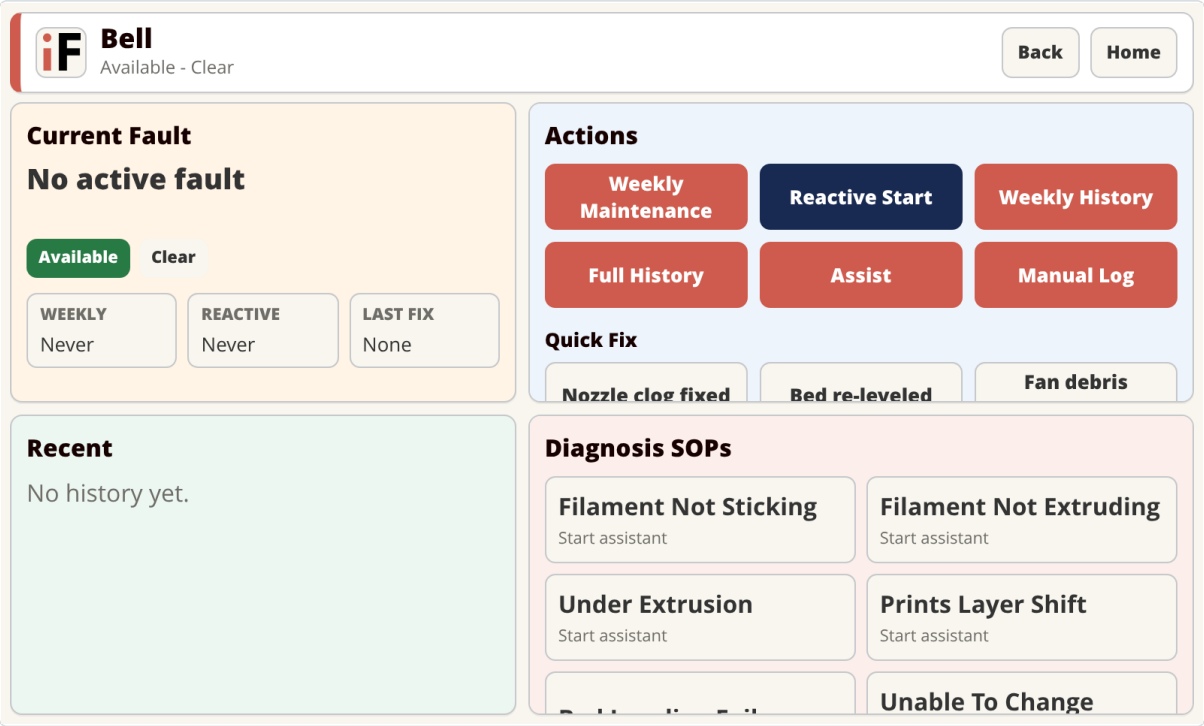

The Actions screen for Bell. The four background colours separate the panels. They do not show printer status.


1. Select **Home**.
2. Select **Bell** on the dashboard.
3. Select **Weekly Maintenance**.
4. Find **Checks**, **Technician**, **Semester** and **Week**.
5. Select **Back**.
6. Select **Assist**.
7. Read the symptom categories.
8. Select **Back** to return to Bell.
9. Select **Full History** to read the saved records.
10. Select **Home** to return to the first dashboard page.

> **Before your first real save**
> Make sure the printer name is correct. Make sure your technician name is correct. Record only work that occurred.

For practice with saves, ask the administrator for a separate test installation. The live kiosk has no training mode.

Understand the system

The kiosk records maintenance on the Raspberry Pi. Google Sheets provides a shared copy for reports.

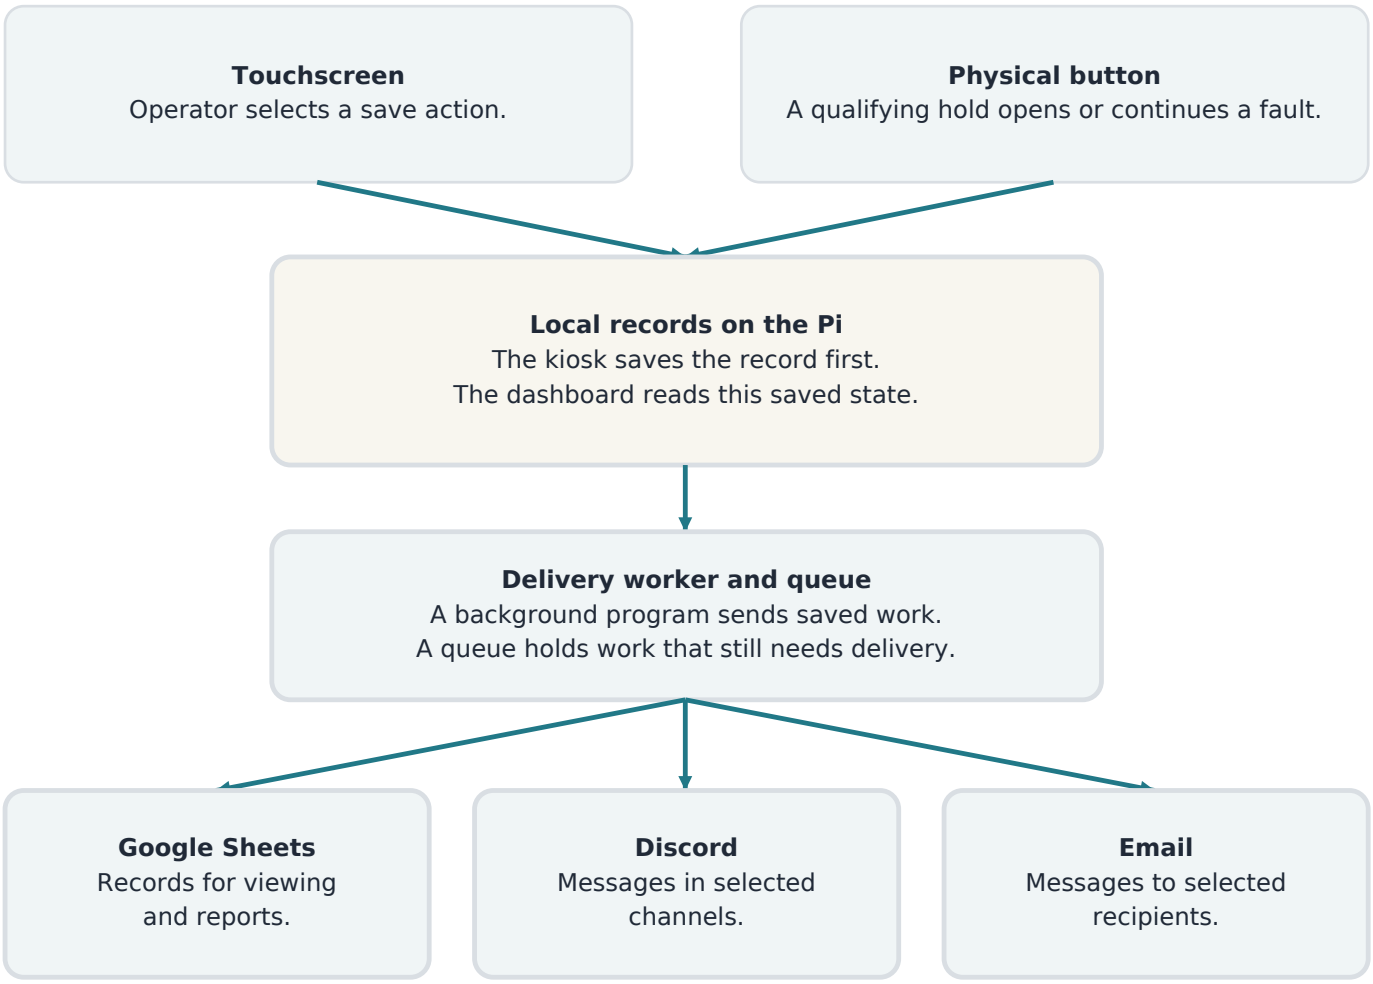

> **A local save and a delivery are different**
> The kiosk can save records without an internet connection. The worker sends pending work when the connection returns.

If an error appears, keep the form open. Read the error. Check history before you save again.


Staff change records in the kiosk. Changes in Google Sheets do not return to the kiosk. The system does not use PostgreSQL.

New installations start with Google, Discord and email off. Physical controls start in Mock mode.

The Pi stores records, settings, credentials and delivery results. Google Sheets alone is not a complete backup.

Read the dashboard

Select a printer card to open its Actions screen.

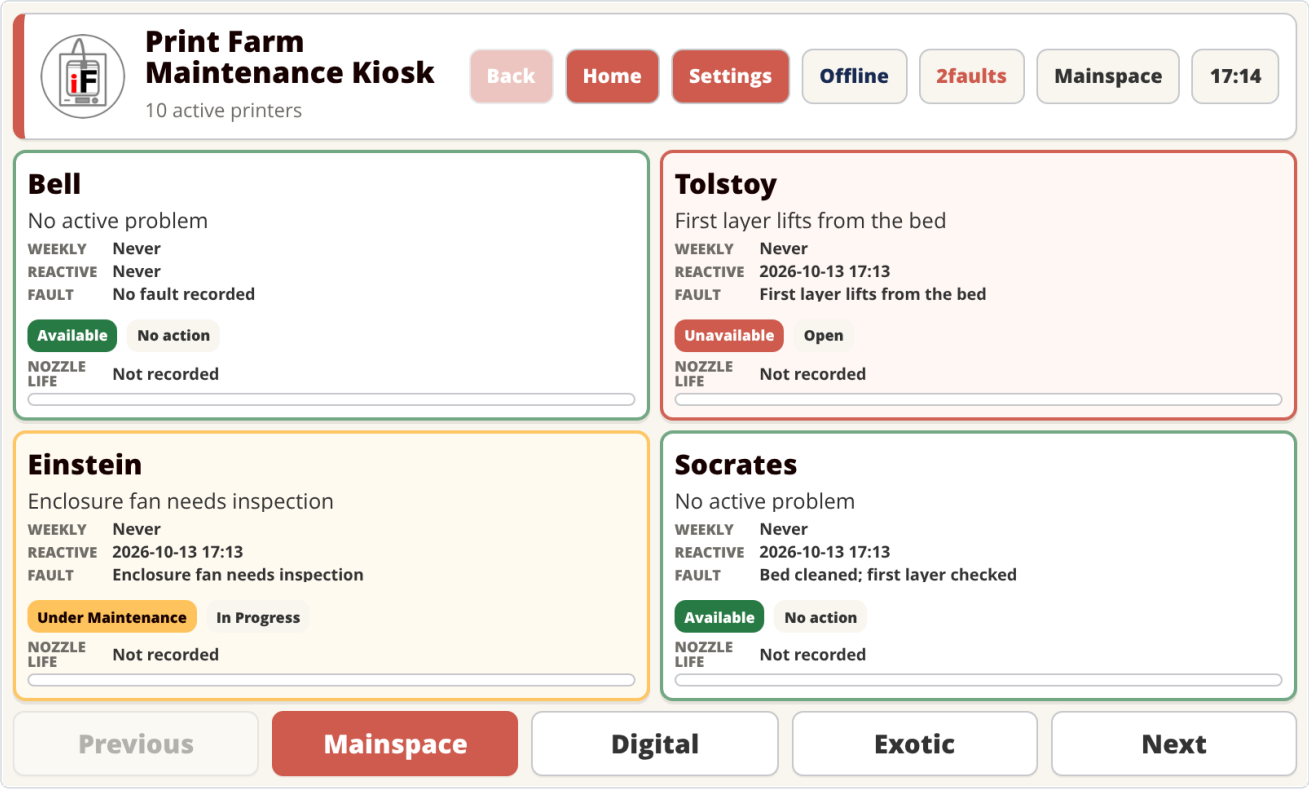

Use Mainspace, Digital, Exotic, Previous or Next to change the group of printers.

Screen label	Meaning
Available	The record identifies the printer as available. Examine the actual printer before use.
Unavailable	The record identifies the printer as unavailable.
Under Maintenance	Maintenance is in progress.
Weekly / Reactive / Fault	The last maintenance dates and the fault or repair summary.
Nozzle life	An estimate from entered data. It is not a measurement from a sensor.

The second badge shows the work state. Examples include **Open**, **In Progress** and **Needs parts**.

Never and **Not recorded** mean that data is absent. They do not show that an inspection occurred.

Choose the correct action

Start on the dashboard. Select the correct printer.

Task	Select	Next action
Do scheduled checks.	**Weekly Maintenance**	Complete the checks. See page 7.
Report a new fault.	**Reactive Start**	Describe the fault. See page 9.
Record a known repair.	**Manual Log**	Record the work and result. See page 10.
Find a possible cause.	**Assist**	Answer the questions. See page 11.
Use a common repair form.	A button under **Quick Fix**	Review the supplied text before you save. See page 12.
Continue weekly work.	**Weekly History**	Open the draft. Select Continue. See page 8.
Read previous work.	**Full History**	Select a filter. See page 14.

Use the navigation controls

Home opens the first dashboard page from any screen. **Back** returns to the last kiosk page that you opened. It keeps the printer and page selections.

Back skips Settings and Testing. Open Settings from the dashboard. Select **Back**. The dashboard opens.

When no earlier page exists, **Back** opens the related printer page or Home. On Home, **Back** is not active when no earlier kiosk page exists.

Actions opens the selected printer’s action menu.

On the Actions screen, four background colours separate **Current Fault**, **Actions**, **Recent** and **Diagnosis SOPs**. Read the status labels to know the printer state.


Some panels contain more data than the screen shows. Scroll inside the panel to see the remaining controls.

> **Home and Back do not save a form**
> Use the correct save button before you leave. For unfinished weekly work, select **Continue Later**.

A browser message can appear when you leave a changed form. Stay on the form if you need to save.

Record weekly maintenance

Path: Dashboard → printer → Weekly Maintenance.

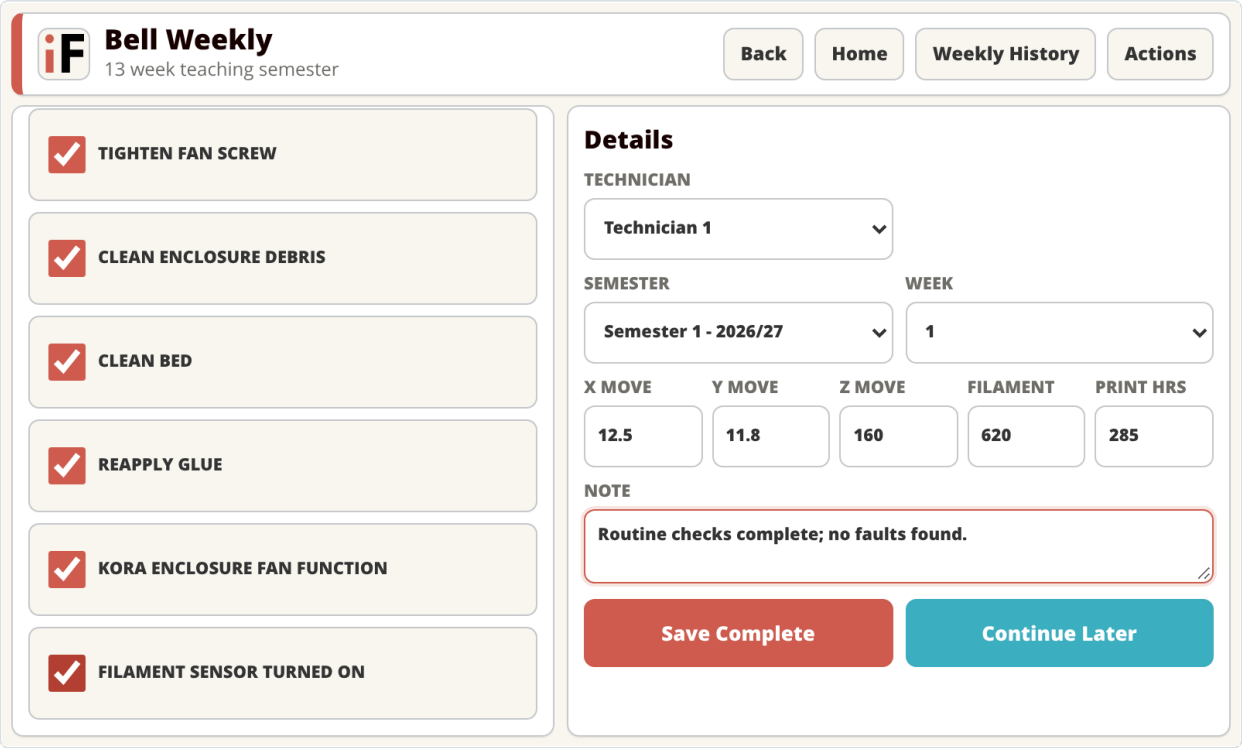

Sample completed form. Use the actual printer readings, not the numbers in this picture.

1. Do the maintenance checks specified by your workshop.
2. Select each completed item under **Checks**.
3. Select your name under **Technician**.
4. Select the correct **Semester**.
5. Select the correct **Week**.
6. Enter the cumulative readings from the printer.
7. Enter necessary details in **Note**.

If your name is absent, select **Other**. Enter your name in the field that appears.


A **cumulative reading** is the total shown by the printer. It is not the amount used during this week.

Units: **X move** and **Y move** use km. **Z move** and **Filament** use m. **Print hrs** uses h.

> **Do not use All for unfinished work**
> **All** selects every check. The default checks are optional in the software. Your workshop can require more checks.

Save or continue weekly work

Choose the save action that agrees with the actual work.

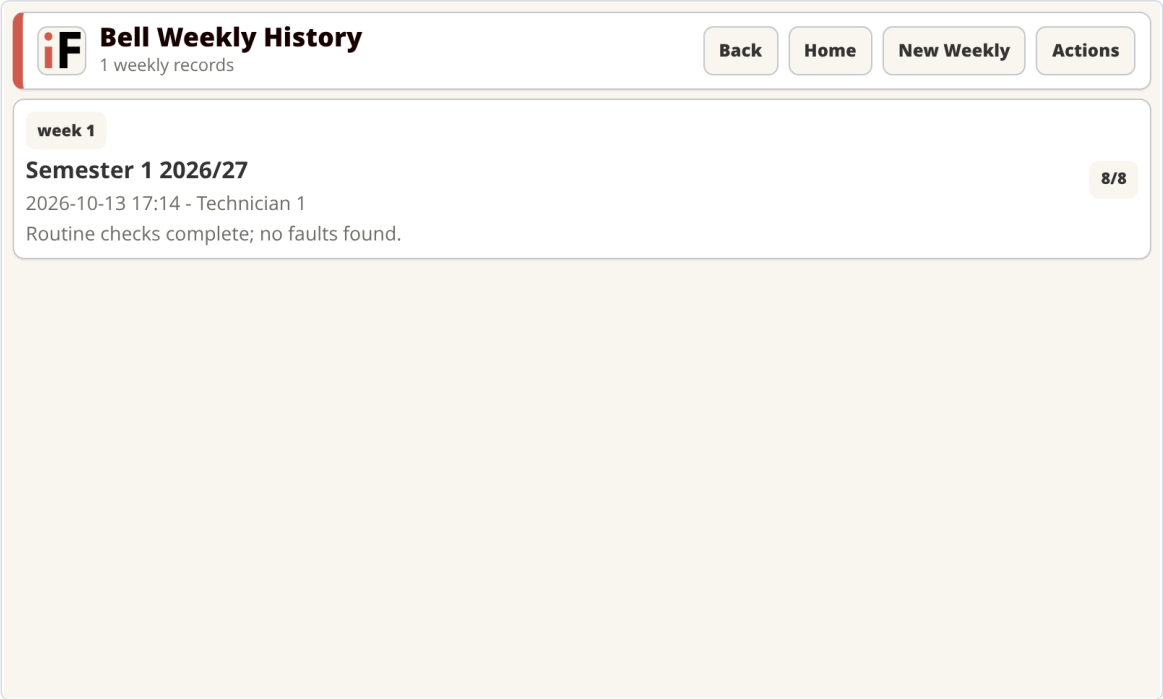

Weekly History opens after a save. A saved record is the confirmation.

Control	Result
Save Complete	Saves completed work. A technician is necessary. Required checks must be complete.
Continue Later	Saves unfinished work as a draft. A draft is a saved record that needs more work.


Continue a draft or correct a completed record

1. Open **Weekly History** for the printer.
2. Select the record for the correct year, semester and week.
3. Select **Continue** for a draft, or **Edit** for a completed record.
4. Change the necessary fields.
5. Select the correct save action.

There is one weekly record for each printer, year, semester and week. Use the existing record to prevent a duplicate.

Record a new fault

Reactive maintenance is work in response to a fault. Path: Printer → Reactive Start.

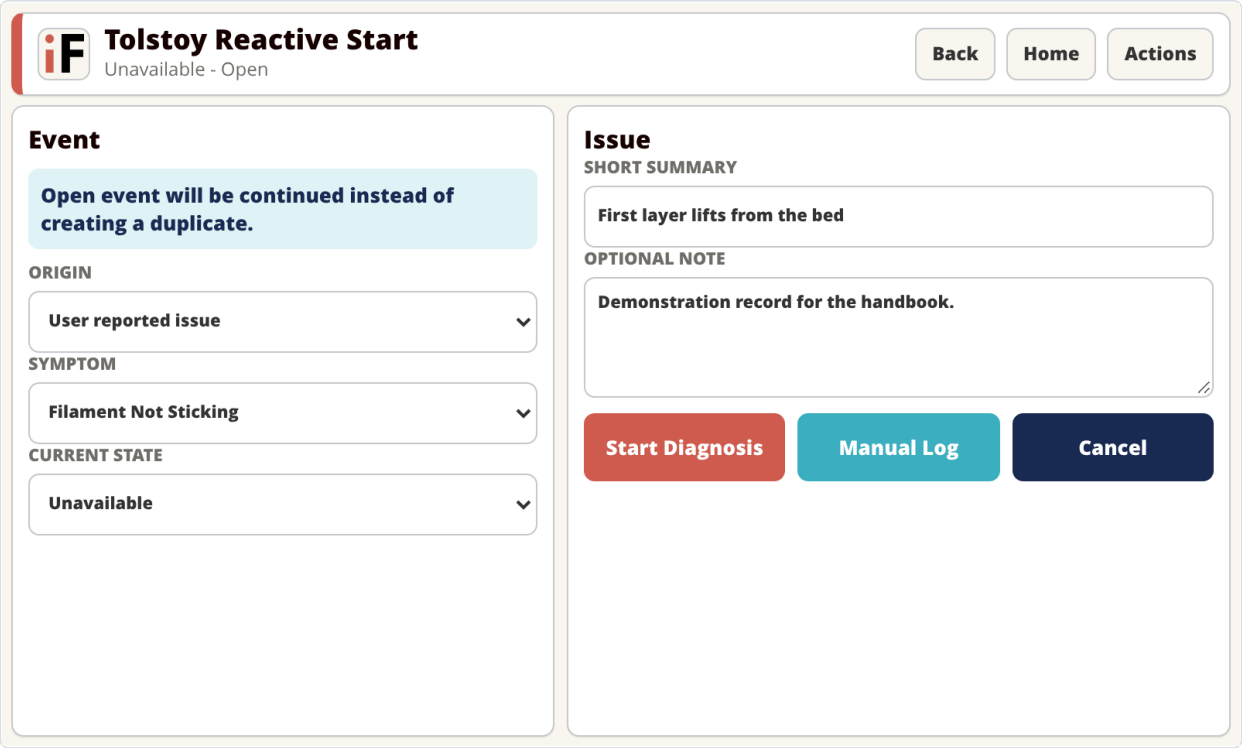

Use a short, specific description of the observed fault.

1. Select the applicable **Origin**.
2. Select the closest **Symptom**.
3. Select the correct **Current state**.
4. Enter the fault in **Short summary**.
5. Select **Start Diagnosis** for questions, or **Manual Log** for a known fault.


> **Both buttons save the fault first**
> **Start Diagnosis** and **Manual Log** save the fault before the next screen opens. **Back** does not remove that fault.

An **incident** is one fault record. If the printer already has an open incident, the kiosk continues that incident.

Intermittent issue and **Investigation only** also set the printer to Unavailable. Use **Under Maintenance** during active maintenance.

Record a known fault or repair

Path: Printer → Manual Log. This form also continues an open incident.

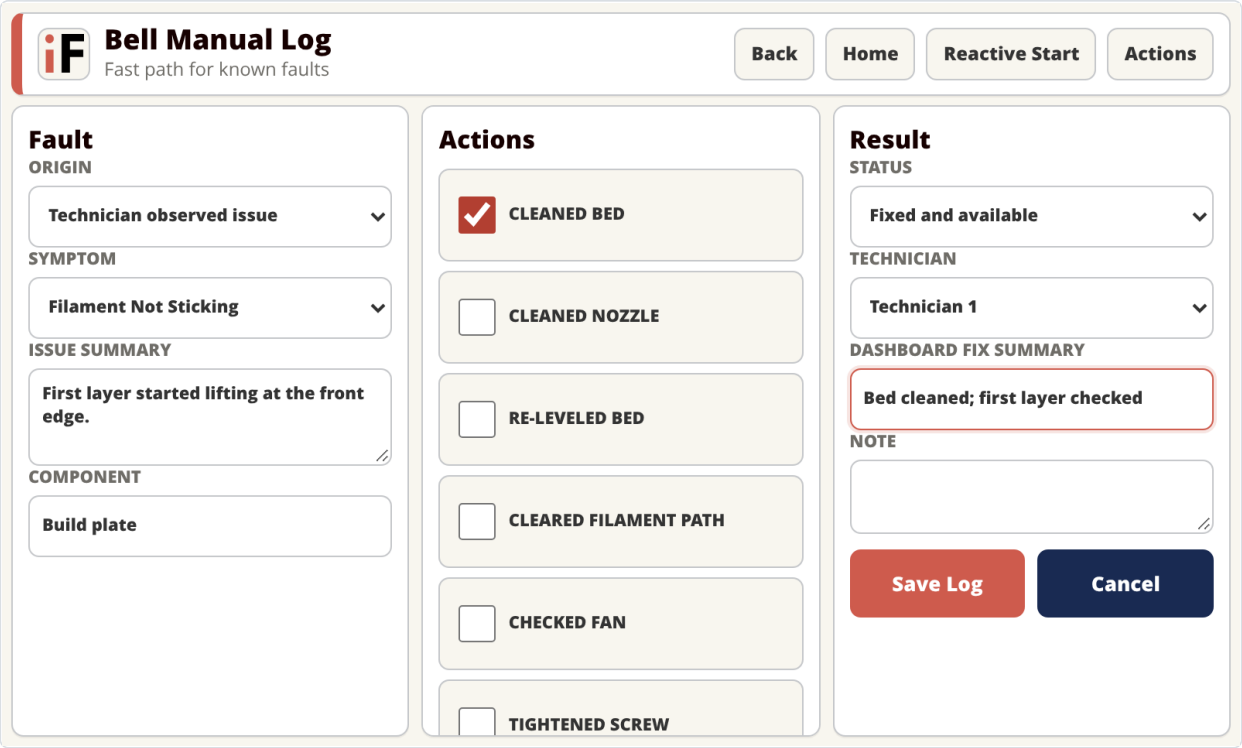

Manual Log contains Fault, Actions and Result panels.


1. Select the applicable **Origin**.
2. Select the closest **Symptom**.
3. Enter the observed problem in **Issue summary**.
4. Select the actions that you completed.
5. Select the correct **Status**. See the table below.
6. Select your **Technician** name.
7. Enter the result in **Dashboard fix summary**.
8. Select **Save Log**.

Status	Printer after Save Log
Fixed and available	Available; the incident is resolved.
Temporary fix / Still unavailable / Needs parts / Escalated	Unavailable; the incident remains unresolved.

Use **Note** for extra details. A fix summary can describe unfinished work: “Replacement fan required. Printer remains unavailable.”

Use Assist to find a cause

Path: Printer → Assist. Assist gives guidance from the saved diagnosis questions.

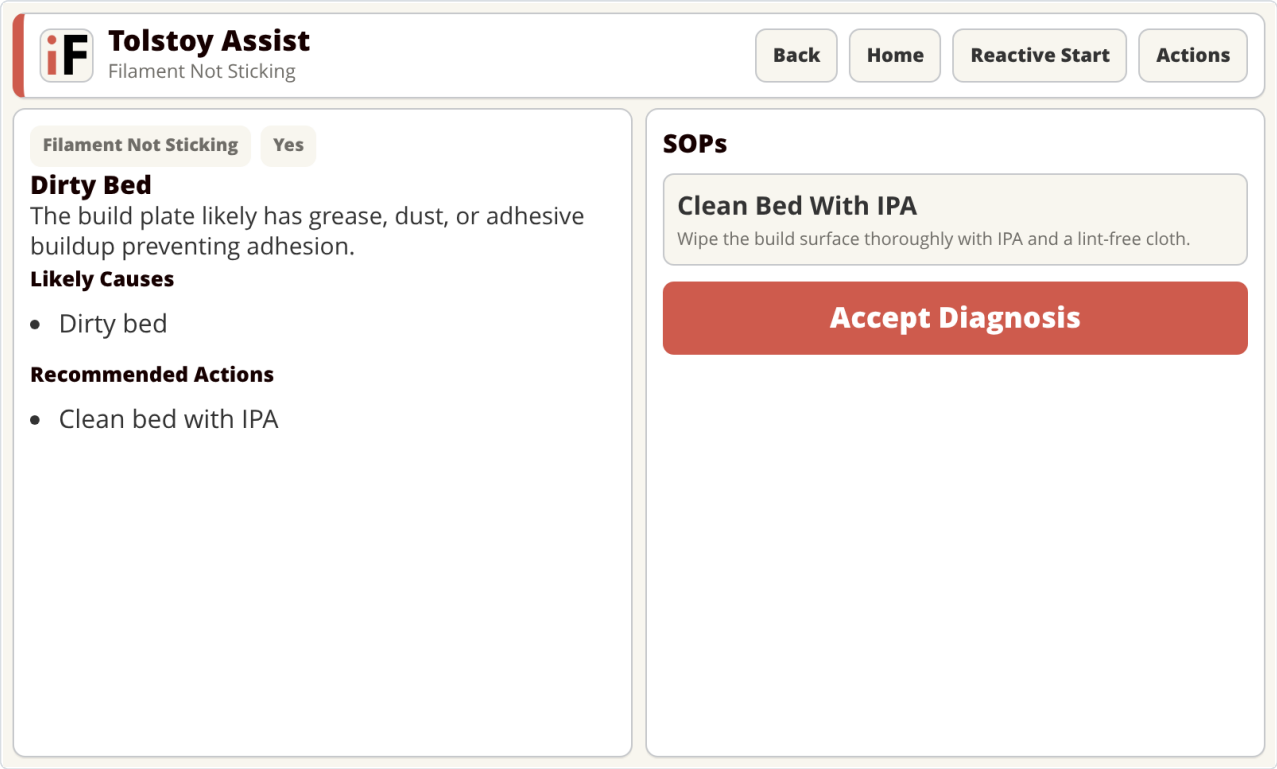

A result shows possible causes, actions and procedure links.


1. Select a **Symptom Category**.
2. Read the question.
3. Select the answer that agrees with your observation.
4. Continue until the result appears.
5. Read **Likely Causes**.
6. Read **Recommended Actions**.
7. Select **Accept Diagnosis** if the result agrees with your findings.

> **A diagnosis is not a confirmed repair**
> **Accept Diagnosis** opens the outcome form. It does not save a repair. Review the supplied text before you save.

Direct use of **Assist** does not create a fault record. **Reactive Start** saves a fault before it opens Assist.

Save the correct outcome

This form opens after Accept Diagnosis or a Quick Fix selection.

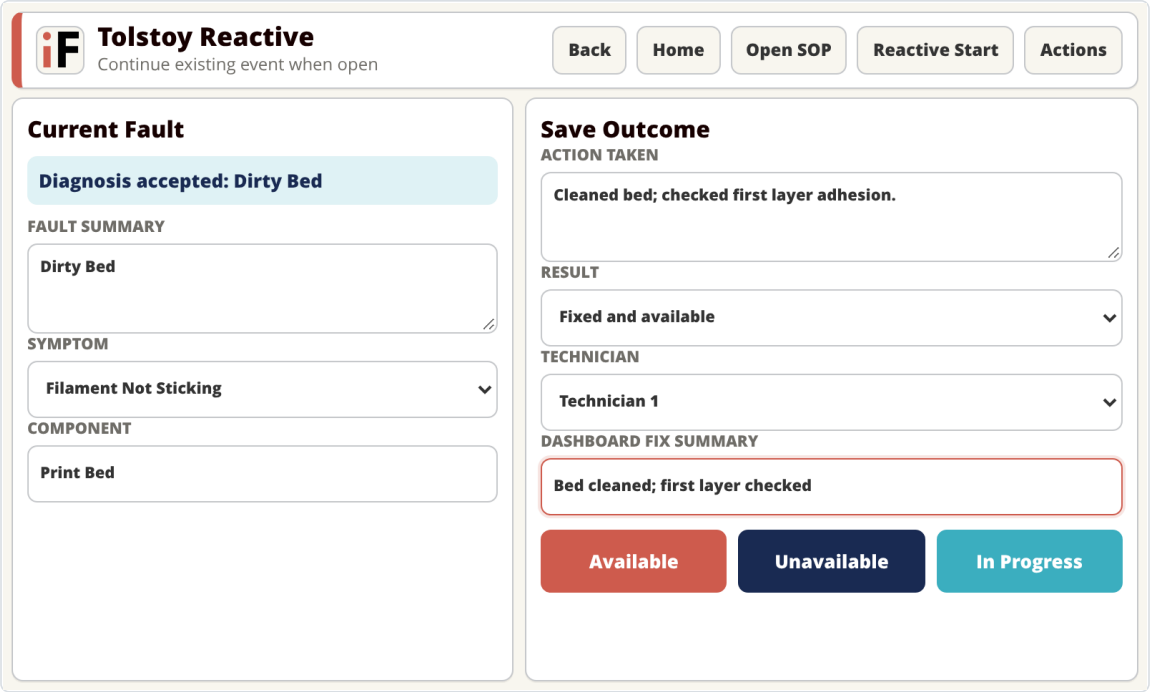

The final save button sets availability. Make sure Result and the button agree.

Complete **Fault summary**, **Action taken**, **Result**, **Technician** and **Dashboard fix summary**. Change supplied text to describe the actual work.


Condition	Result	Final button
Repair confirmed.	**Fixed and available**	**Available**
Fault remains.	**Still unavailable**	**Unavailable**
Work continues.	**Temporary fix**	**In Progress**
Parts are necessary.	**Needs parts**	**Unavailable**
Another person must help.	**Escalated**	**Unavailable**

Check the final button
Available resolves the incident. **In Progress** sets the printer to Under Maintenance. The button can override **Result**.

A Quick Fix selection only fills a form. It does not do a repair or save a record.

Read the correct procedure

SOP means standard operating procedure. An SOP contains instructions for a specific task.

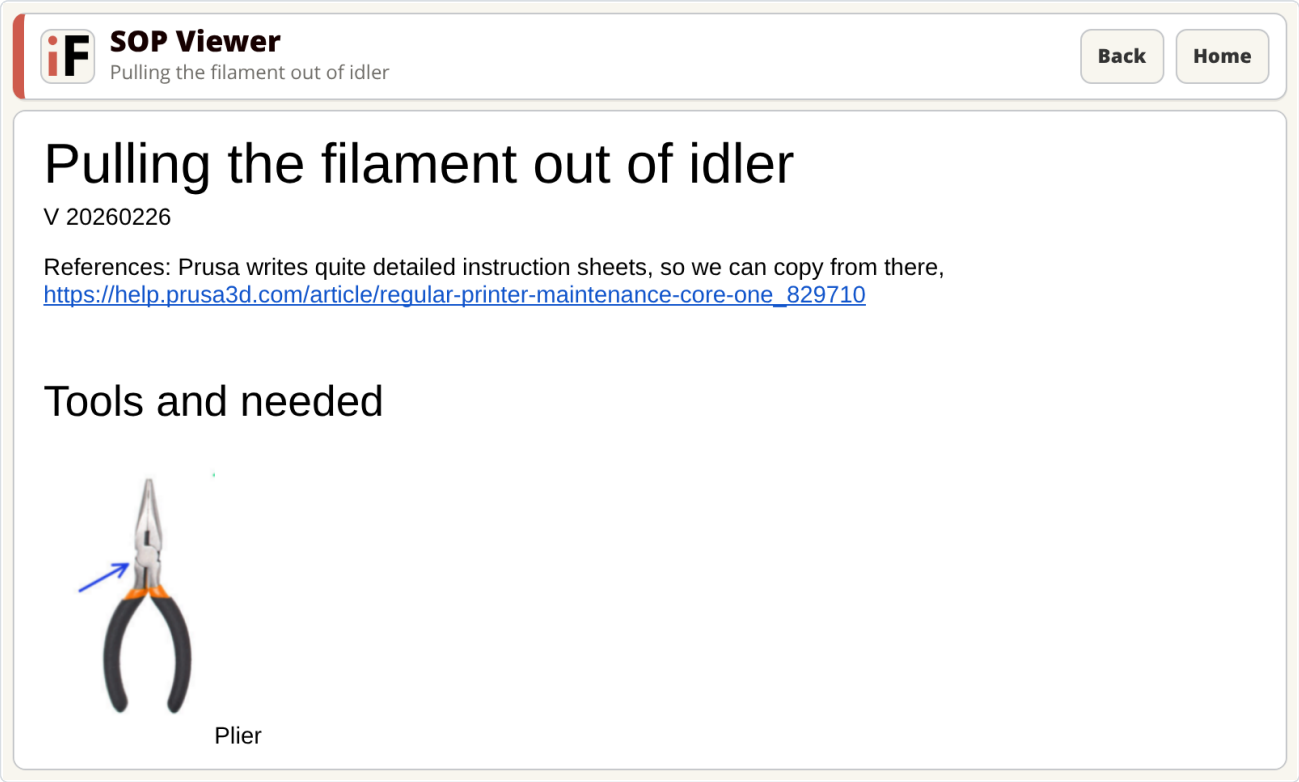

Example of an installed illustrated SOP. Not every diagnosis result links to this document.

1. Select the applicable SOP on the diagnosis result or **Open SOP** on a Quick Fix form.
2. Read the complete procedure before the work starts.
3. Scroll inside the document to read the remaining instructions.
4. Select **Back** to return to the page that opened the SOP.


> **If the instruction file is absent**
> Stop at the missing-file message. Ask the workshop lead for the approved procedure. Do not treat a short description as complete instructions.

This version has 23 links to PDF files that are not installed. It includes three illustrated HTML procedures and three text procedures.

For example, **Back** returns to the diagnosis result when you opened the SOP from that result. **Home** opens the first dashboard page.

Read history and transfer work

Path: Printer → Full History. Use Weekly History for detailed weekly records.

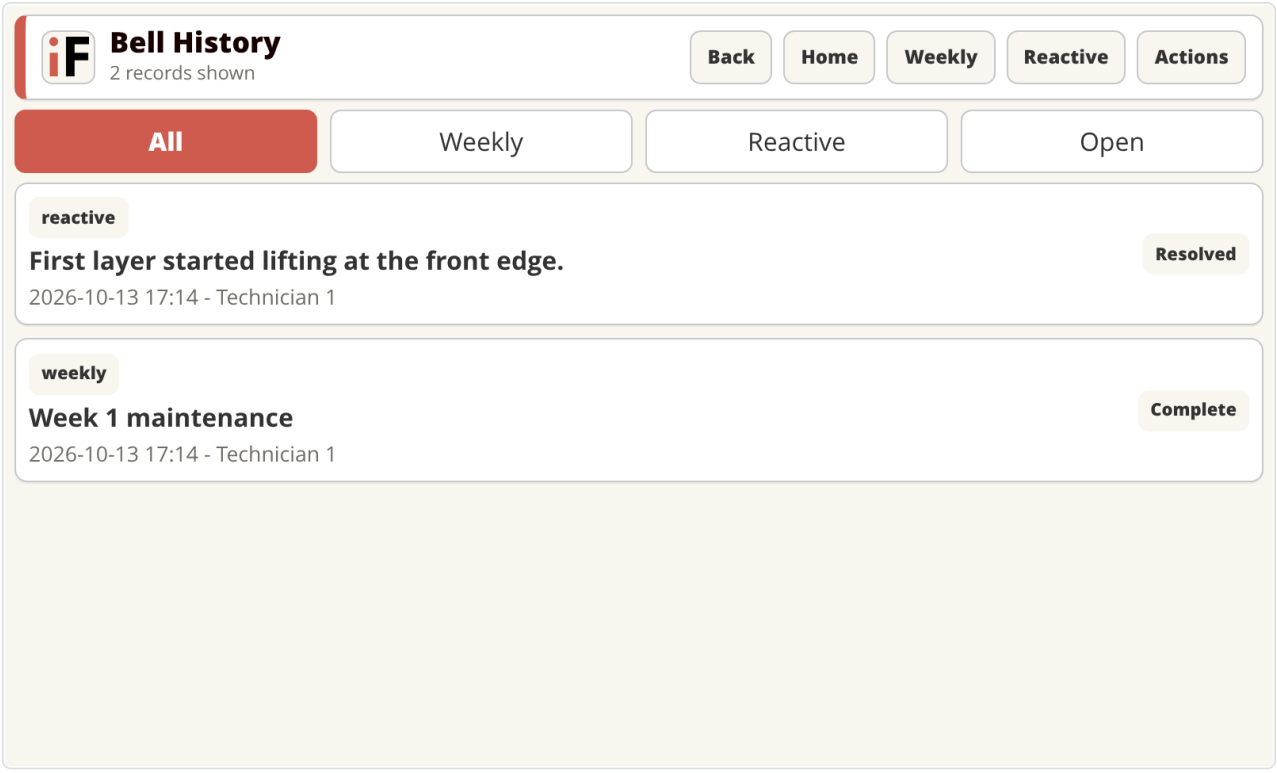

Full History shows the current saved summary of each record.

Filter	Records shown
All	Weekly records and fault records.
Weekly	Weekly maintenance records.
Reactive	Fault records and repair results.
Open	Unfinished weekly drafts and open incidents.


Full History rows are not edit controls. To change a weekly record, use **Weekly History**. To continue an open incident, use **Manual Log**.

The current screen has no edit control for an old resolved incident. Report an incorrect resolved record to the administrator.

> **Before you leave**
> Check the saved record and printer status. Record the next necessary action. An **Escalated** status does not prove that someone received a message.

Change settings correctly

Path: Dashboard → Settings. Scroll the menu and the form on the Pi screen.

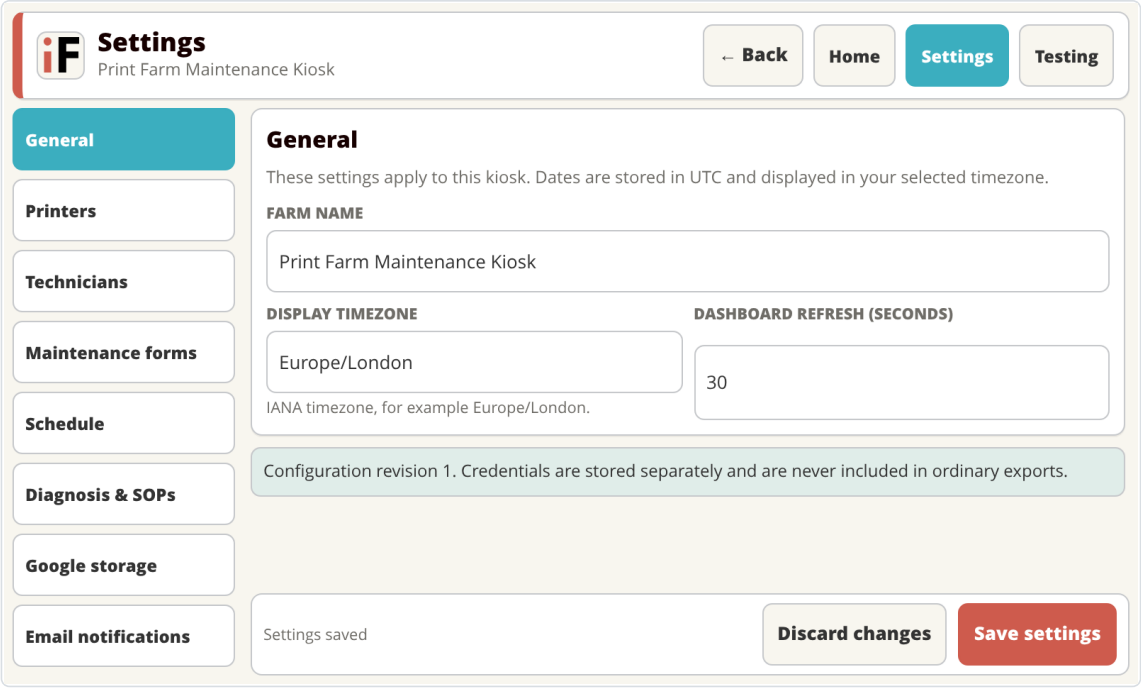

Home and Back are at the top. The save controls remain at the bottom.

Save control	What it saves
Save settings	Applies ordinary settings to the kiosk.
Store credential	Stores one password, key or webhook URL. Wait for the Stored badge.
Save diagnosis & SOPs	Applies changes to the diagnosis questions and SOP links.
Save draft	Keeps unfinished settings in this browser only. It does not apply them.

A **credential** is a password, key or secret address that permits access. Store or clear typed credentials before **Save settings**.

Back returns to the last kiosk page before Settings or Testing. **Home** opens the first dashboard page.

> **Save before a test**
> Testing uses saved settings. A **Stored** badge only shows that a credential exists. It does not confirm access.

When you leave with unsaved settings, choose **Save draft**, **Discard changes** or **Stay**. Drafts do not contain credentials.

Set people, printers and forms

Use Settings to change the lists. You do not need to change software files.

Settings section	Use
General	Set the farm name, display timezone and dashboard refresh time.
Printers	Set names, models, list order and Active in kiosk. Use + Add printer for another printer.
Technicians	Set technician names and Active in kiosk. These names identify records; they are not login accounts.
Maintenance forms	Set checklist labels, Required to complete and Show on form. Set reading names and units.
Schedule	Set the academic year, semester, current week and number of teaching weeks.
Diagnosis & SOPs	Change symptom categories, questions, results and SOP document links.

Change one item

1. Open the applicable Settings section.
2. Select the item that needs a change.
3. Change the required value.
4. Select **Save settings**. Use **Save diagnosis & SOPs** for diagnosis changes.
5. Open the applicable operator screen to check the result.


> **Keep the historical links**
> An ID is the permanent identifier for an item. Do not replace an existing ID to rename an item. Clear **Active in kiosk** to remove an item from active use.

The current teaching week does not advance automatically. Update **Schedule** when the week changes.

SOP settings change document links. They do not upload a PDF. After a diagnosis change, run **Validate diagnosis**.

Prepare the Google spreadsheet

Do this once before you connect the kiosk. Use a dedicated spreadsheet for maintenance records.

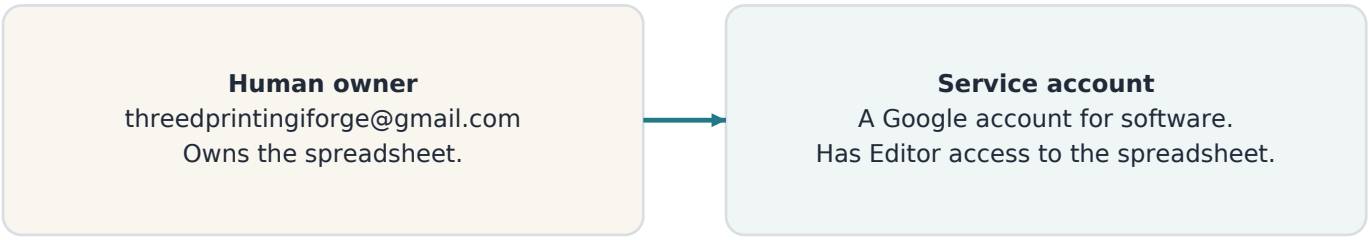

Create the spreadsheet

1. Sign in to Google Drive as **threedprintingiforge@gmail.com**.
2. Create a Google spreadsheet for maintenance records.
3. Give ordinary staff **Viewer** access.

Create the connection credentials

1. Open **Google Cloud Console** at console.cloud.google.com.
2. Create or select the project for the kiosk.
3. Enable **Google Sheets API** in **APIs & Services → Library**.
4. Enable **Google Drive API** in the same project.
5. Create a service account under **IAM & Admin → Service Accounts**.
6. Create a **JSON** key under that service account's **Keys** controls.
7. Save the downloaded key in a private location.

JSON is the format of the key file. Use the complete file contents when you connect the kiosk.

Give the service account access


1. Open **Share** in the maintenance spreadsheet.
2. Add the service account email with **Editor** access.

Use the service account email from Google Cloud or the key's **client_email** field. The human account remains the owner.

> **Treat the JSON key as a password**
> Do not put the key in notes or pictures. If Google blocks key creation, ask your Google administrator for help.

Connect the kiosk to Google

Path: Settings → Google storage. Keep synchronization off until the tests pass.

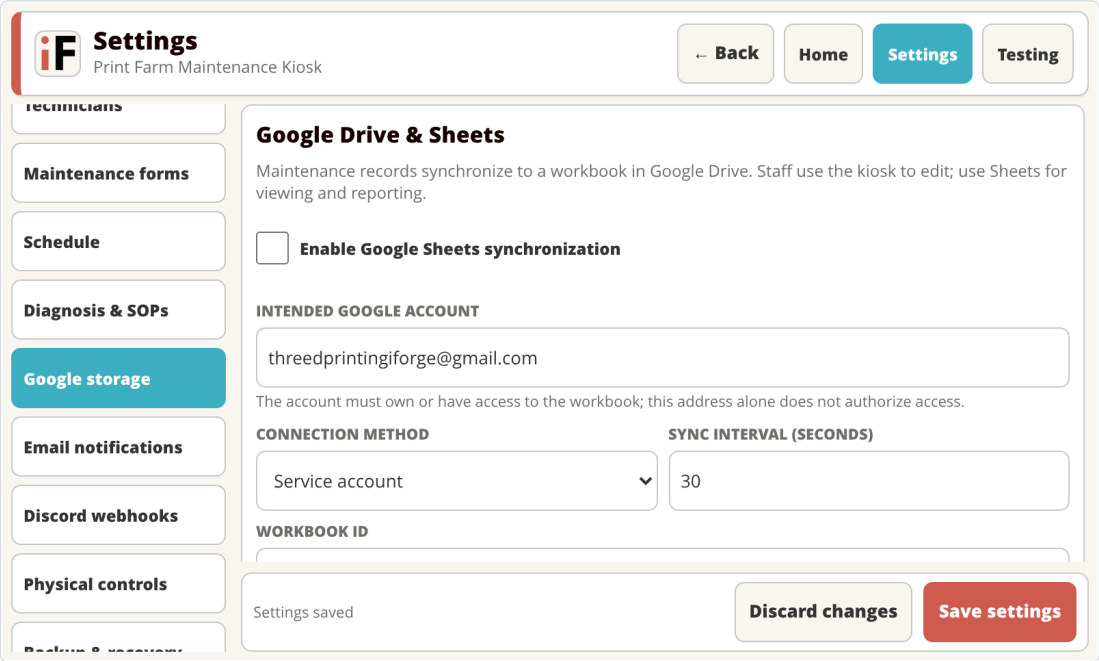

The connection fields. Scroll down to the Service account JSON credential control.

1. Set **Intended Google account** to **threedprintingiforge@gmail.com**.
2. Set **Connection method** to **Service account**.
3. Enter the spreadsheet ID in **Workbook ID**.
4. Paste the complete key text into **Service account JSON → Credential JSON**.
5. Select **Store credential**.
6. Select **Save settings**.
7. Select **Testing → Check Google connection**.
8. Select **Run Sheets write test** after the connection check passes.
9. If both Google tests pass, select **Enable Google Sheets synchronization** in **Settings → Google storage**.
10. Select **Save settings**.

The ID is between **/d/** and **/edit** in the spreadsheet URL. The email address alone does not connect the kiosk.

Drive folder ID is optional. The workbook must be inside that folder. The service account must have access to the folder.

The write test clears its test row after success. The **_Kiosk_Tests** tab can remain. Review any cleanup error.

Use Google Sheets for reports

Staff enter and change maintenance records through the kiosk. Use Google Sheets to read and report the data.

Spreadsheet tab	Contents
Printers	Current printer names, availability, open faults and recent maintenance dates.
Weekly_Maintenance	One current row for each weekly record. Includes checks, readings, technician and notes.
Reactive_Maintenance	One current row for each incident. Includes fault, actions, result and diagnosis references.
Activity_Log	One row for each accepted record change. Includes the record version at that change.
_Kiosk_Tests	A separate tab for the explicit write test.

Read the dashboard connection label

Label	Meaning
Offline	Google synchronization is off. This label does not test Wi-Fi.
Ready	Google synchronization is on, but no Google delivery jobs exist yet.
Pending	At least one Google job is pending or failed. Read the delivery queue in Testing.
Synced	Existing Google jobs are complete. This does not confirm email or Discord delivery.


> **Keep managed data unchanged**
> Do not rename managed tabs or column headings. Do not change record IDs or revision numbers. Use separate report tabs or filter views.

A **job** is one item in the delivery queue. The worker creates managed tabs during writes. When you first enable Google, the worker also sends existing local records.

For Google account authorization instead of a service account, use the OAuth setup instructions.

Set Discord notifications

A webhook is a secret address that receives messages for one Discord channel.

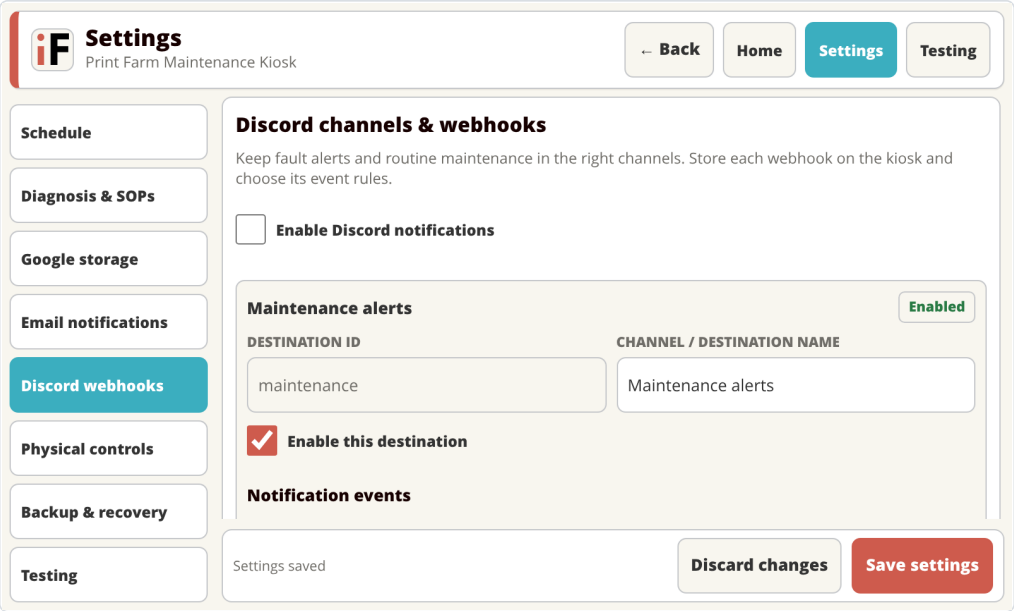

Each destination has event rules and printer selections. Scroll down to its credential control.

1. Create a webhook in the required Discord channel’s integration controls.
2. Open **Settings → Discord webhooks**.
3. Select **+ Add destination** if another channel is necessary.
4. Enter a clear **Channel / destination name**.
5. Select the required **Notification events** and printers.
6. Select **Save settings** before you store a new destination’s webhook.
7. Paste the URL into **Discord webhook URL → Credential**.
8. Select **Store credential**.
9. Select the destination under **Testing → Discord webhook**.
10. Select **Send test Discord message**.


Confirm the test message in the intended channel. In **Settings → Discord webhooks**, select **Enable Discord notifications**. Select **Save settings**.

Events: **Fault Opened**, **Incident Escalated**, **Incident Resolved** and **Weekly Completed**. Repeated triggers do not create another fault alert.

> **Check the destination rules**
> **Enable this destination** must also be selected. No selected printers means all printers. Tests send immediately, even with production notifications off.

Set email notifications

SMTP is the set of rules that computers use to send email. Use the connection values from your email administrator.

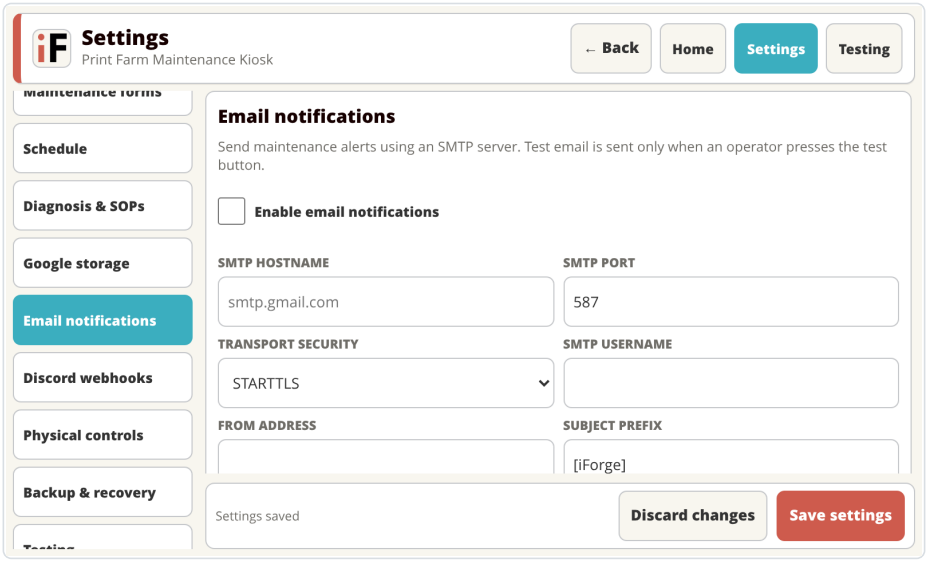

Path: Settings → Email notifications. Store the SMTP password in its separate credential control.

Field	Gmail example
SMTP hostname / SMTP port	smtp.gmail.com / 587
Transport security	STARTTLS
SMTP username / From address	The full Gmail address.
SMTP password	A Google app password, if the account permits one.

Enter the connection fields and **Recipients**. Separate recipient addresses with commas. Select the required notification events.


1. Select **Store credential** after you enter the SMTP password.
2. Select **Save settings**.
3. Enter one **Test recipient** under **Testing → Email delivery**.
4. Select **Send test email**.
5. Confirm that the recipient received the message.
6. Select **Enable email notifications** in Settings.
7. Select **Save settings**.

A passed test means the mail server accepted the message. Examine the inbox and spam folder to confirm receipt.

Google Sheets authorization does not authorize Gmail SMTP. A normal Google password is not an app password.

Set physical buttons and LEDs

GPIO means the Pi's input and output pins. An LED is an indicator light.

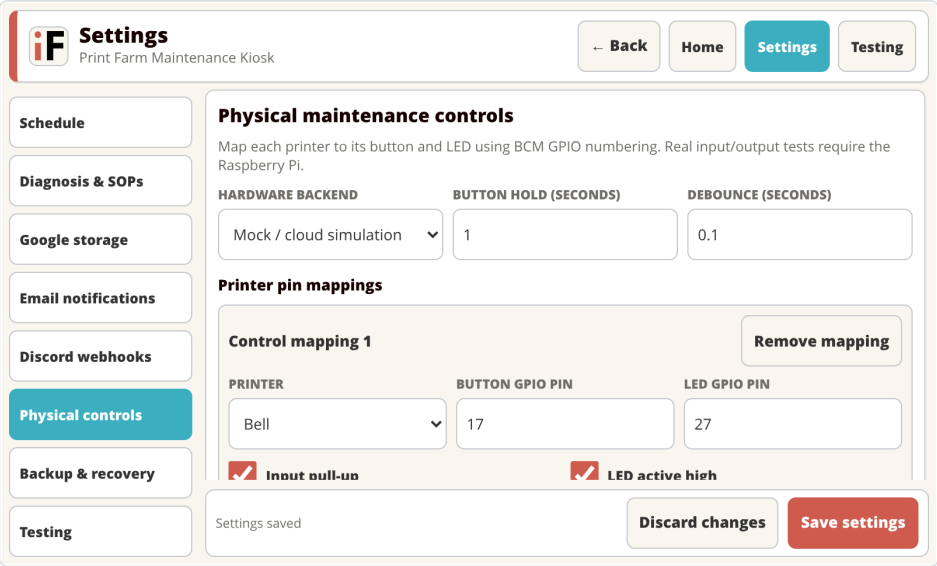

Path: Settings → Physical controls. Mock / cloud simulation does not operate the physical pins.

> **Confirm the wiring before you enable GPIO**
> Use **BCM GPIO numbers**, not physical header positions. Ask the hardware installer to check the wiring and LED resistors. Use each GPIO pin only once.

1. Select **Raspberry Pi GPIO** under **Hardware backend**.
2. Set **Button hold (seconds)** and **Debounce (seconds)**.
3. Set **Button GPIO pin**, **LED GPIO pin**, **Input pull-up** and **LED active high** for each printer.
4. Select **Save settings**.
5. Select the printer under **Testing → Physical button**.
6. Set a **Session length** longer than the required hold time.
7. Make sure the button is released.
8. Select **Monitor physical input**.
9. Press and hold the actual button during the test session.
10. Select **Test LED output** for the correct printer.


Examine the actual LED during its test. **Debounce** rejects brief unwanted changes from the button.

The tests pause the normal watcher. They do not create a real incident. The watcher continues after the test.

A new fault makes the printer Unavailable. A repeated trigger keeps the existing incident and status. The LED indicates unavailable maintenance states.

Use the correct test

Path: Settings → Testing. Tests use saved settings.

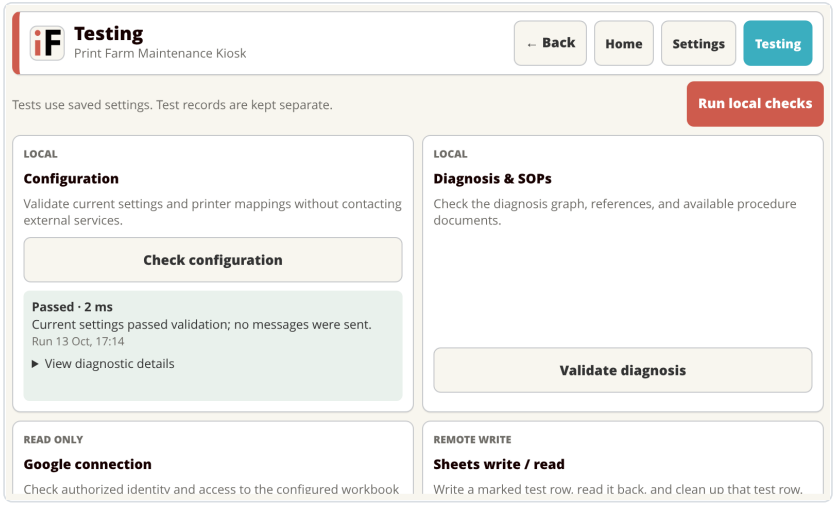

Run local checks tests the configuration and diagnosis content. It does not send messages.

Control	Effect
Check Google connection	Reads Google access and workbook details. It does not write maintenance records.
Run Sheets write test	Writes, reads and clears a test row in a separate Google tab.
Send test email / Send test Discord message	Sends a real, labelled test message to the selected destination.
Simulate trigger	Tests software with separate records. It does not test the wiring.
Test offline queue / Test recovery	Uses separate records and a simulated connection. It does not reboot the Pi.
Monitor physical input / Test LED output	Tests actual hardware. See page 22.
Process pending jobs	Sends REAL queued records and messages. This is not an isolated test.

Passed applies only to the stated check. For **Failed**, read **View diagnostic details**. **Unavailable** is not a pass.

> **A disabled connection can still have queued work**
> Disabling an integration stops new jobs. It does not cancel existing jobs. Do not select **Process pending jobs** to practise.

Operate the Raspberry Pi

The installer starts the app, delivery worker, hardware watcher and fullscreen browser after a reboot.

Start and stop

Use the normal Pi power supply. Wait for the dashboard after startup. The app can start without internet access.

Use a keyboard or SSH for system commands. **SSH** is a remote terminal connection. **Ctrl+Alt+F2** opens a terminal on the Pi.

To shut down, enter this command. Wait for the Pi to finish before you disconnect power.

```
sudo shutdown -h now
```

To restart the Pi, enter this command:

```
sudo reboot
```

Alt+F4 closes Chromium temporarily. The kiosk starts Chromium again. It does not stop the system.

Use a larger screen for Settings

Run this command on your Mac. Replace the example username and hostname with the Pi’s actual values.

```
ssh -L 5000:127.0.0.1:5000 \
  YOUR_PI_USER@YOUR_PI_HOSTNAME.local
```

Keep the terminal connection open. Open **http://127.0.0.1:5000** in the Mac browser.

> **This connection changes the real Pi data**
> The Mac browser uses the Pi’s records. It is not a training copy. Stop another Mac app that already uses port 5000.

Check the app

```
systemctl status maintenance-kiosk --no-pager
curl http://127.0.0.1:5000/api/health
journalctl -u maintenance-kiosk -n 50 --no-pager
```

The health result confirms the web app only. It does not confirm Google, messages or GPIO.

For installation and updates, use the Raspberry Pi setup guide. The supported OS versions are Bookworm and Trixie.

Keep a complete backup

A backup is a separate copy that you can use after data loss.

Use the screen exports

Open **Settings → Backup & recovery**. **Export all records** downloads records. **Export settings** downloads ordinary settings.

These files download to the browser’s device. They exclude credentials and are not a complete backup. Automatic Drive backups do not run.

Make a complete Pi backup

Arrange a pause in kiosk use. Run these commands in a Pi terminal after installation with the supplied installer.

```
sudo systemctl stop \
  maintenance-kiosk maintenance-kiosk-worker \
  maintenance-kiosk-hardware
umask 077
backup_path="$HOME/maintenance-kiosk-$(date +%Y%m%d-%H%M%S).tar.gz"
sudo tar -cz -C /var/lib maintenance-kiosk > "$backup_path"
sudo systemctl start \
  maintenance-kiosk maintenance-kiosk-worker \
  maintenance-kiosk-hardware
```

Make sure the commands complete without an error. Copy the archive to a private location outside the Pi’s SD card.

> **The complete backup contains credentials**
> Protect the archive as you protect passwords. The data directory contains records, settings, credentials and delivery results.

Restore only with administrator control

Stop all kiosk services before a restore. Use a complete runtime backup. Do not combine two record journals or overwrite newer records.

The installer stores runtime data in **/var/lib/maintenance-kiosk**. Application updates use a separate directory.

Review an earlier configuration

Import a settings export and **Review this version** load settings for review. Select **Save settings** to apply them.

These controls do not restore credentials or maintenance records. Google Sheets alone cannot restore the complete system.

Find and correct a problem

Read the message before you try again. Do not create a duplicate record to correct a delivery delay.

Problem	Action
A required check is incomplete.	Complete the check, or select Continue Later for unfinished work.
Your technician name is absent.	Select Other. Enter your name. Ask the administrator to update the regular list.
Another session changed the record.	Keep a note of your changes. Reload the latest record. Apply your changes to that record.
The weekly record already exists.	Open the existing record through Weekly History. Select Continue or Edit.
A fault remains after you leave Assist.	Reactive Start saved the incident first. Use Manual Log to record the actual outcome.
Google stays Pending.	Read Testing → Delivery queue. Check Wi-Fi and the delivery worker. Correct the reported connection error.
Email passes, but no email arrives.	Confirm the Test recipient. Examine the inbox and spam folder.
An SOP file is absent.	Get the approved procedure from the workshop lead. Ask the administrator to repair the link.
A physical button has no effect.	Check the selected backend, printer mapping and hold time. Use Monitor physical input.
The app does not open.	Use the terminal checks on page 24. Keep the data directory. Read the service error before a reinstall.

Check the delivery worker

```
systemctl status maintenance-kiosk-worker --no-pager
journalctl -u maintenance-kiosk-worker -n 50 --no-pager
```

To stop automatic delivery during investigation, stop the worker. Do not select **Process pending jobs** while delivery must remain stopped.

```
sudo systemctl stop maintenance-kiosk-worker
```

After you correct the problem, start the worker with **sudo systemctl start maintenance-kiosk-worker**.

Technical terms and limits

These terms have the same meaning throughout this handbook.

Term	Meaning
Dashboard	The screen that shows printer cards and current status.
Record / incident	A record contains saved work. An incident is one fault record, from its start to resolution.
Weekly draft	An unfinished weekly record saved on the Pi with Continue Later.
Settings draft	Unfinished settings saved only in the current browser. They do not apply to the kiosk yet.
Delivery worker / queue	A background program sends work. The queue contains work that still needs delivery.
Notification	An email or Discord message about a selected event.
Credential	A password, key or secret address that permits access.
Workbook / tab	The Google spreadsheet file and one named sheet inside it.
SOP	Standard operating procedure: instructions for a specific task.
BCM GPIO number	The Pi signal number. It is different from the physical header position.
Revision	The version number of a saved record or configuration.

Limits of this version

The app does not send scheduled reminders or digests. It does not upload automatic Drive backups. Staff use the kiosk to edit records.

Edition 1.1 includes Home, Back and the four Actions panel colours. Pictures show actual screens with sample data. Physical Pi behavior needs a check on the installed device.

Screen labels, product names, paths and commands are technical names. They keep the spelling that the system uses.

Short reference for the kiosk

Keep this page near the screen. Start every task with the correct printer.

> **Before a save**
> Check the printer name. Check the technician name. Check the week or repair result. Save only work that occurred.

Task	Route
Weekly work complete	Printer → Weekly Maintenance → completed checks and details → Save Complete.
Weekly work unfinished	Printer → Weekly Maintenance → Continue Later.
Continue weekly work	Printer → Weekly History → saved draft → Continue.
Report a fault	Printer → Reactive Start → fault details → Start Diagnosis or Manual Log.
Record a known repair	Printer → Manual Log → work and correct Status → Save Log.
Read previous work	Printer → Full History → All, Weekly, Reactive or Open.

Remember the status

Available: the record identifies the printer as available.
Unavailable: keep the printer out of use.
Under Maintenance: work is in progress.

Remember the save

Home and **Back** do not save. **Continue Later** saves a weekly draft. **Start Diagnosis** saves a fault before the questions open.

Use Home and Back

Home: first dashboard page.
Back: last kiosk page. It skips Settings and Testing.

Remember the connection

A saved local record does not prove delivery to Google, Discord or email. Do not enter the same work again because a message is late.

> **If you cannot continue**
> Keep the unsaved form open. Read the error. Ask the workshop lead or administrator for help.

More help: settings, page 15 • tests, page 23 • problems, page 26