nucleotide diversity

Table of Contents

0.1 Library 1
0.2 Data 1
0.3 Plot 2

0.1 Library

```
library(tidyverse)
```

```
-- Attaching core tidyverse packages ------------------------ tidyverse 2.0.0 --
v dplyr     1.1.4     v readr     2.1.5
v forcats   1.0.0     v stringr   1.5.1
v ggplot2   3.5.1     v tibble    3.2.1
v lubridate 1.9.3     v tidyr     1.3.1
v purrr     1.0.2
-- Conflicts ------------------------------------------ tidyverse_conflicts() --
x dplyr::filter() masks stats::filter()
x dplyr::lag()    masks stats::lag()
i Use the conflicted package (<http://conflicted.r-lib.org/>) to force all conflicts to becor
```

0.2 Data


The raw complete VCF file was used to compute nucleotide diversity values averaged over 1Mb windows.

```
vcftools --gzvcf vfaba_hedin_peamust_SNP_GATK.vcf.gz
         --window-pi 1000000
         --out vfaba_hedin_peamust_SNP_GATK.window1Mb.pi
```

```
# Load the data
#| echo: true
#| message: false
#| warning: false

pi <- read.delim("./vfaba_hedin_peamust_SNP_GATK.window1Mb.pi",
                 header = TRUE, sep = "\t", stringsAsFactors = FALSE) %>%
  # remove contigs by filtering on "contig" string
  dplyr::filter(!grepl("contig", CHROM))
```

0.3 Plot

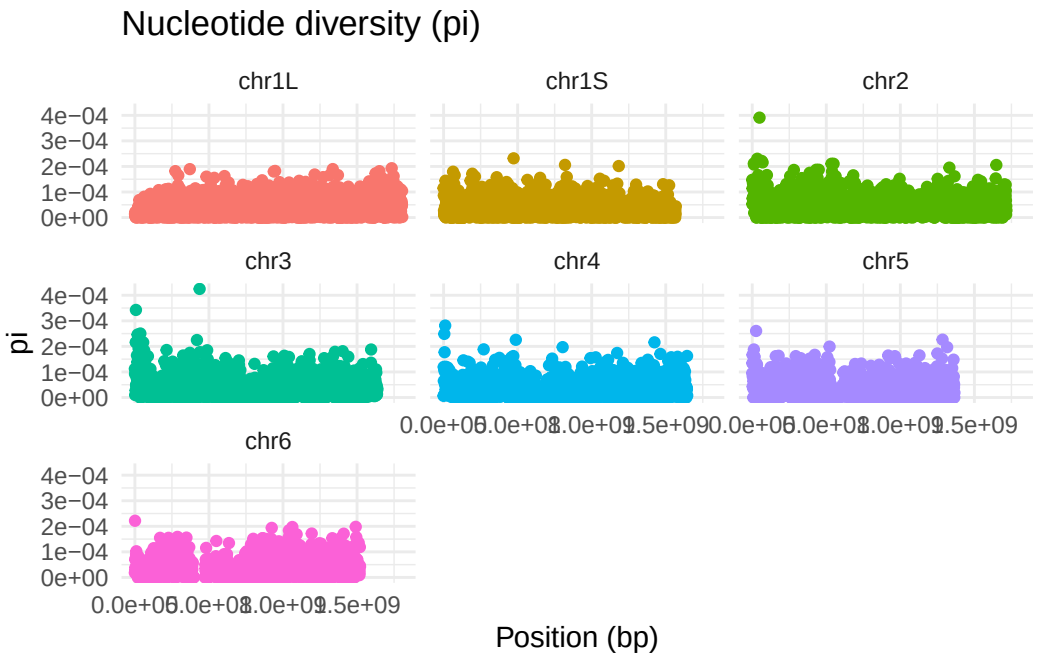

When you click the **Render** button a document will be generated that includes both content and the output of embedded code. You can embed code like this:

```
1 + 1
```

```
[1] 2
```

You can add options to executable code like this

```
[1] 4
```

The `echo: false` option disables the printing of code (only output is displayed).