Table 9-2. Figure.savefig options

Argument	Description
`fname`	String containing a filepath or a Python file-like object. The figure format is inferred from the file extension (e.g., `.pdf` for PDF or `.png` for PNG)
`dpi`	The figure resolution in dots per inch; defaults to 100 out of the box but can be configured
`facecolor`, `edgecolor`	The color of the figure background outside of the subplots; `'w'` (white), by default
`format`	The explicit file format to use (`'png'`, `'pdf'`, `'svg'`, `'ps'`, `'eps'`, ...)
`bbox_inches`	The portion of the figure to save; if `'tight'` is passed, will attempt to trim the empty space around the figure

matplotlib Configuration

matplotlib comes configured with color schemes and defaults that are geared primarily toward preparing figures for publication. Fortunately, nearly all of the default behavior can be customized via an extensive set of global parameters governing figure size, subplot spacing, colors, font sizes, grid styles, and so on. One way to modify the configuration programmatically from Python is to use the `rc` method; for example, to set the global default figure size to be 10×10, you could enter:

```
plt.rc('figure', figsize=(10, 10))
```

The first argument to `rc` is the component you wish to customize, such as `'figure'`, `'axes'`, `'xtick'`, `'ytick'`, `'grid'`, `'legend'`, or many others. After that can follow a sequence of keyword arguments indicating the new parameters. An easy way to write down the options in your program is as a dict:

```
font_options = {'family' : 'monospace',
                'weight' : 'bold',
                'size'   : 'small'}
plt.rc('font', **font_options)
```

For more extensive customization and to see a list of all the options, matplotlib comes with a configuration file *matplotlibrc* in the *matplotlib/mpl-data* directory. If you customize this file and place it in your home directory titled *.matplotlibrc*, it will be loaded each time you use matplotlib.

As we'll see in the next section, the seaborn package has several built-in plot themes or *styles* that use matplotlib's configuration system internally.

9.2 Plotting with pandas and seaborn

matplotlib can be a fairly low-level tool. You assemble a plot from its base components: the data display (i.e., the type of plot: line, bar, box, scatter, contour, etc.), legend, title, tick labels, and other annotations.

In pandas we may have multiple columns of data, along with row and column labels. pandas itself has built-in methods that simplify creating visualizations from DataFrame and Series objects. Another library is `seaborn`, a statistical graphics library created by Michael Waskom. Seaborn simplifies creating many common visualization types.



Importing seaborn modifies the default matplotlib color schemes and plot styles to improve readability and aesthetics. Even if you do not use the seaborn API, you may prefer to import seaborn as a simple way to improve the visual aesthetics of general matplotlib plots.

Line Plots

Series and DataFrame each have a `plot` attribute for making some basic plot types. By default, `plot()` makes line plots (see Figure 9-13):

```
In [60]: s = pd.Series(np.random.randn(10).cumsum(), index=np.arange(0, 100, 10))

In [61]: s.plot()
```

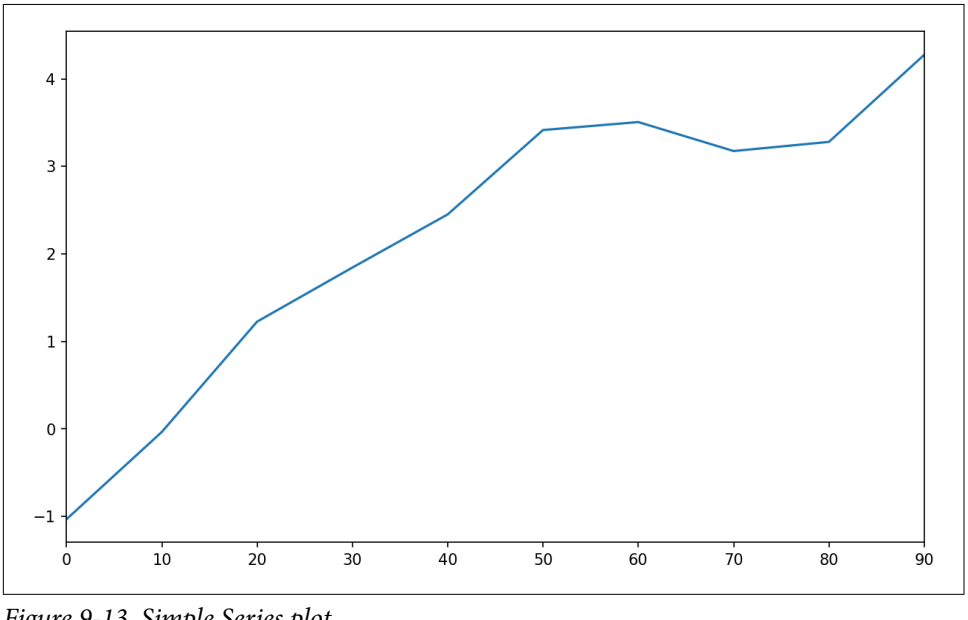


Figure 9-13. Simple Series plot

The Series object's index is passed to matplotlib for plotting on the x-axis, though you can disable this by passing `use_index=False`. The x-axis ticks and limits can be adjusted with the `xticks` and `xlim` options, and y-axis respectively with `yticks` and

`ylim`. See Table 9-3 for a full listing of `plot` options. I'll comment on a few more of them throughout this section and leave the rest to you to explore.

Most of pandas's plotting methods accept an optional `ax` parameter, which can be a matplotlib subplot object. This gives you more flexible placement of subplots in a grid layout.

DataFrame's `plot` method plots each of its columns as a different line on the same subplot, creating a legend automatically (see Figure 9-14):

```
In [62]: df = pd.DataFrame(np.random.randn(10, 4).cumsum(0),
   ....:                   columns=['A', 'B', 'C', 'D'],
   ....:                   index=np.arange(0, 100, 10))

In [63]: df.plot()
```

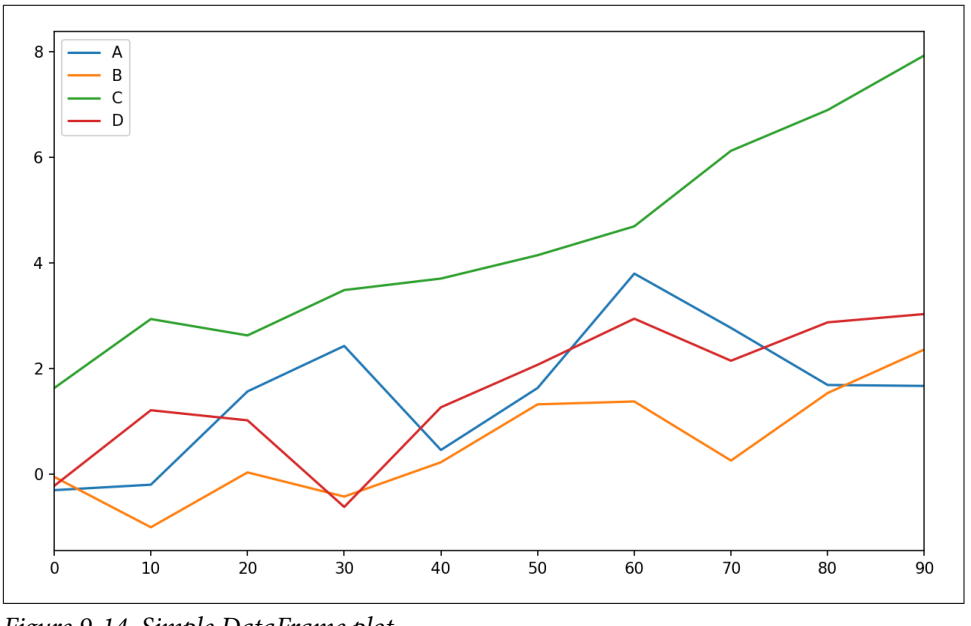


Figure 9-14. Simple DataFrame plot

The `plot` attribute contains a "family" of methods for different plot types. For example, `df.plot()` is equivalent to `df.plot.line()`. We'll explore some of these methods next.



Additional keyword arguments to `plot` are passed through to the respective matplotlib plotting function, so you can further customize these plots by learning more about the matplotlib API.

Table 9-3. Series.plot method arguments

Argument	Description
`label`	Label for plot legend
`ax`	matplotlib subplot object to plot on; if nothing passed, uses active matplotlib subplot
`style`	Style string, like `'ko--'`, to be passed to matplotlib
`alpha`	The plot fill opacity (from 0 to 1)
`kind`	Can be `'area'`, `'bar'`, `'barh'`, `'density'`, `'hist'`, `'kde'`, `'line'`, `'pie'`
`logy`	Use logarithmic scaling on the y-axis
`use_index`	Use the object index for tick labels
`rot`	Rotation of tick labels (0 through 360)
`xticks`	Values to use for x-axis ticks
`yticks`	Values to use for y-axis ticks
`xlim`	x-axis limits (e.g., `[0, 10]`)
`ylim`	y-axis limits
`grid`	Display axis grid (on by default)

DataFrame has a number of options allowing some flexibility with how the columns are handled; for example, whether to plot them all on the same subplot or to create separate subplots. See Table 9-4 for more on these.

Table 9-4. DataFrame-specific plot arguments

Argument	Description
`subplots`	Plot each DataFrame column in a separate subplot
`sharex`	If `subplots=True`, share the same x-axis, linking ticks and limits
`sharey`	If `subplots=True`, share the same y-axis
`figsize`	Size of figure to create as tuple
`title`	Plot title as string
`legend`	Add a subplot legend (`True` by default)
`sort_columns`	Plot columns in alphabetical order; by default uses existing column order



For time series plotting, see Chapter 11.

Bar Plots

The `plot.bar()` and `plot.barh()` make vertical and horizontal bar plots, respectively. In this case, the Series or DataFrame index will be used as the x (`bar`) or y (`barh`) ticks (see Figure 9-15):

```
In [64]: fig, axes = plt.subplots(2, 1)

In [65]: data = pd.Series(np.random.rand(16), index=list('abcdefghijklmnop'))

In [66]: data.plot.bar(ax=axes[0], color='k', alpha=0.7)
Out[66]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb62493d470>

In [67]: data.plot.barh(ax=axes[1], color='k', alpha=0.7)
```

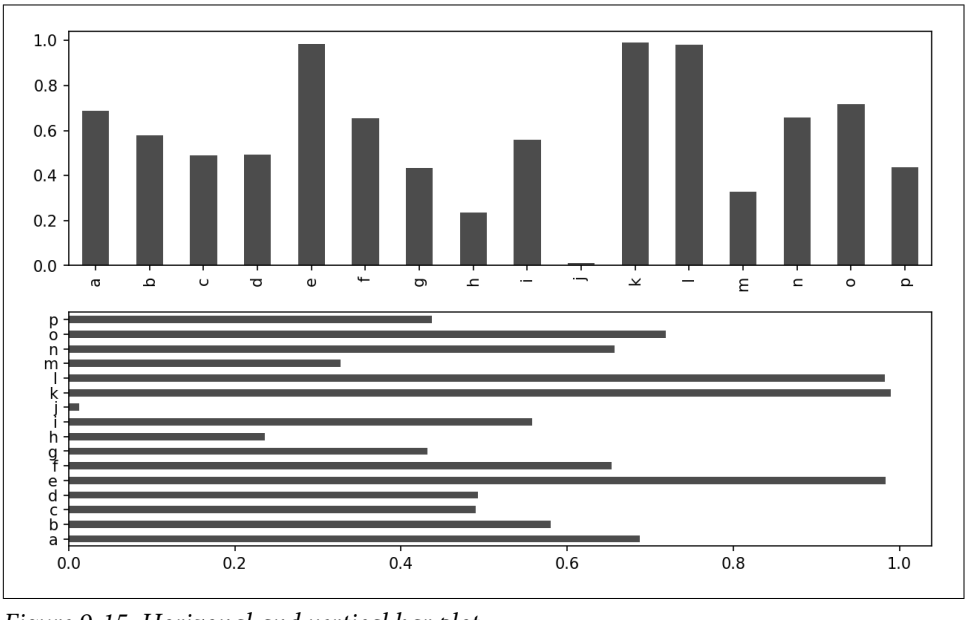


Figure 9-15. Horizonal and vertical bar plot

The options `color='k'` and `alpha=0.7` set the color of the plots to black and use partial transparency on the filling.

With a DataFrame, bar plots group the values in each row together in a group in bars, side by side, for each value. See Figure 9-16:

```
In [69]: df = pd.DataFrame(np.random.rand(6, 4),
   ....:                   index=['one', 'two', 'three', 'four', 'five', 'six'],
   ....:                   columns=pd.Index(['A', 'B', 'C', 'D'], name='Genus'))

In [70]: df
Out[70]:
Genus         A         B         C         D
one    0.370670  0.602792  0.229159  0.486744
two    0.420082  0.571653  0.049024  0.880592
three  0.814568  0.277160  0.880316  0.431326
four   0.374020  0.899420  0.460304  0.100843
five   0.433270  0.125107  0.494675  0.961825
six    0.601648  0.478576  0.205690  0.560547

In [71]: df.plot.bar()
```

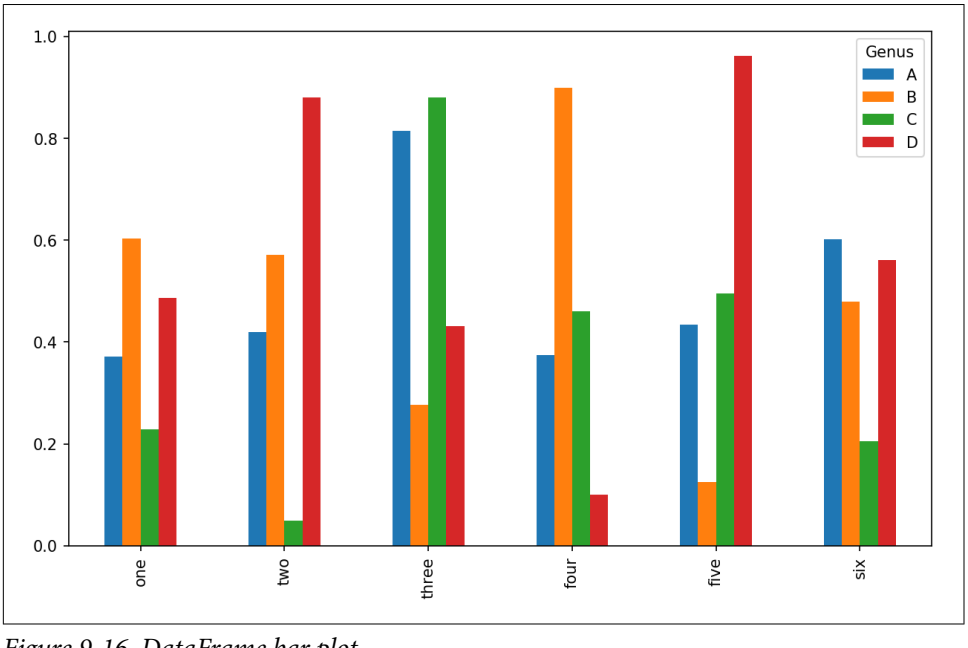


Figure 9-16. DataFrame bar plot

Note that the name "Genus" on the DataFrame's columns is used to title the legend.

We create stacked bar plots from a DataFrame by passing `stacked=True`, resulting in the value in each row being stacked together (see Figure 9-17):

```
In [73]: df.plot.barh(stacked=True, alpha=0.5)
```

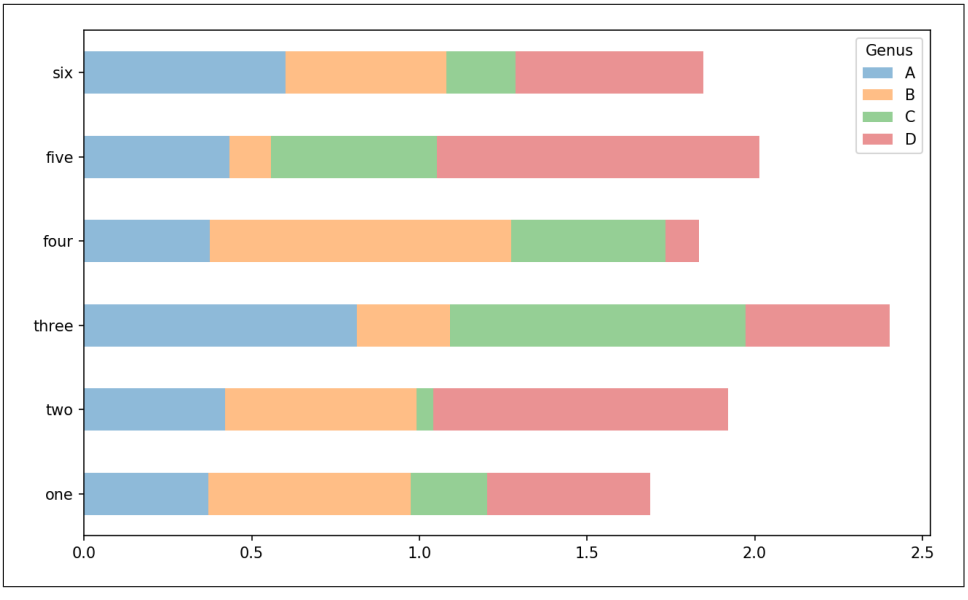


Figure 9-17. DataFrame stacked bar plot



A useful recipe for bar plots is to visualize a Series's value frequency using `value_counts`: `s.value_counts().plot.bar()`.

Returning to the tipping dataset used earlier in the book, suppose we wanted to make a stacked bar plot showing the percentage of data points for each party size on each day. I load the data using `read_csv` and make a cross-tabulation by day and party size:

```
In [75]: tips = pd.read_csv('examples/tips.csv')

In [76]: party_counts = pd.crosstab(tips['day'], tips['size'])

In [77]: party_counts
Out[77]:
size  1   2   3   4  5  6
day
Fri   1  16   1   1  0  0
Sat   2  53  18  13  1  0
Sun   0  39  15  18  3  1
Thur  1  48   4   5  1  3
```

```
# Not many 1- and 6-person parties
In [78]: party_counts = party_counts.loc[:, 2:5]
```

Then, normalize so that each row sums to 1 and make the plot (see Figure 9-18):

```
# Normalize to sum to 1
In [79]: party_pcts = party_counts.div(party_counts.sum(1), axis=0)

In [80]: party_pcts
Out[80]:
size         2         3         4         5
day
Fri   0.888889  0.055556  0.055556  0.000000
Sat   0.623529  0.211765  0.152941  0.011765
Sun   0.520000  0.200000  0.240000  0.040000
Thur  0.827586  0.068966  0.086207  0.017241

In [81]: party_pcts.plot.bar()
```

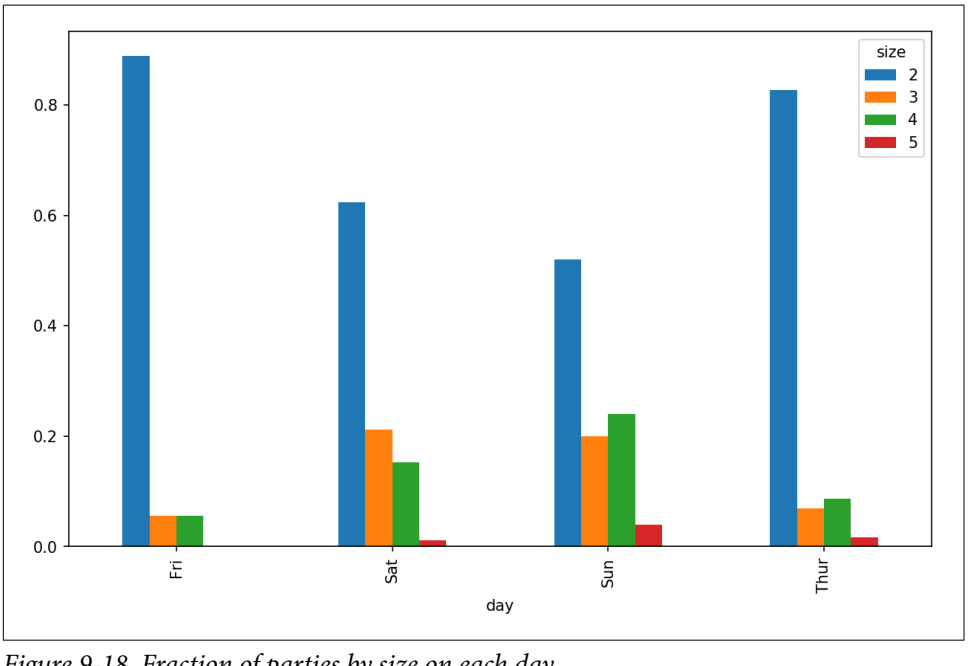


Figure 9-18. Fraction of parties by size on each day

So you can see that party sizes appear to increase on the weekend in this dataset.

With data that requires aggregation or summarization before making a plot, using the `seaborn` package can make things much simpler. Let's look now at the tipping percentage by day with seaborn (see Figure 9-19 for the resulting plot):

```
In [83]: import seaborn as sns

In [84]: tips['tip_pct'] = tips['tip'] / (tips['total_bill'] - tips['tip'])

In [85]: tips.head()
Out[85]:
   total_bill   tip smoker  day    time  size   tip_pct
0       16.99  1.01     No  Sun  Dinner     2  0.063204
1       10.34  1.66     No  Sun  Dinner     3  0.191244
2       21.01  3.50     No  Sun  Dinner     3  0.199886
3       23.68  3.31     No  Sun  Dinner     2  0.162494
4       24.59  3.61     No  Sun  Dinner     4  0.172069

In [86]: sns.barplot(x='tip_pct', y='day', data=tips, orient='h')
```

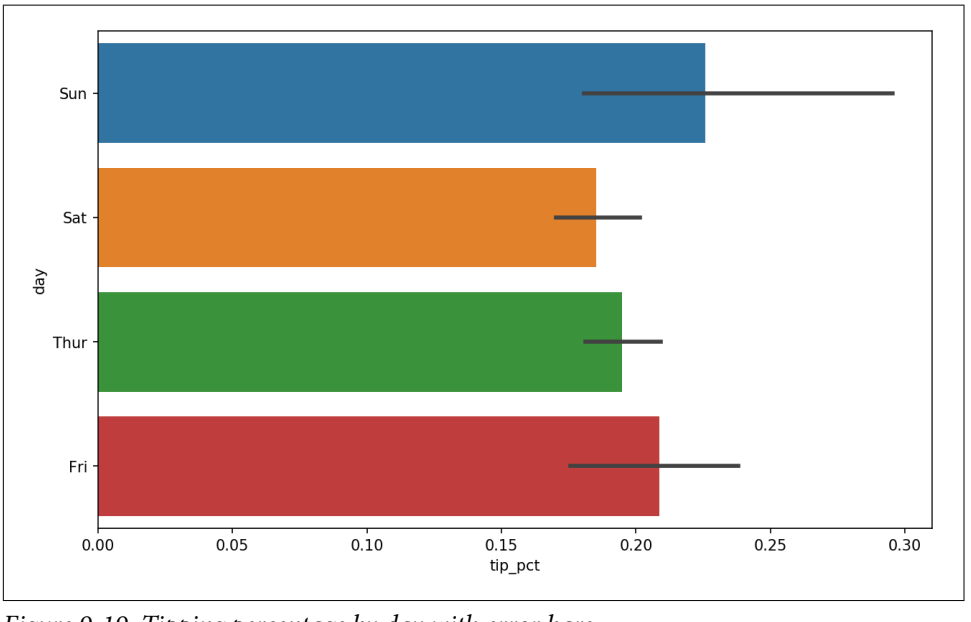


Figure 9-19. Tipping percentage by day with error bars

Plotting functions in seaborn take a `data` argument, which can be a pandas DataFrame. The other arguments refer to column names. Because there are multiple observations for each value in the `day`, the bars are the average value of `tip_pct`. The black lines drawn on the bars represent the 95% confidence interval (this can be configured through optional arguments).

`seaborn.barplot` has a `hue` option that enables us to split by an additional categorical value (Figure 9-20):

```
In [88]: sns.barplot(x='tip_pct', y='day', hue='time', data=tips, orient='h')
```

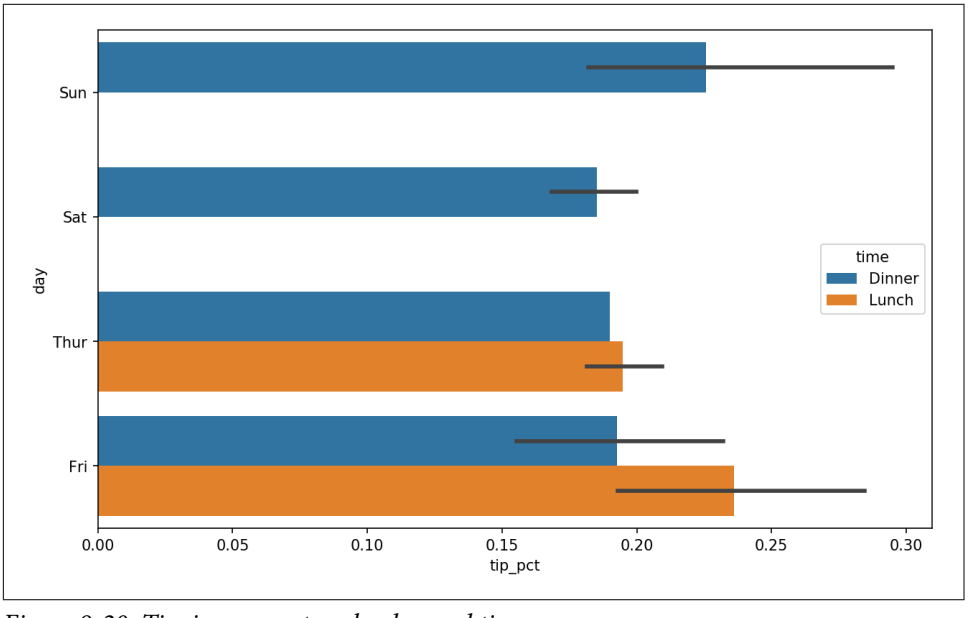


Figure 9-20. Tipping percentage by day and time

Notice that seaborn has automatically changed the aesthetics of plots: the default color palette, plot background, and grid line colors. You can switch between different plot appearances using `seaborn.set`:

```
In [90]: sns.set(style="whitegrid")
```

Histograms and Density Plots

A histogram is a kind of bar plot that gives a discretized display of value frequency. The data points are split into discrete, evenly spaced bins, and the number of data points in each bin is plotted. Using the tipping data from before, we can make a histogram of tip percentages of the total bill using the `plot.hist` method on the Series (see Figure 9-21):

```
In [92]: tips['tip_pct'].plot.hist(bins=50)
```

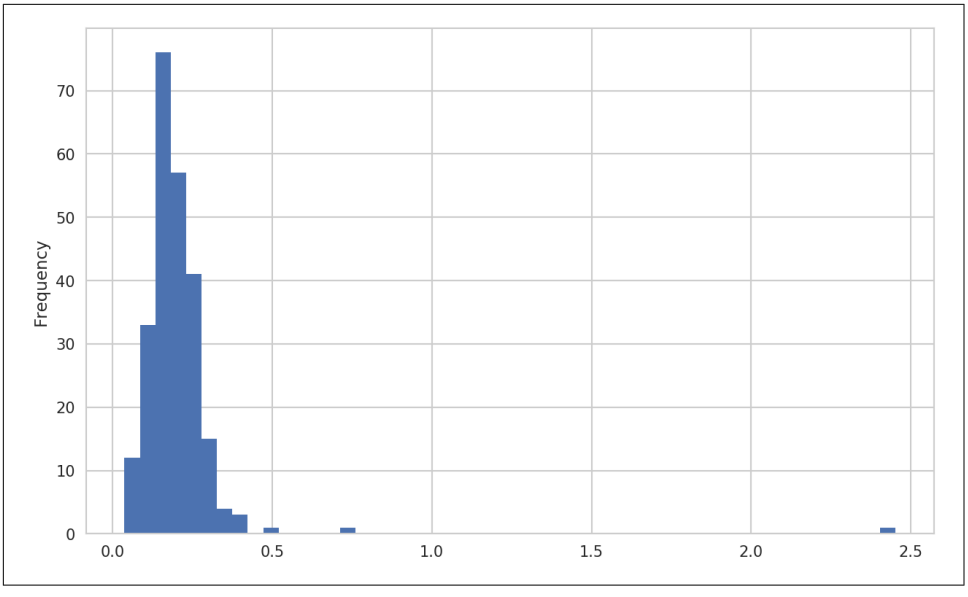


Figure 9-21. Histogram of tip percentages

A related plot type is a *density plot*, which is formed by computing an estimate of a continuous probability distribution that might have generated the observed data. The usual procedure is to approximate this distribution as a mixture of "kernels"—that is, simpler distributions like the normal distribution. Thus, density plots are also known as kernel density estimate (KDE) plots. Using `plot.kde` makes a density plot using the conventional mixture-of-normals estimate (see Figure 9-22):

```
In [94]: tips['tip_pct'].plot.density()
```

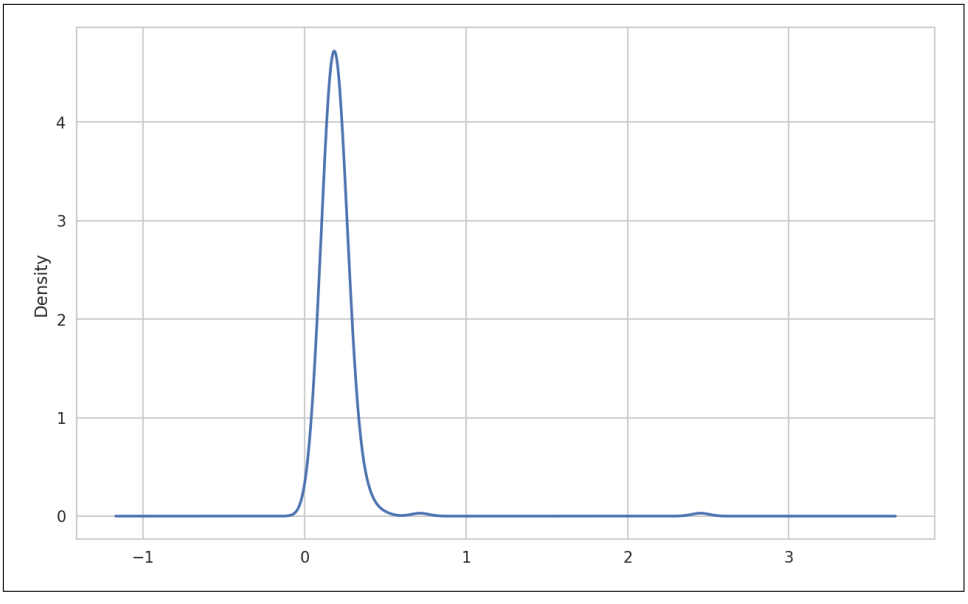


Figure 9-22. Density plot of tip percentages

Seaborn makes histograms and density plots even easier through its `distplot` method, which can plot both a histogram and a continuous density estimate simultaneously. As an example, consider a bimodal distribution consisting of draws from two different standard normal distributions (see Figure 9-23):

```
In [96]: comp1 = np.random.normal(0, 1, size=200)

In [97]: comp2 = np.random.normal(10, 2, size=200)

In [98]: values = pd.Series(np.concatenate([comp1, comp2]))

In [99]: sns.distplot(values, bins=100, color='k')
```

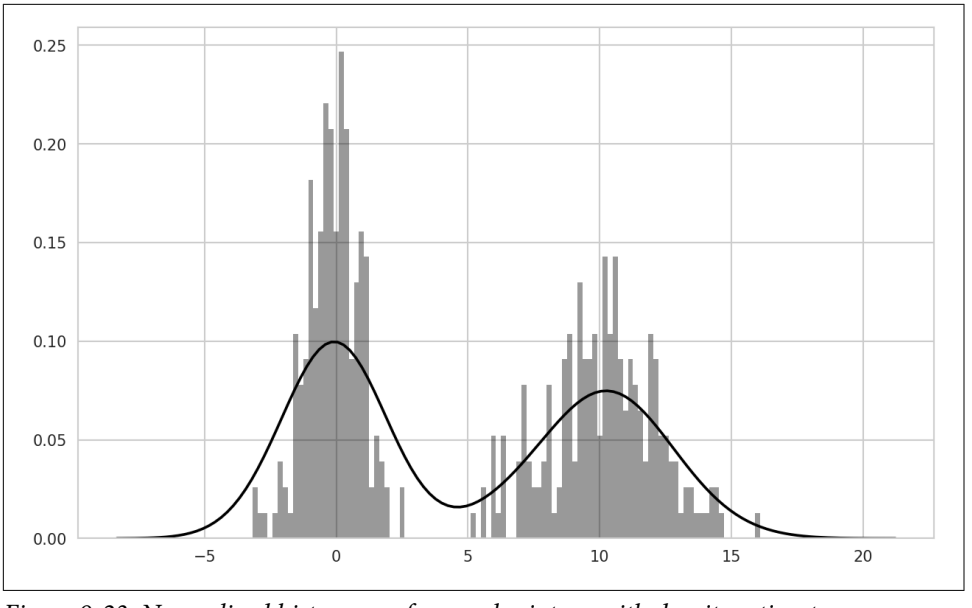


Figure 9-23. Normalized histogram of normal mixture with density estimate

Scatter or Point Plots

Point plots or scatter plots can be a useful way of examining the relationship between two one-dimensional data series. For example, here we load the `macrodata` dataset from the statsmodels project, select a few variables, then compute log differences:

```
In [100]: macro = pd.read_csv('examples/macrodata.csv')

In [101]: data = macro[['cpi', 'm1', 'tbilrate', 'unemp']]

In [102]: trans_data = np.log(data).diff().dropna()

In [103]: trans_data[-5:]
Out[103]:
          cpi        m1  tbilrate     unemp
198 -0.007904  0.045361 -0.396881  0.105361
199 -0.021979  0.066753 -2.277267  0.139762
200  0.002340  0.010286  0.606136  0.160343
201  0.008419  0.037461 -0.200671  0.127339
202  0.008894  0.012202 -0.405465  0.042560
```

We can then use seaborn's `regplot` method, which makes a scatter plot and fits a linear regression line (see Figure 9-24):

```
In [105]: sns.regplot('m1', 'unemp', data=trans_data)
Out[105]: <matplotlib.axes._subplots.AxesSubplot at 0x7fb613720be0>

In [106]: plt.title('Changes in log %s versus log %s' % ('m1', 'unemp'))
```

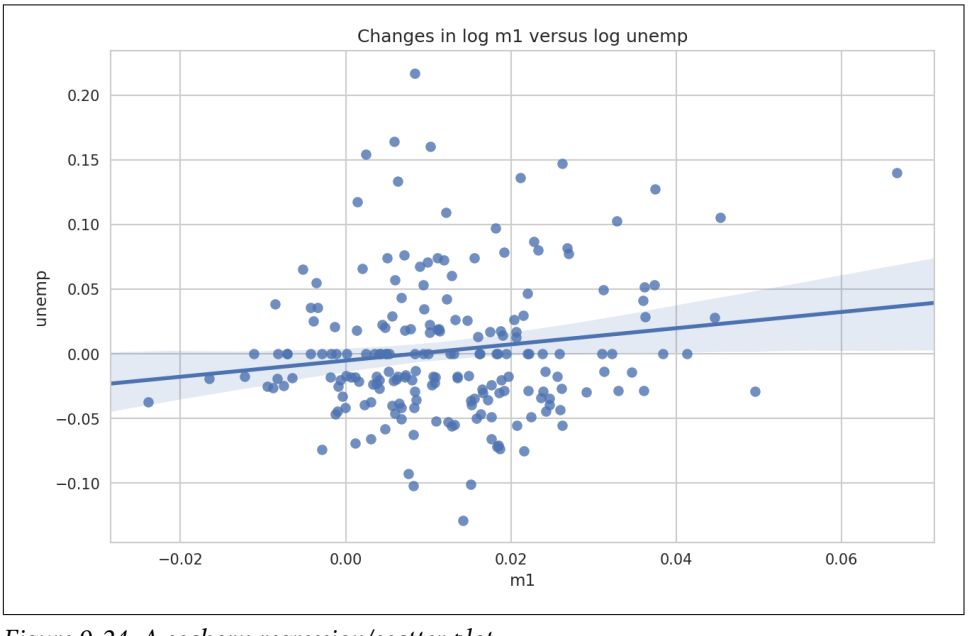


Figure 9-24. A seaborn regression/scatter plot

In exploratory data analysis it's helpful to be able to look at all the scatter plots among a group of variables; this is known as a *pairs* plot or *scatter plot matrix*. Making such a plot from scratch is a bit of work, so seaborn has a convenient `pairplot` function, which supports placing histograms or density estimates of each variable along the diagonal (see Figure 9-25 for the resulting plot):

```
In [107]: sns.pairplot(trans_data, diag_kind='kde', plot_kws={'alpha': 0.2})
```

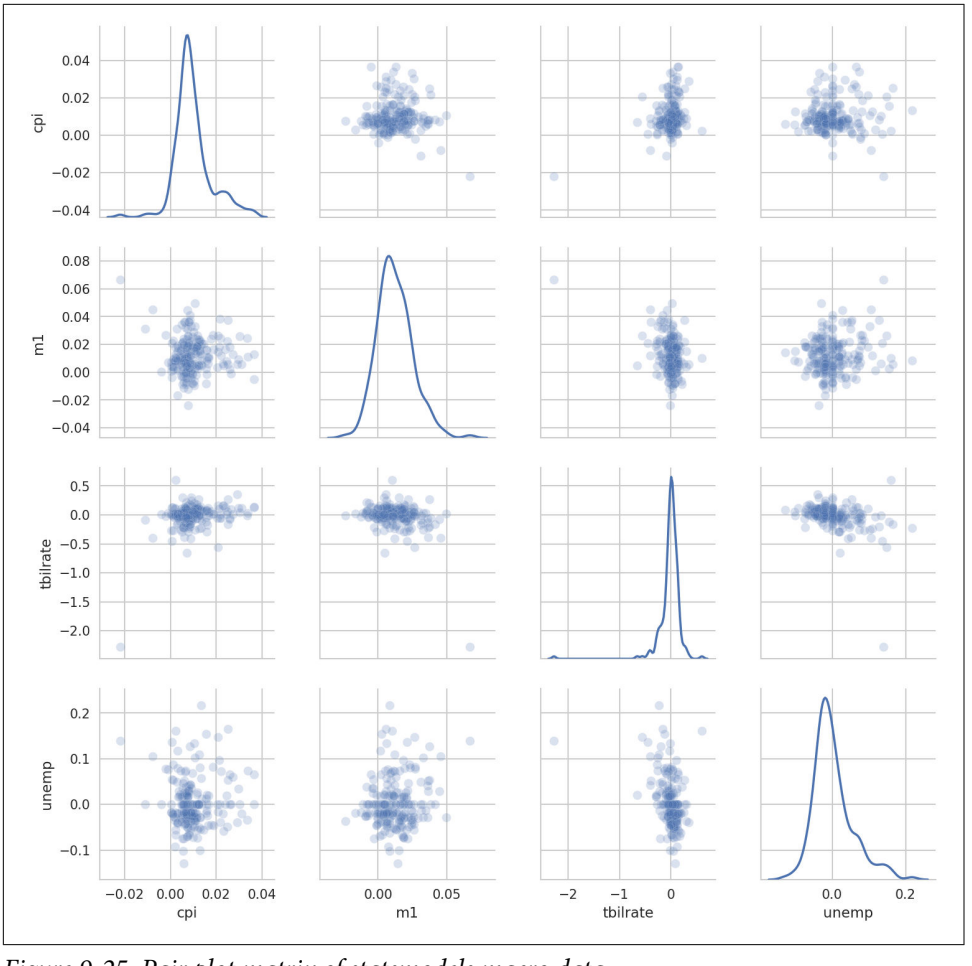


Figure 9-25. Pair plot matrix of statsmodels macro data

You may notice the `plot_kws` argument. This enables us to pass down configuration options to the individual plotting calls on the off-diagonal elements. Check out the `seaborn.pairplot` docstring for more granular configuration options.

Facet Grids and Categorical Data

What about datasets where we have additional grouping dimensions? One way to visualize data with many categorical variables is to use a *facet grid*. Seaborn has a useful built-in function `factorplot` that simplifies making many kinds of faceted plots (see Figure 9-26 for the resulting plot):

```
In [108]: sns.factorplot(x='day', y='tip_pct', hue='time', col='smoker',
   .....:                kind='bar', data=tips[tips.tip_pct < 1])
```

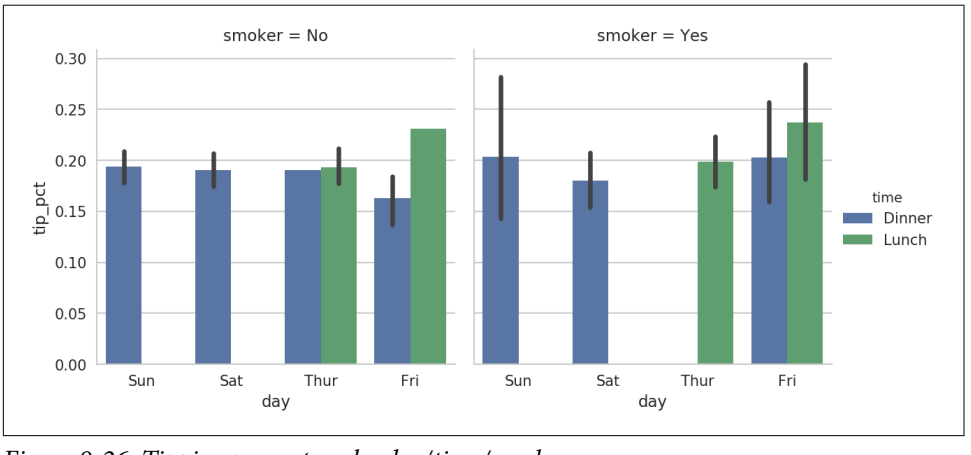


Figure 9-26. Tipping percentage by day/time/smoker

Instead of grouping by `'time'` by different bar colors within a facet, we can also expand the facet grid by adding one row per `time` value (Figure 9-27):

```
In [109]: sns.factorplot(x='day', y='tip_pct', row='time',
   .....:                col='smoker',
   .....:                kind='bar', data=tips[tips.tip_pct < 1])
```

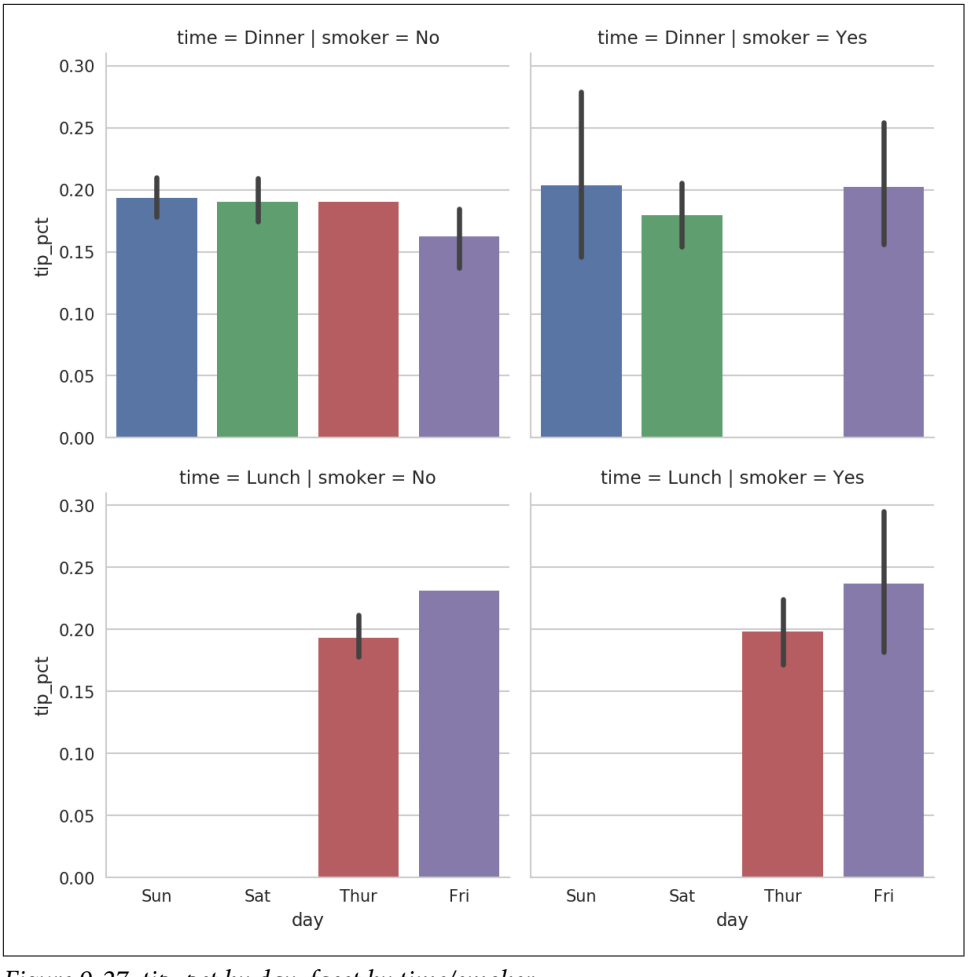


Figure 9-27. tip_pct by day; facet by time/smoker

`factorplot` supports other plot types that may be useful depending on what you are trying to display. For example, box plots (which show the median, quartiles, and outliers) can be an effective visualization type (Figure 9-28):

```
In [110]: sns.factorplot(x='tip_pct', y='day', kind='box',
   .....:                data=tips[tips.tip_pct < 0.5])
```