
Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

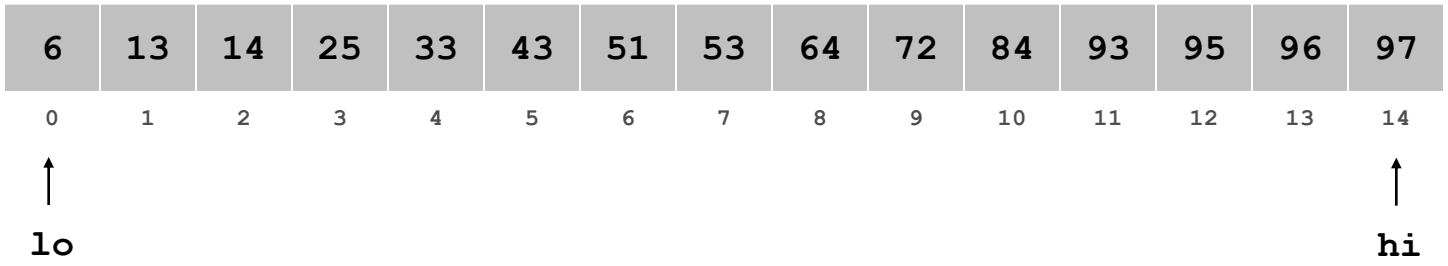


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

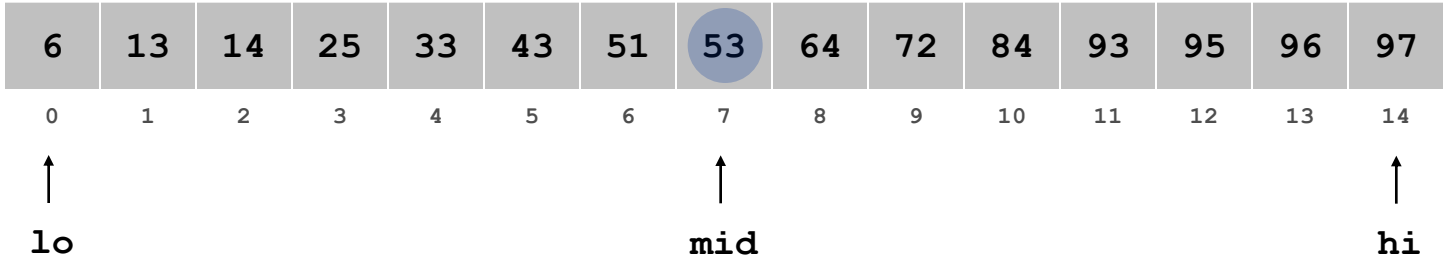


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

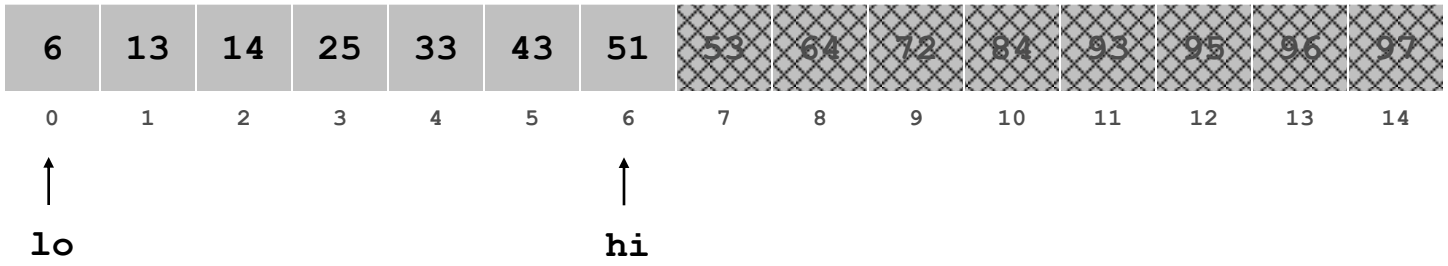


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

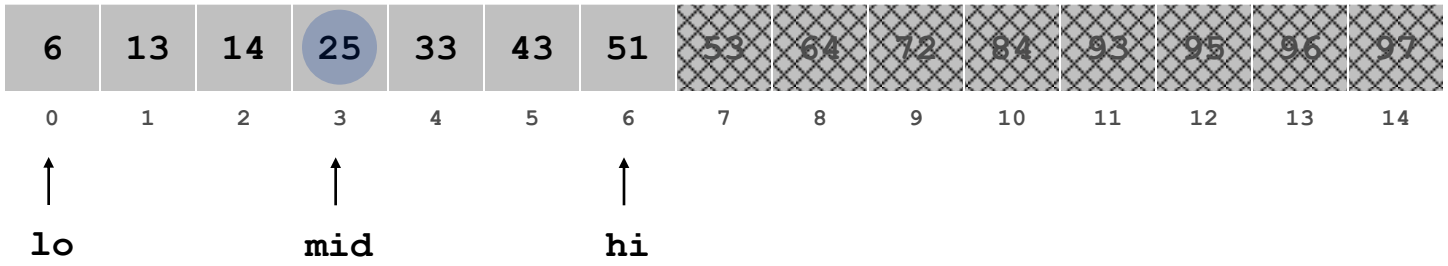


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

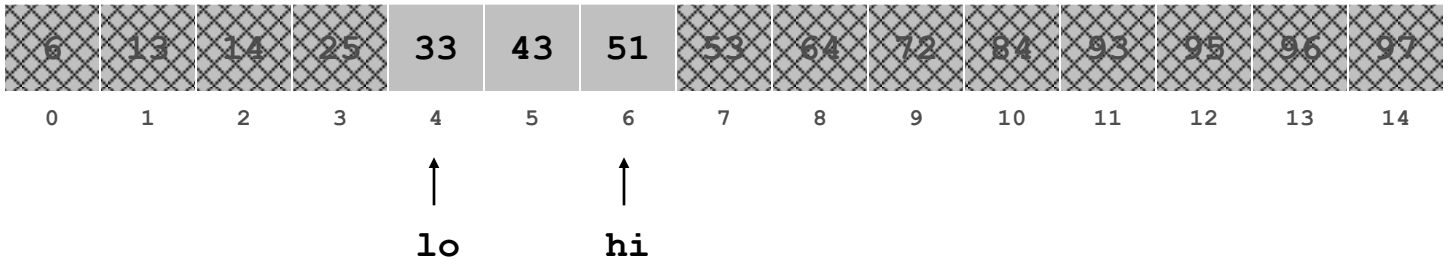


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

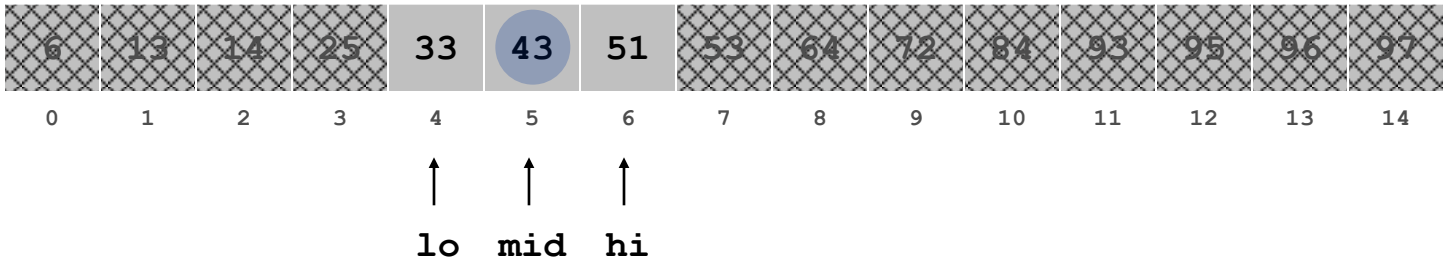


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

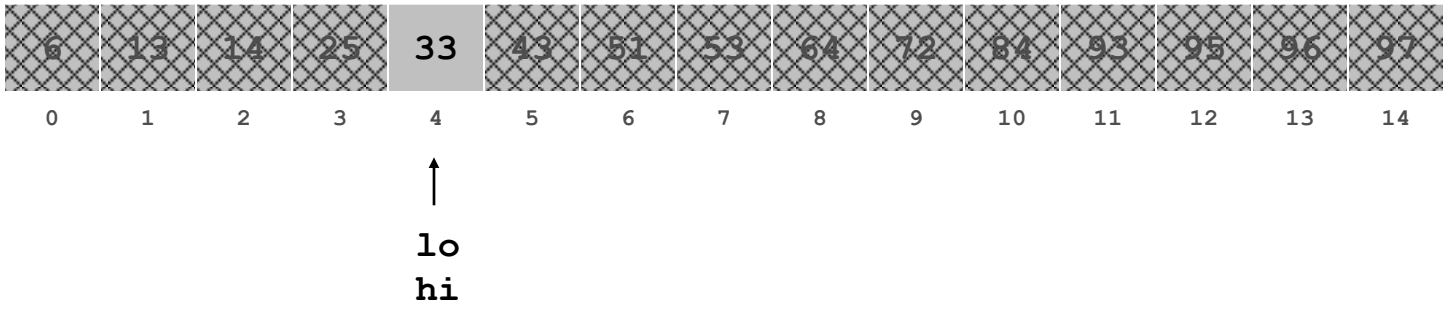


Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

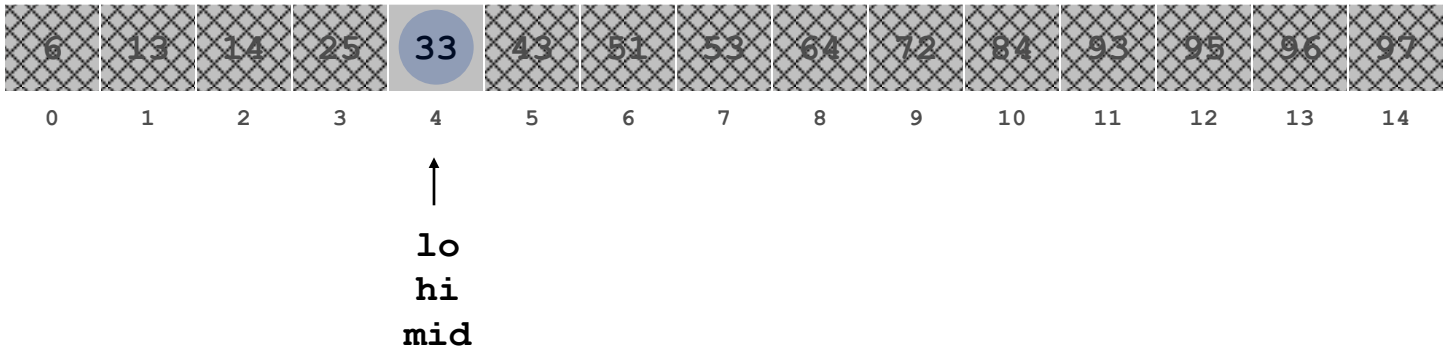

Binary Search

Binary search. Given `value` and sorted array `a[]`, find index `i` such that `a[i] = value`, or report that no such index exists.

Invariant. Algorithm maintains `a[lo]` ≤ `value` ≤ `a[hi]`.

Ex. Binary search for 33.

