

Schema documentation for S129.xsd

july 19, 2026

Table of Contents

Namespace: "http://www.iho.int/S129/2.1"	1
Schema(s)	1
Main schema S129.xsd	1
Element(s)	1
Element UnderKeelClearancePlan	1
Element UnderKeelClearancePlanArea	3
Element UnderKeelClearanceNonNavigableArea	4
Element UnderKeelClearanceAlmostNonNavigableArea	5
Element UnderKeelClearanceControlPoint	6
Element Dataset	7

Namespace: "http://www.iho.int/S129/2.1"

Schema(s)

Main schema S129.xsd


Namespace	http://www.iho.int/S129/2.1		
Properties	attribute form default:	unqualified	
	element form default:	qualified	
	version:	2.1.0-20260719	

Element(s)

Element UnderKeelClearancePlan

Namespace	http://www.iho.int/S129/2.1
-----------	-----------------------------

Diagram

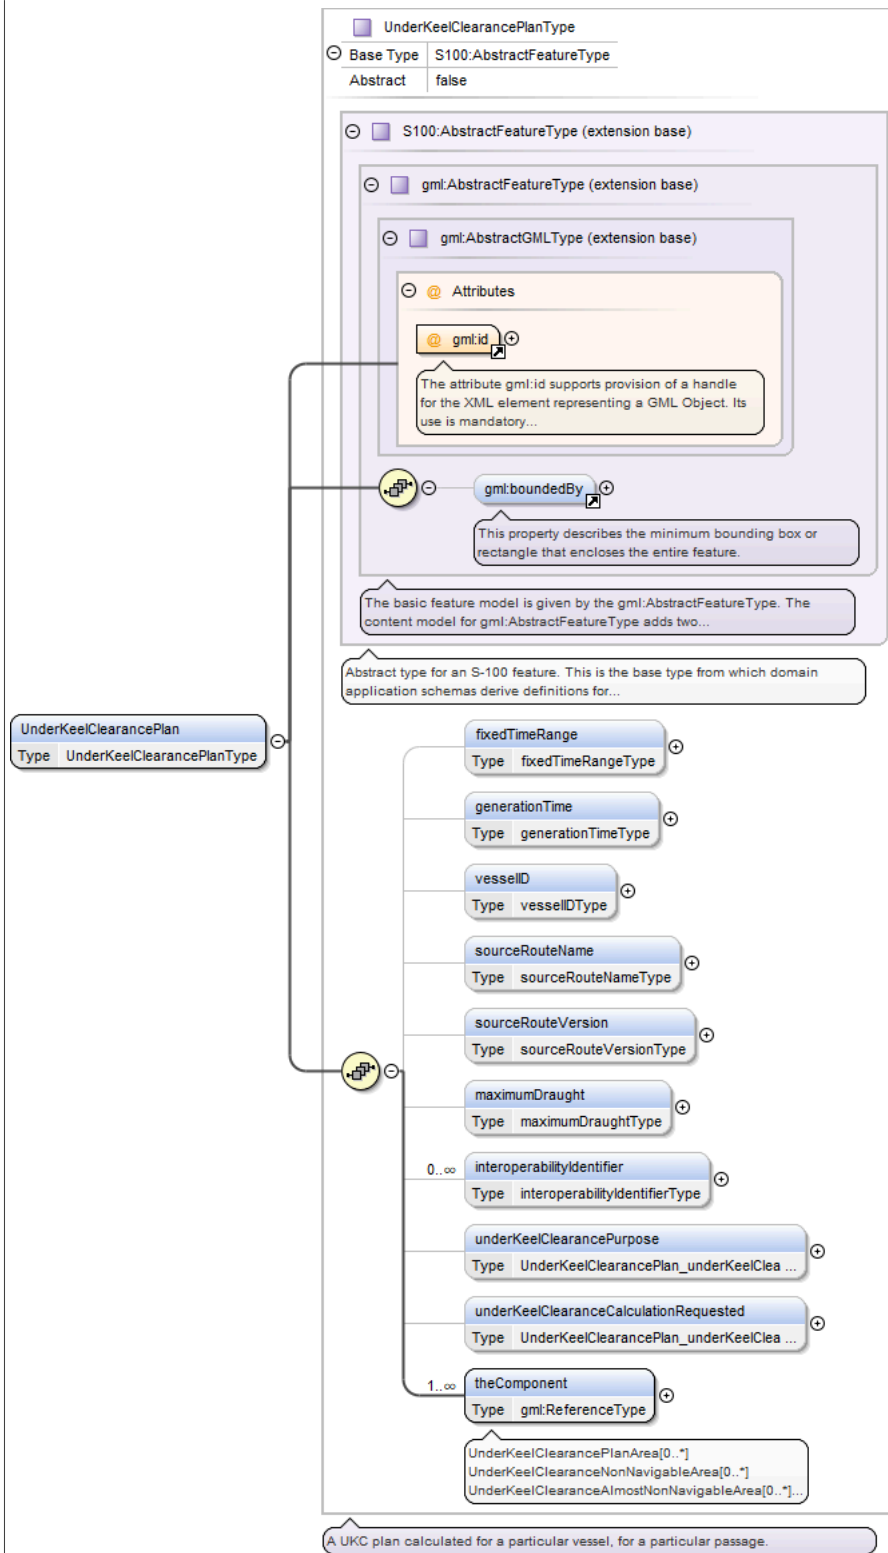

Type	UnderKeelClearancePlanType
Type hierarchy	- gml:AbstractGMLType - gml:AbstractFeatureType - AbstractFeatureType - UnderKeelClearancePlanType
Properties	content: complex

Used by	Element Group MemberObjects			
Model	gml:boundedBy{0,1} , fixedTimeRange{0,1} , generationTime{0,1} , vesselID{0,1} , sourceRouteName{0,1} , sourceRouteVersion{0,1} , maximumDraught{0,1} , interoperabilityIdentifier* , underKeelClearancePurpose{0,1} , underKeelClearanceCalculationRequested{0,1} , theComponent+			
Attributes	QName	Type	Use	
	gml:id	ID	required	
		The attribute gml:id supports provision of a handle for the XML element representing a GML Object. Its use is mandatory for all GML objects. It is of XML type ID, so is constrained to be unique in the XML document within which it occurs.		

Element UnderKeelClearancePlanArea

Namespace	http://www.iho.int/S129/2.1		
Diagram	The diagram illustrates the class hierarchy and structure of UnderKeelClearancePlanAreaType. It is an extension base for S100:AbstractFeatureType, which in turn extends gml:AbstractFeatureType, which extends gml:AbstractGMLType. The Attributes section includes gml:id. The content section includes gml:boundedBy, interoperabilityIdentifier (0..∞), theCollection (1..∞), and geometry (1..∞). A note indicates that the area is for which an under keel clearance plan has been calculated for a particular vessel, for a particular passage.		
Type	UnderKeelClearancePlanAreaType		
Type hierarchy	- gml:AbstractGMLType - gml:AbstractFeatureType - AbstractFeatureType - UnderKeelClearancePlanAreaType		
Properties	content:	complex	

Attributes	QName	Type	Use	
	gml:id	ID	required	
		The attribute gml:id supports provision of a handle for the XML element representing a GML Object. Its use is mandatory for all GML objects. It is of XML type ID, so is constrained to be unique in the XML document within which it occurs.		

Element UnderKeelClearanceControlPoint


Namespace	http://www.iho.int/S129/2.1
Diagram	
Type	UnderKeelClearanceControlPointType
Type hierarchy	- gml:AbstractGMLType - gml:AbstractFeatureType - AbstractFeatureType

	UnderKeelClearanceControlPointType			
Properties	content: complex			
Used by	Element Group MemberObjects			
Model	gml:boundedBy{0,1} , featureName{0,1} , expectedPassingTime{0,1} , expectedPassingSpeed{0,1} , distanceAboveUK-CLimit{0,1} , interoperabilityIdentifier* , fixedTimeRange{0,1} , theCollection , geometry+			
Attributes	QName	Type	Use	
	gml:id	ID	required	
		The attribute gml:id supports provision of a handle for the XML element representing a GML Object. Its use is mandatory for all GML objects. It is of XML type ID, so is constrained to be unique in the XML document within which it occurs.		

Element Dataset

Namespace	http://www.iho.int/S129/2.1
-----------	-----------------------------

Diagram

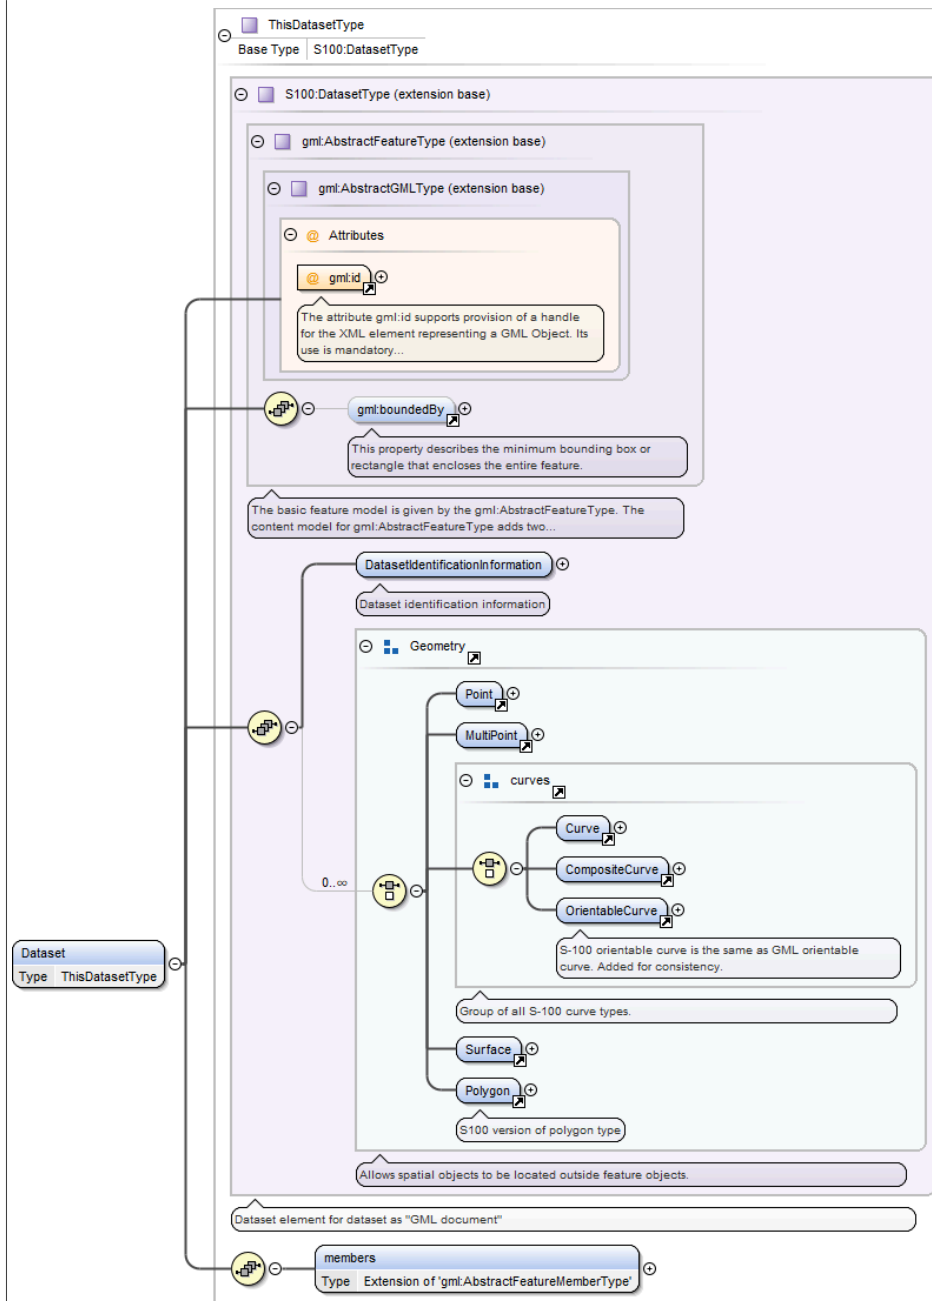

Type	ThisDatasetType			
Type hierarchy	• gml:AbstractGMLType • gml:AbstractFeatureType • DatasetType • ThisDatasetType			
Properties	content: complex			
Model	gml:boundedBy{0,1} , DatasetIdentificationInformation , (Point MultiPoint Curve CompositeCurve OrientableCurve Surface Polygon) , members			
Attributes	QName	Type	Use	
	gml:id	ID	required	
	The attribute gml:id supports provision of a handle for the XML element representing a GML Object. Its use is mandatory for all GML objects. It is of XML type ID, so is constrained to be unique in the XML document within which it			

	QName	Type	Use	
		occurs.		