



VIRTUAL TRIP AND PLANNING ADVISOR

Applied Data Science Capstone Project
IBM Data Science Professional Certificate Specialization
By Ihor Kulmatytskyy

Virtual Trip advisor or classifier project consist of:



Gathering data about Ukrainian Carpathian Mountains and nearest venues



Applying clustering with k-Mean to determine mountain peaks with similar nearest outdoor activities



Studying result, picking a labels to the determined clusters, vizualization and presentation




	Name	Height	Location	id	Latitude	Longitude
0	Goverla	2061.0	Chornogora	1	48.15111	24.50000
1	Brebeneskul	2035.8	Chornogora	2	48.09833	24.58056
2	Pip Ivan Chornogors'kii	2028.5	Chornogora	3	48.04778	24.62778
3	Petros	2022.5	Chornogora	4	48.17194	24.42111
4	Gutin Tomnatik	2016.4	Chornogora	5	48.10000	24.55667

Mountain peaks
from Wiki

Sights and venues
from Foursquare

	id	Name	Category	Latitude	Longitude
0	1	Говерла (2061 м) / Hoverla	Mountain	48.16039	24.50037
1	2	Брескул (1911 м) / Breskul	Mountain	48.15037	24.51103
2	3	Гірське Крісло	Other Great Outdoors	48.16272	24.50573
3	4	Говерлянка	Mountain	48.16615	24.50546
4	5	Пожижевська (1822 м)	Mountain	48.14430	24.52357

Gather data from
and prepare it to
further processing

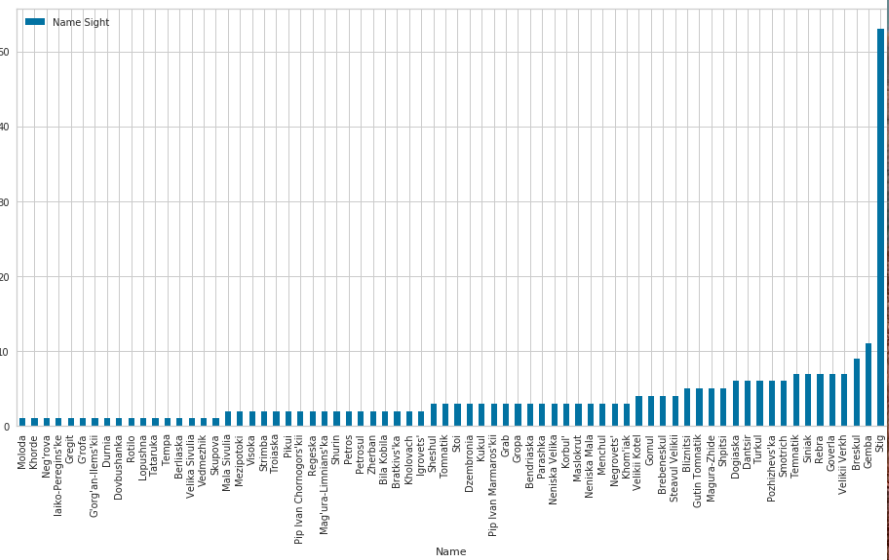

Frequencies of venues
in relation to mountain
peaks – illustration of
non-consistent data
on small data
amounts




Apply k-Mean to cluster Mountain Peaks by categories of the nearest venues.



Use elbow method to determine optimal number of clusters $k = 6$.

Perform k-Means and pick up proper cluster names

Display result on a map

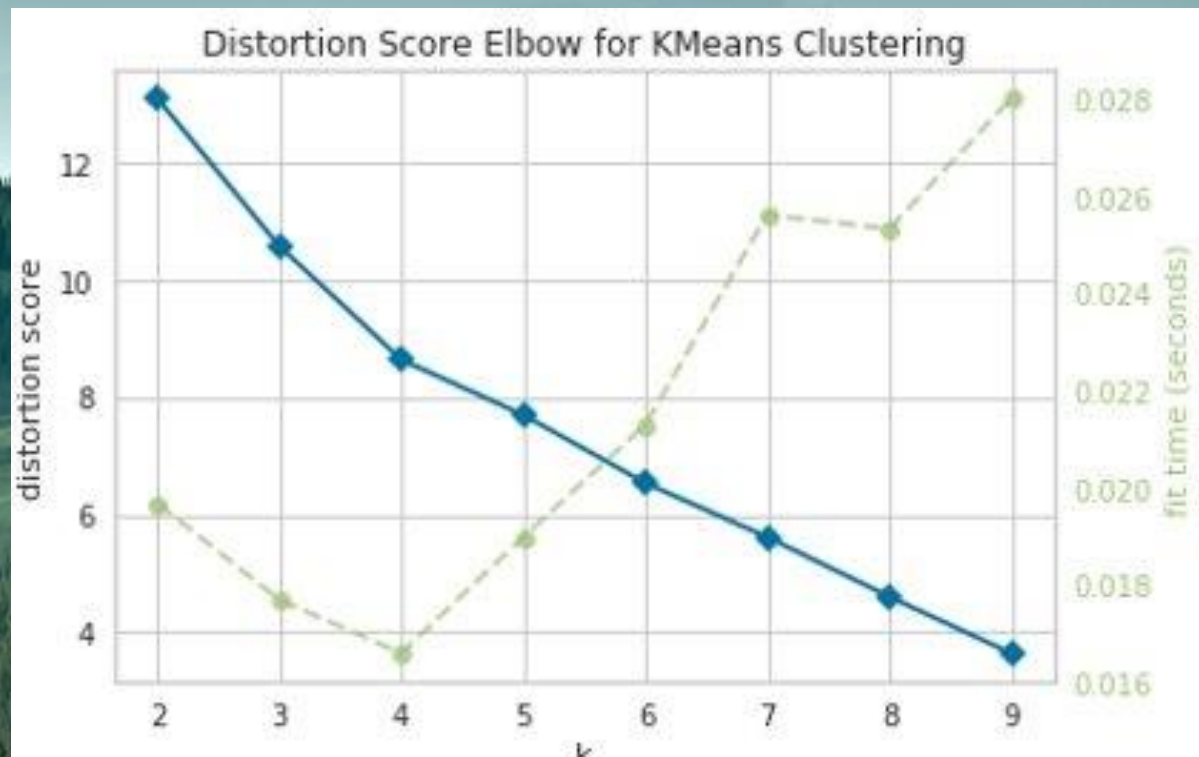

Use elbow method to determine optimal number of clusters $k = 6$.



```
In [55]: # set number of clusters
k = 6

# run k-means clustering
kmeans = KMeans(n_clusters=k, random_state=0).fit(sights_categories.drop(['Name'], 1).drop
# check cluster labels generated for each row in the dataframe
kmeans.labels_




Out[55]: array([0, 5, 1, 1, 1, 2, 5, 4, 1, 5, 2, 0, 5, 1, 2, 2, 2, 0, 1, 1, 1, 4,
                2, 1, 1, 1, 0, 4, 0, 0, 1, 2, 0, 2, 0, 1, 4, 4, 0, 1, 2, 2, 3, 5],
                dtype=int32)

In [67]: cluster_names = ['Lakes', 'Mountains', 'Ski Lodges', 'Hills', 'Forests', 'Ski Services']
```

Perform k-
Means and
pick up proper
cluster names

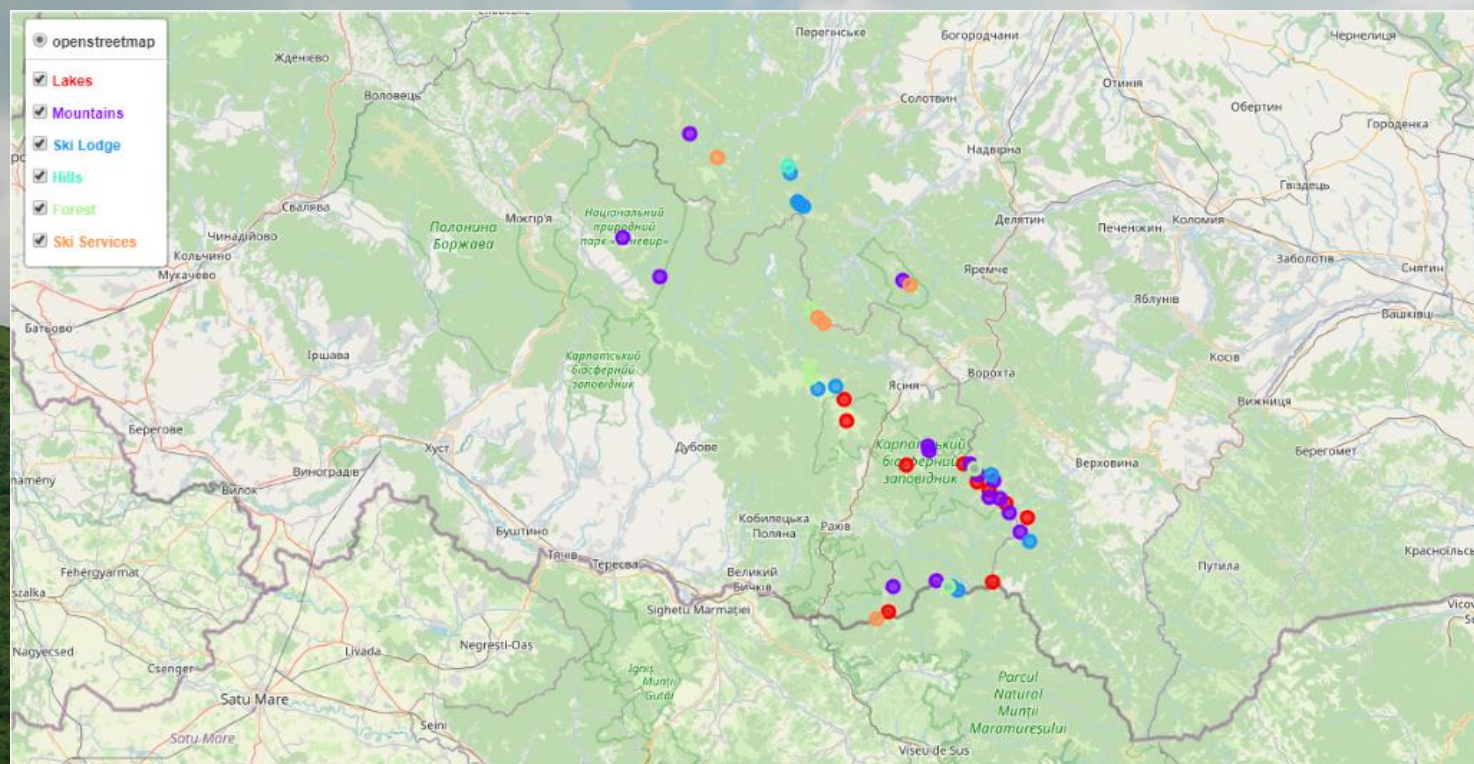

Display result on a map with an option to filter by cluster

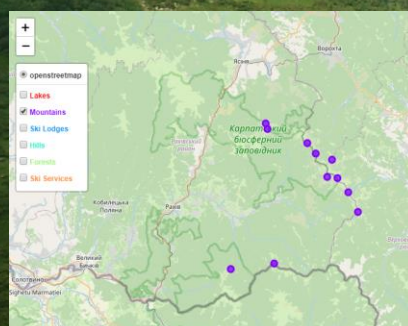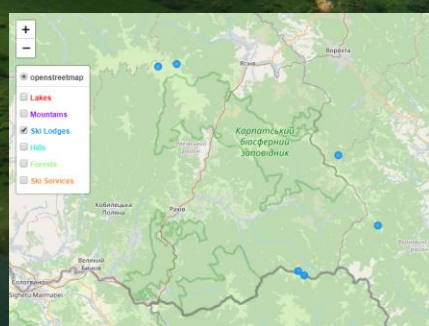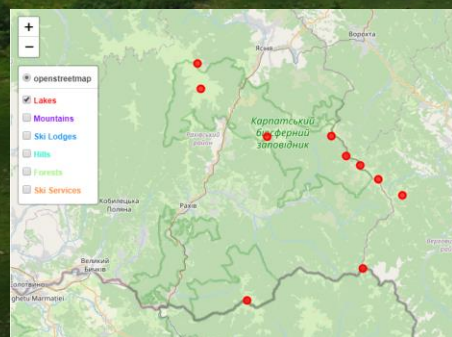

A person wearing a red coat is standing next to a vintage suitcase. The person's hand is visible, resting on the suitcase. The suitcase is light-colored with dark brown leather straps and buckles. The background is blurred, suggesting an outdoor setting. The entire image is overlaid with a dark, semi-transparent filter.

THANK YOU

Stay healthy and positive