

MACHINE LEARNING FOR SIGNAL PROCESSING

24-2-2025




Sriram Ganapathy
LEAP lab, Electrical Engineering, Indian Institute of Science,
sriramg@iisc.ac.in

.....
Viveka Salinamakki, Varada R.
LEAP lab, Electrical Engineering, Indian Institute of Science
.....

<http://leap.ee.iisc.ac.in/sriram/teaching/MLSP25/>

STORY SO FAR

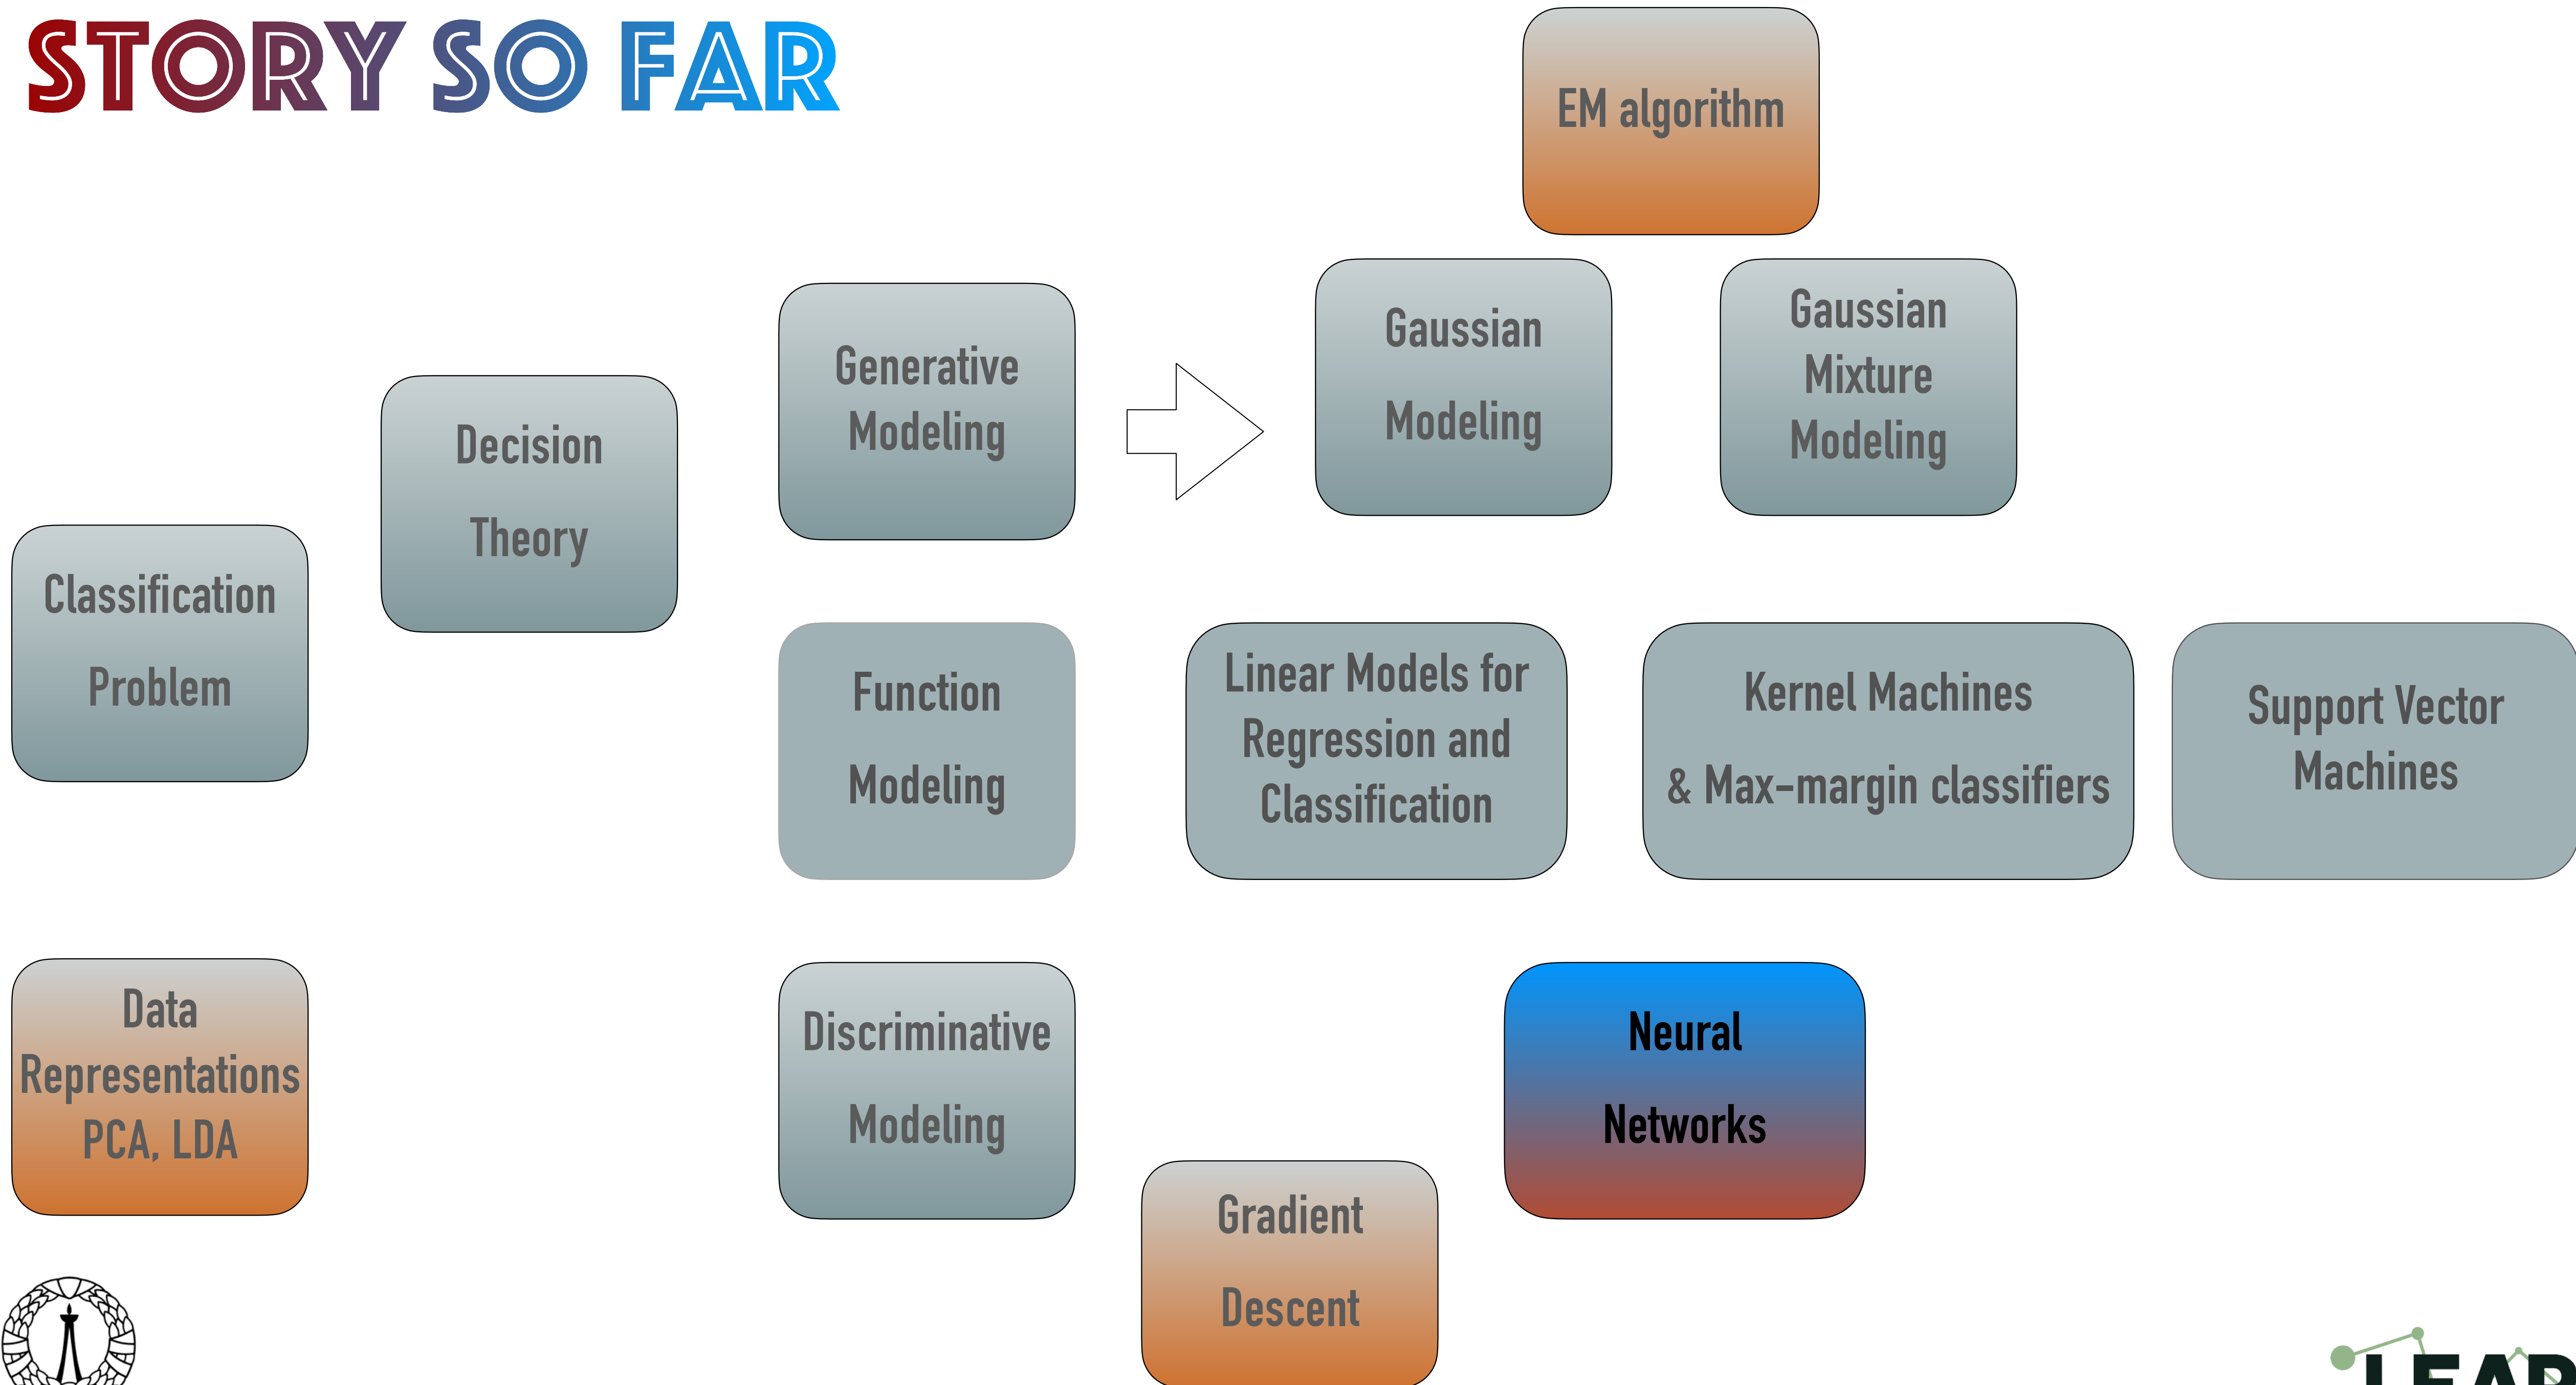

Overlapping class boundaries

- The classes are not linearly separable - Introducing slack variables ζ_n
- Slack variables are non-negative $\zeta_n \geq 0$
- They are defined using


$$t_n y(\mathbf{x}_n) \geq 1 - \zeta_n$$

- The upper bound on mis-classification

$$\sum_n \zeta_n$$

- The cost function to be optimized in this case

$$C \sum_n \zeta_n + \frac{1}{2} \mathbf{w}^T \mathbf{w}$$

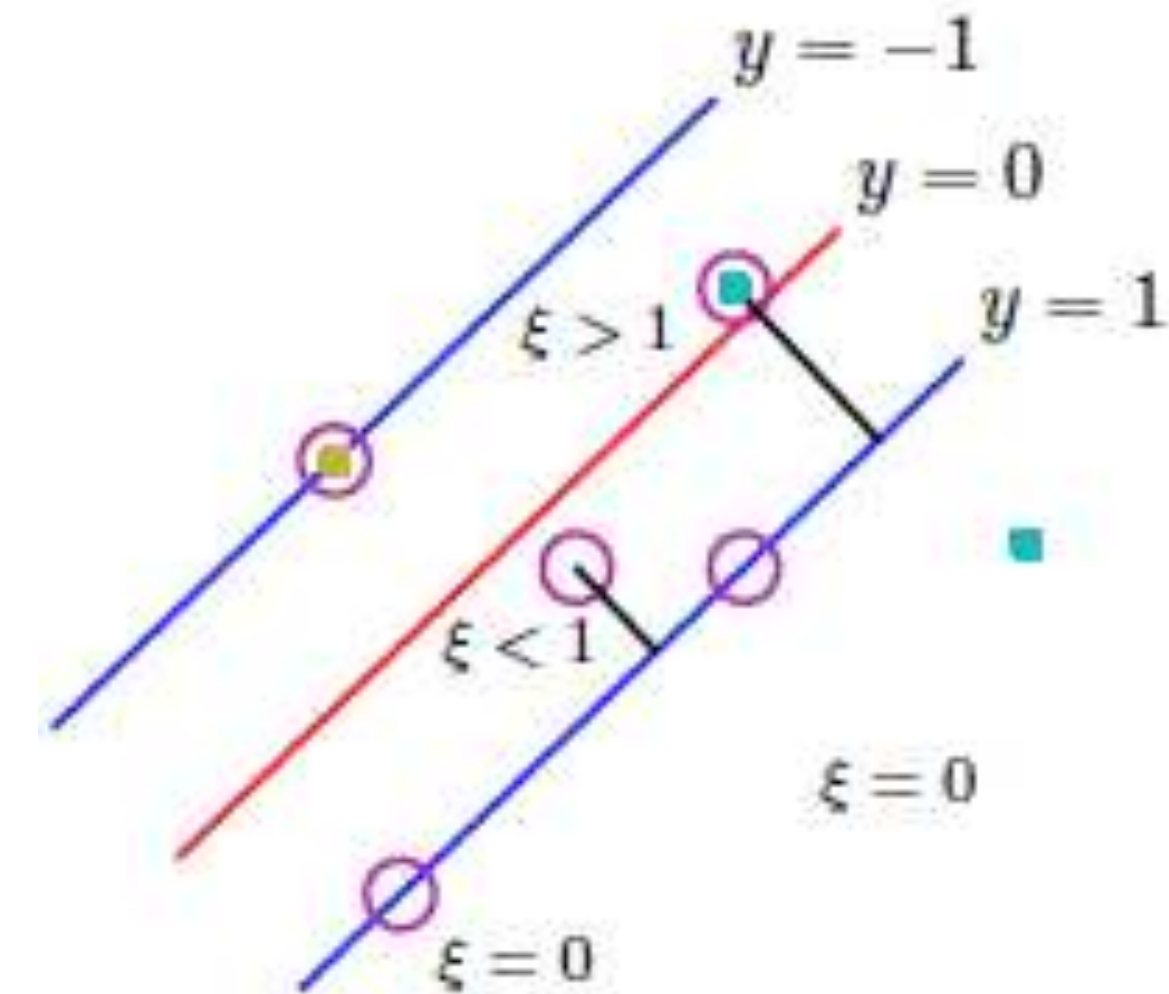

SVM Formulation - overlapping classes


- Formulation very similar to previous case except for additional constraints

$$0 \leq a_n \leq C$$

- Solved using the dual formulation - sequential minimal optimization algorithm
- Final classifier is based on the sign of

$$y(\mathbf{x}) = \sum_{n \in S} a_n k(\mathbf{x}_n, \mathbf{x}) + b$$


Overlapping class boundaries

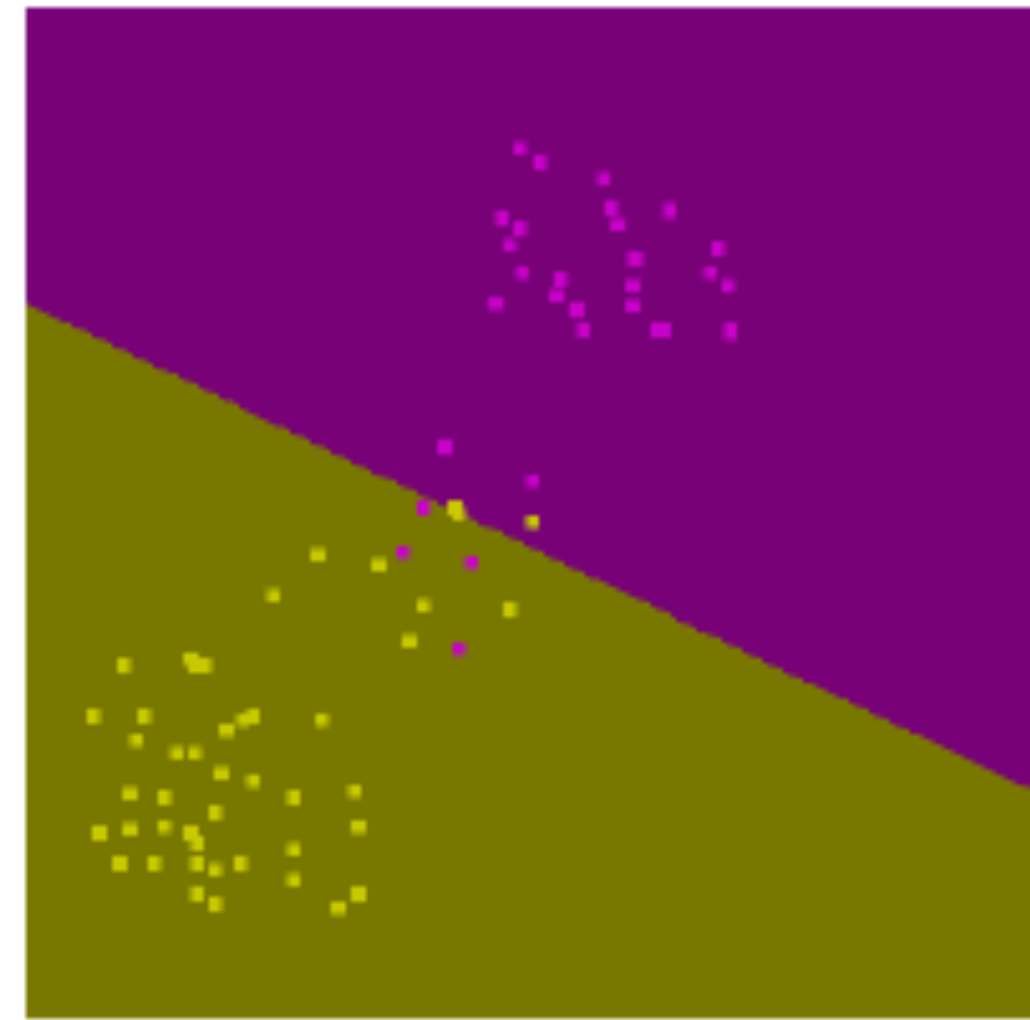


$C=100$



$C=1$

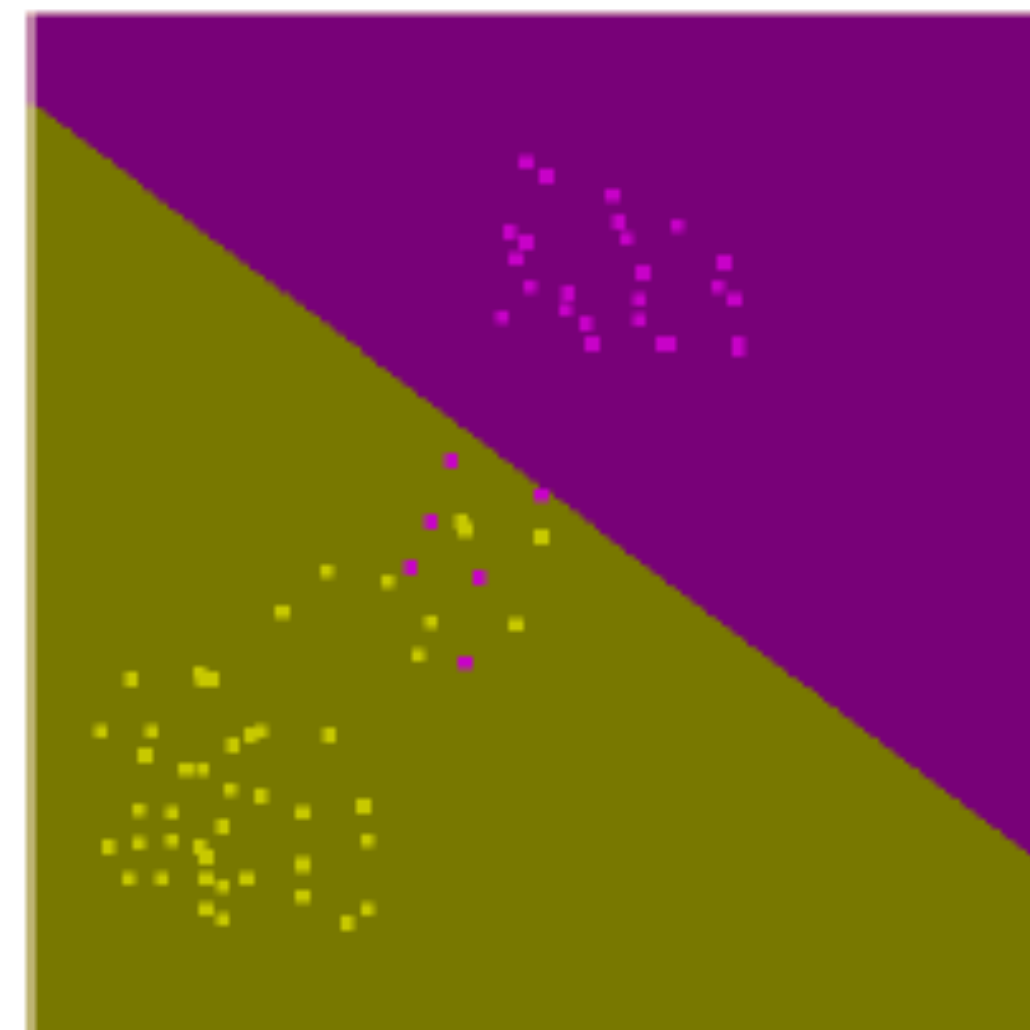


$C=0.15$

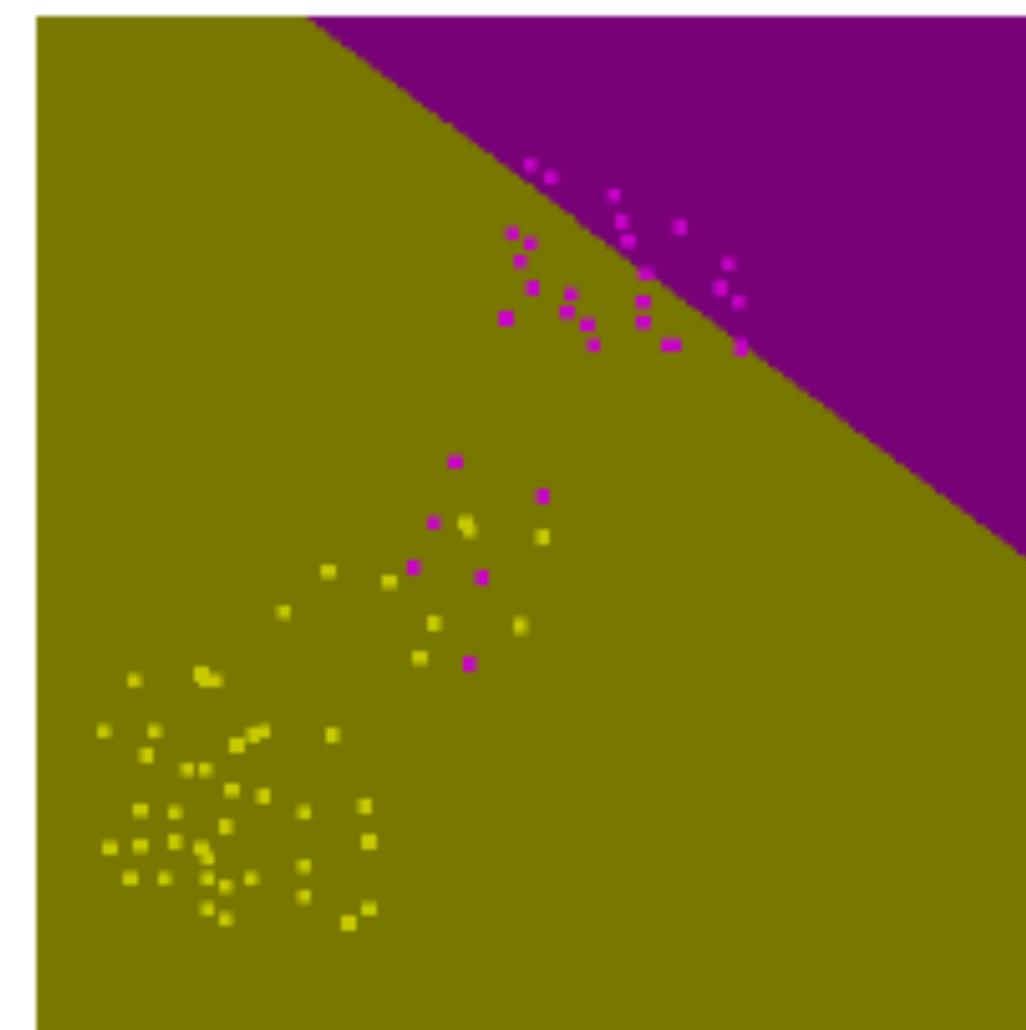

$C=0.1$

CONNECTION WITH OTHER MODELS

Plot of the 'hinge' error function used in support vector machines, shown in blue, along with the error function for logistic regression, rescaled by a factor of $1/\ln(2)$ so that it passes through the point $(0, 1)$, shown in red. Also shown are the misclassification error in black and the squared error in green.

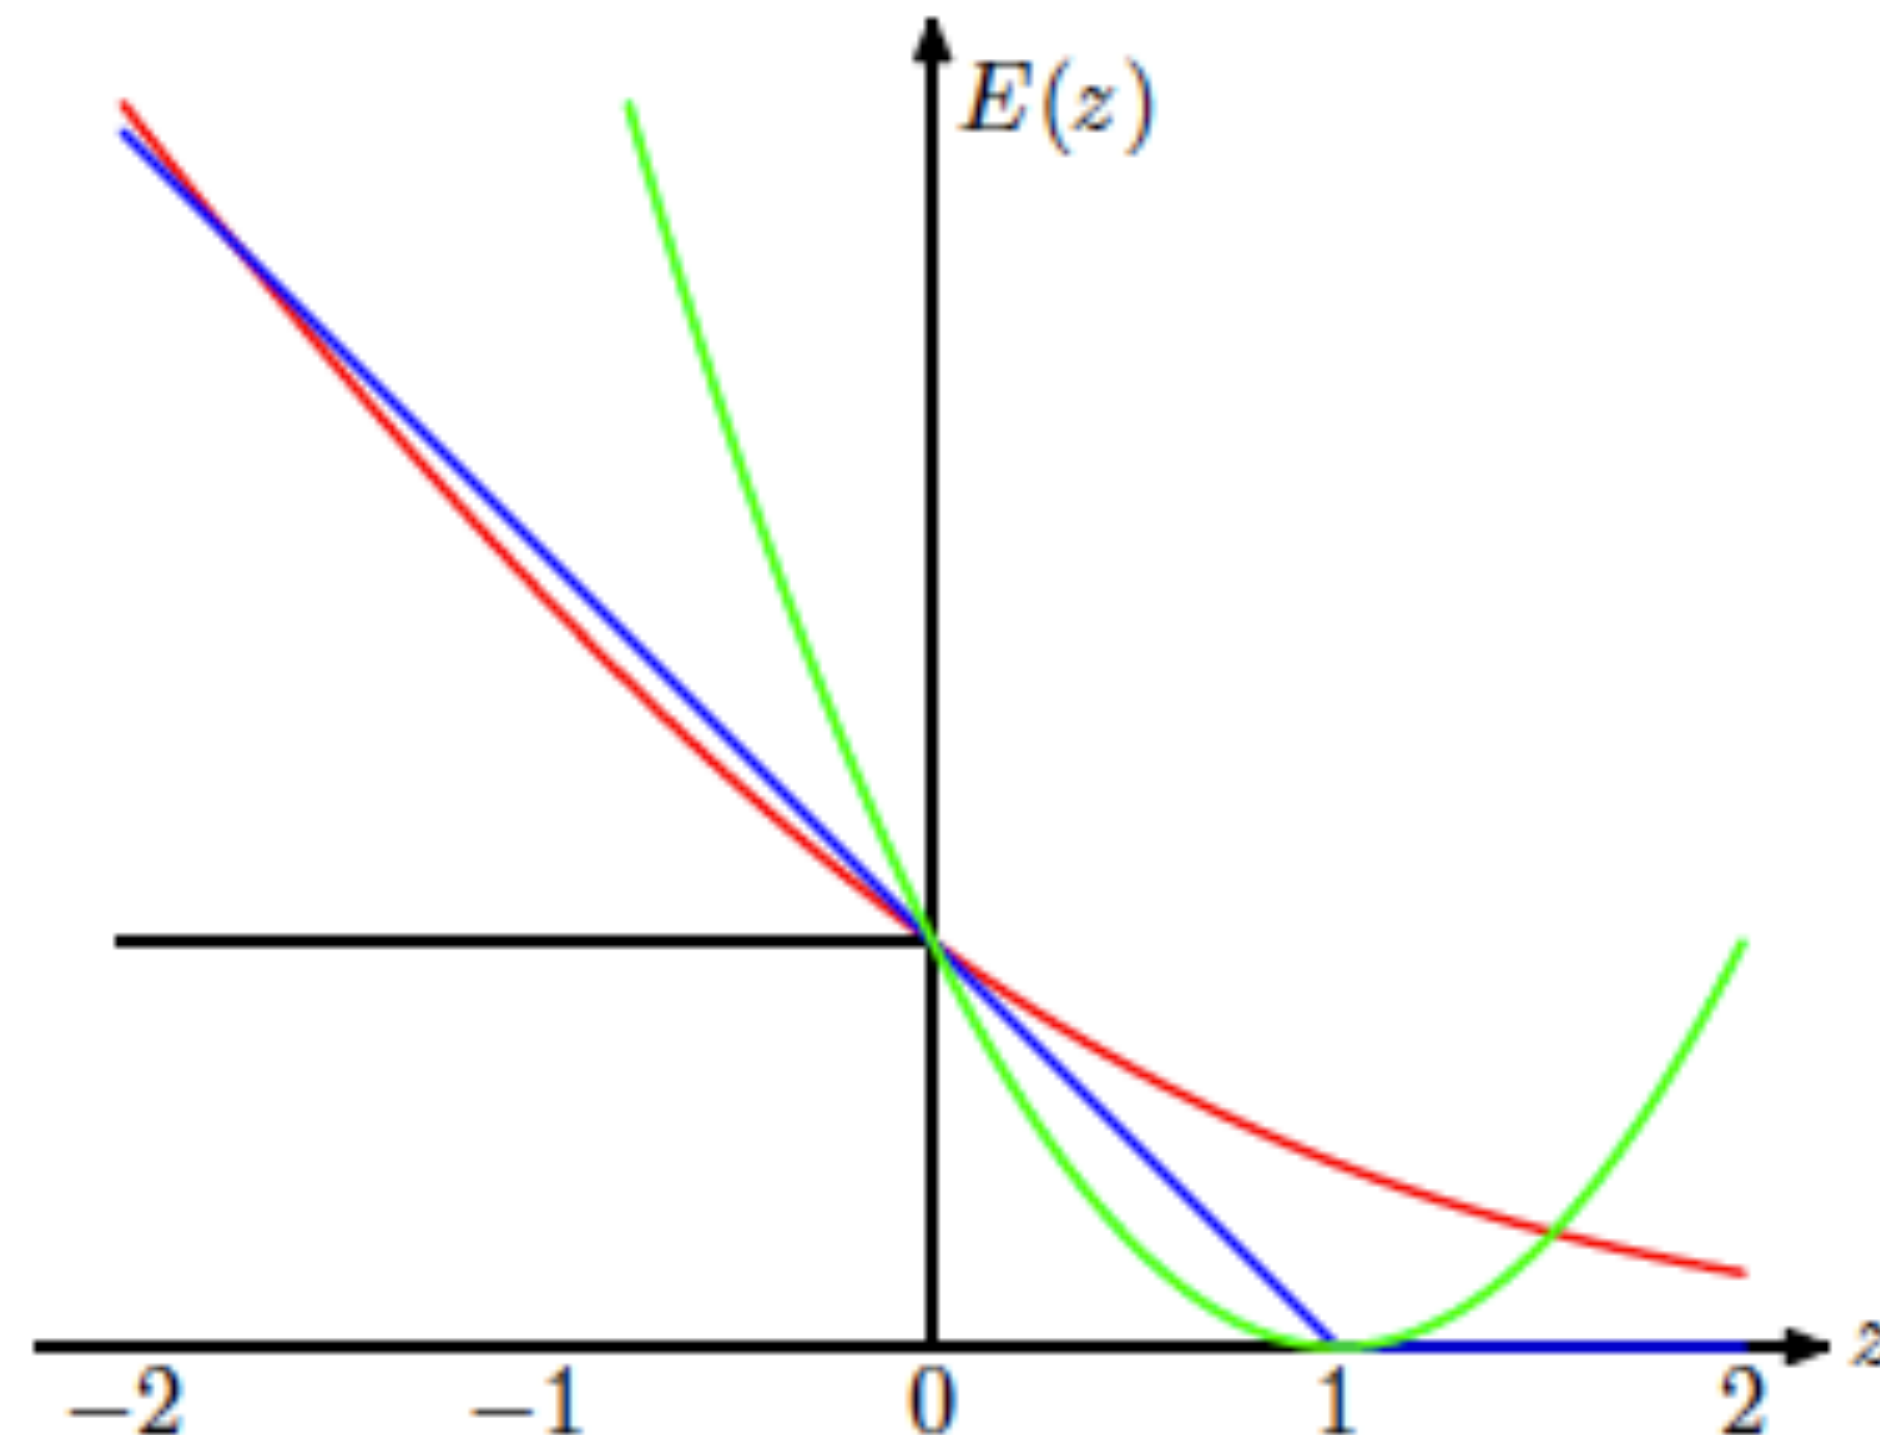


SVM Applications

- SVM has been used successfully in many real-world problems
 - text (and hypertext) categorization
 - image classification
 - bioinformatics (Protein classification, Cancer classification)
 - hand-written character recognition

NEURAL NETWORKS AND DEEP LEARNING

VISUALIZING LOGISTIC REGRESSION AS A NEURAL NETWORK

- ❖ A logistic regression is the simplest neural network
 - Number of parameters in the model - $D+1$

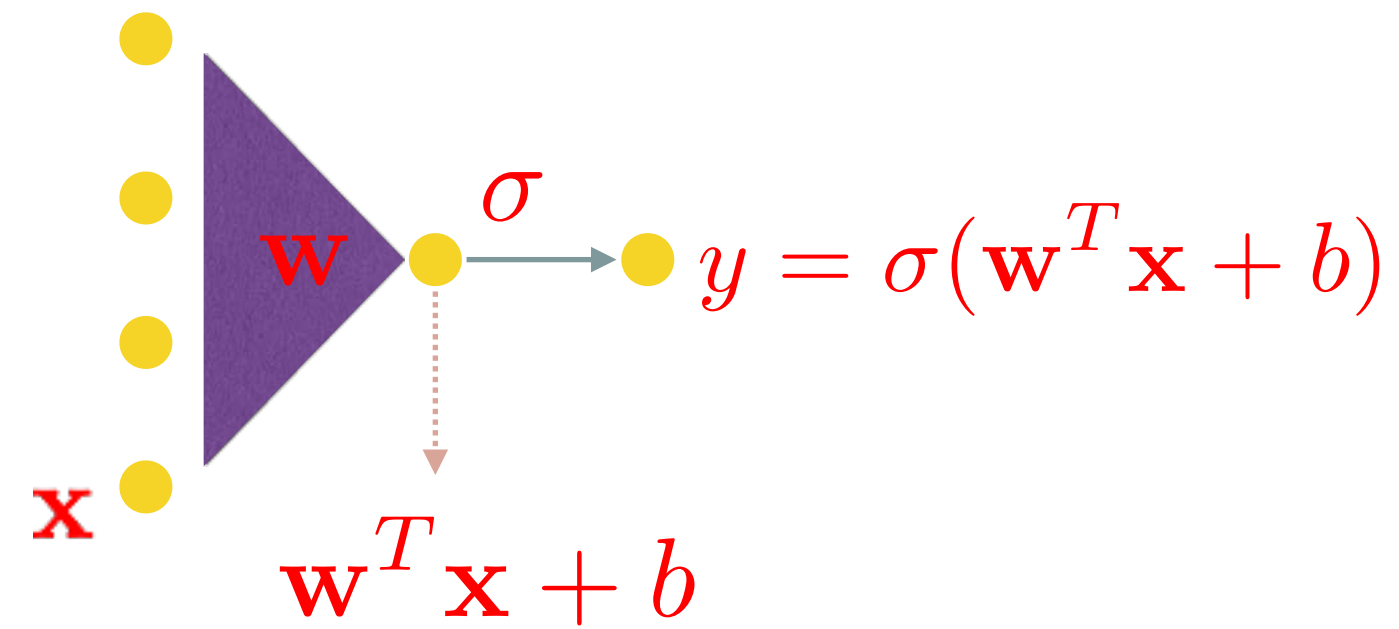

MULTI-CLASS LOGISTIC REGRESSION

- ❖ Targets are one-hot encoded vectors
 - Model approximates class posteriors using
 - softmax function

$$\text{softmax}(\mathbf{a}) = \begin{bmatrix} \frac{e^{a_1}}{\sum_j e^{a_j}} \\ \frac{e^{a_2}}{\sum_j e^{a_j}} \\ \vdots \\ \frac{e^{a_K}}{\sum_j e^{a_j}} \end{bmatrix}$$

$\mathbf{y} = \text{softmax}(\mathbf{W}^T \mathbf{x} + \mathbf{b})$

$\mathbf{W} \in \mathcal{R}^{K \times D} \quad \mathbf{b} \in \mathcal{R}^K$

SOFTMAX FUNCTION


- ❖ Each value is positive
- ❖ Sum of the vector is 1.0
 - Can be interpreted as class posterior probabilities

$$\text{softmax}(\mathbf{a}) = \begin{bmatrix} \frac{e^{a_1}}{\sum_j e^{a_j}} \\ \frac{e^{a_2}}{\sum_j e^{a_j}} \\ \cdot \\ \cdot \\ \frac{e^{a_K}}{\sum_j e^{a_j}} \end{bmatrix}$$

$$\begin{bmatrix} p(C_1|\mathbf{x}) \\ p(C_2|\mathbf{x}) \\ \cdot \\ \cdot \\ p(C_K|\mathbf{x}) \end{bmatrix}$$


QUESTION

- ❖ **Can we transform the data to linearly separable space**
 - then apply the logistic regression to find the classifier.
 - Example

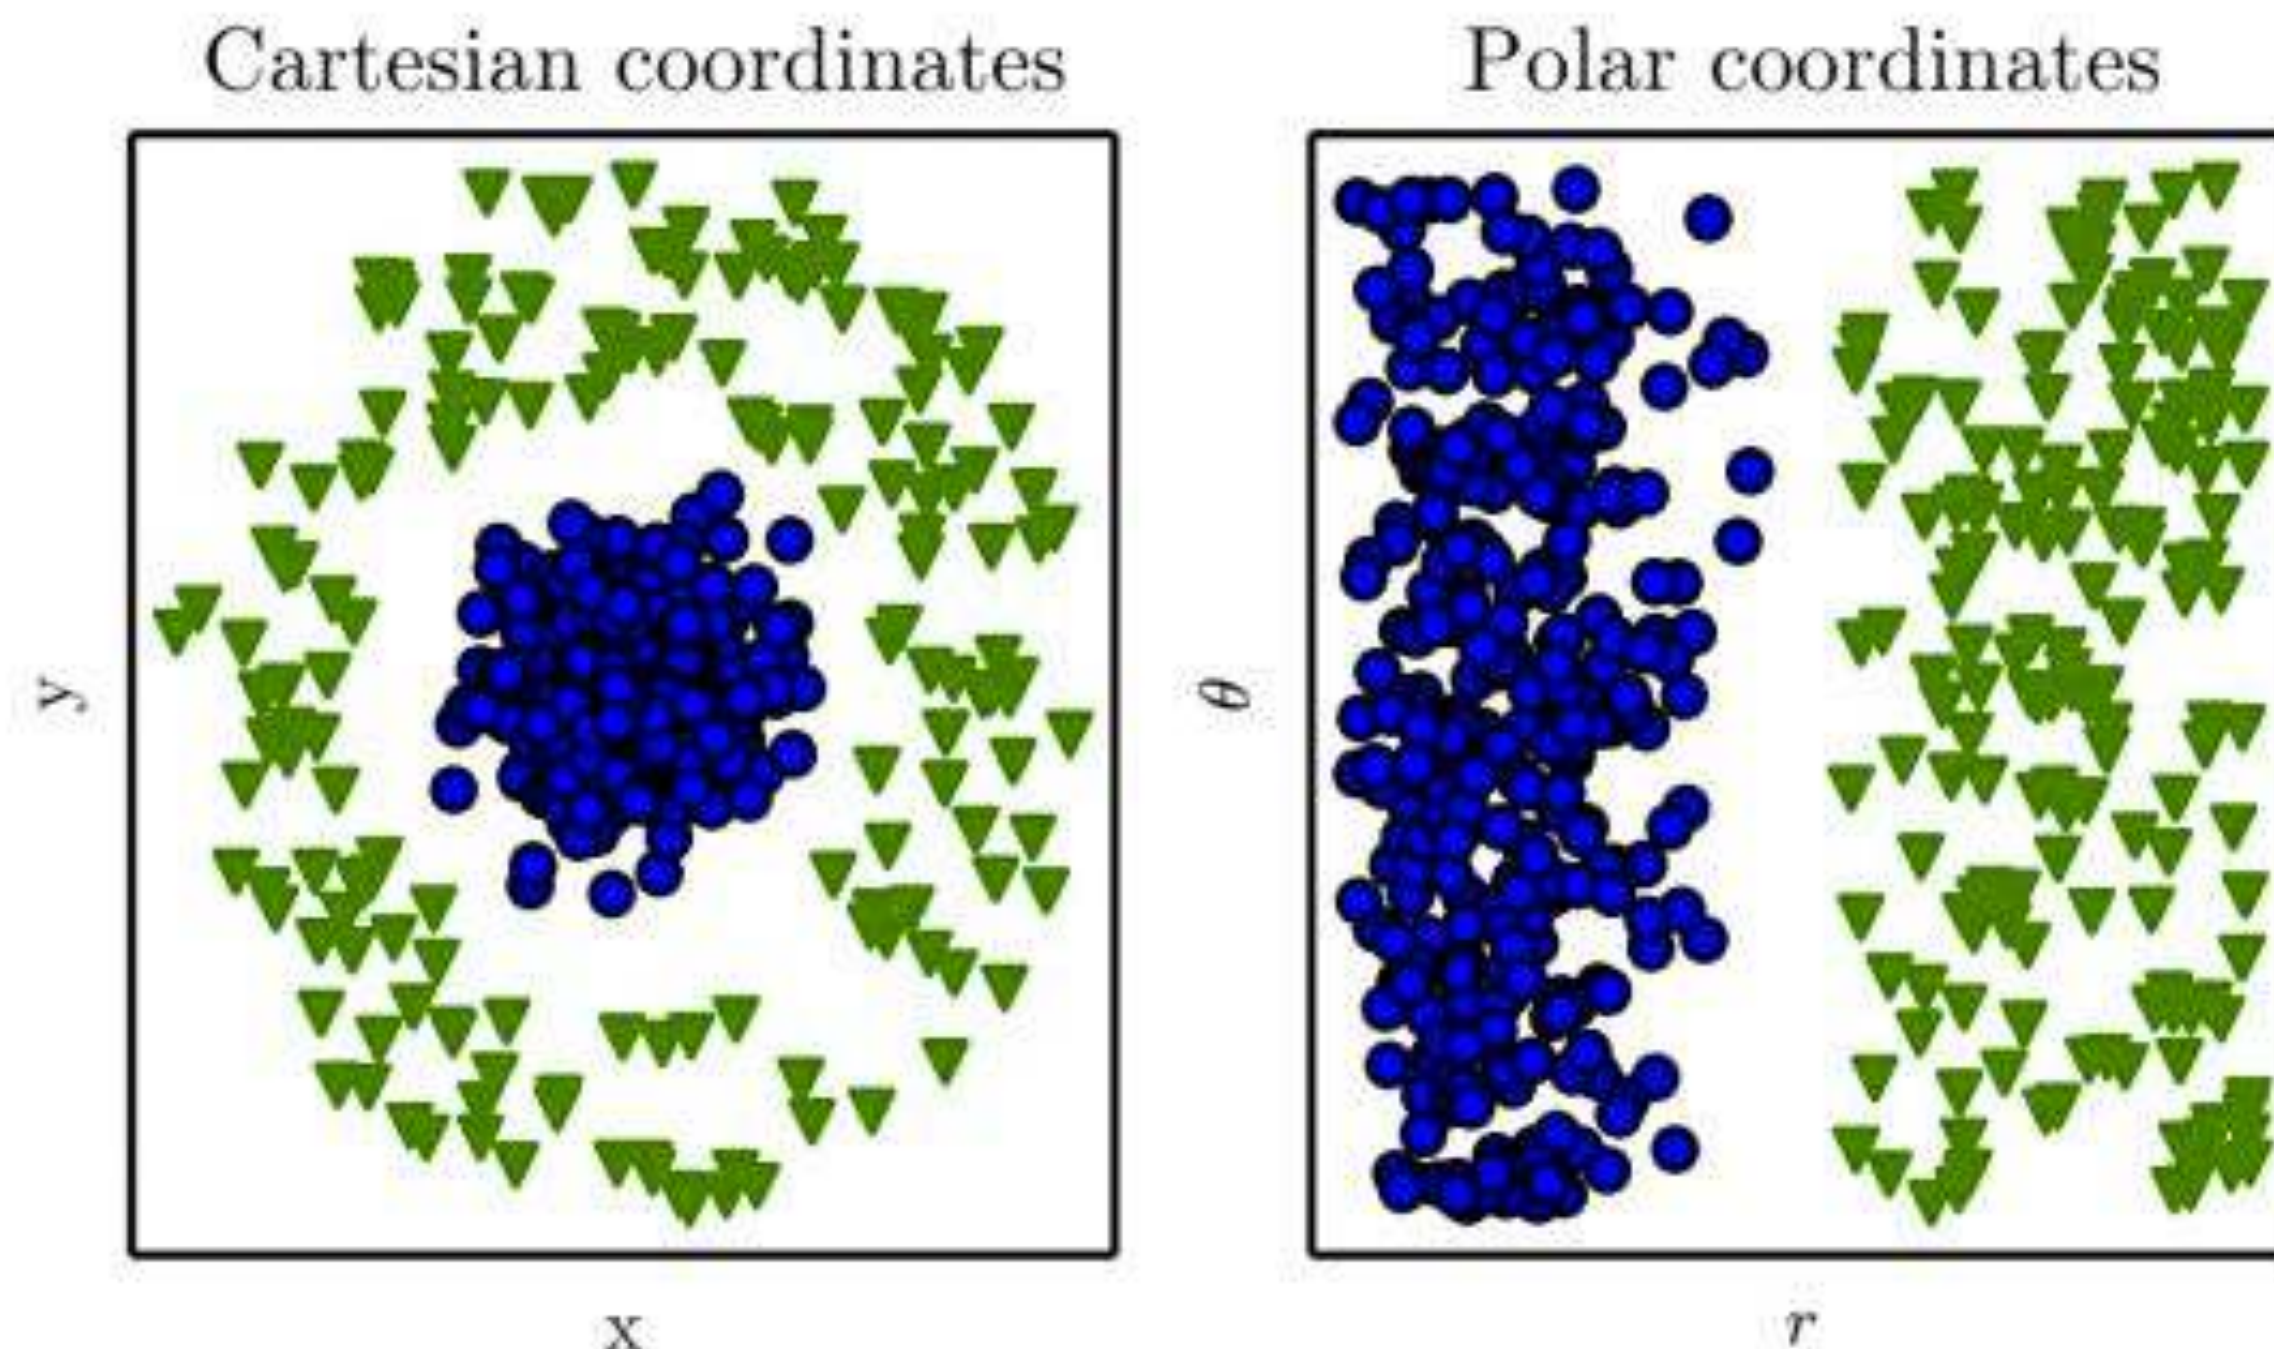


QUESTION

- ❖ **Can we transform the data to linearly separable space**
 - then apply the logistic regression to find the classifier.
 - Can we learn such a transform from the data itself
 - non-linear transformation of the data is needed

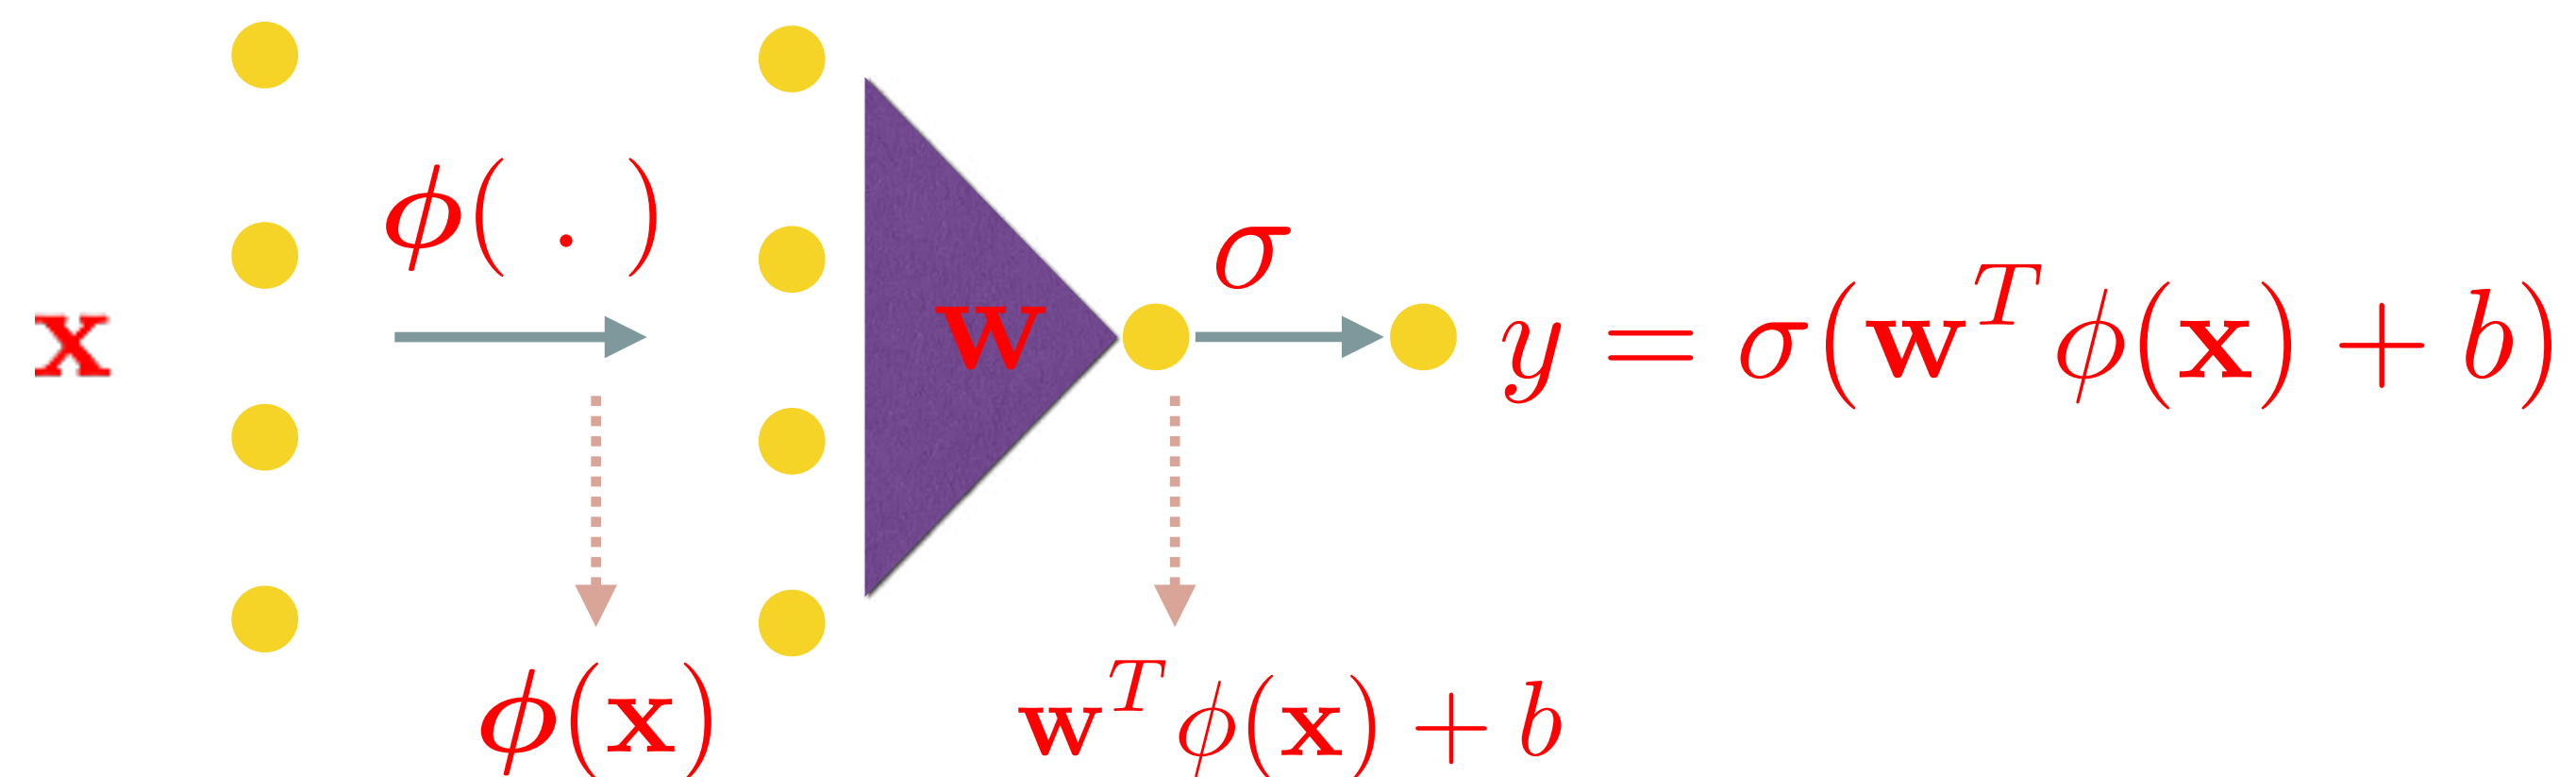


QUESTION

- ❖ **Can we transform the data to linearly separable space**
 - then apply the logistic regression to find the classifier.
- **Can we learn such a transform from the data itself**
 - non-linear transformation of the data is needed.
 - can this also be realized as neural layer

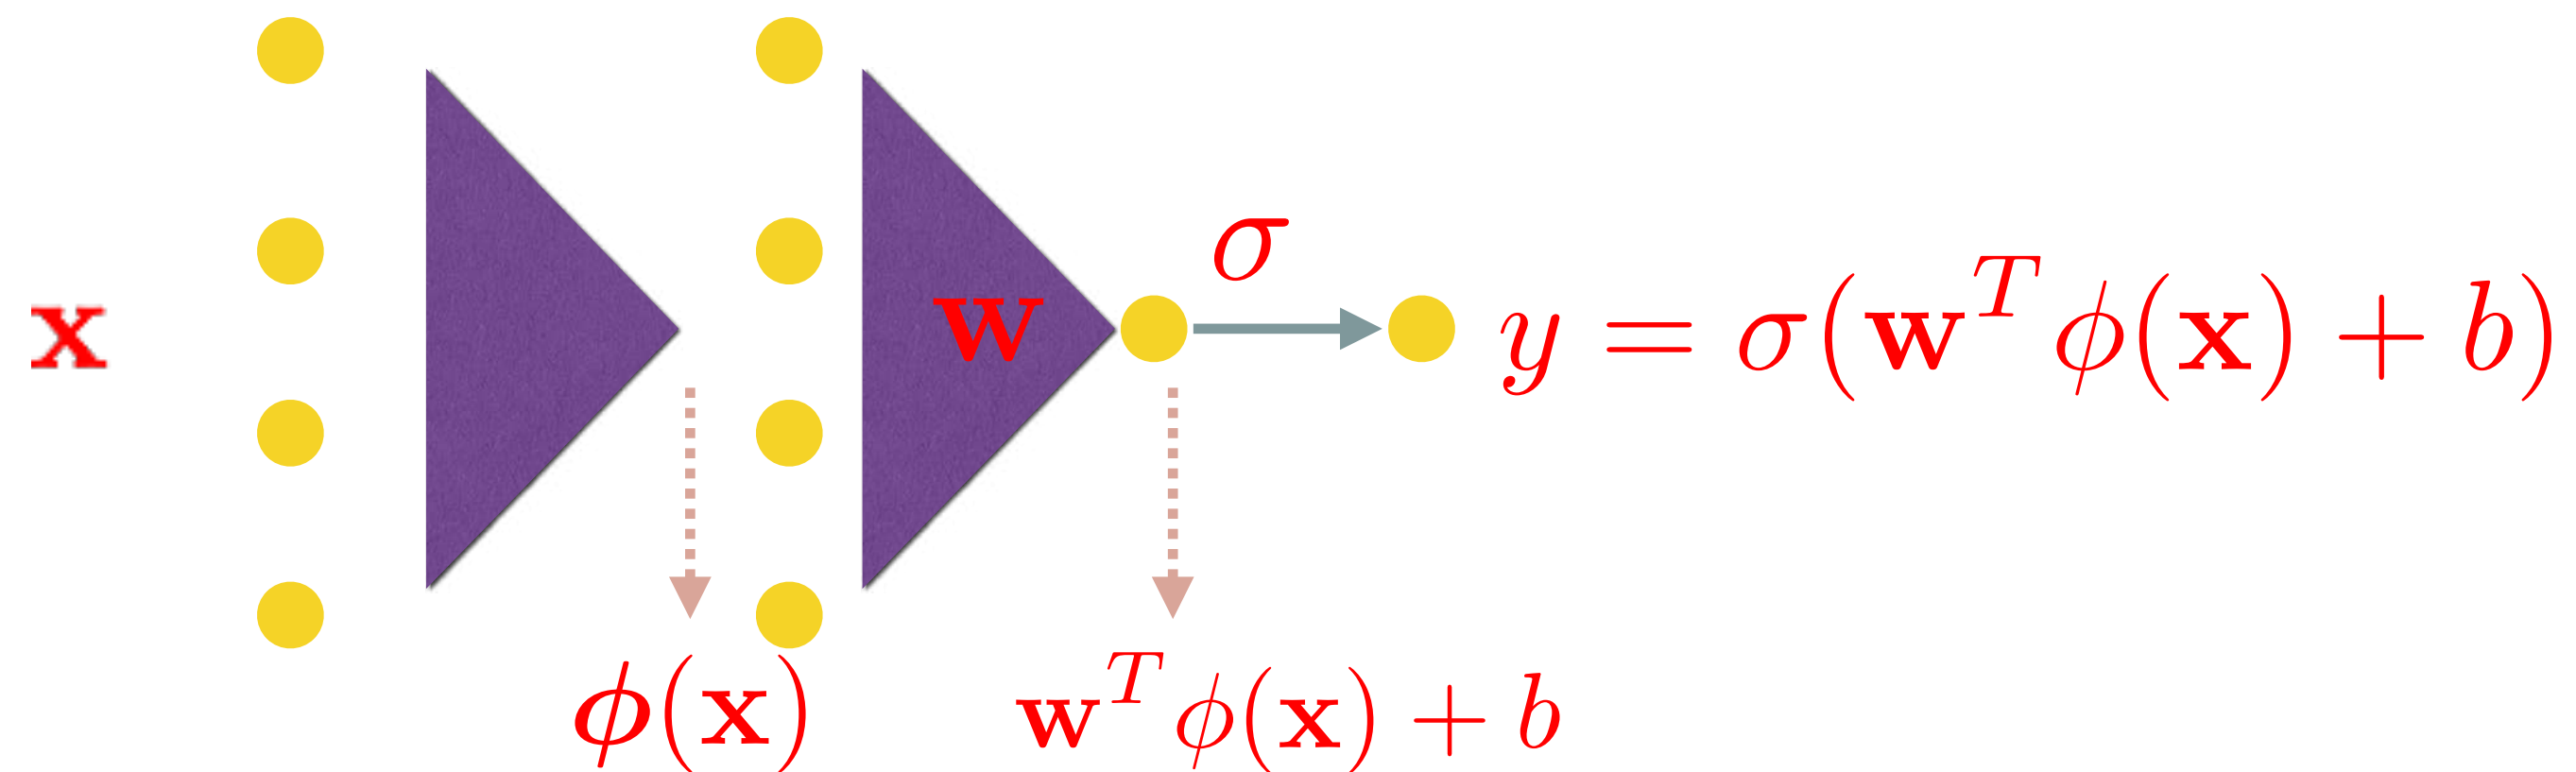

NEURAL NETWORK - 1- HIDDEN LAYER


- ❖ Has more capacity than logistic regression
 - can learn non-linear data separation functions
 - both 2-class and K-class classification possible
 - can be learnt using gradient descent

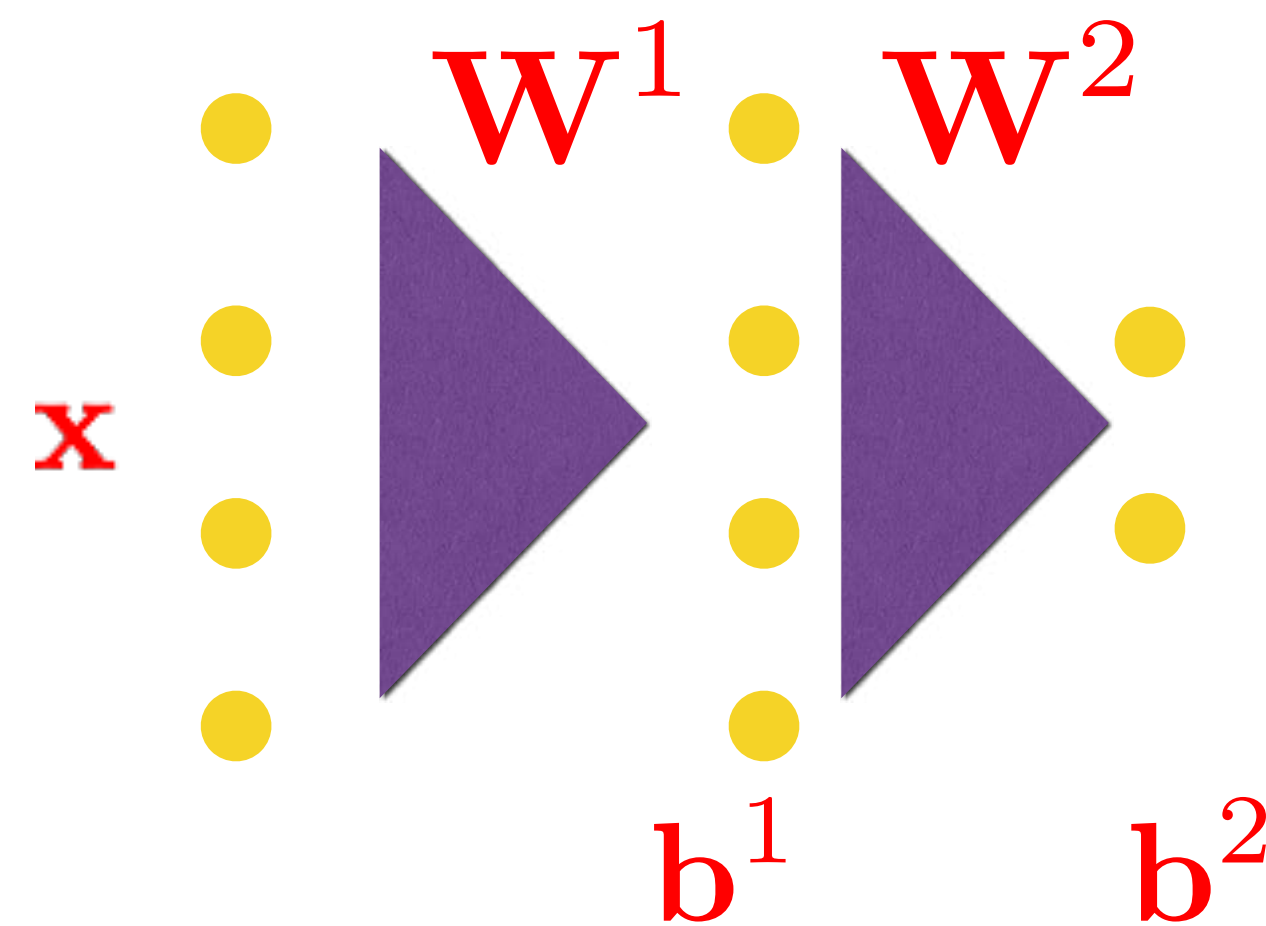


TYPES OF NON-LINEARITIES

Non-linearity in hidden layer


tanh

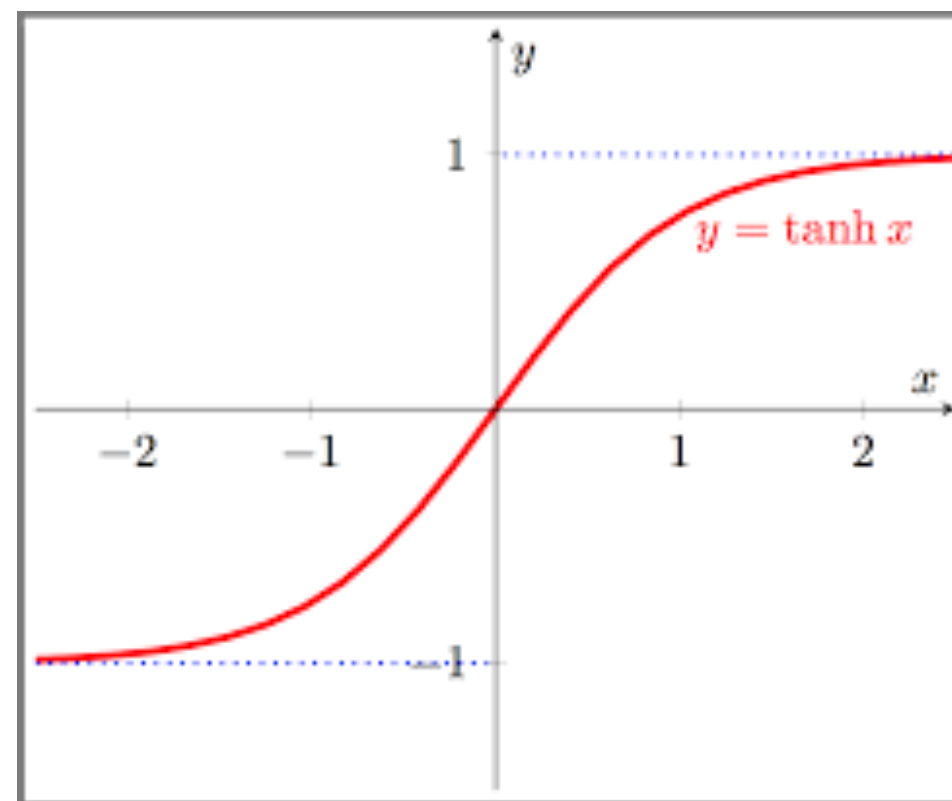

sigmoid

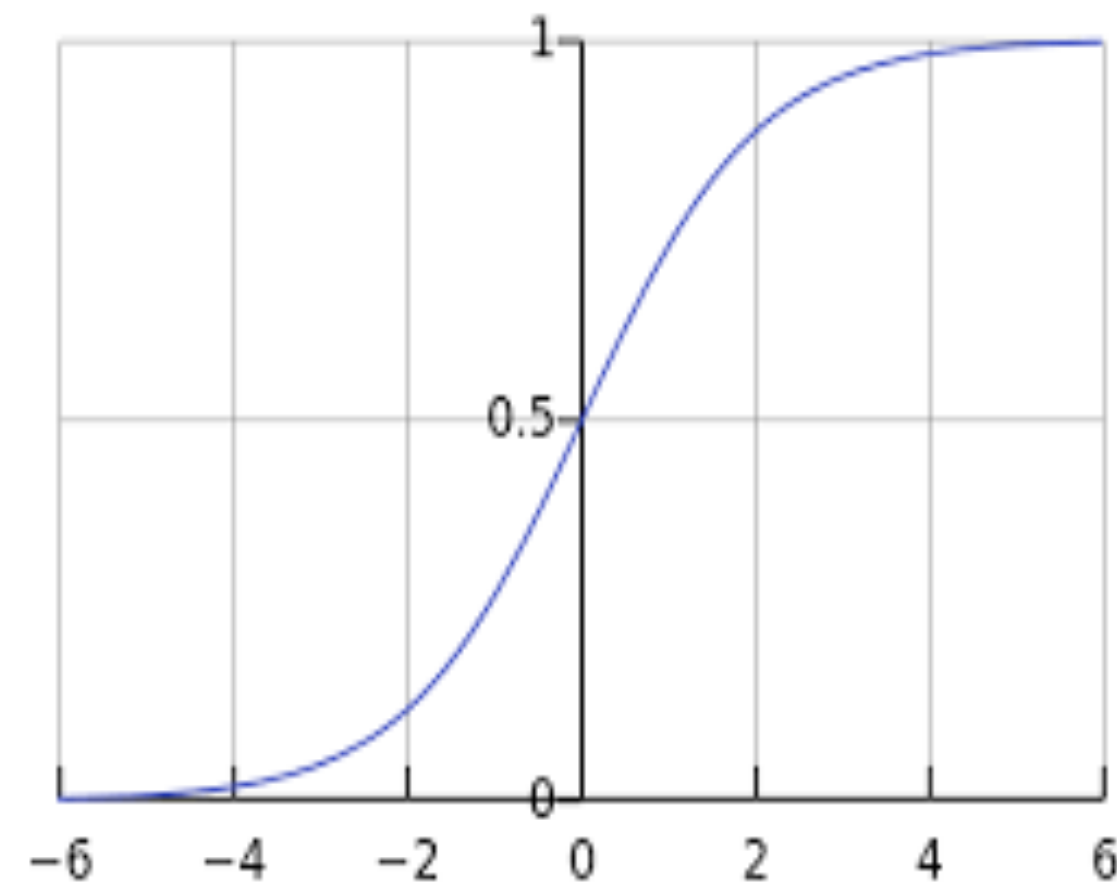

ReLu

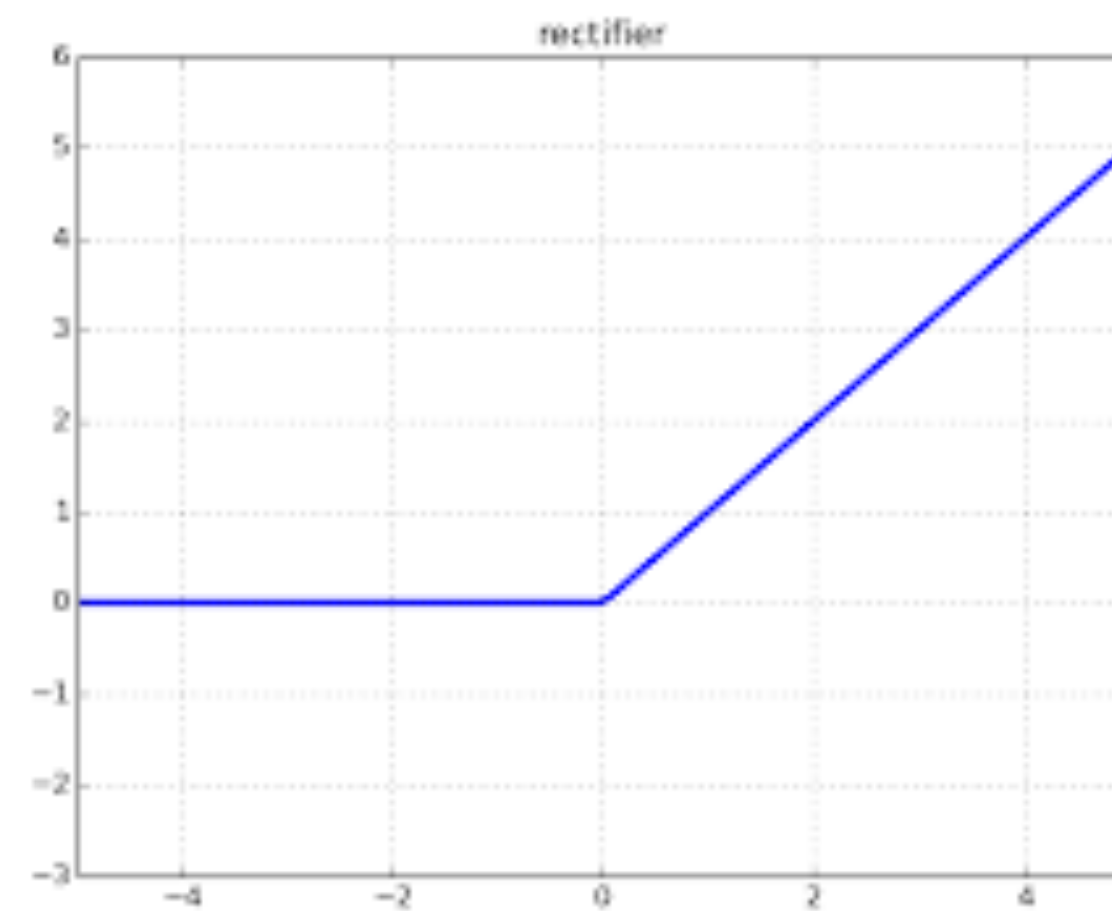

OUTPUT LAYER NON-LINEARITY AND COST FUNCTIONS

- ❖ Using a softmax non-linearity
 - error function is cross entropy

$$E_{CE} = - \sum_n \sum_k t_{nk} \log(v_{nk})$$

- ❖ For regression style tasks - output is linear
 - error function is mean square error

$$E_{MSE} = - \sum_n \sum_k (t_{nk} - v_{nk})^2$$

FORWARD THROUGH THE MODEL PROPAGATION LEARNING

- ❖ Computations in the forward direction

$$\begin{aligned}\mathbf{a}^1 &= \mathbf{W}^1 \mathbf{x} + \mathbf{b}^1 \\ \mathbf{z}^1 &= \sigma(\mathbf{a}^1) \\ \mathbf{a}^2 &= \mathbf{W}^2 \mathbf{z}^1 + \mathbf{b}^2 \\ \mathbf{y} &= \text{softmax}(\mathbf{a}^2)\end{aligned}$$

- ❖ Loss function

$$E_{CE} = - \sum_n \sum_k t_{nk} \log(v_{nk})$$

$$\Theta = \{\mathbf{W}^1, \mathbf{b}^1, \mathbf{W}^2, \mathbf{b}^2\}$$

- ❖ Parameters in the model

Need to be updated based on the gradients w.r.t. the error


GRADIENT COMPUTATION IN THE MODEL

$$\begin{aligned}\mathbf{a}^1 &= \mathbf{W}^1 \mathbf{x} + \mathbf{b}^1 \\ \mathbf{z}^1 &= \sigma(\mathbf{a}^1) \\ \mathbf{a}^2 &= \mathbf{W}^2 \mathbf{z}^1 + \mathbf{b}^2 \\ \mathbf{y} &= \text{softmax}(\mathbf{a}^2)\end{aligned}$$

$$E_{CE} = - \sum_n \sum_k t_{nk} \log(v_{nk})$$


- ❖ When computing the gradients
 - Order of computations
 - The derivative of the loss function w.r.t output layer
 - The derivative of the loss function w.r.t output activation
 - The derivative of the loss function w.r.t hidden layer outputs
 - The derivative of the loss function w.r.t. hidden layer activations

BACK PROPAGATION LEARNING

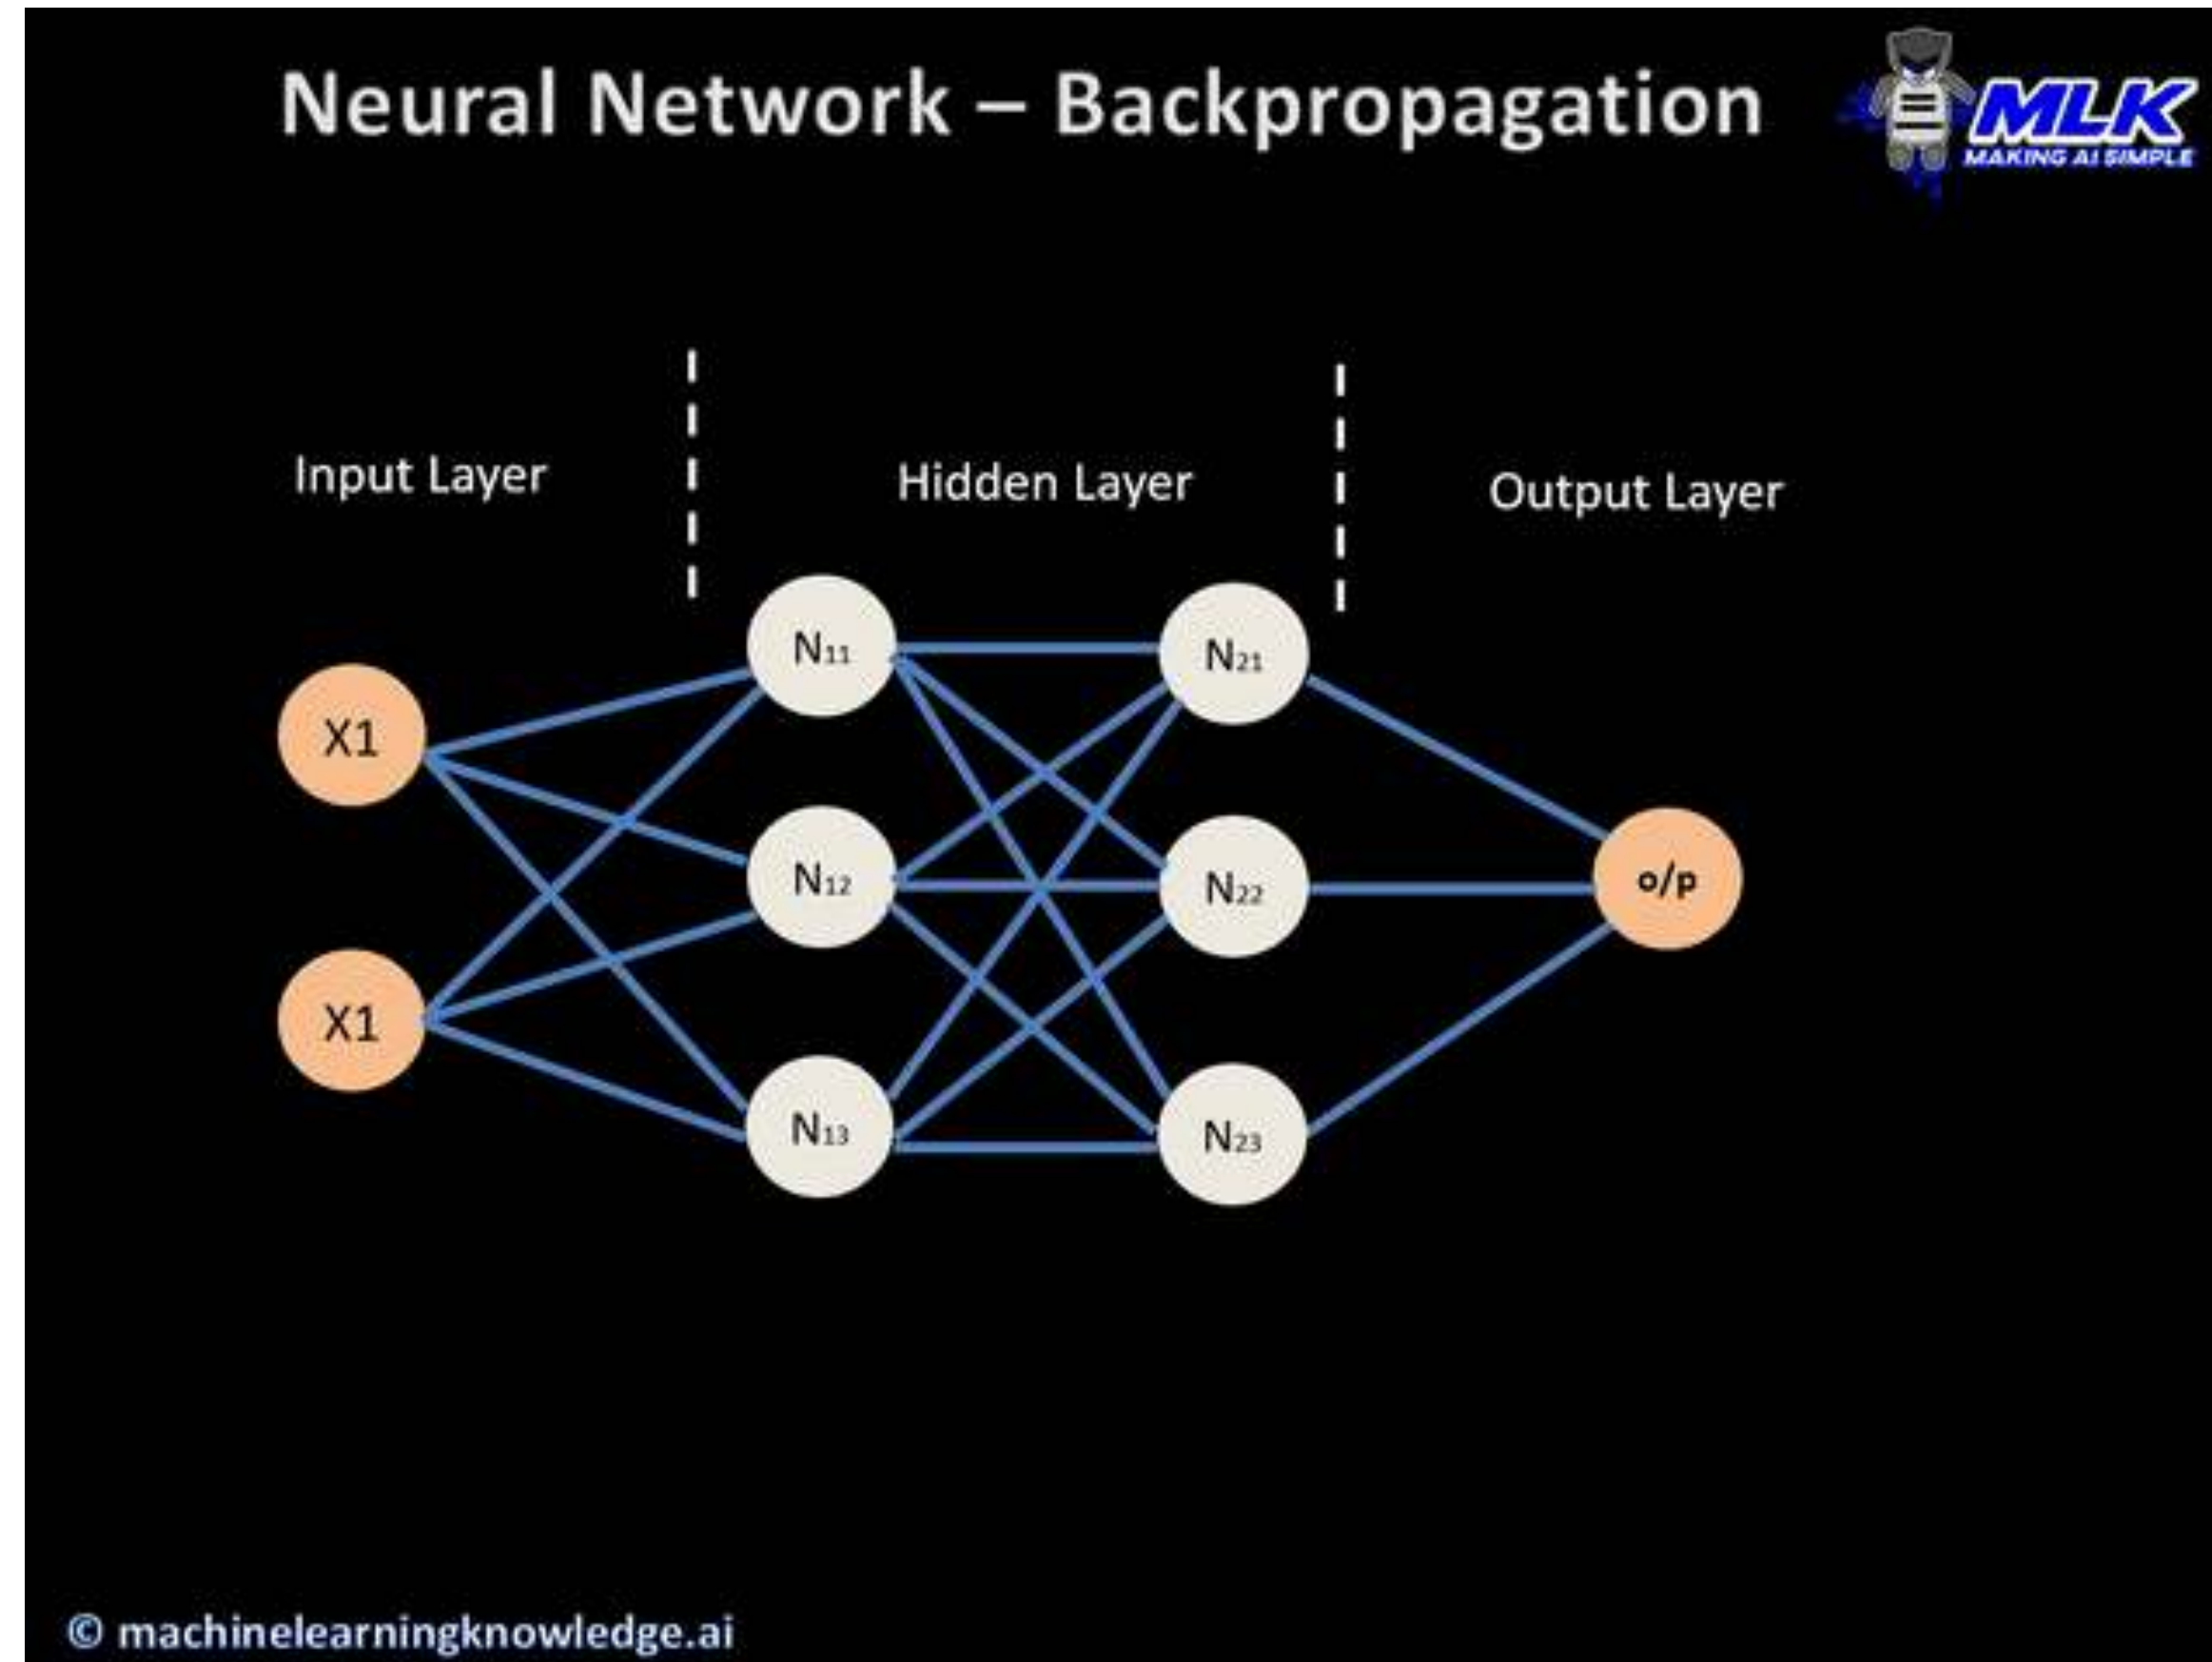


PERCEPTRON ALGORITHM

Perceptron Model [McCulloch, 1943, Rosenblatt, 1957]

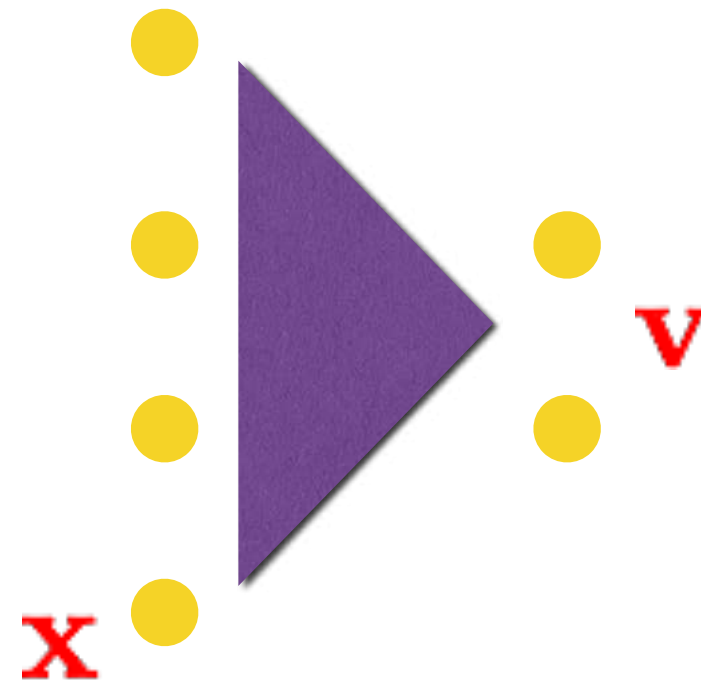


Targets are binary classes $[-1, 1]$

What if the data is not
linearly separable

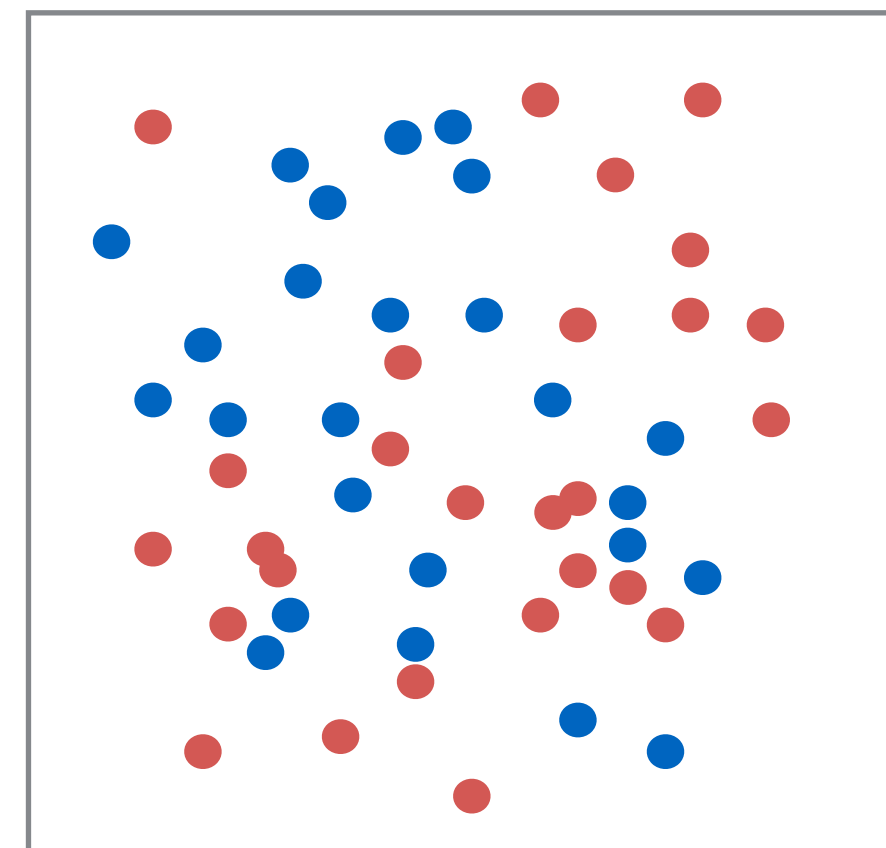


MULTI-LAYER PERCEPTRON

Multi-layer Perceptron [Hopfield, 1982]

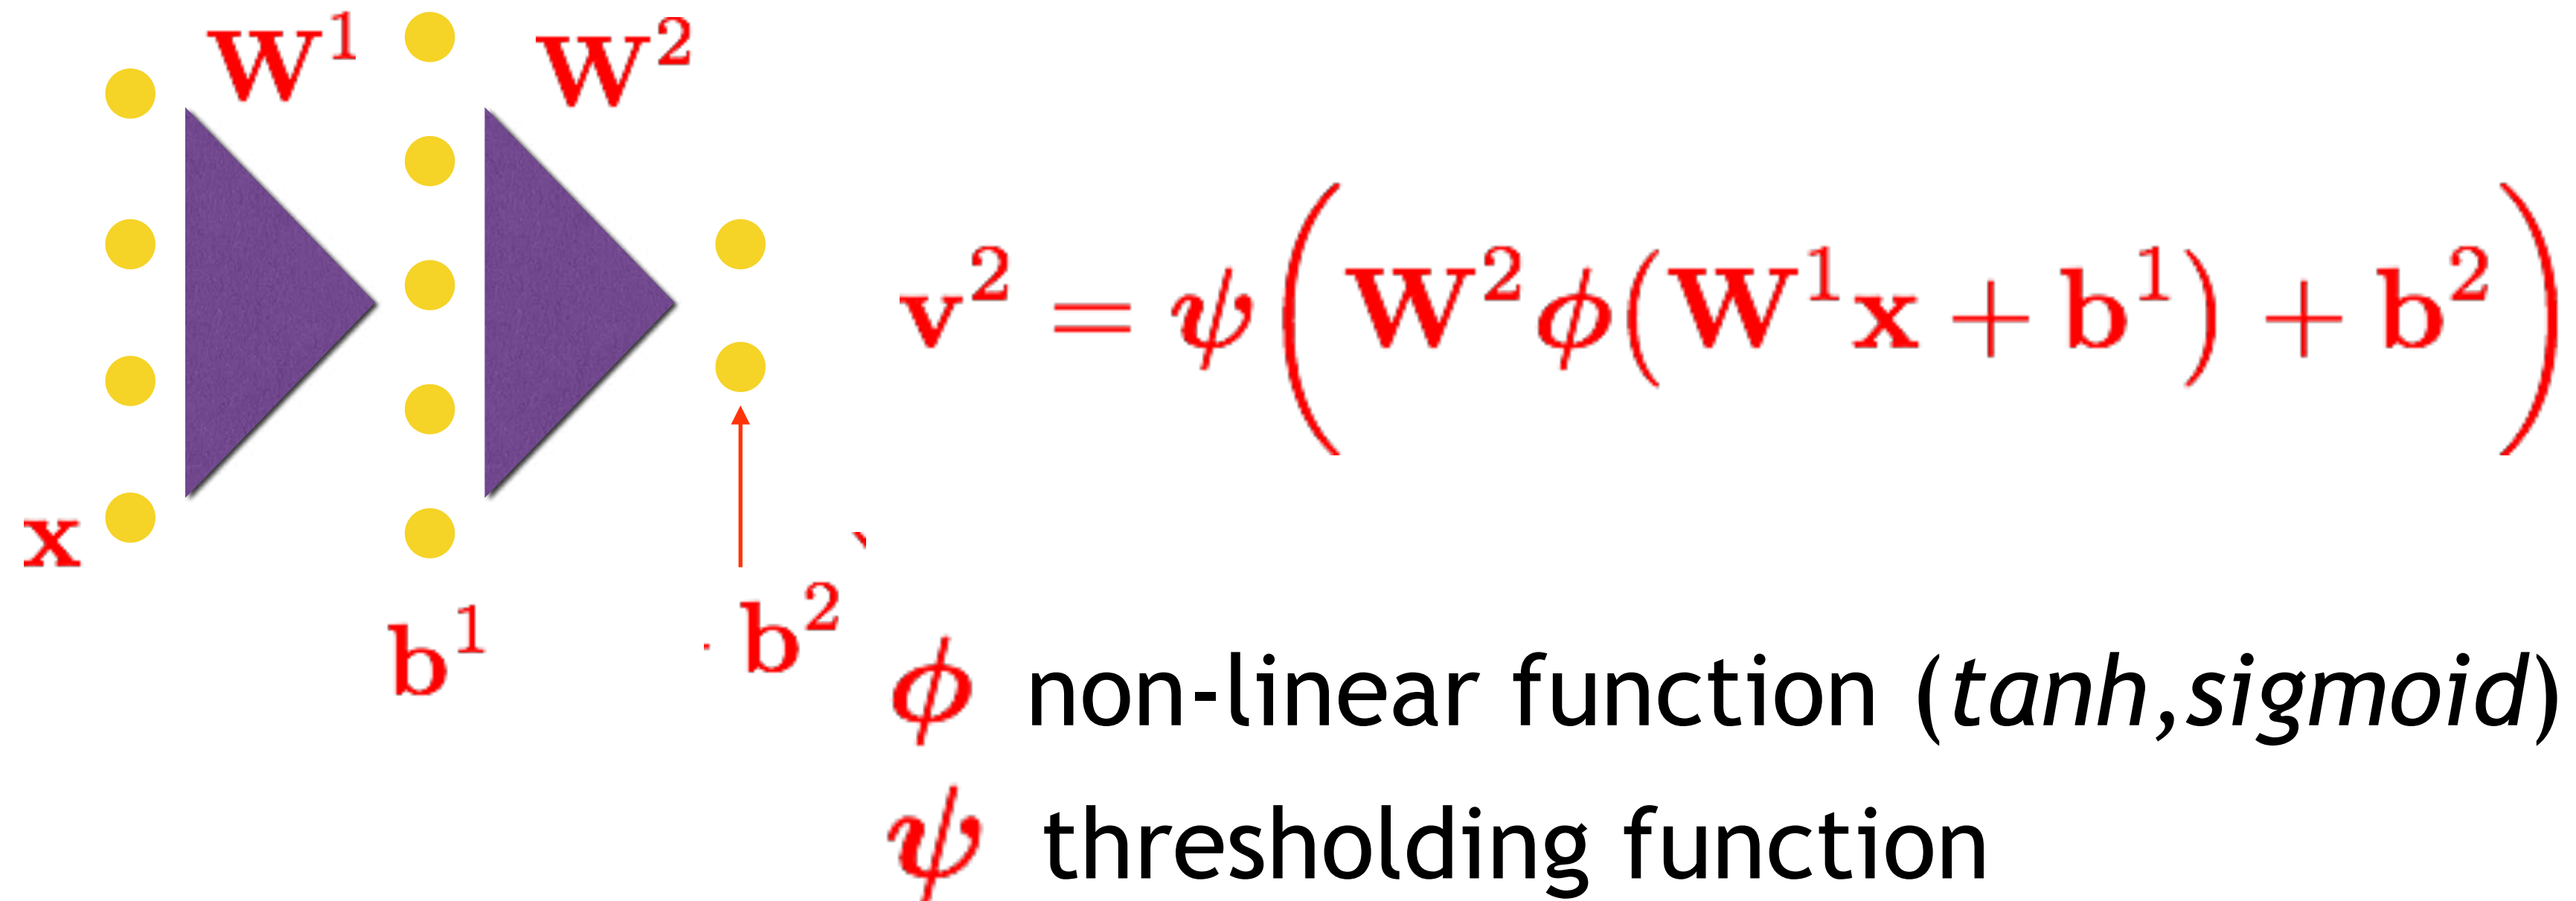


MULTI-LAYER PERCEPTRON

- Solving a non-convex optimization.
- Iterative solution.
- Depends on the initialization.
- Convergence to a local optima.
- Judicious choice of learning rate

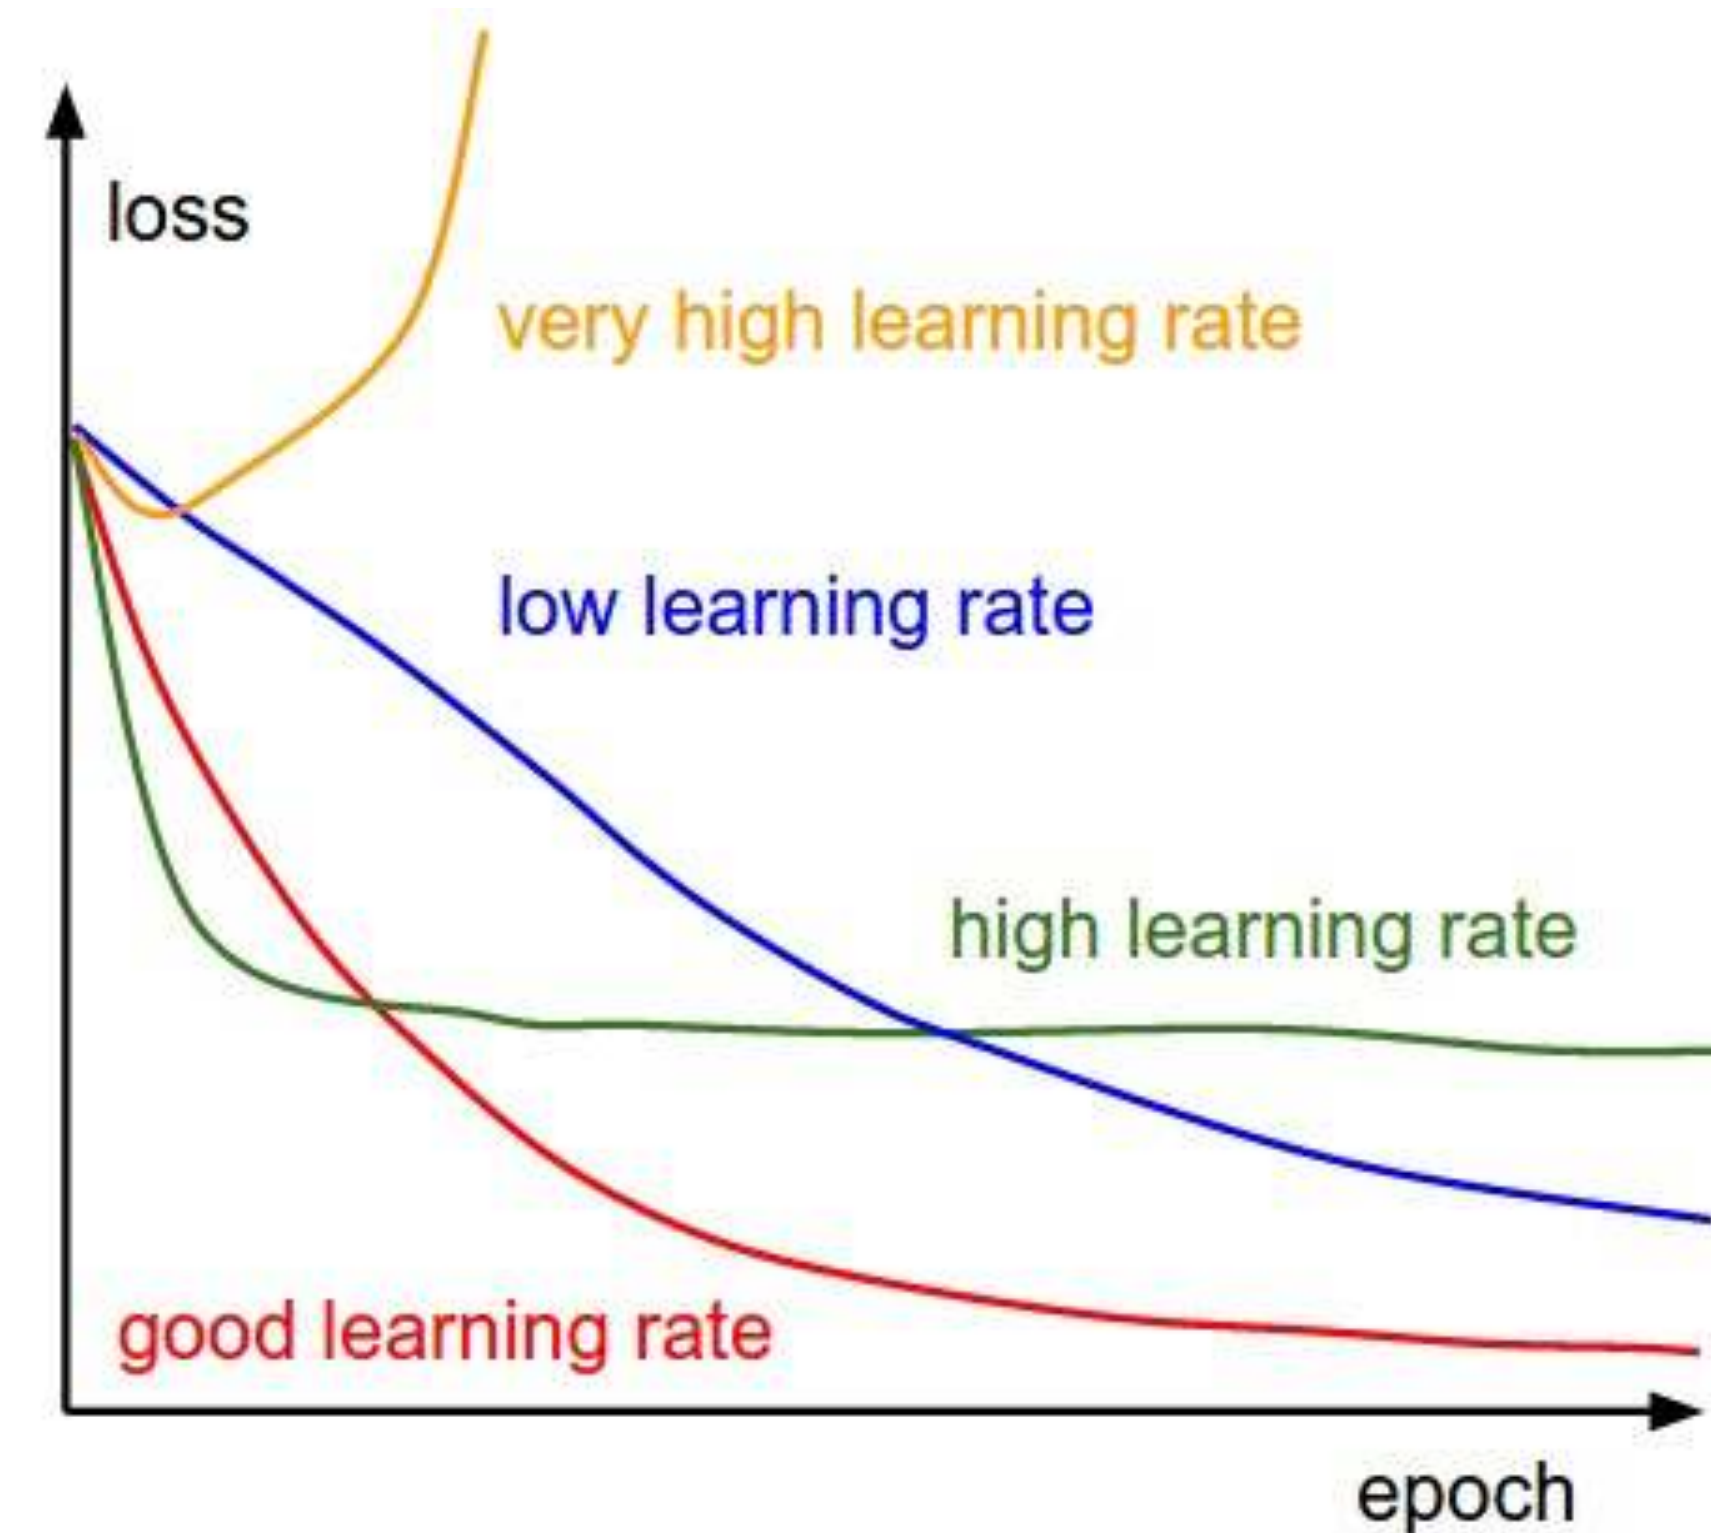


REGULARIZATION IN NEURAL NETWORKS

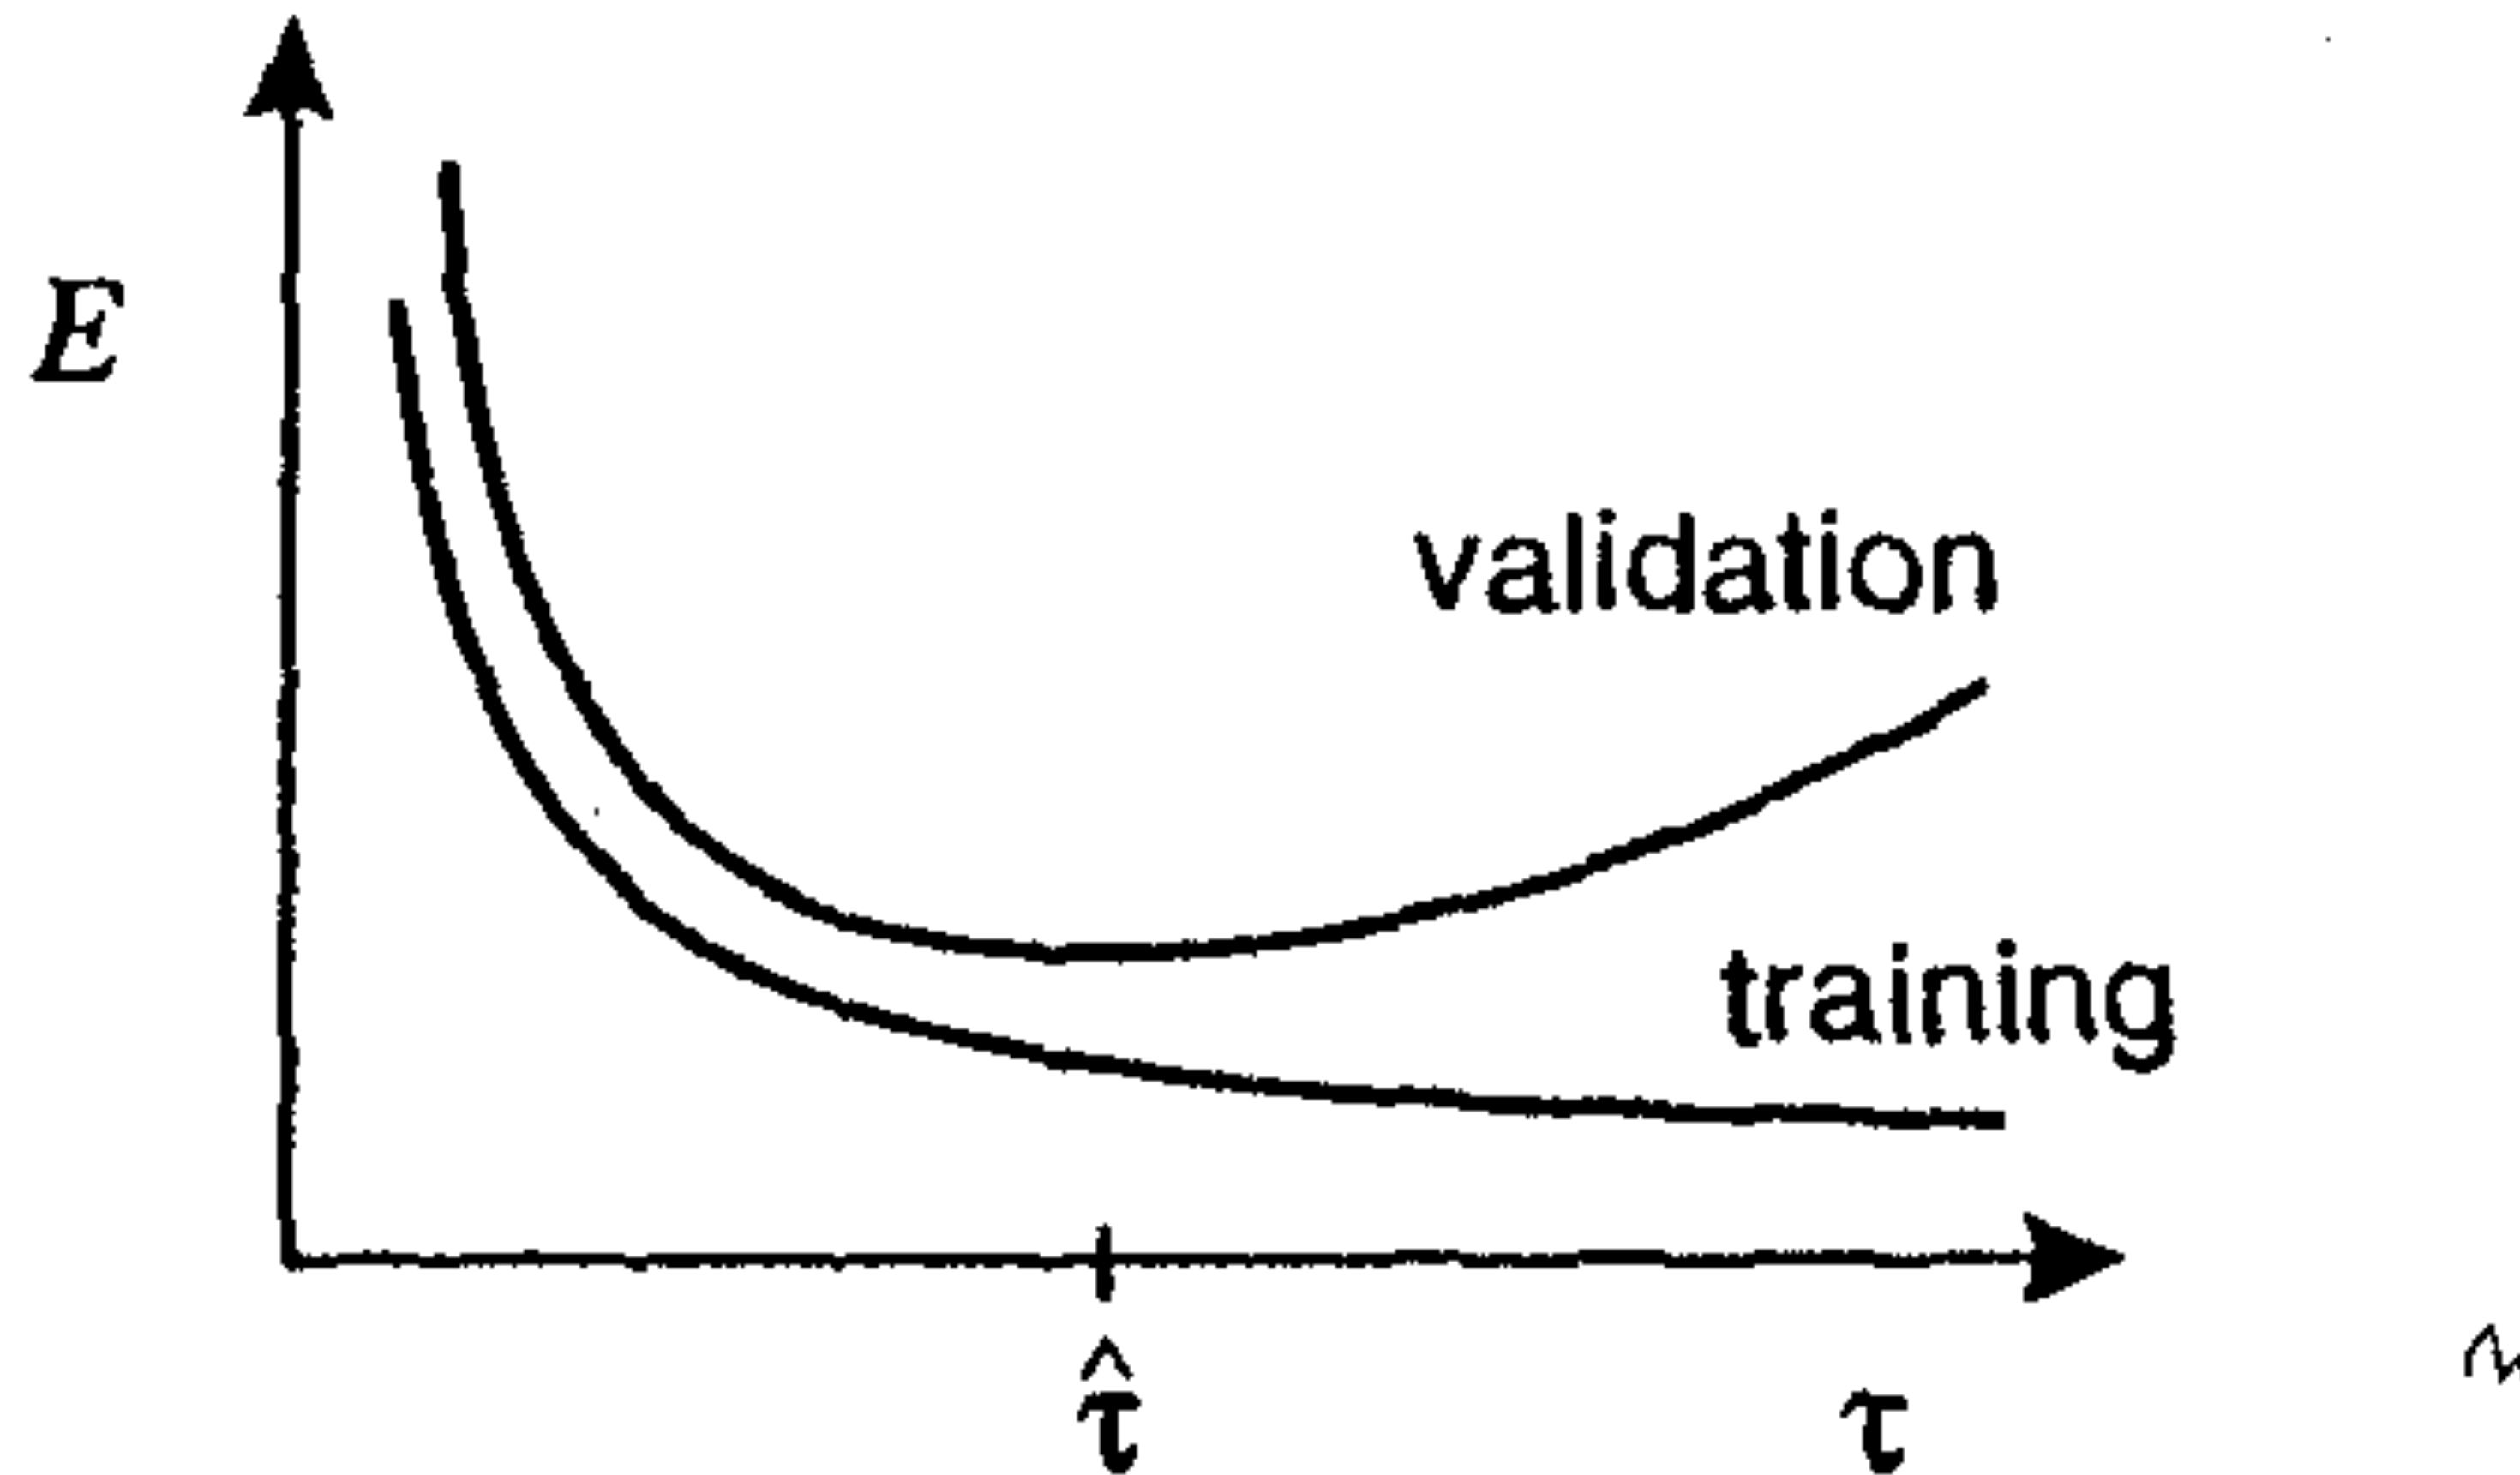


OTHER APPROACHES

- ❖ Training with noise
- ❖ Mixture of models
- ❖ Mixture of experts approach

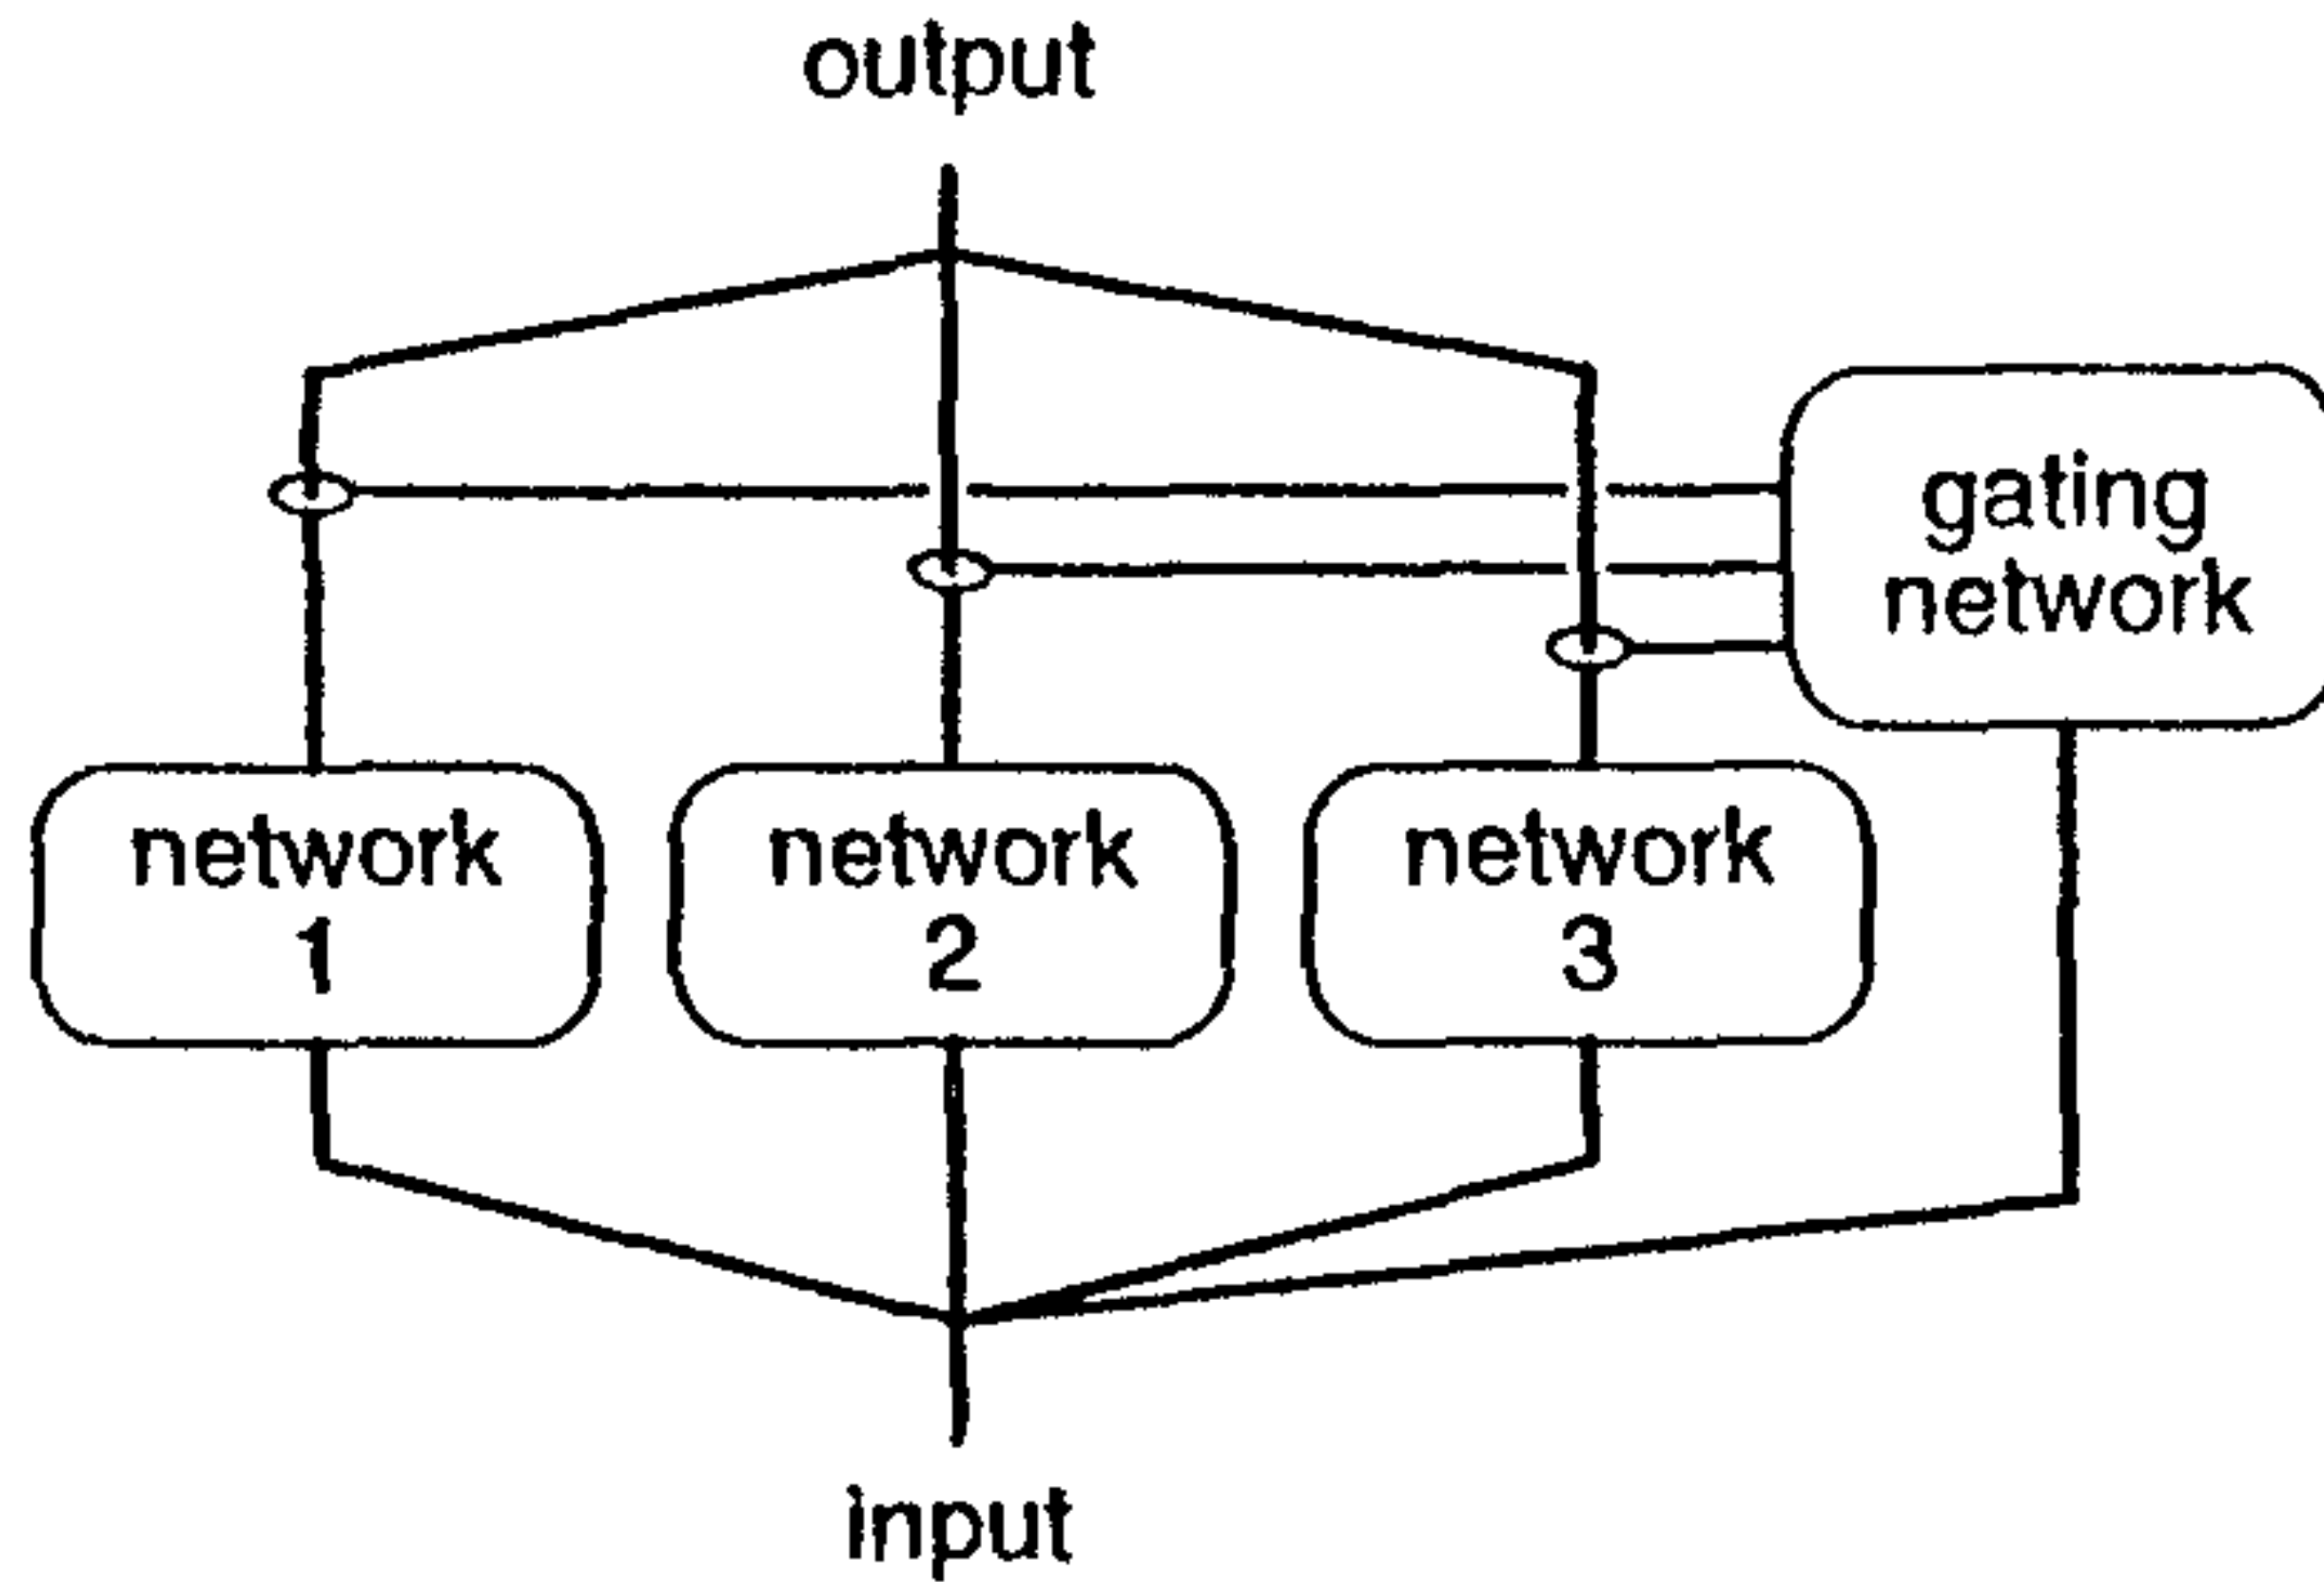


NEURAL NETWORKS - 1 HIDDEN LAYER


- ❖ For complex problems in audio/image/text
 - Single hidden layer may be too restrictive in learning the model parameters
 - May not scale up with availability of big data.

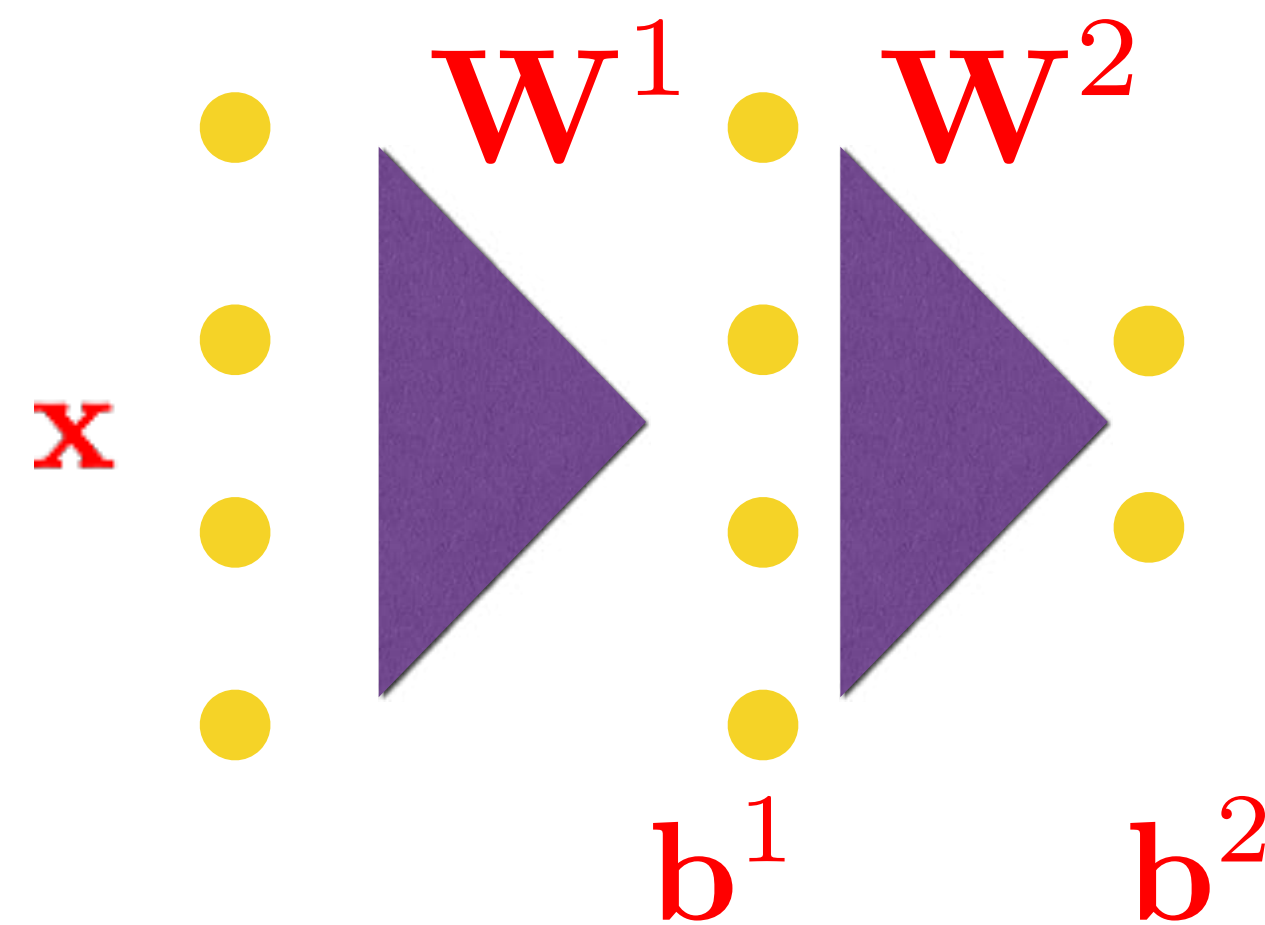

NEURAL NETWORKS – DEEP

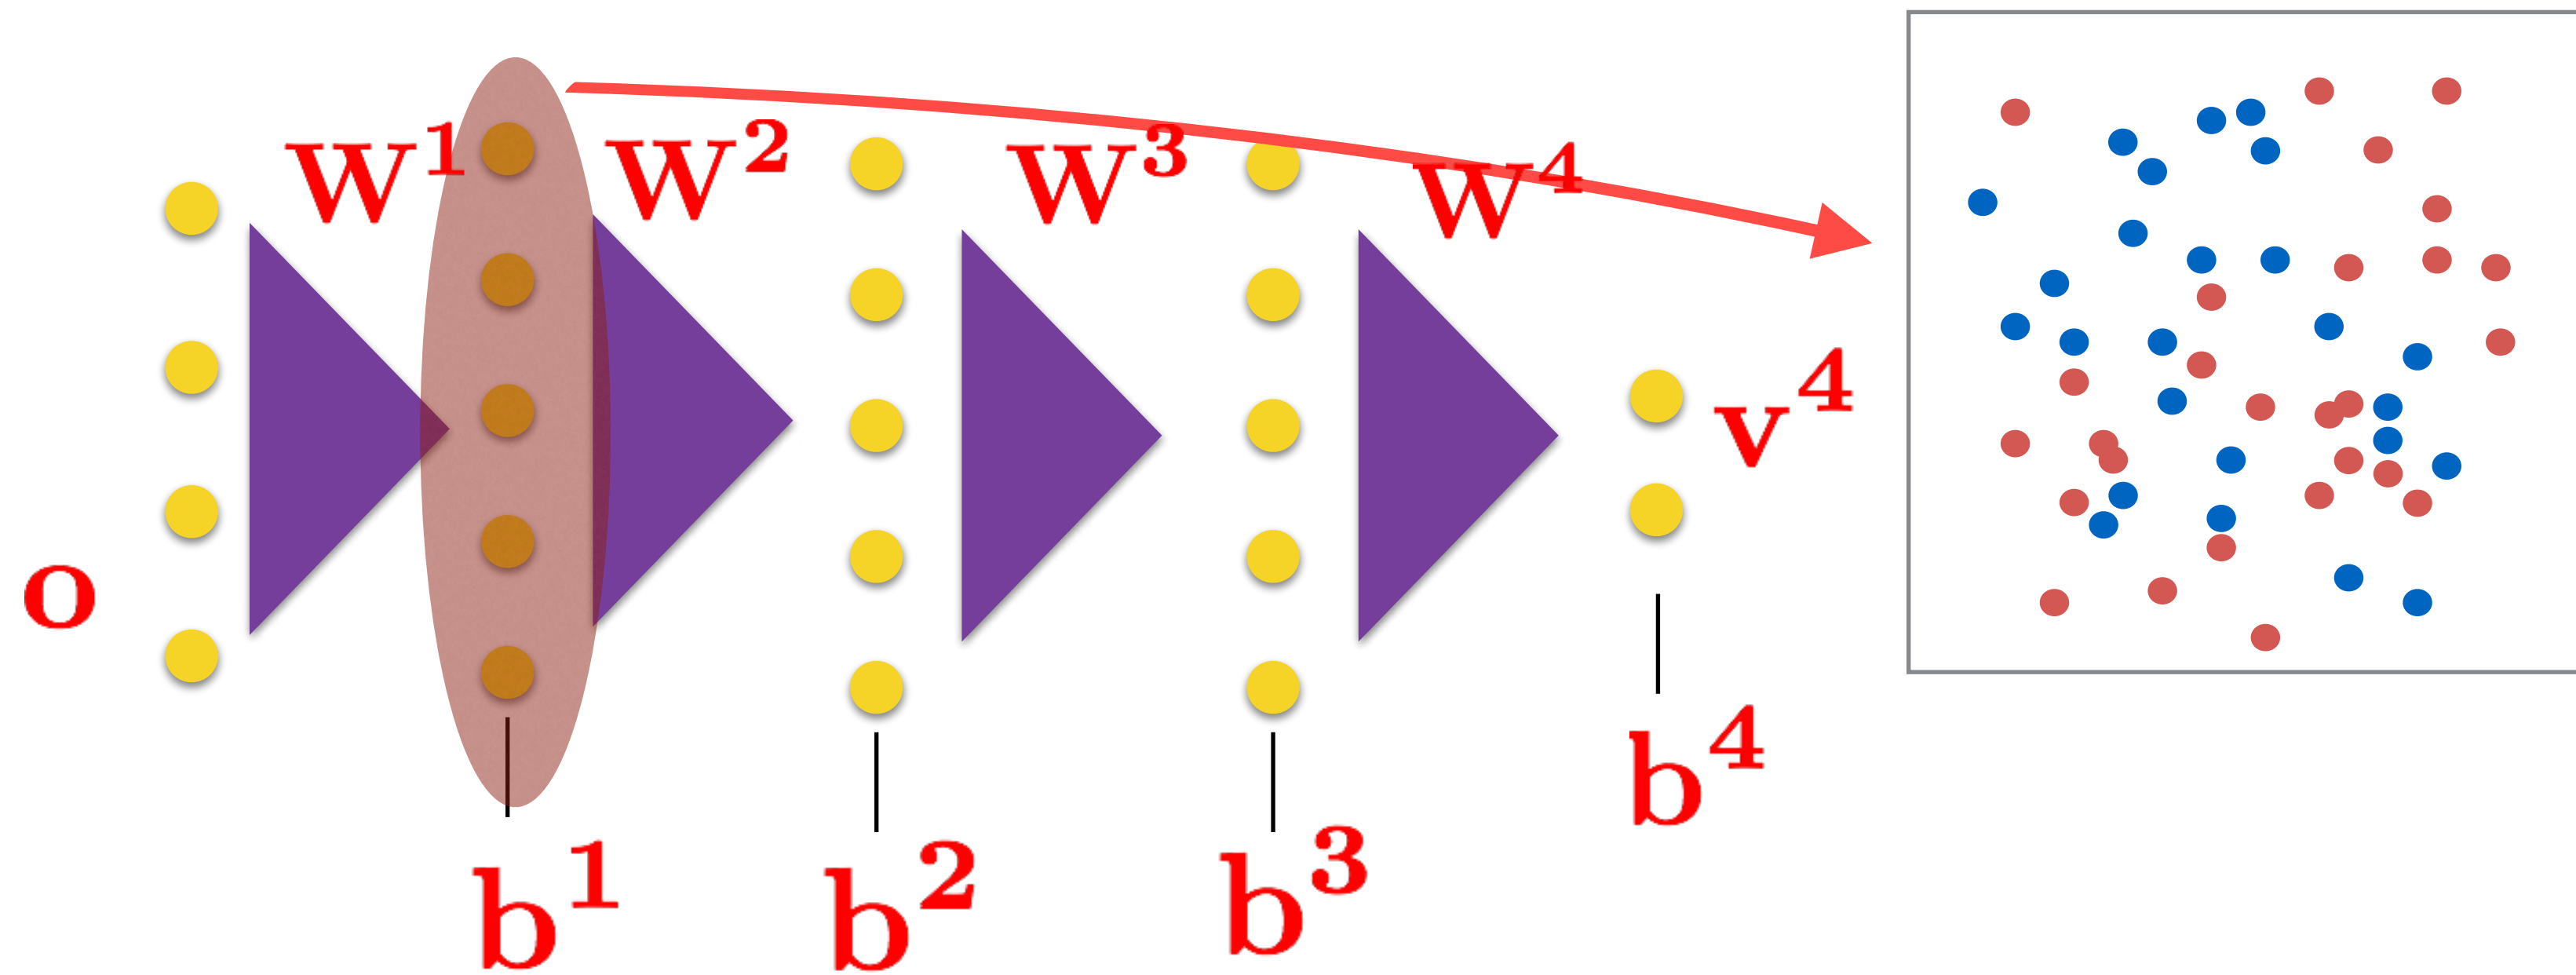


Neural networks with multiple hidden layers - Deep networks

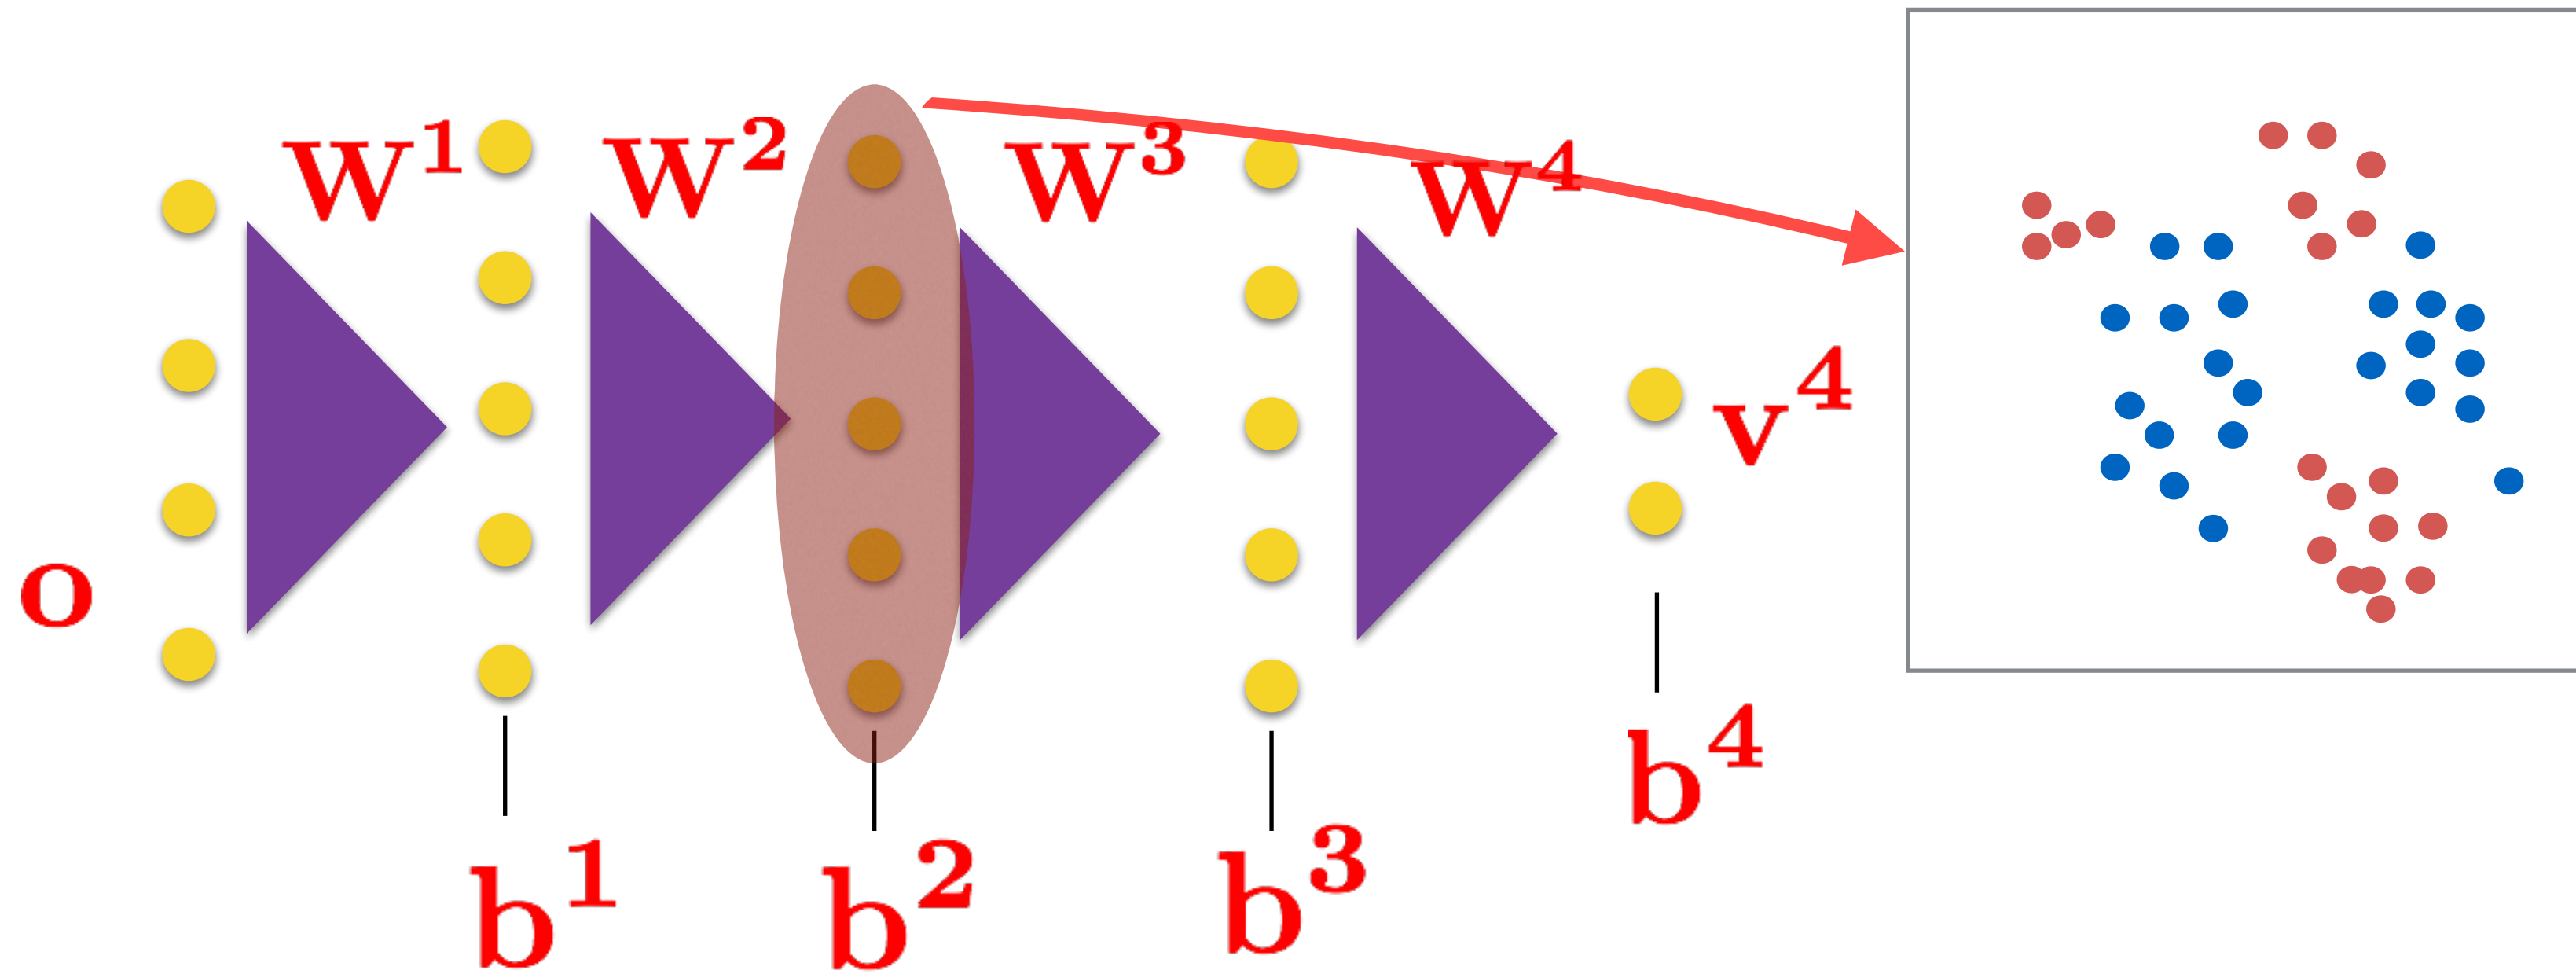


DEEP NEURAL NETWORKS

Neural networks with multiple hidden layers - Deep networks

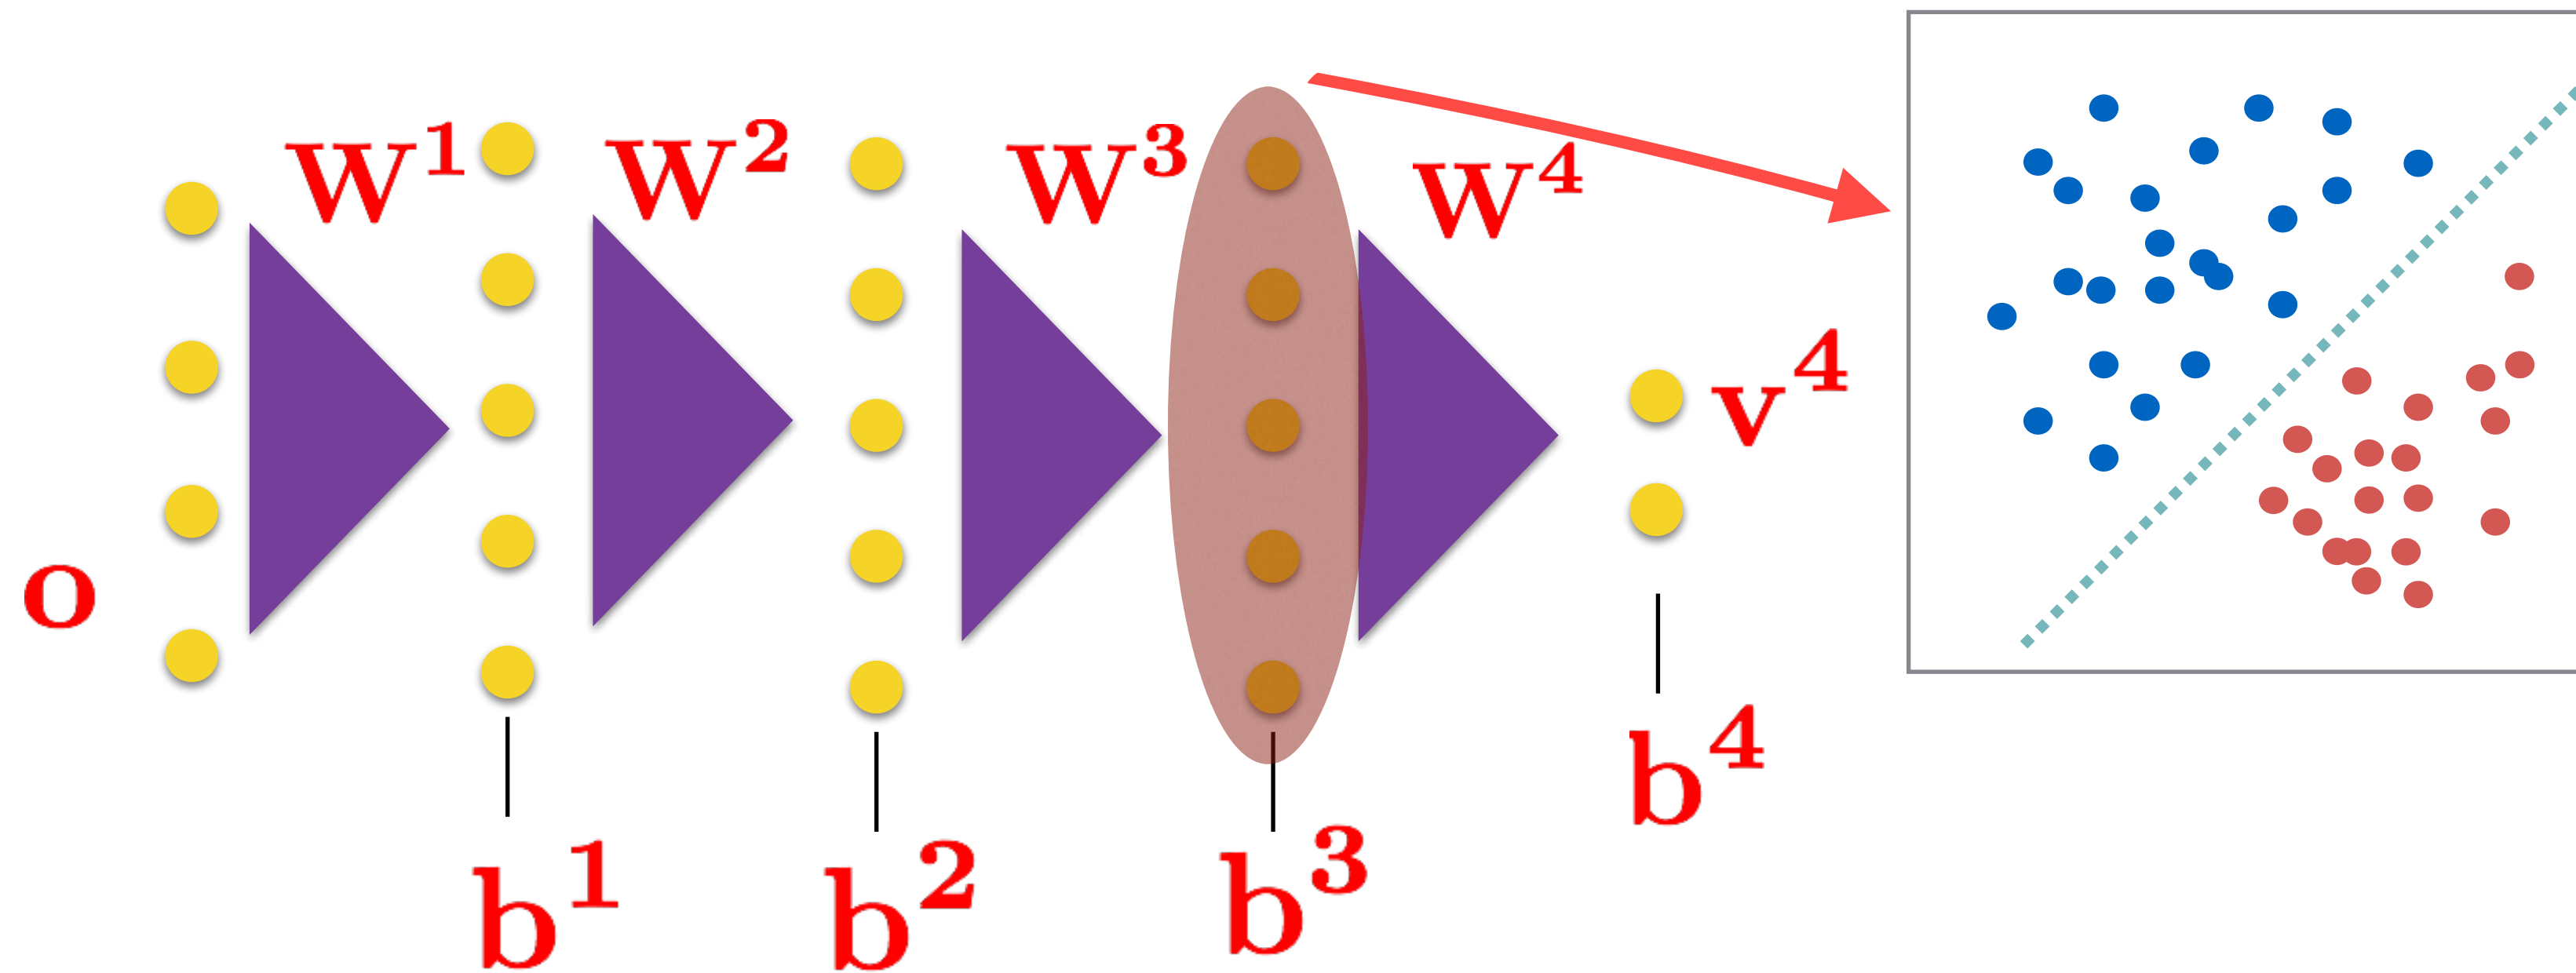

Deep networks perform **hierarchical data abstractions** which enable the non-linear separation of complex data samples.


Need for Depth

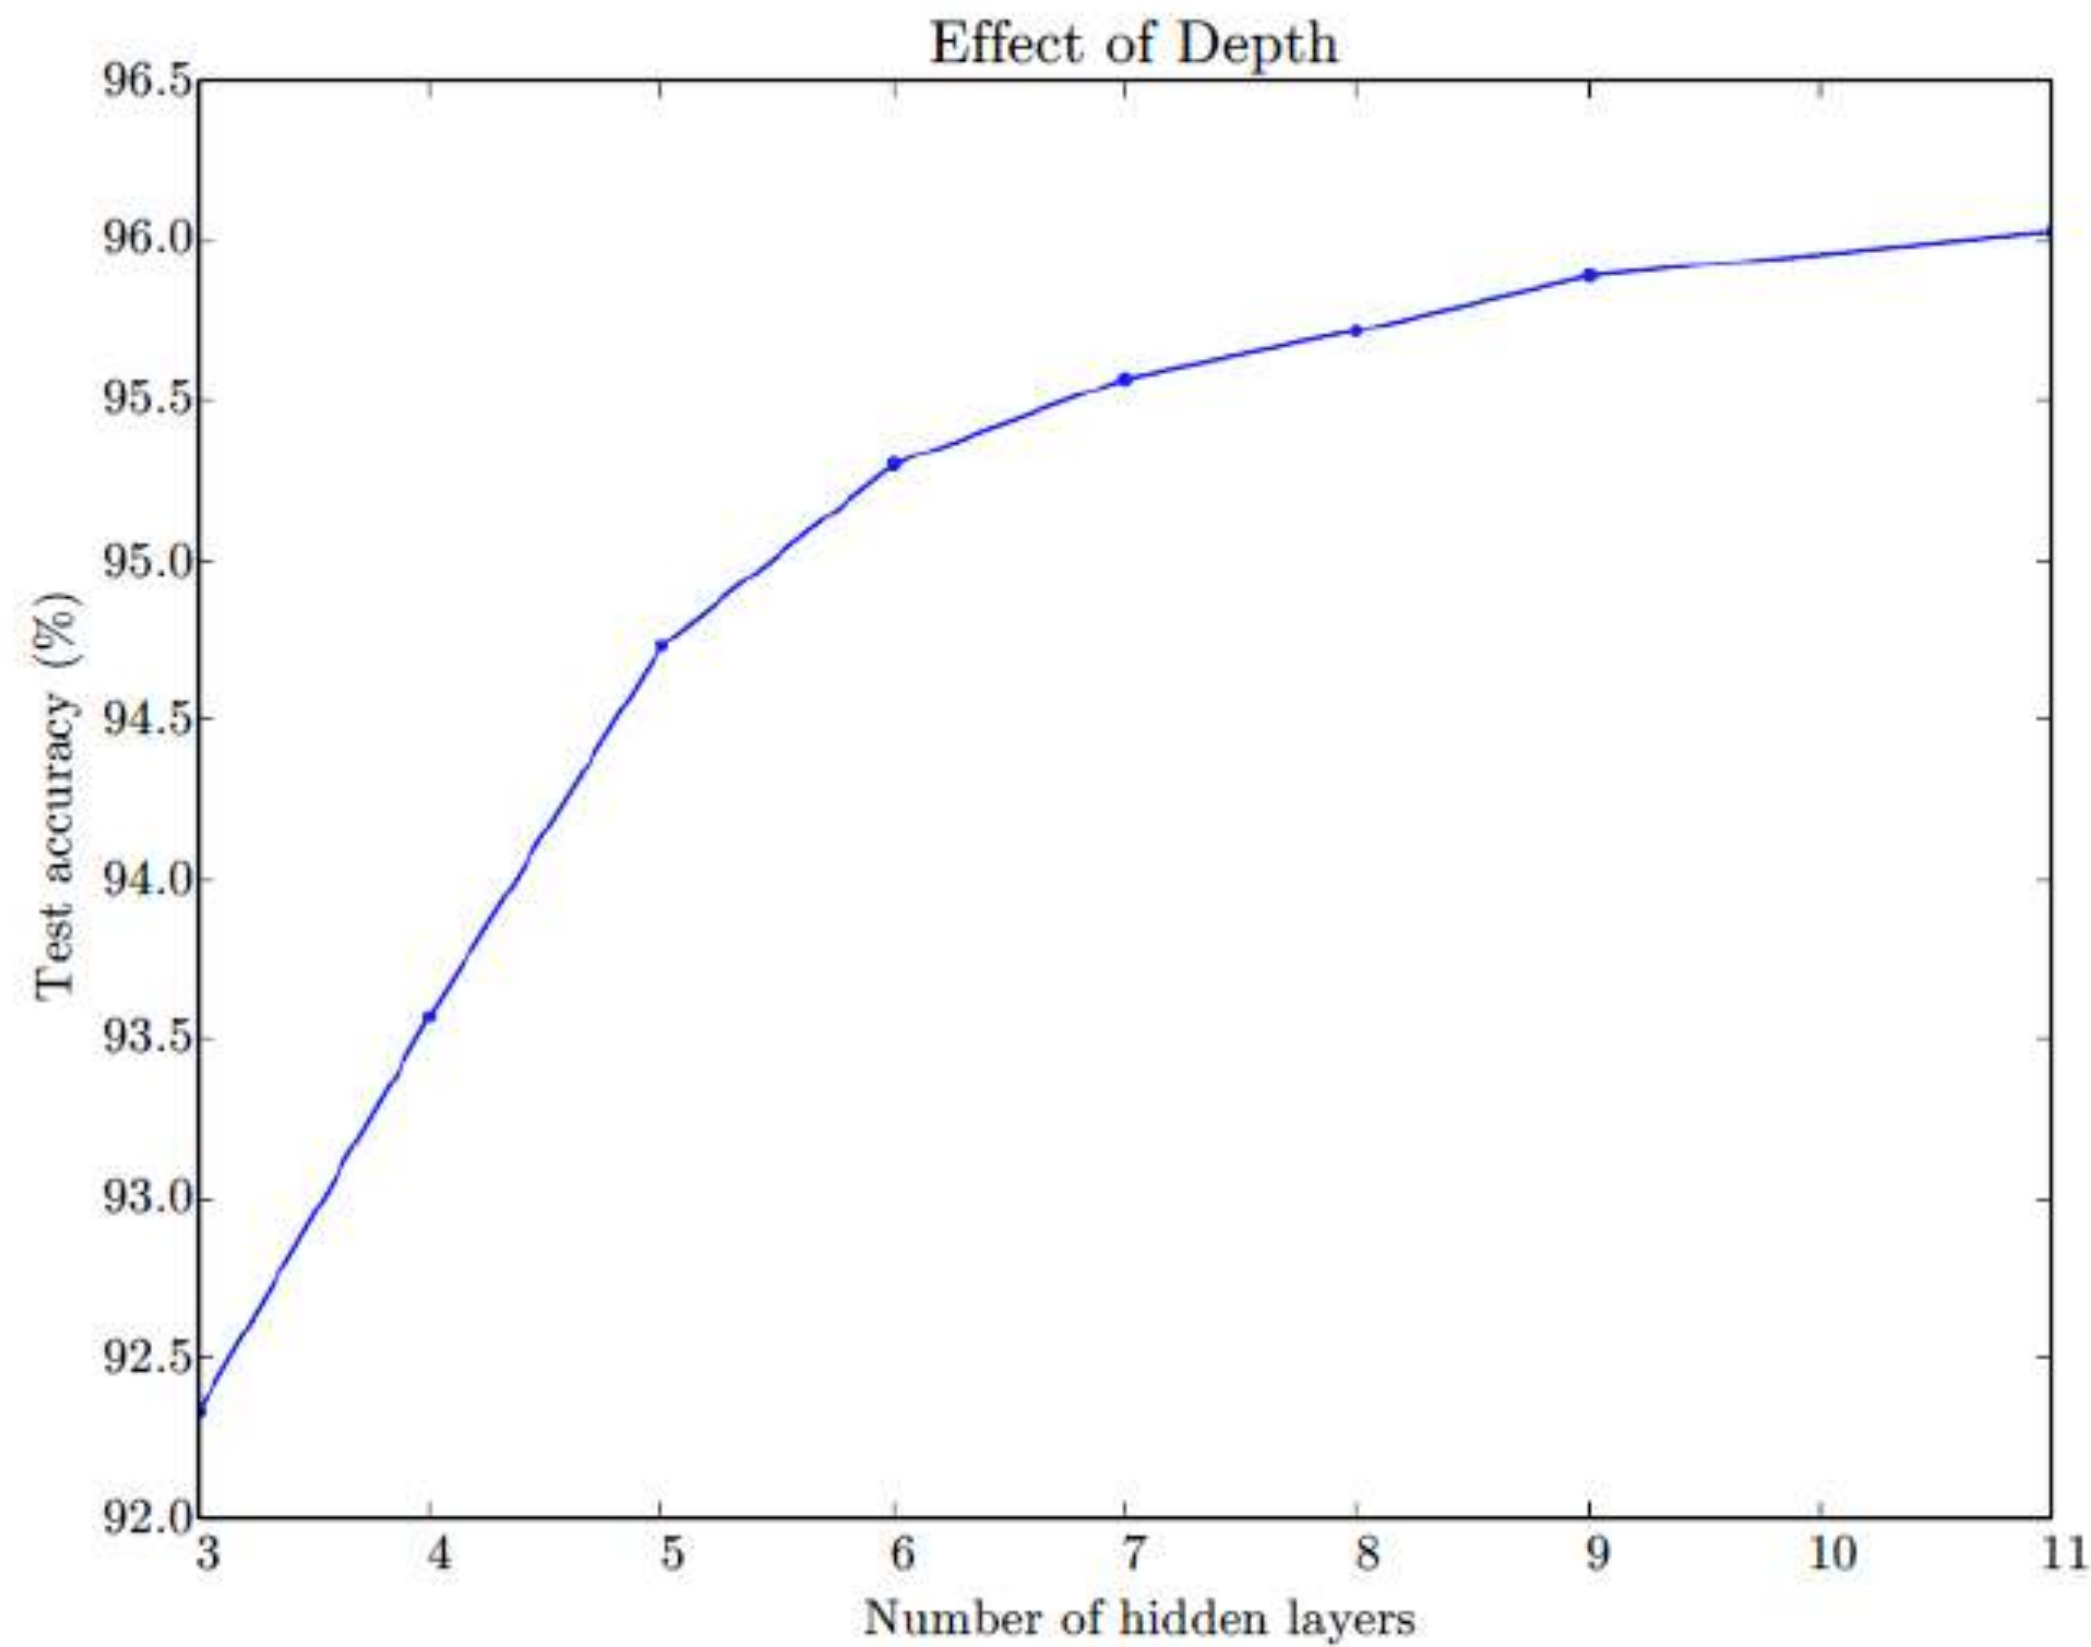

$$\mathbf{h}^{(1)} = g^{(1)} \left(\mathbf{W}^{(1)\top} \mathbf{x} + \mathbf{b}^{(1)} \right)$$

$$\mathbf{h}^{(2)} = g^{(2)} \left(\mathbf{W}^{(2)\top} \mathbf{h}^{(1)} + \mathbf{b}^{(2)} \right)$$

DEEP NEURAL NETWORKS

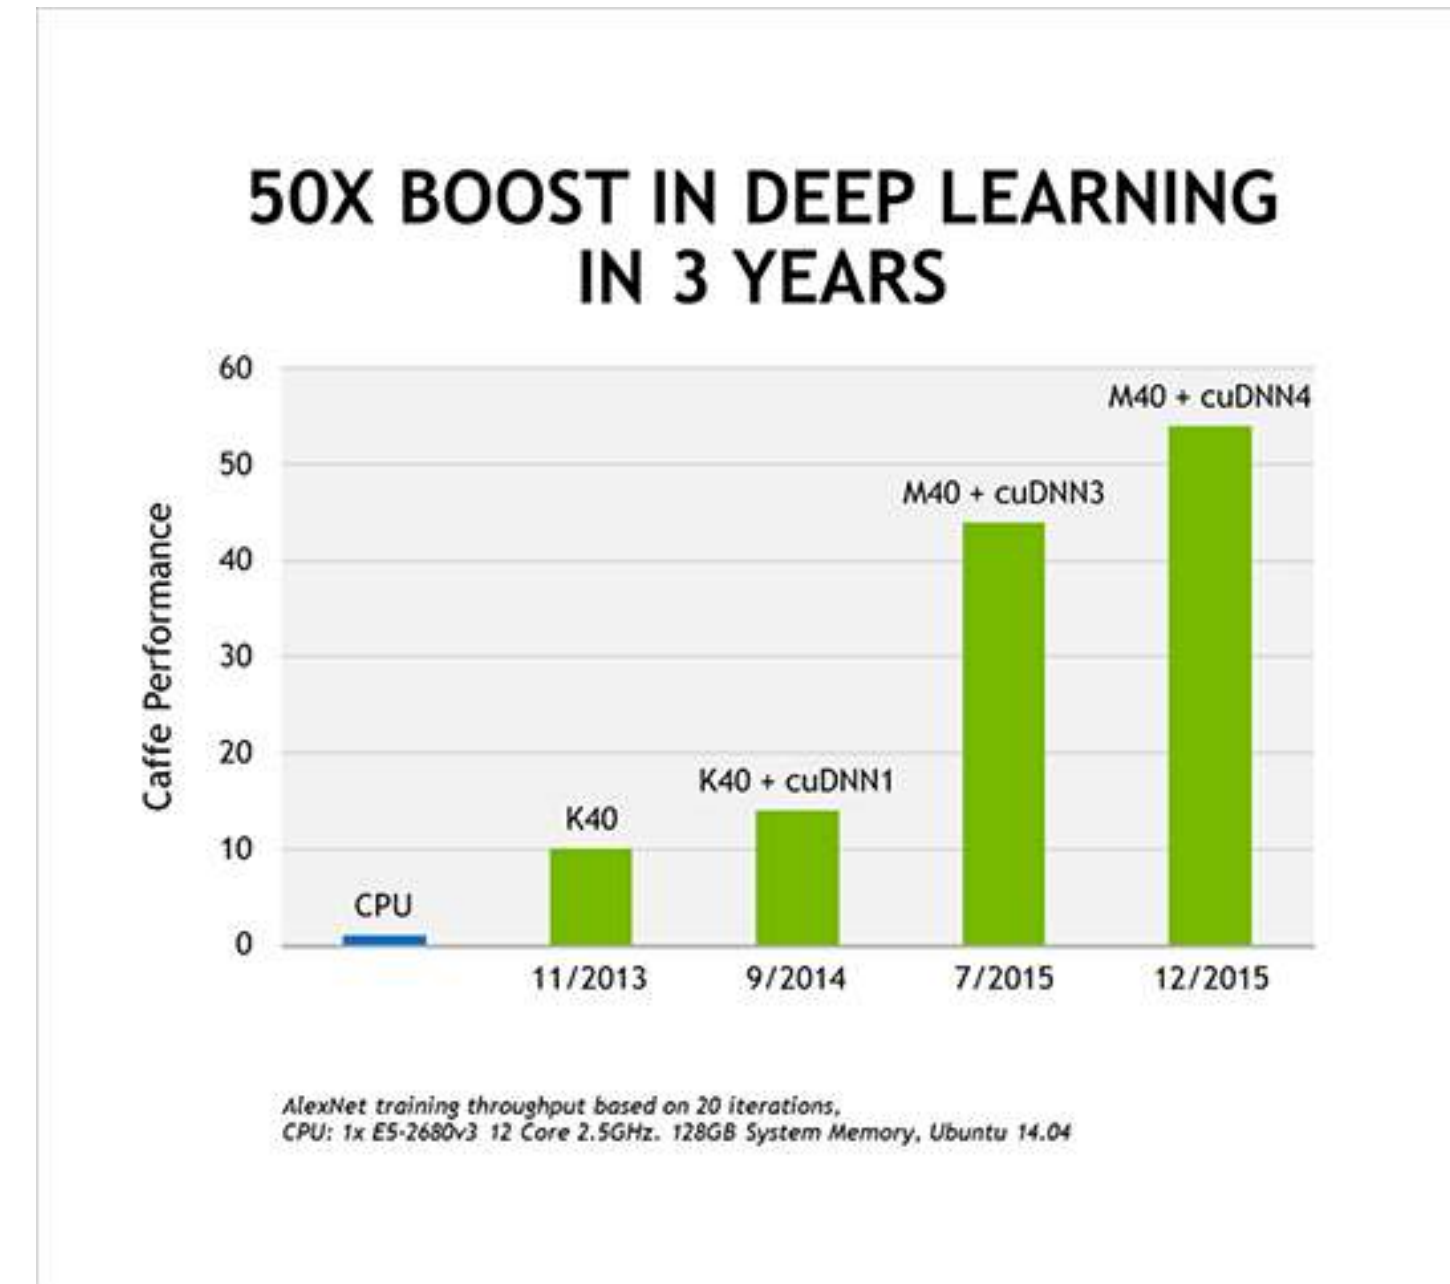

- Are these networks trainable ?
 - Advances in computation and processing
 - **Graphical processing units** (GPUs) performing multiple parallel multiply accumulate operations.
 - Large amounts of supervised data sets

DEEP NEURAL NETWORKS

- Will the networks **generalize** with deep networks
 - DNNs are **quite data hungry** and performance improves by increasing the data.
 - Generalization problem is tackled by **providing training data from all possible conditions.**
 - Many artificial data augmentation methods have been successfully deployed
 - Providing the **state-of-art performance in several real world applications.**

Representation Learning in Deep Networks

- The input data representation is one of most important components of any machine learning system.
 - Extract factors that enable classification while suppressing factors which are susceptible to noise.
- Finding the right representation for real world applications - substantially challenging.
 - Deep learning solution - **build complex representations from simpler representations.**
 - The dependencies between these hierarchical representations are refined by the target.

THANK YOU

Sriram Ganapathy and TA team
LEAP lab, C328, EE, IISc
sriramg@iisc.ac.in

