

E9 205 Machine Learning for Signal Processing

MLE for Gaussian Mixture Model

10-09-2018

Instructor - Sriram Ganapathy (sriramg@iisc.ac.in)

Teaching Assistant - Akshara Soman (aksharas@iisc.ac.in)



Expectation Maximization Algorithm

- Iterative procedure.
- Assume the existence of hidden variable $\mathbf{z}_i$ associated with each data sample $\mathbf{x}_i$
- Let the current estimate (at iteration n) be Θ^n
Define the Q function as

$$\begin{aligned} Q(\Theta, \Theta^n) &= E_{\mathbf{z}|\mathbf{X}, \Theta^n} [\log(P(\mathbf{X}, \mathbf{z}|\Theta))] \\ &= \sum_{\mathbf{z}} \log(P(\mathbf{X}, \mathbf{z}|\Theta)) P(\mathbf{z}|\mathbf{X}, \Theta^n) \end{aligned}$$

Expectation Maximization Algorithm

- It can be proven that if we choose

$$\Theta^{n+1} = \arg \max_{\Theta} Q(\Theta, \Theta^n)$$

then $L(\Theta^{n+1}) \geq L(\Theta^n)$

- In many cases, finding the maximum for the Q function **may be easier** than likelihood function w.r.t. the parameters.
- Solution is dependent on finding **a good choice of the hidden variables** which eases the computation
- **Iteratively** improve the log-likelihood function.

EM Algorithm Summary

- Initialize with a set of model parameters ($n=1$)
- Compute the conditional expectation (E-step)

$$E_{\mathbf{z}|\mathbf{X}, \Theta^n} [\log(P(\mathbf{X}, \mathbf{z}|\Theta))]$$

- Maximize the conditional expectation w.r.t. parameter. (M-step) ($n = n+1$)
- Check for convergence
- Go back to E-step if model has not converged.

EM Algorithm for GMM

- The hidden variables $\mathbf{z}_i = l$ will be the index of the mixture component which generated $\mathbf{x}_i$
- Re-estimation formulae


$$\alpha_\ell^{new} = \frac{1}{N} \sum_{i=1}^N p(\ell|x_i, \Theta^g)$$

$$\mu_\ell^{new} = \frac{\sum_{i=1}^N x_i p(\ell|x_i, \Theta^g)}{\sum_{i=1}^N p(\ell|x_i, \Theta^g)}$$


$$\Sigma_\ell^{new} = \frac{\sum_{i=1}^N p(\ell|x_i, \Theta^g) (x_i - \mu_\ell^{new})(x_i - \mu_\ell^{new})^T}{\sum_{i=1}^N p(\ell|x_i, \Theta^g)}$$

EM Algorithm for GMM


E-step

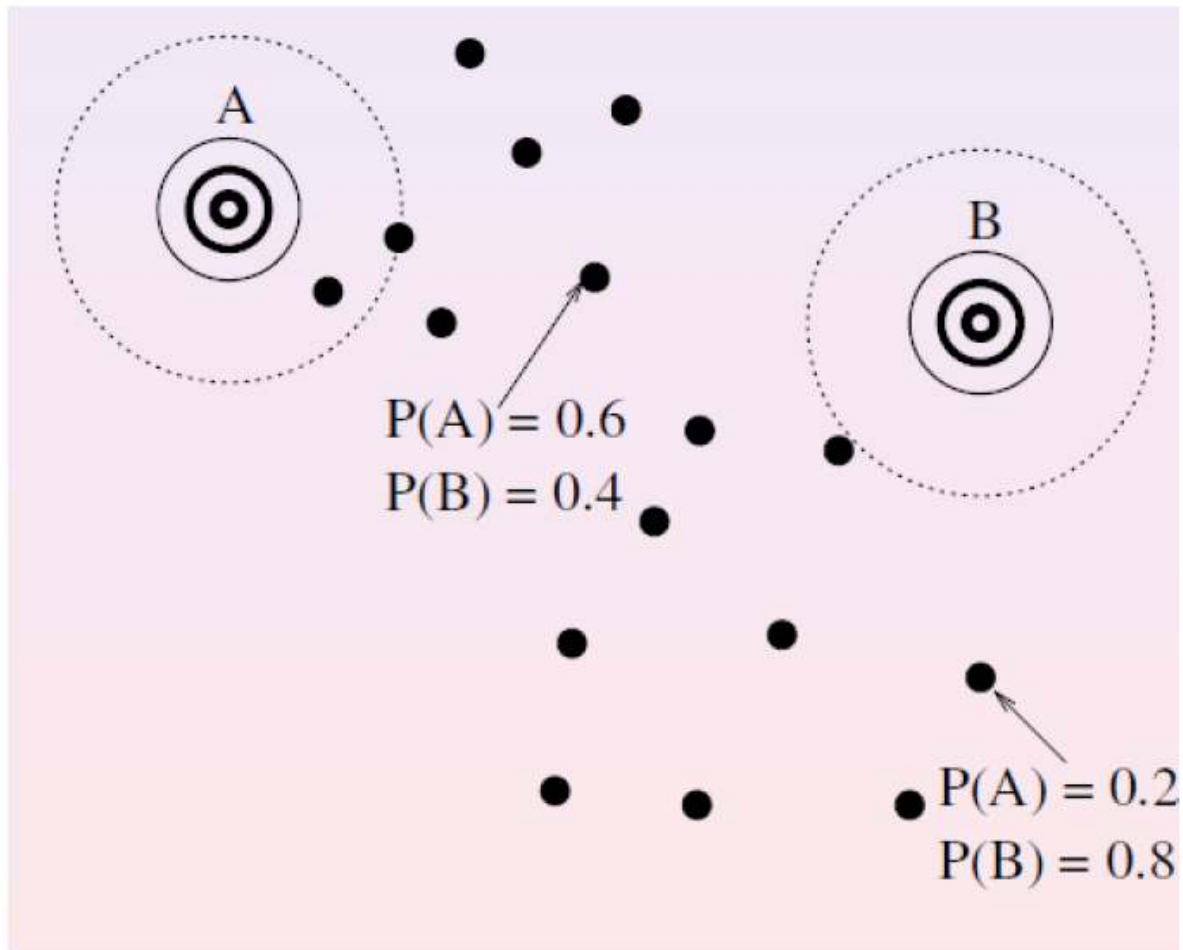


M-step

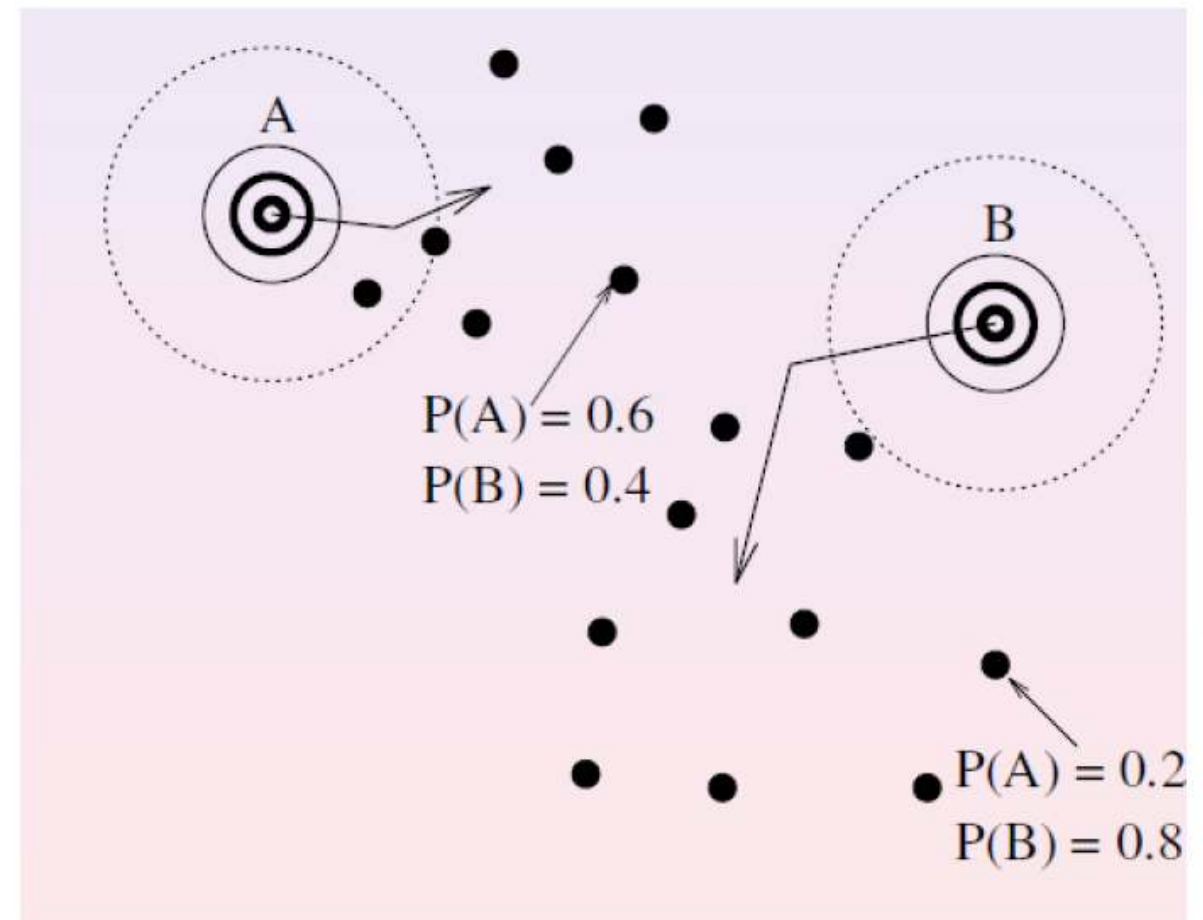


EM Algorithm for GMM

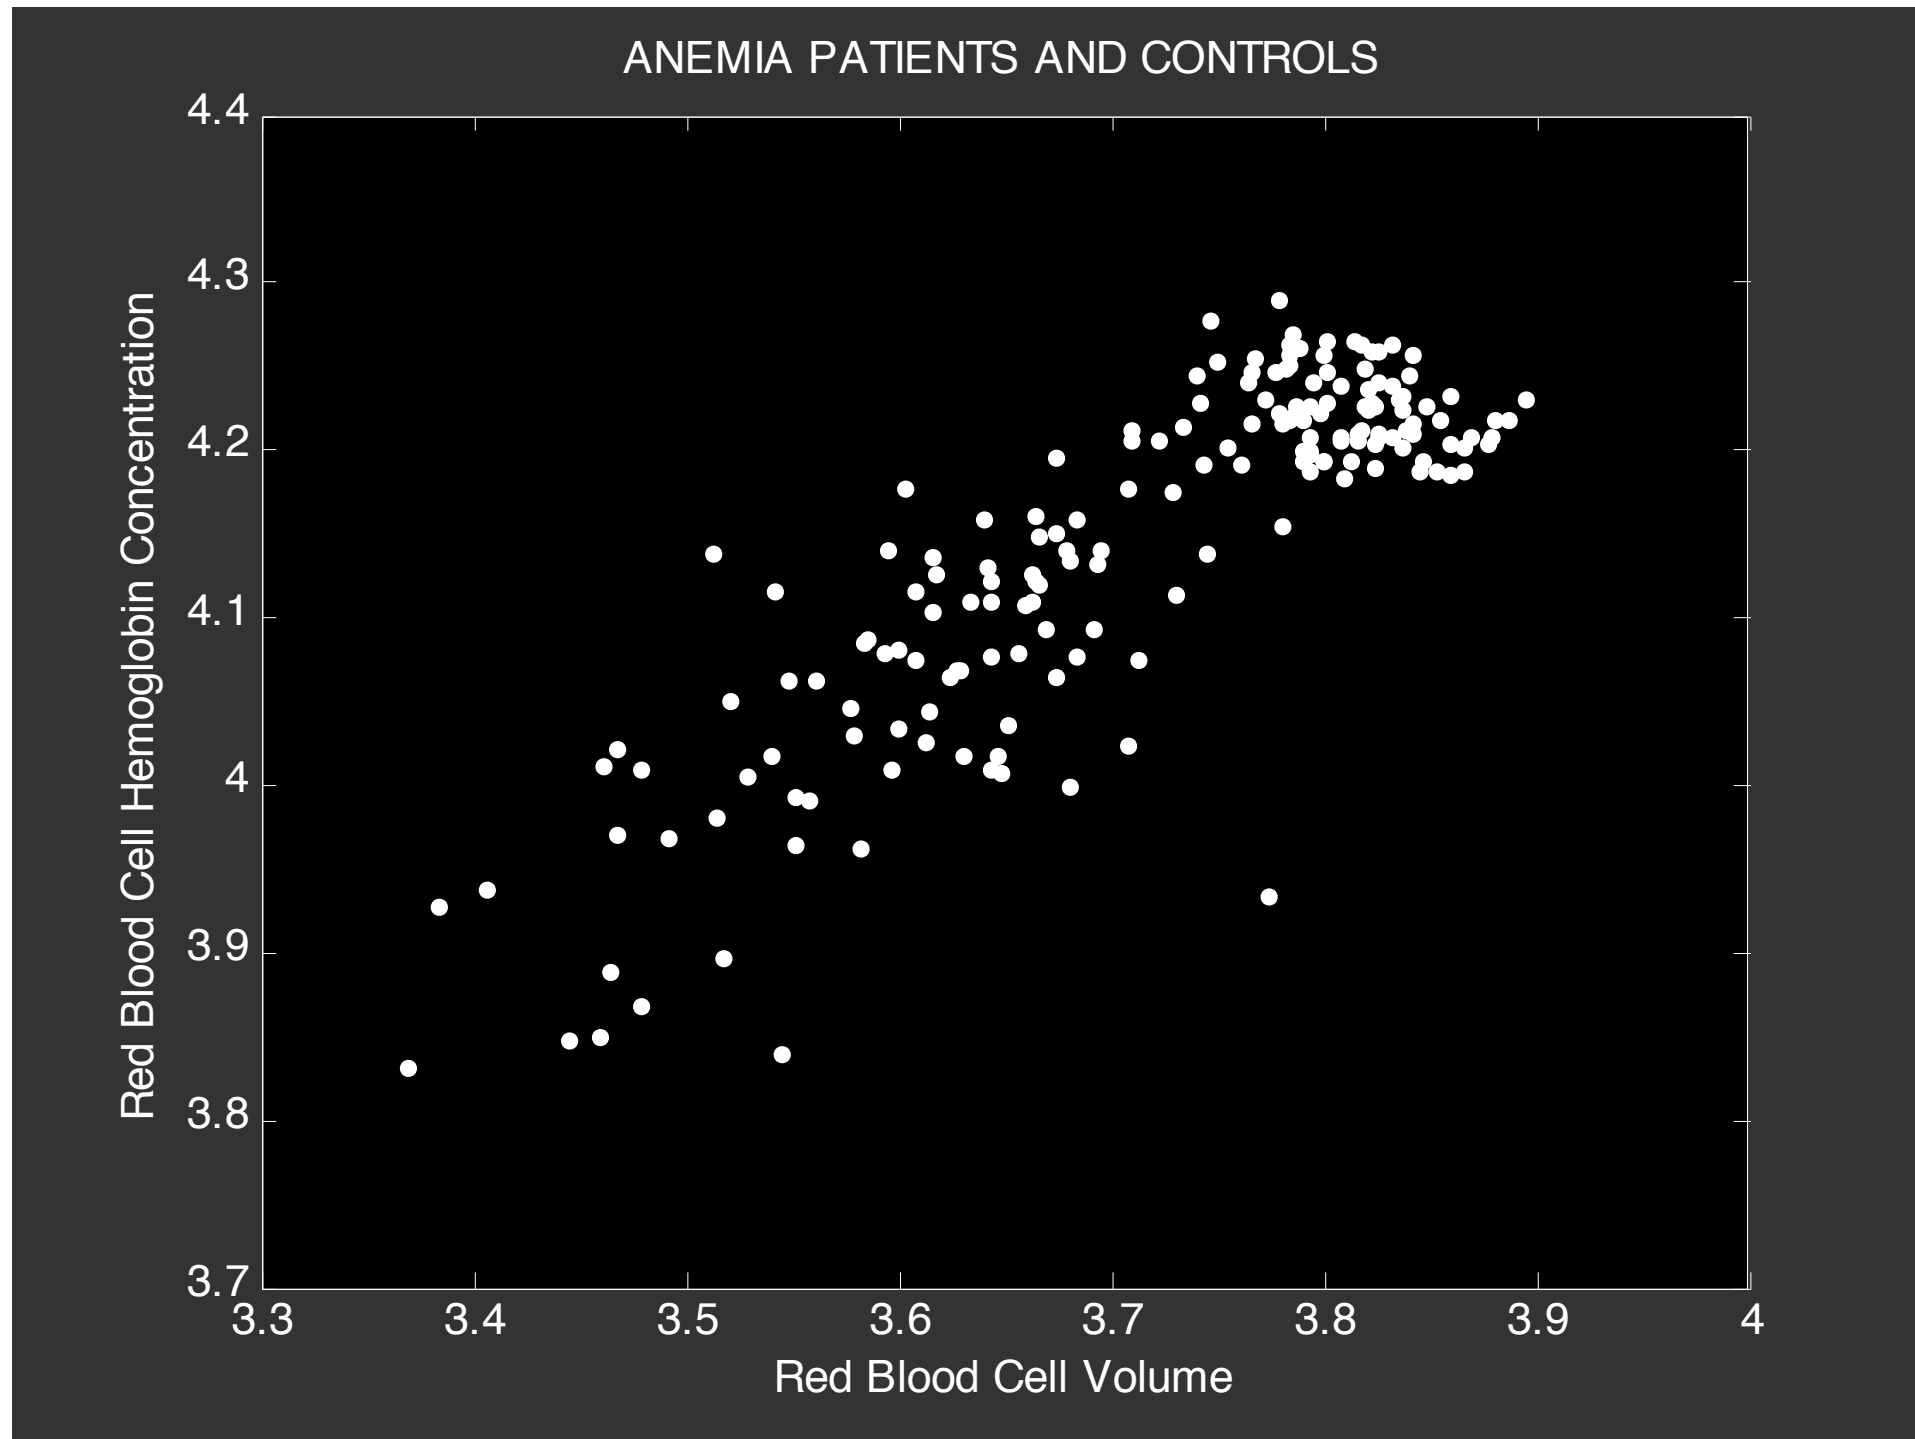


EM Algorithm for GMM

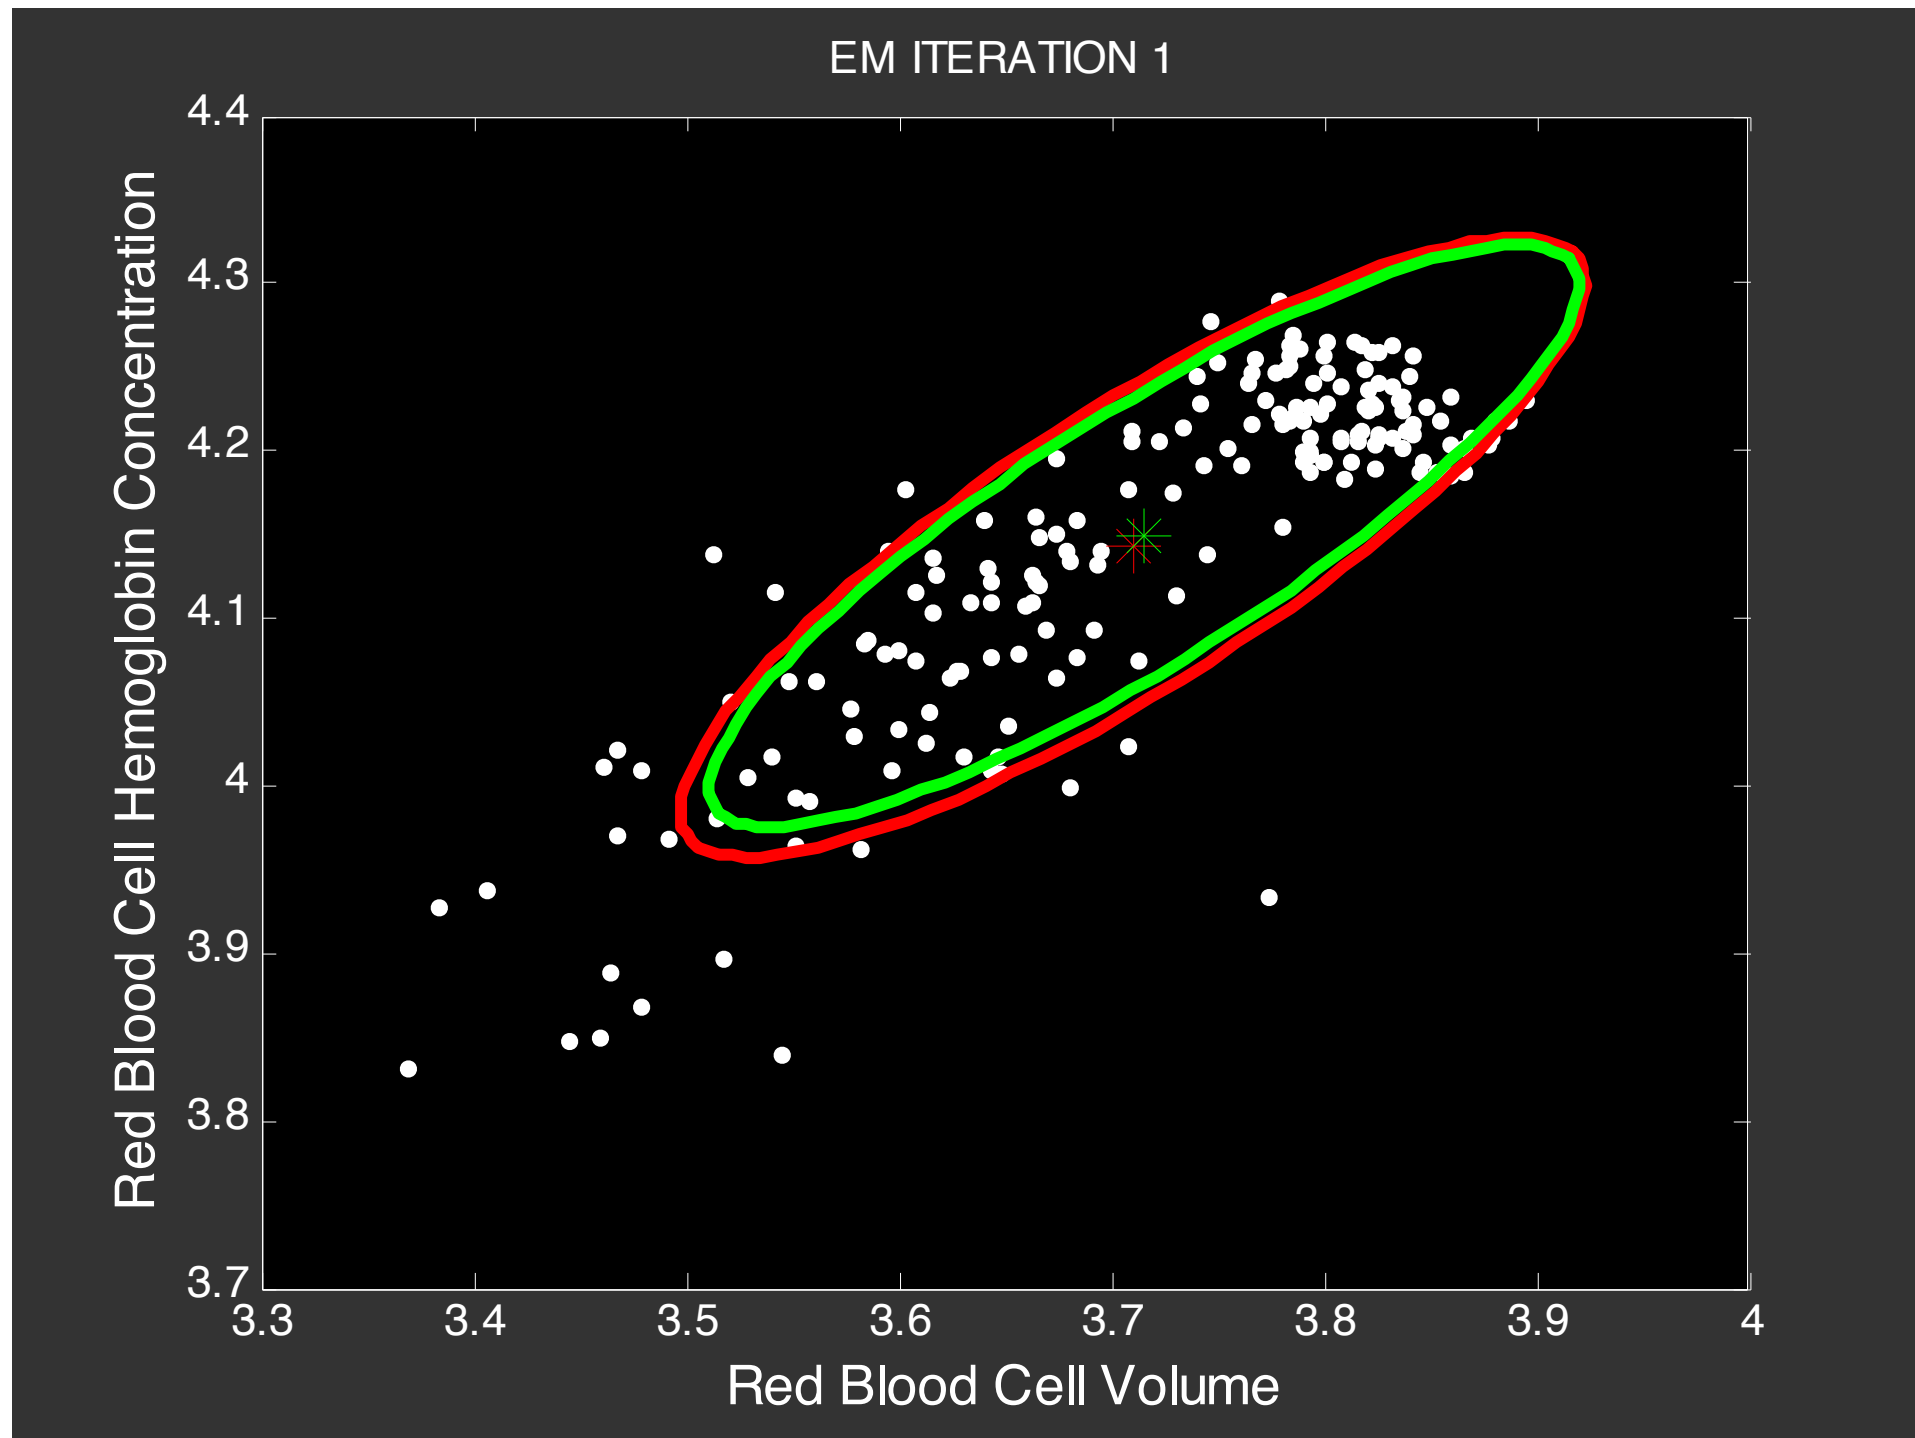


EM Algorithm for GMM

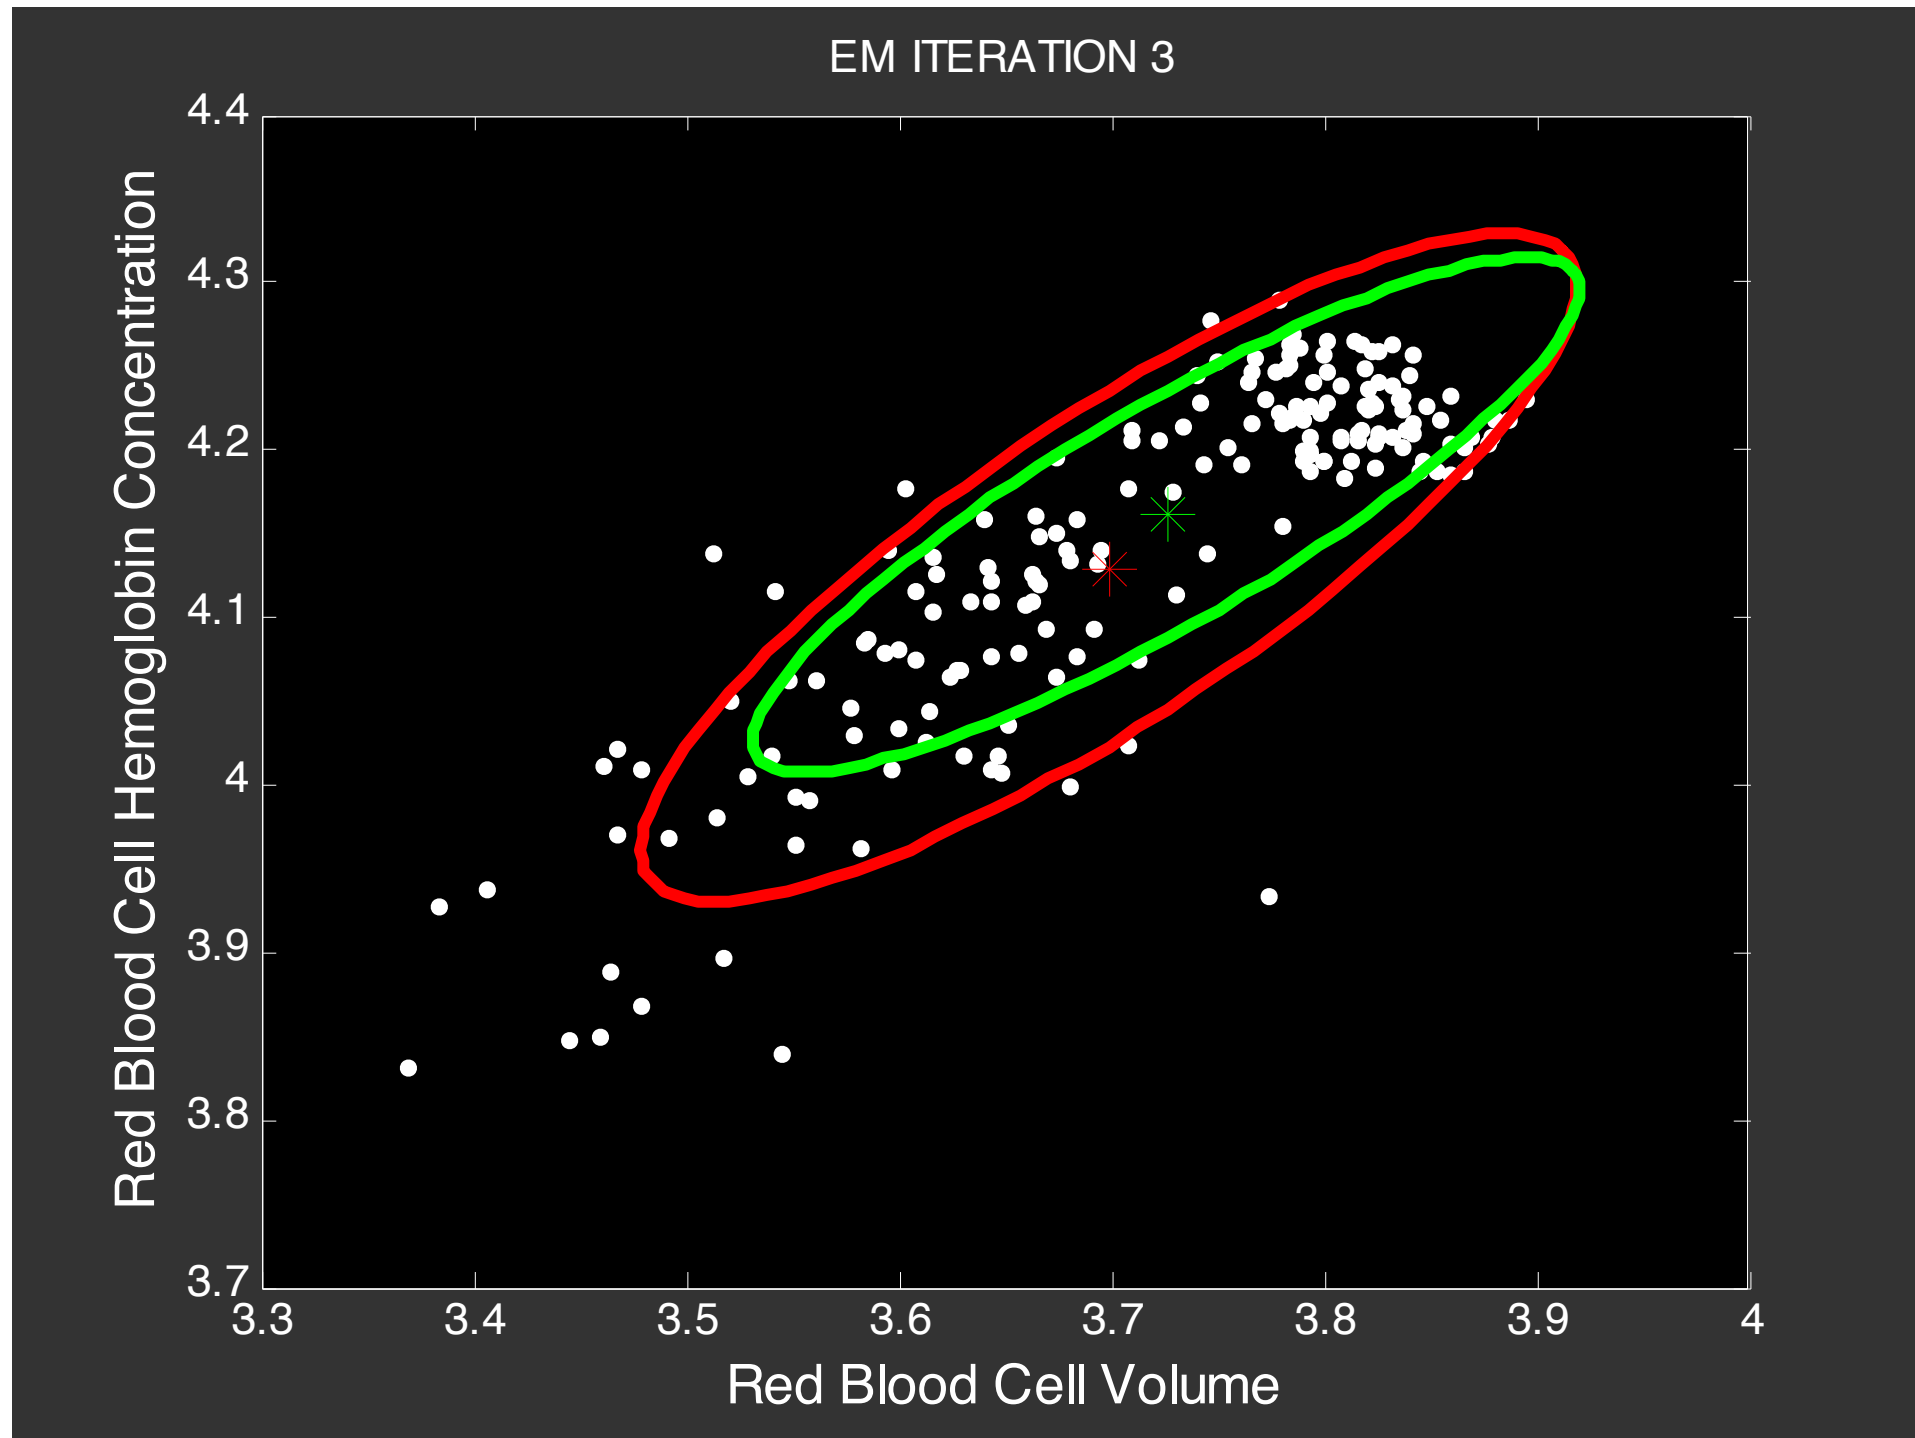


EM Algorithm for GMM

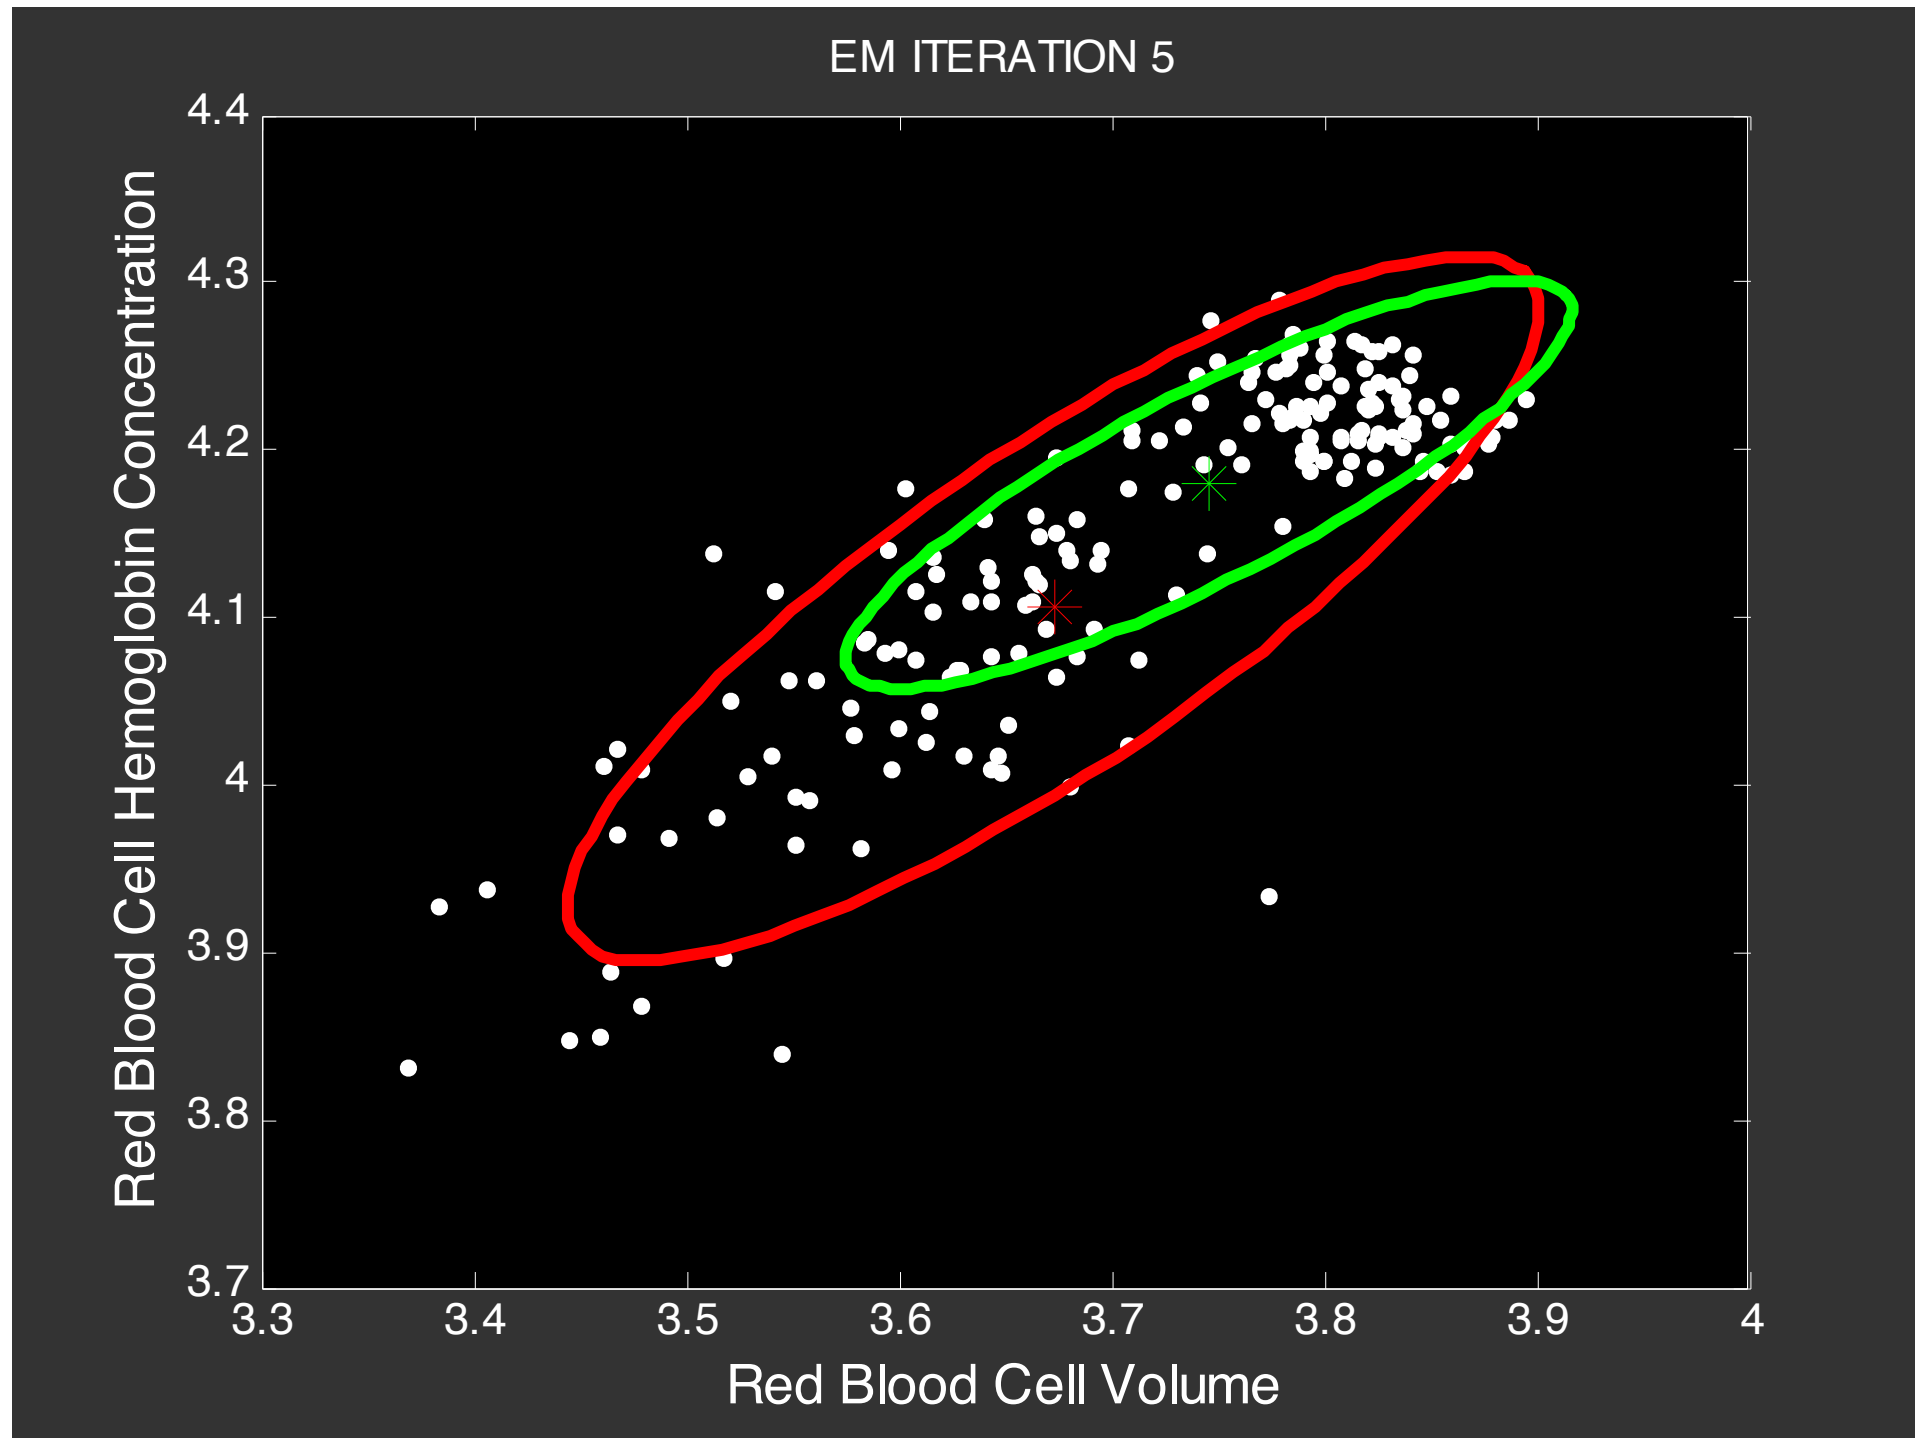


EM Algorithm for GMM

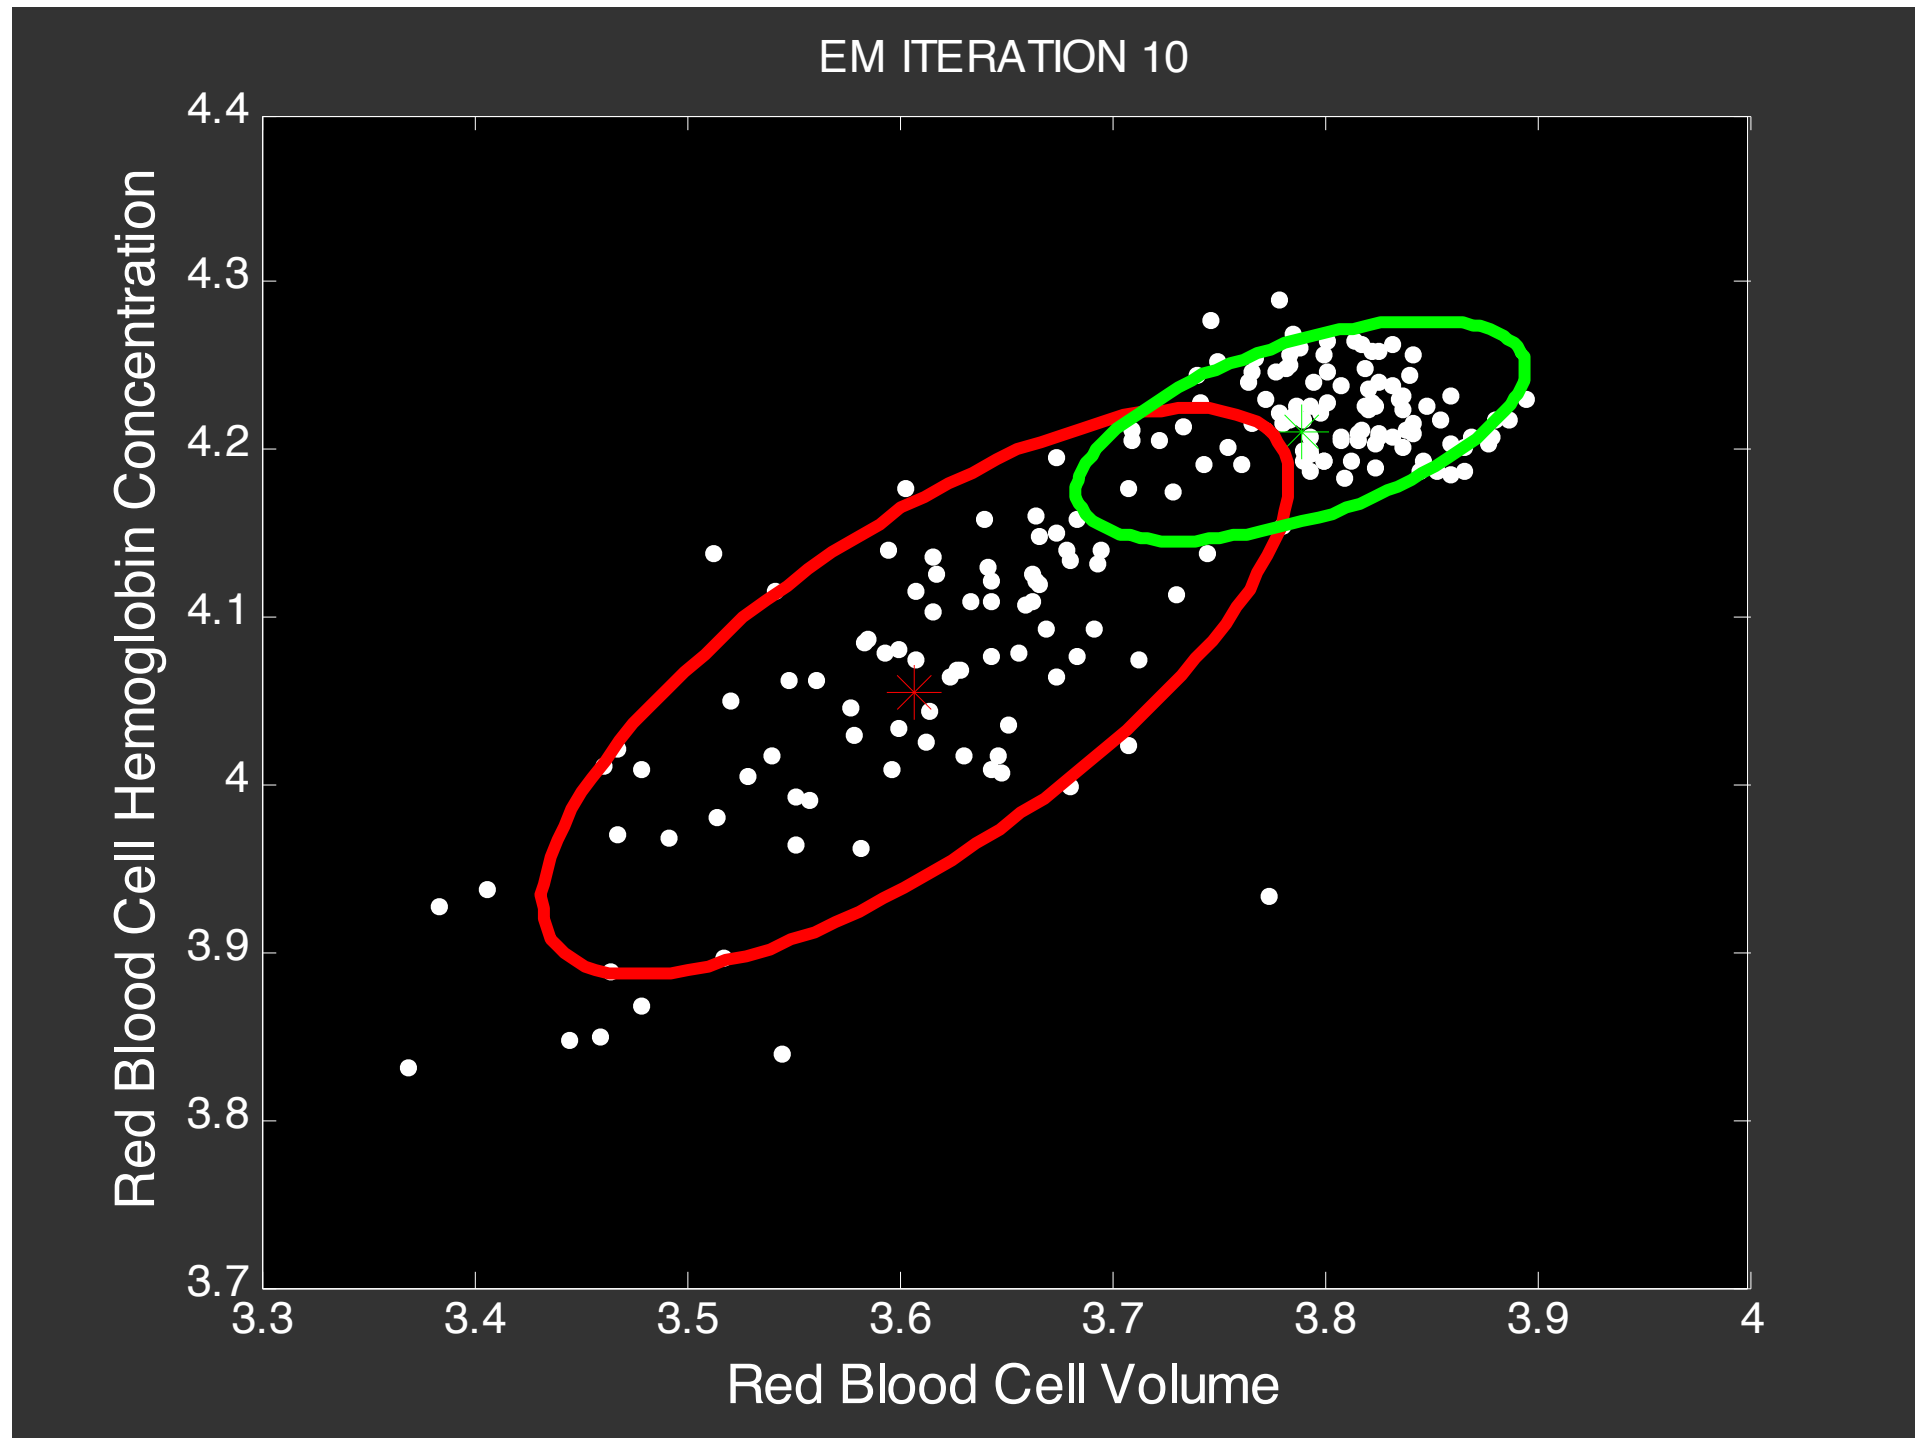


EM Algorithm for GMM

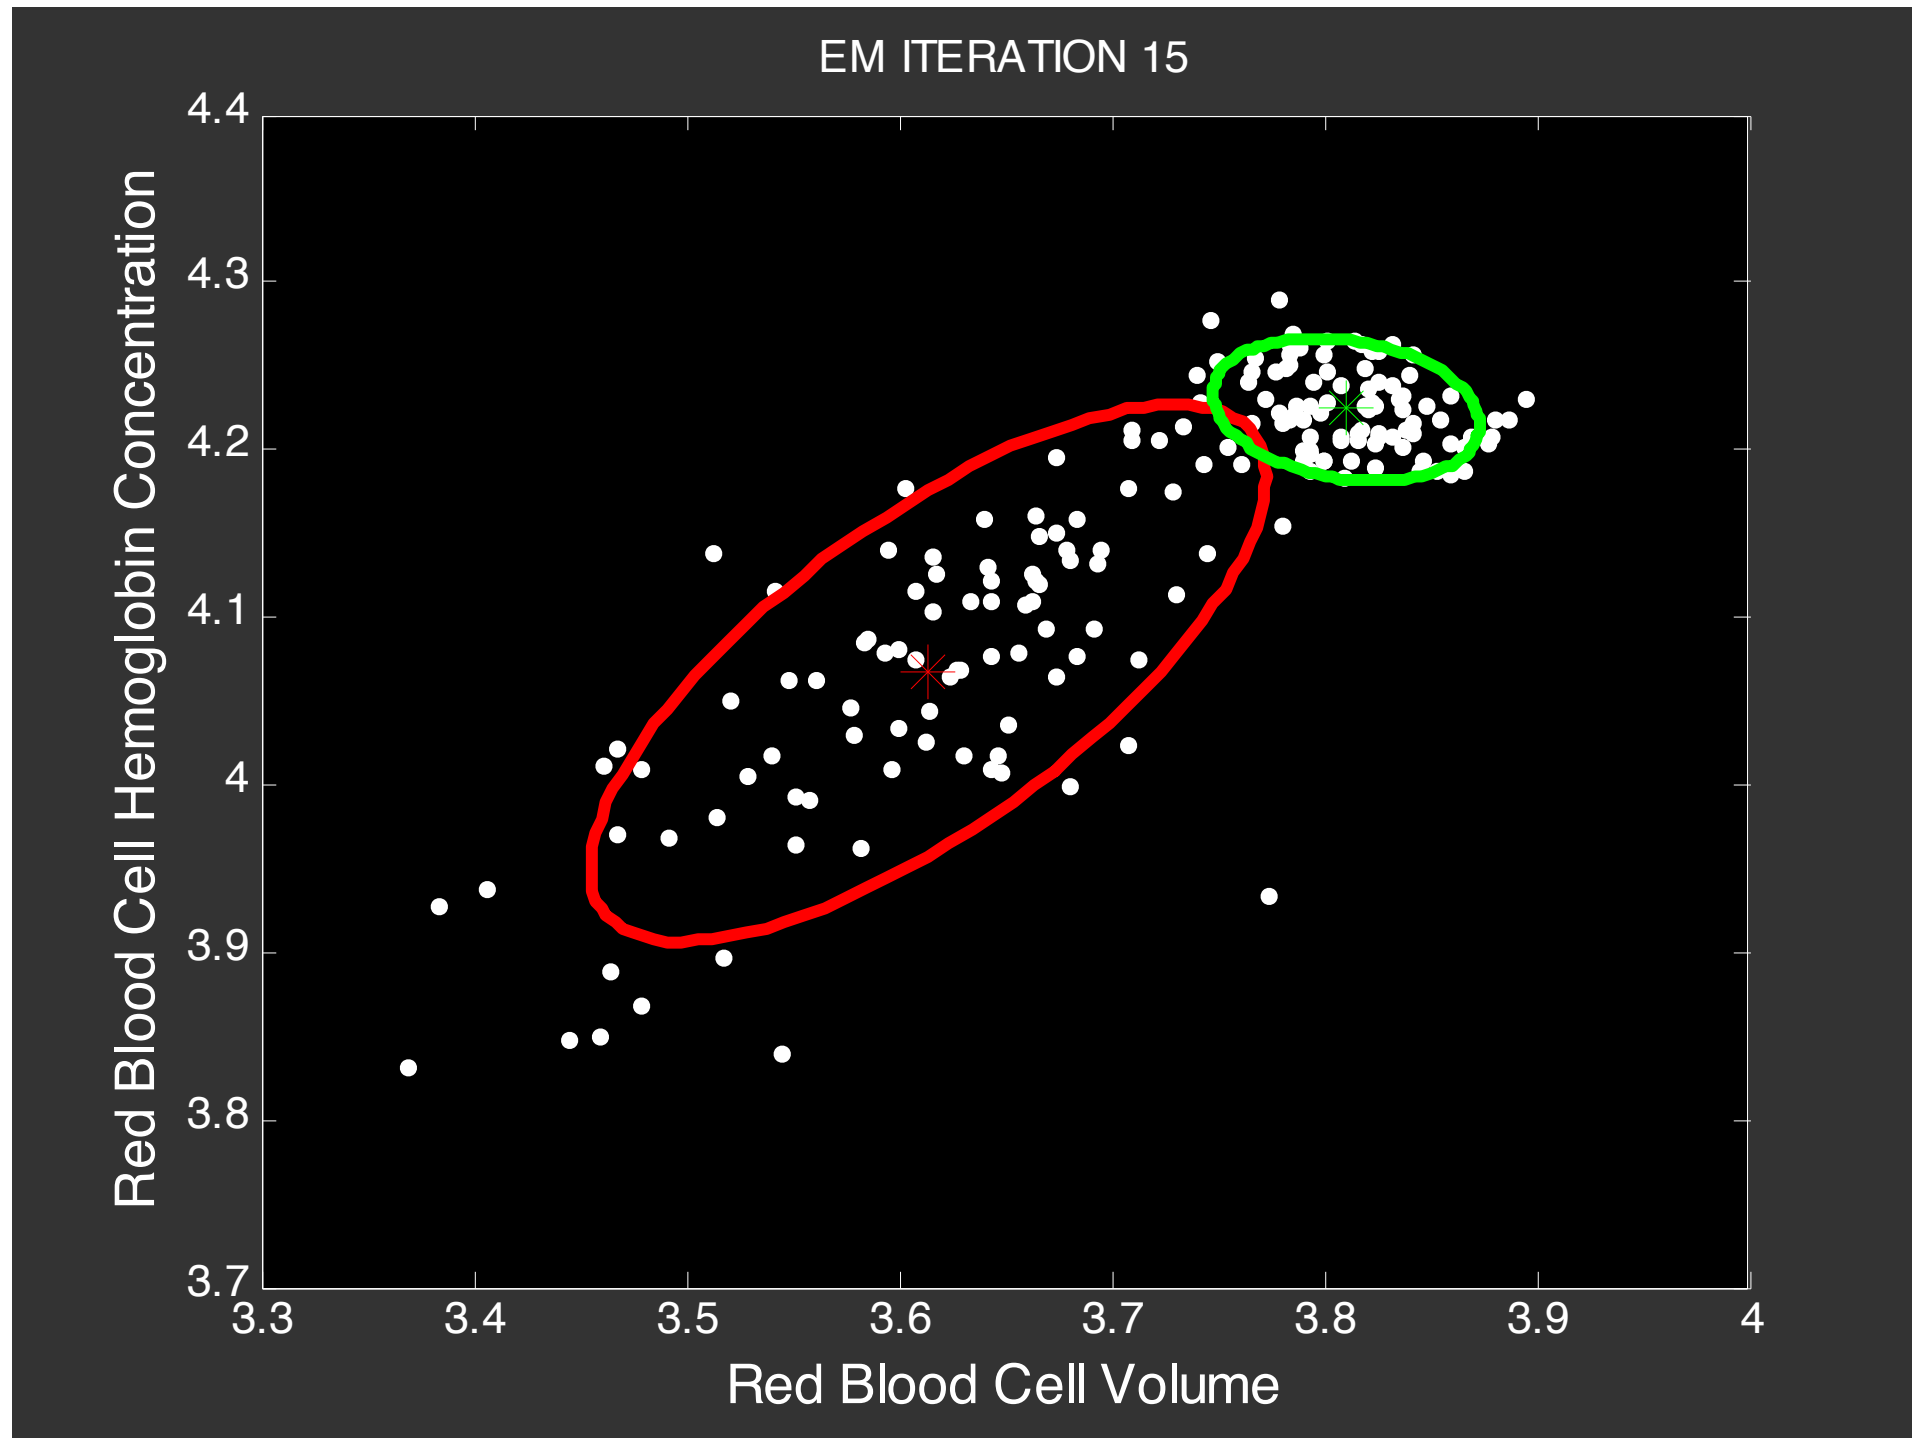


EM Algorithm for GMM

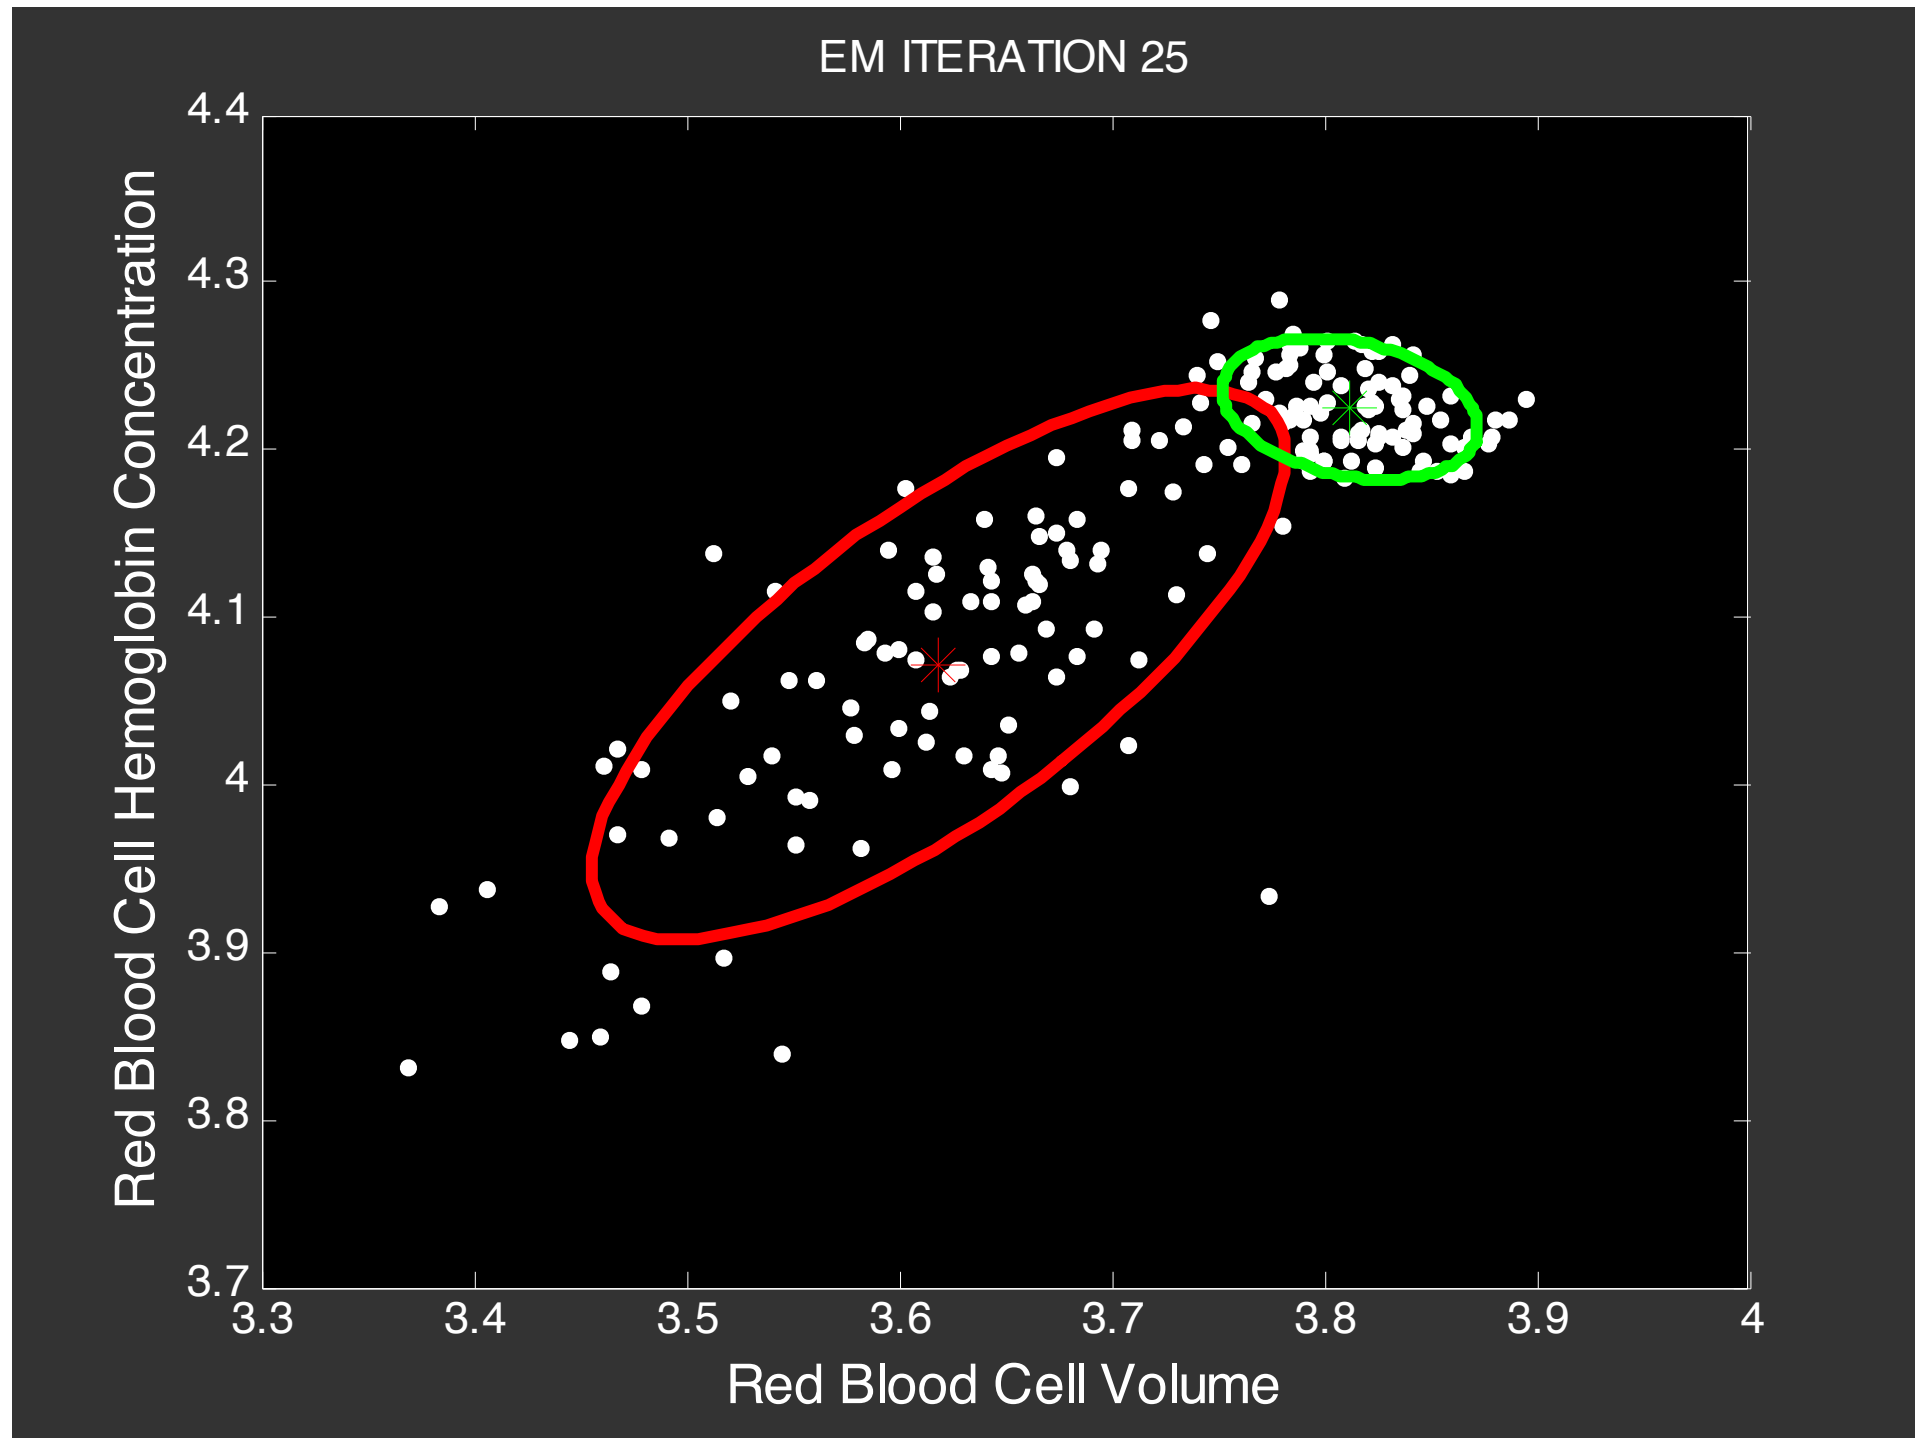

EM Algorithm for GMM

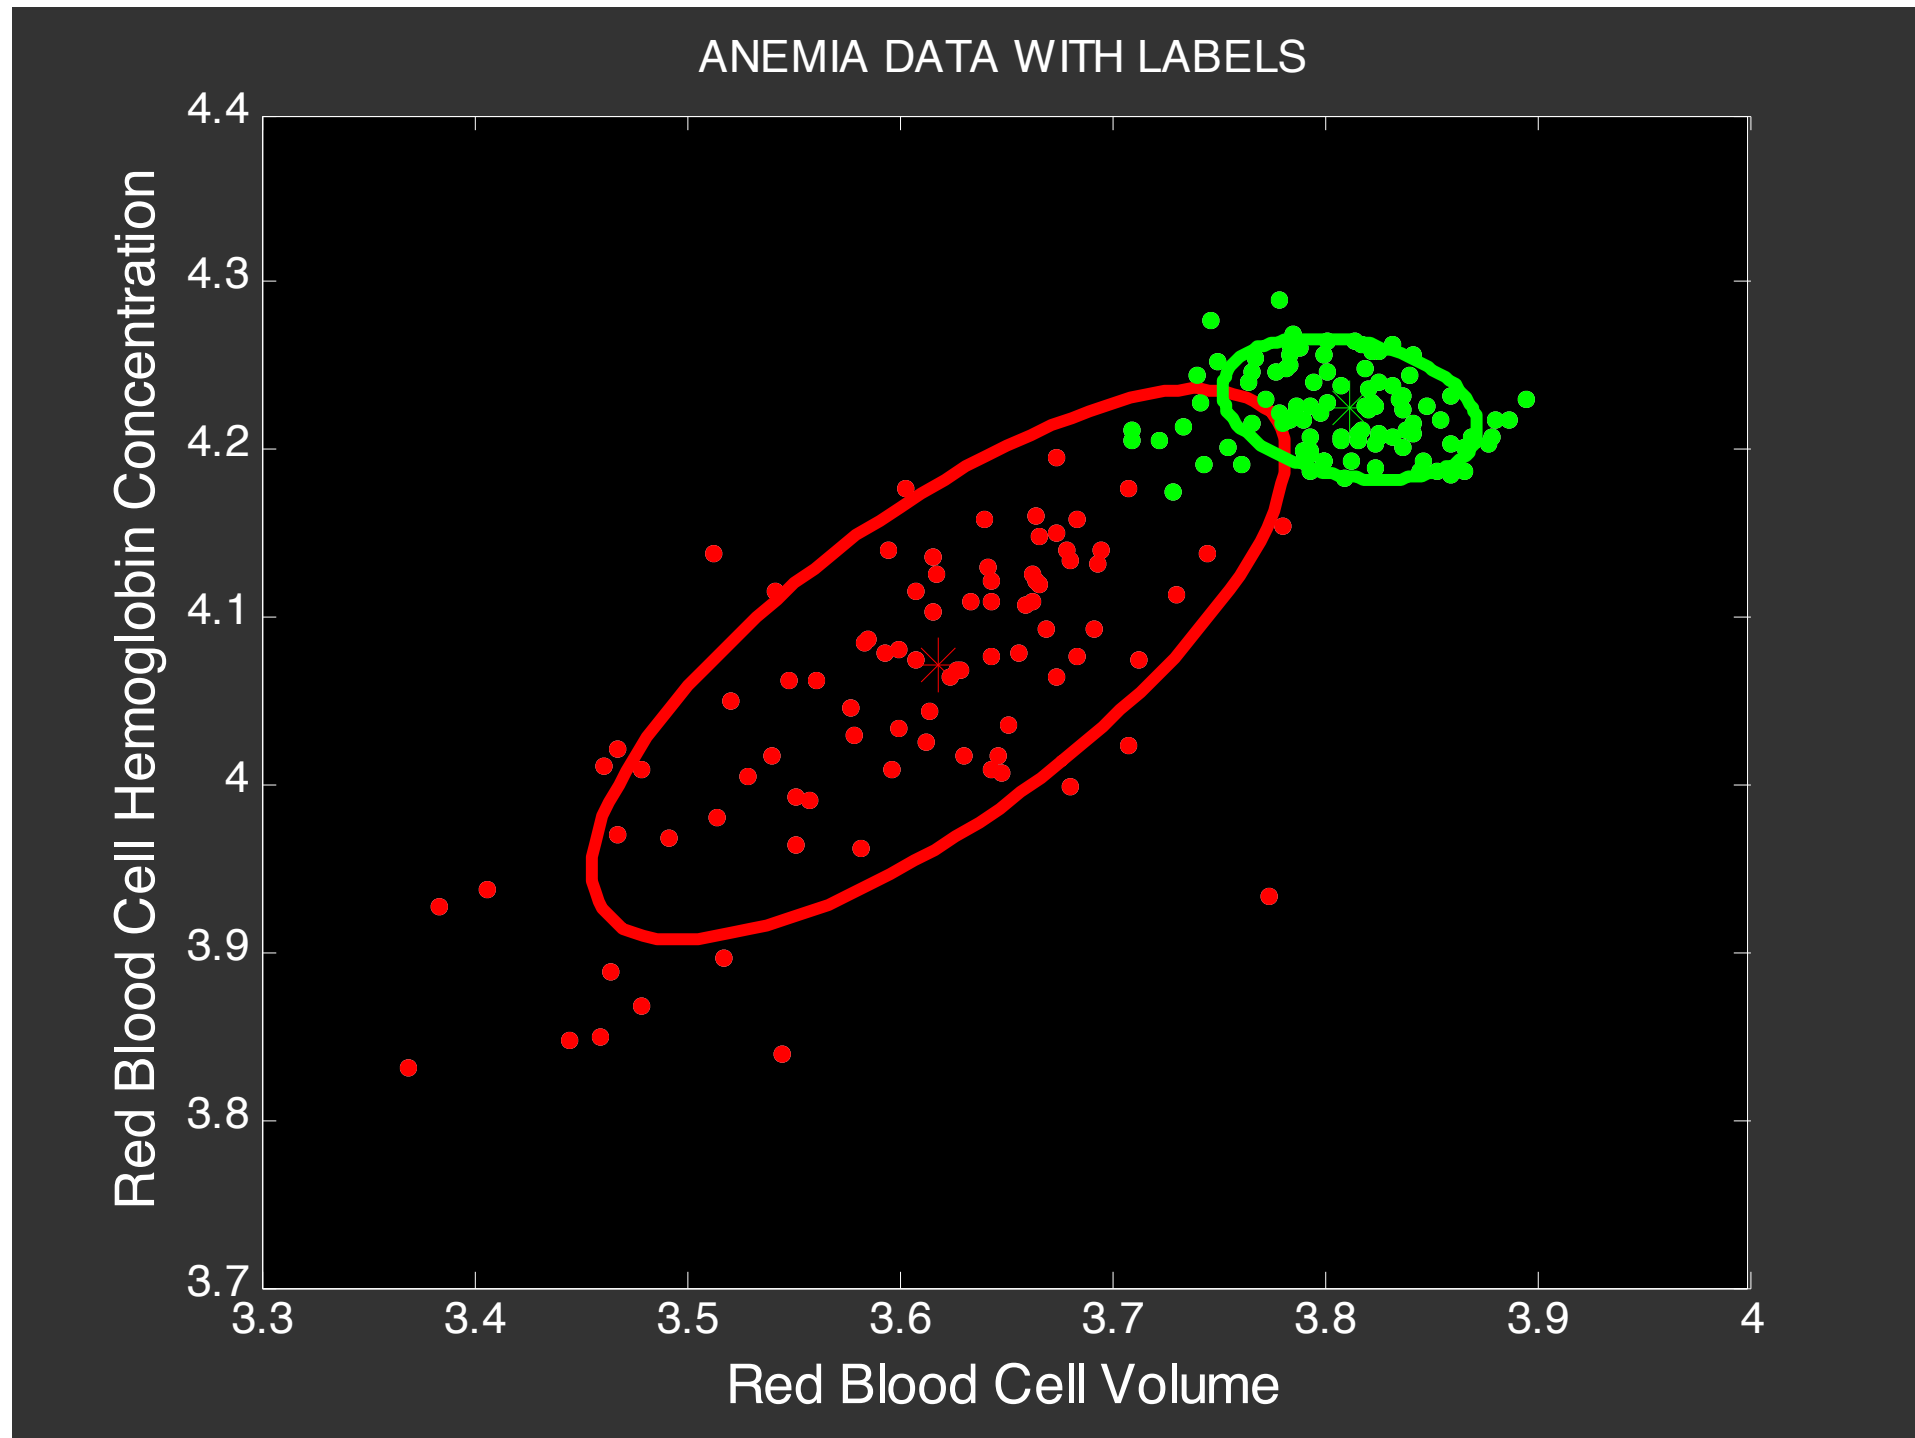


K-means Algorithm for Initialization

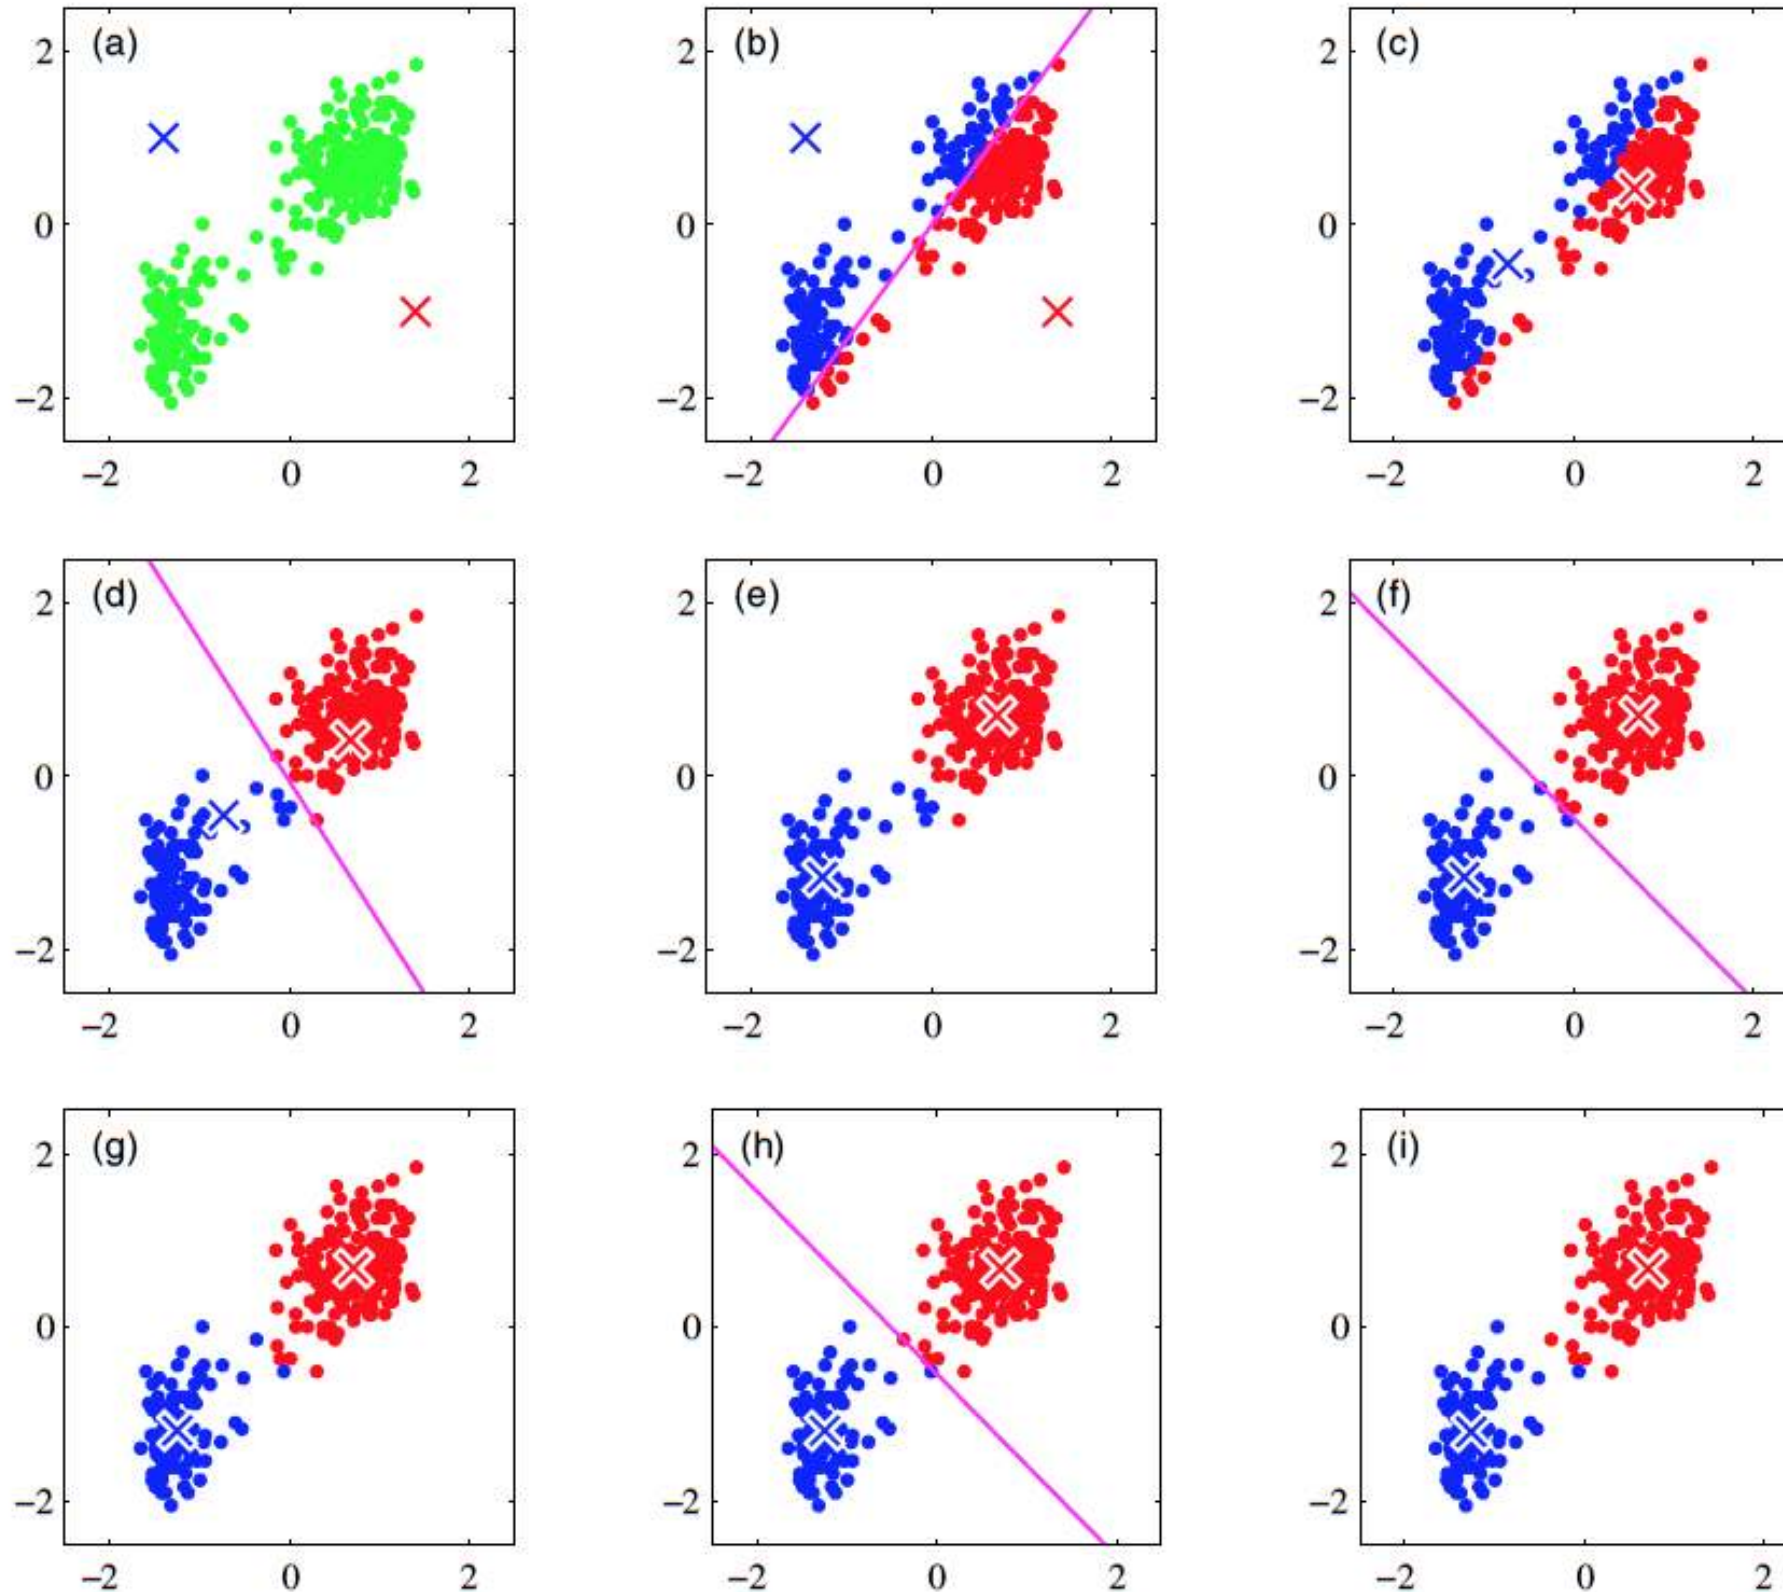

Other Considerations


- Initialization - random or k-means
- Number of Gaussians
- Type of Covariance matrix
 - Spherical covariance

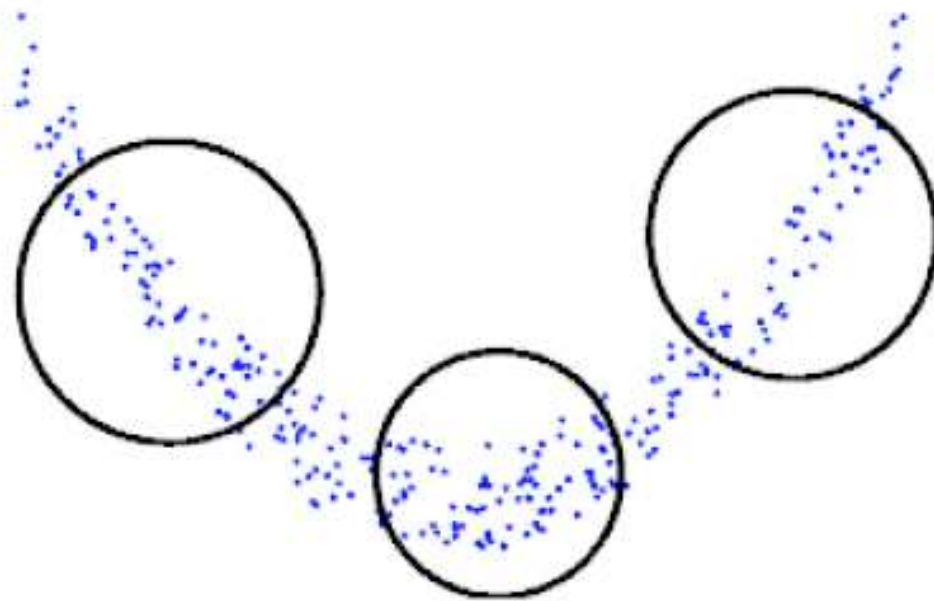

- Less precise.
- Very efficient to compute.

Other Considerations


- Initialization - random or k-means
- Number of Gaussians
- Type of Covariance matrix
 - Diagonal covariance

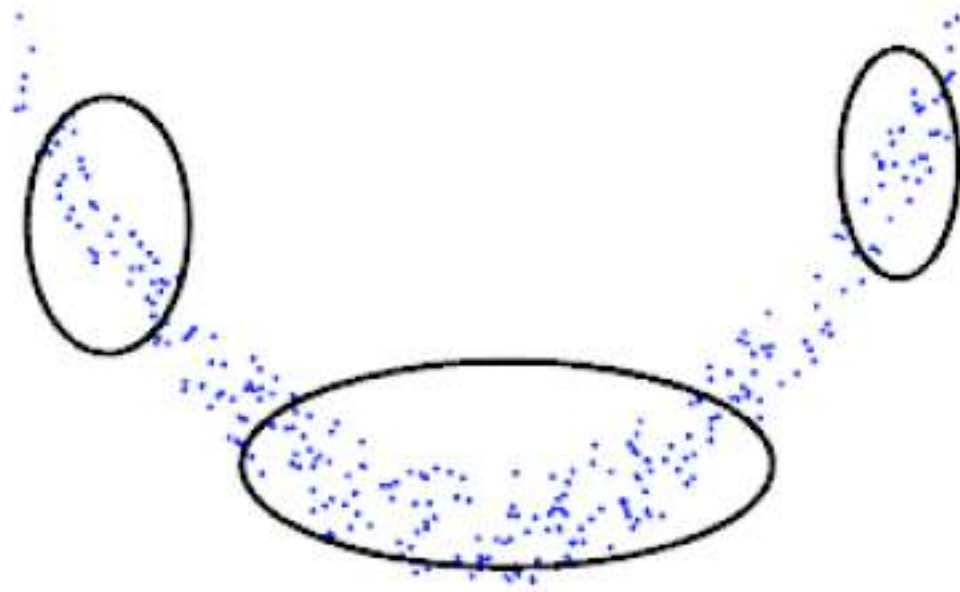

**-More precise.
-Efficient to compute.**

Other Considerations

- Initialization - random or k-means
- Number of Gaussians
- Type of Covariance matrix
 - Full covariance

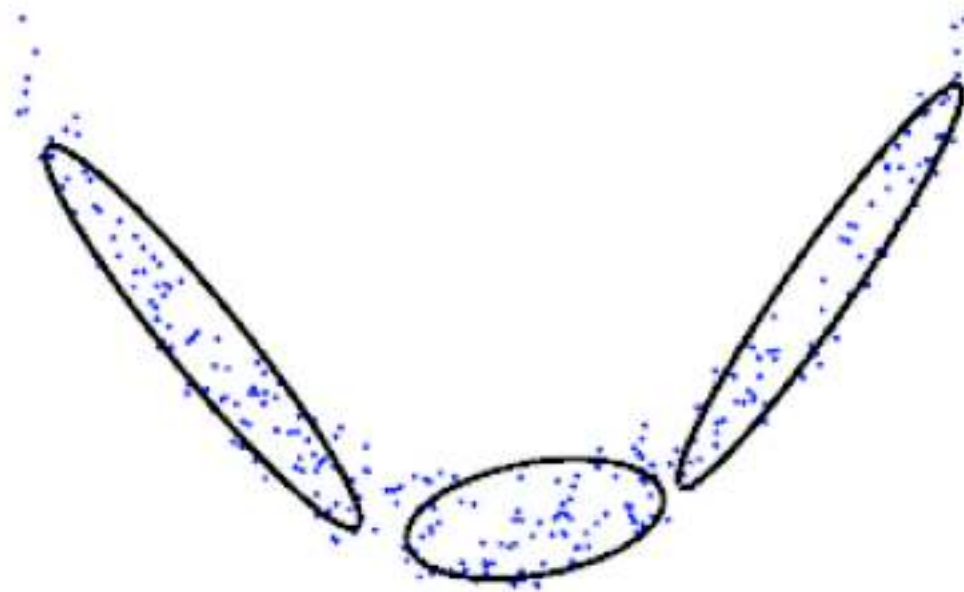

- Very precise.
- Less efficient to compute.