


Classical solver comparison, TFIM 1D, matched hyperparameters, 100 iterations
MCMC vs. classical annealing/tabu (10-15 independent seeds per point, no best-of)

(A) vs. system size, $h=1.0$ (critical point)



(B) vs. field strength, $N=8$ fixed

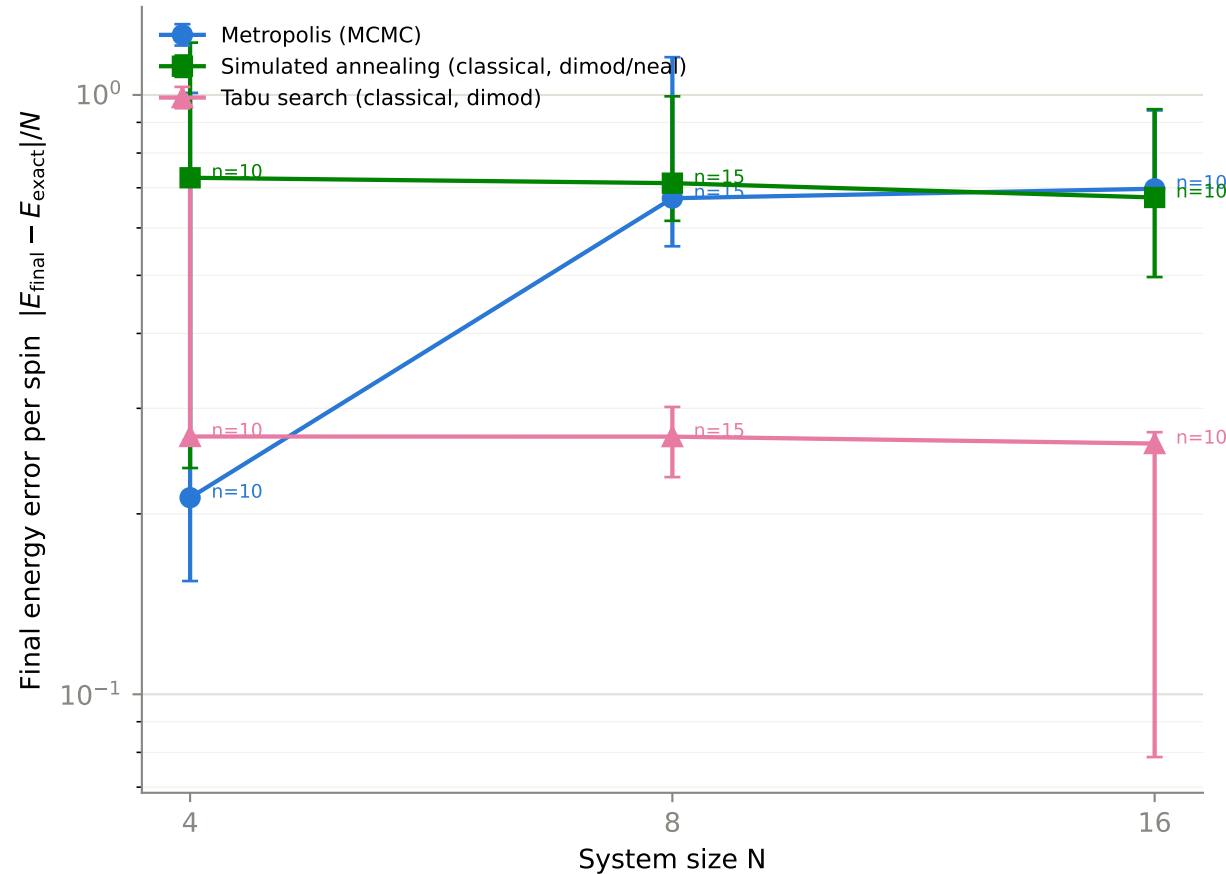