


Classical solver comparison, TFIM 1D, matched hyperparameters, 100 iterations  
MCMC vs. classical annealing/tabu (10-15 independent seeds per point, no best-of)

(A) vs. system size,  $h=1.0$  (critical point)



(B) vs. field strength,  $N=8$  fixed

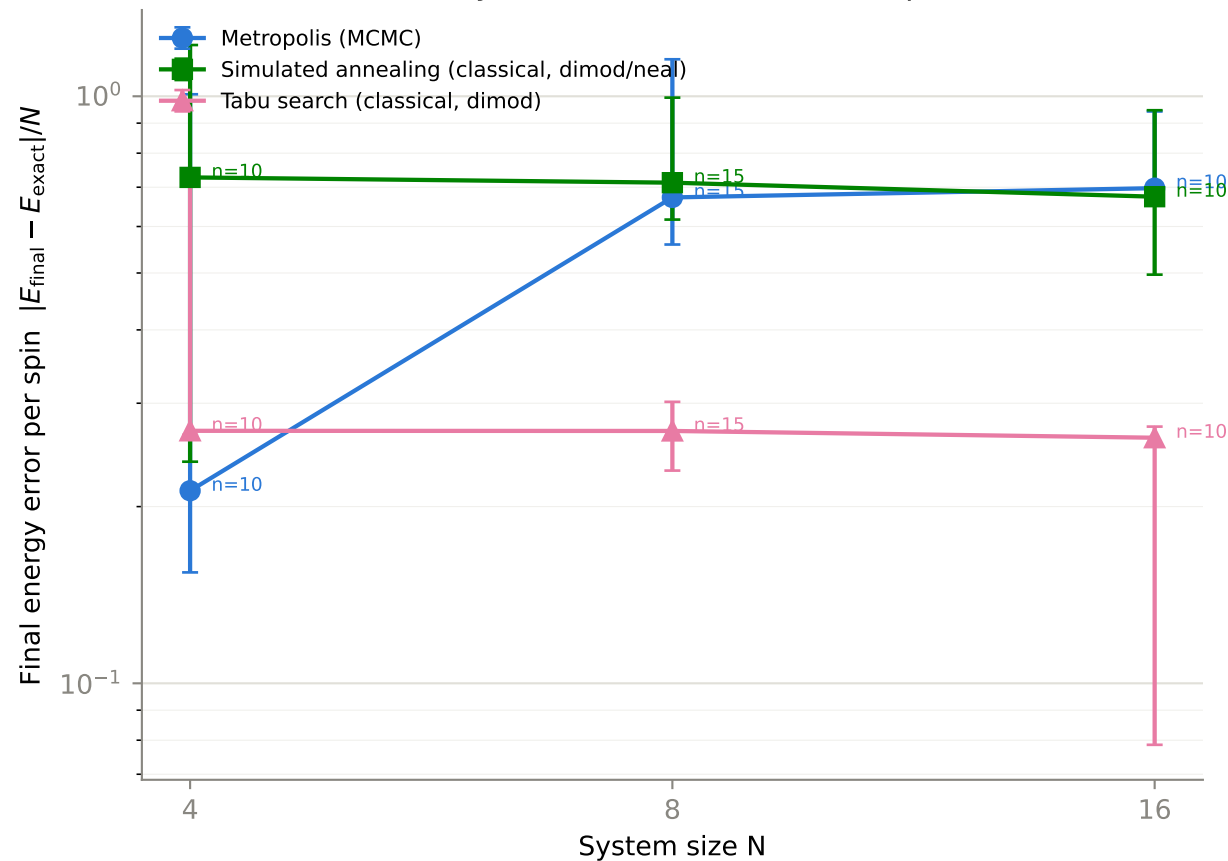