

Brute Force Attack: Simulation, Detection, and Defense

By Ponomareva Olesya

1 Introduction

A **brute force attack** is a method where an attacker tries multiple password or key combinations repeatedly until the correct one is found. It is one of the simplest yet most common attack techniques used to gain unauthorized access to systems, applications, or accounts.

Disclaimer: The following content is for **educational and ethical purposes only**. These techniques should only be executed in a **controlled lab environment** with explicit permission. Unauthorized use against systems you do not own or manage is illegal and punishable by law.

2 Types of Brute Force Attacks

- **Simple brute force attack** – Directly attempting all possible combinations of passwords.
- **Dictionary attack** – Using a predefined list of likely passwords (a “dictionary”) instead of trying every possible combination.
- **Hybrid brute force attack** – Combining dictionary attacks with variations (e.g., adding numbers or symbols).
- **Reverse brute force attack** – Starting with a single commonly used password and trying it against many usernames.
- **Credential stuffing** – Using leaked username-password pairs from previous data breaches to attempt logins on other systems.

3 Popular Brute Force Tools

- **John the Ripper** – A fast password cracker for Unix, Windows, and other platforms.
- **Hashcat** – A powerful GPU-based password recovery tool, ideal for cracking password hashes.
- **Aircrack-ng** – Focused on cracking Wi-Fi network keys.
- **L0phtCrack** – Used to audit and recover Windows passwords.

4 Hydra for Brute Force Attacks

Hydra is one of the most widely used tools for network login brute forcing. It can perform rapid dictionary-based attacks against more than 50 protocols, including **HTTP**, **SSH**, **FTP**, **RDP**, **Telnet**, and more.

4.1 Hydra Command Structure

```
hydra -L <username_file> -P <password_file> <target>
```

- -L : Specifies the file containing a list of usernames.
- -P : Specifies the file containing a list of passwords.

5 Brute Force SSH

A brute force SSH attack attempts to gain unauthorized access to a remote machine by repeatedly trying different username and password combinations against the **SSH service** (port 22 by default).

5.1 Example Hydra Command

```
hydra -L <username_file> -P <password_file> ssh://<target_ip>
```

6 System Requirements

- **Attacker Machine:** Kali Linux
- **Target Machine:** Windows system (with SSH enabled)

Note: Since Windows does not enable SSH by default, you must install and enable OpenSSH Server before running this test.

7 Simulating an SSH Brute Force Attack with Hydra

7.1 Step 1: Preparing the Password List

On the **attacker machine** (Kali Linux), we first create a list of possible passwords in a file named `passwords.txt`. This file will be used by Hydra to attempt login combinations against the target system.

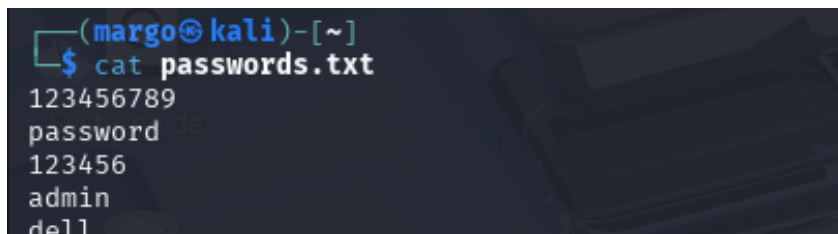
A terminal window on a Kali Linux machine. The prompt is `(margo@kali)-[~]`. The user has entered `$ cat passwords.txt`. The output of the command is displayed on the following lines:
123456789
password
123456
admin
dell

Figure 1: Password file used for brute force simulation

7.2 Step 2: Running the Hydra Command

Since we already know the username of the target system is `dell`, we use the `-l` option to specify it directly. If we did not know the username, we could use the `-L` option along with a file containing a list of usernames.

```
hydra -l dell -P passwords.txt ssh://<target_ip>
```

```
root@kali: ~/Documents
hydra -l dell -P passwords.txt ssh://
Hydra v9.5.3 (c) 2023 by Team Hydra - Please do not use in military or secret service organizations, or for illegal purposes (this is non-binding, these *th* ignore laws and ethics anyway).
Hydra (https://github.com/vanhauser-thc/thc-hydra) starting at 2023-08-05 21:51:33
[WARNING] New SSH configurations limit the number of parallel tasks, it is recommended to reduce the tasks: use -t <
[INFO] max. 7 tasks per 1 server, overall 7 tasks, 7 login tries (1115/7), 1 try per task
[DATA] attacking ssh://
[DATA] 1 of 1 target simulated, 0 valid password found
Hydra (https://github.com/vanhauser-thc/thc-hydra) finished at 2023-08-05 21:51:33
```

Figure 2: Running Hydra against SSH service

7.3 Step 3: Observing the Attack

Hydra will automatically attempt multiple login attempts using the given username and password list. Each failed login attempt is logged by the target's SSH service.

8 Detection in Wazuh

After simulating the brute force attack, we switch to the **Wazuh dashboard**. In the **Threat Hunting** section, we can see the following indicators:

- Multiple **failed login attempts** for the SSH service.
- Alerts triggered by **Wazuh security rules** detecting brute force activity.
- Event details, such as the source IP (attacker machine) and the affected service (SSH).

Threat Hunting					
Aug 4, 2025 @ 20:52:27.856 - Aug 5, 2025 @ 20:52:27.856					
Export Formatted 1159 available fields Columns Density 1 fields sorted Full screen					
timestamp	agent_name	rule.description	rule.level	rule.id	
Aug 5, 2025 @ 20:51:34.999	MyPc	Login Failure - Unknown user or bad password	5	60122	
Aug 5, 2025 @ 20:51:34.368	MyPc	Login Failure - Unknown user or bad password	5	60122	
Aug 5, 2025 @ 20:51:34.317	MyPc	Login Failure - Unknown user or bad password	5	60122	
Aug 5, 2025 @ 20:51:34.308	MyPc	User account locked out (multiple login errors)	9	60115	
Aug 5, 2025 @ 20:51:34.304	MyPc	Login Failure - Unknown user or bad password	5	60122	
Aug 5, 2025 @ 20:51:34.235	MyPc	Login Failure - Unknown user or bad password	5	60122	
Aug 5, 2025 @ 20:48:43.579	MyPc	Login Failure - Unknown user or bad password	5	60122	

Figure 3: Wazuh detecting brute force attack

Windows Security Event Analysis

Event Details

Field name	Field value	Meaning
data.win.eventdata.failureReason	%%2313	Unknown user name or bad password.
data.win.eventdata.keyLength	0	No encryption key was used.
data.win.eventdata.logonProcessName	Advapi	Typical for services, not interactive logins.
data.win.eventdata.logonType	8	Logon type 8 = NetworkCleartext. Credentials were sent in clear text over the network (common with SSHD).
data.win.eventdata.processId	0x65d8	The process ID (0x65d8) of the process that attempted the logon.
data.win.eventdata.processName	C:\Windows\System32\OpenSSH\sshd.exe	Confirms someone tried to connect to this machine over SSH.
data.win.eventdata.status	0xc000006d	Status = Logon failure.
data.win.eventdata.subStatus	0xc0000064	User logon with unknown user name OR bad password.
data.win.system.channel	Security	The event comes from the Windows Security log.
data.win.system.eventID	4625	Event ID 4625 = An account failed to log on.
data.win.system.eventRecordID	919137	A unique sequential ID for this event in the event log.
data.win.system.systemTime	2025-08-05T20:51:34.3997254Z	Event timestamp (UTC).
decoder.name	windows_eventchannel	Wazuh parsed this as a Windows EventChannel log.
input.type	log	Confirms this came from a log source (Windows logs).
rule.firedtimes	14	At least 14 failed logins of this type have occurred.

Table 1: Windows Event 4625 – Failed Logon Attempt

Summary

- On **05-08-2025 at 20:51:34 UTC**, the Windows machine **MyPc** received an SSH login attempt via **sshd.exe**.
- Authentication failed with error **Unknown username or bad password** (0xc0000064).
- This was logged as **Event ID 4625** (failed logon).

- Wazuh classified it under **failed authentication events**, severity level **5**, and mapped it to multiple compliance frameworks.
- The rule has already fired **14 times**, so this is **not an isolated event**.

9 Defensive Countermeasures

While detection is critical, **prevention** strengthens system defenses against brute force attempts. Recommended strategies include:

- Use strong and unique passwords.
- Enable multi-factor authentication (MFA).
- Regularly monitor login activity.
- Implement rate-limiting to restrict login attempts and lock accounts after repeated failures.

10 Conclusion

Brute force attacks remain one of the most common methods used by attackers to gain unauthorized access to systems and services. In this report, we demonstrated how such an attack can be simulated using the Hydra tool against an SSH service. We also observed how Wazuh is capable of detecting these attacks in real time, highlighting multiple failed login attempts in the dashboard.

This exercise shows the importance of monitoring and detection tools like Wazuh in strengthening system defenses. While brute force attacks are relatively simple, they can still be effective if strong passwords and proper security measures are not in place. In future work, deeper analysis of Wazuh logs and alerting mechanisms will provide further insights into identifying, investigating, and mitigating brute force threats.