

Dataset Construction Pipeline



Source labels are used only for candidate selection.
Final labels are assigned in the Schwartz-10 value space.

1 Source text collection

Texts are collected from four complementary sources.



Sensitive topics



High-confidence inappropriate



High-confidence appropriate / neutral



TAPE ethics



Candidate pool:
70,649 texts

2 Candidate pool



All texts form a large candidate pool for value annotation.



70,649 texts

3 Construction-model annotation


ValueLlama labels the candidates; GPT-4.1-mini cross-annotates 43,165 items.

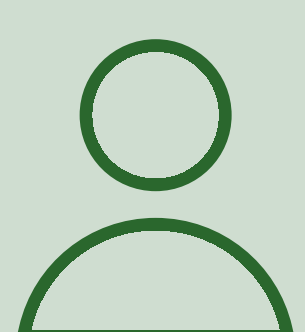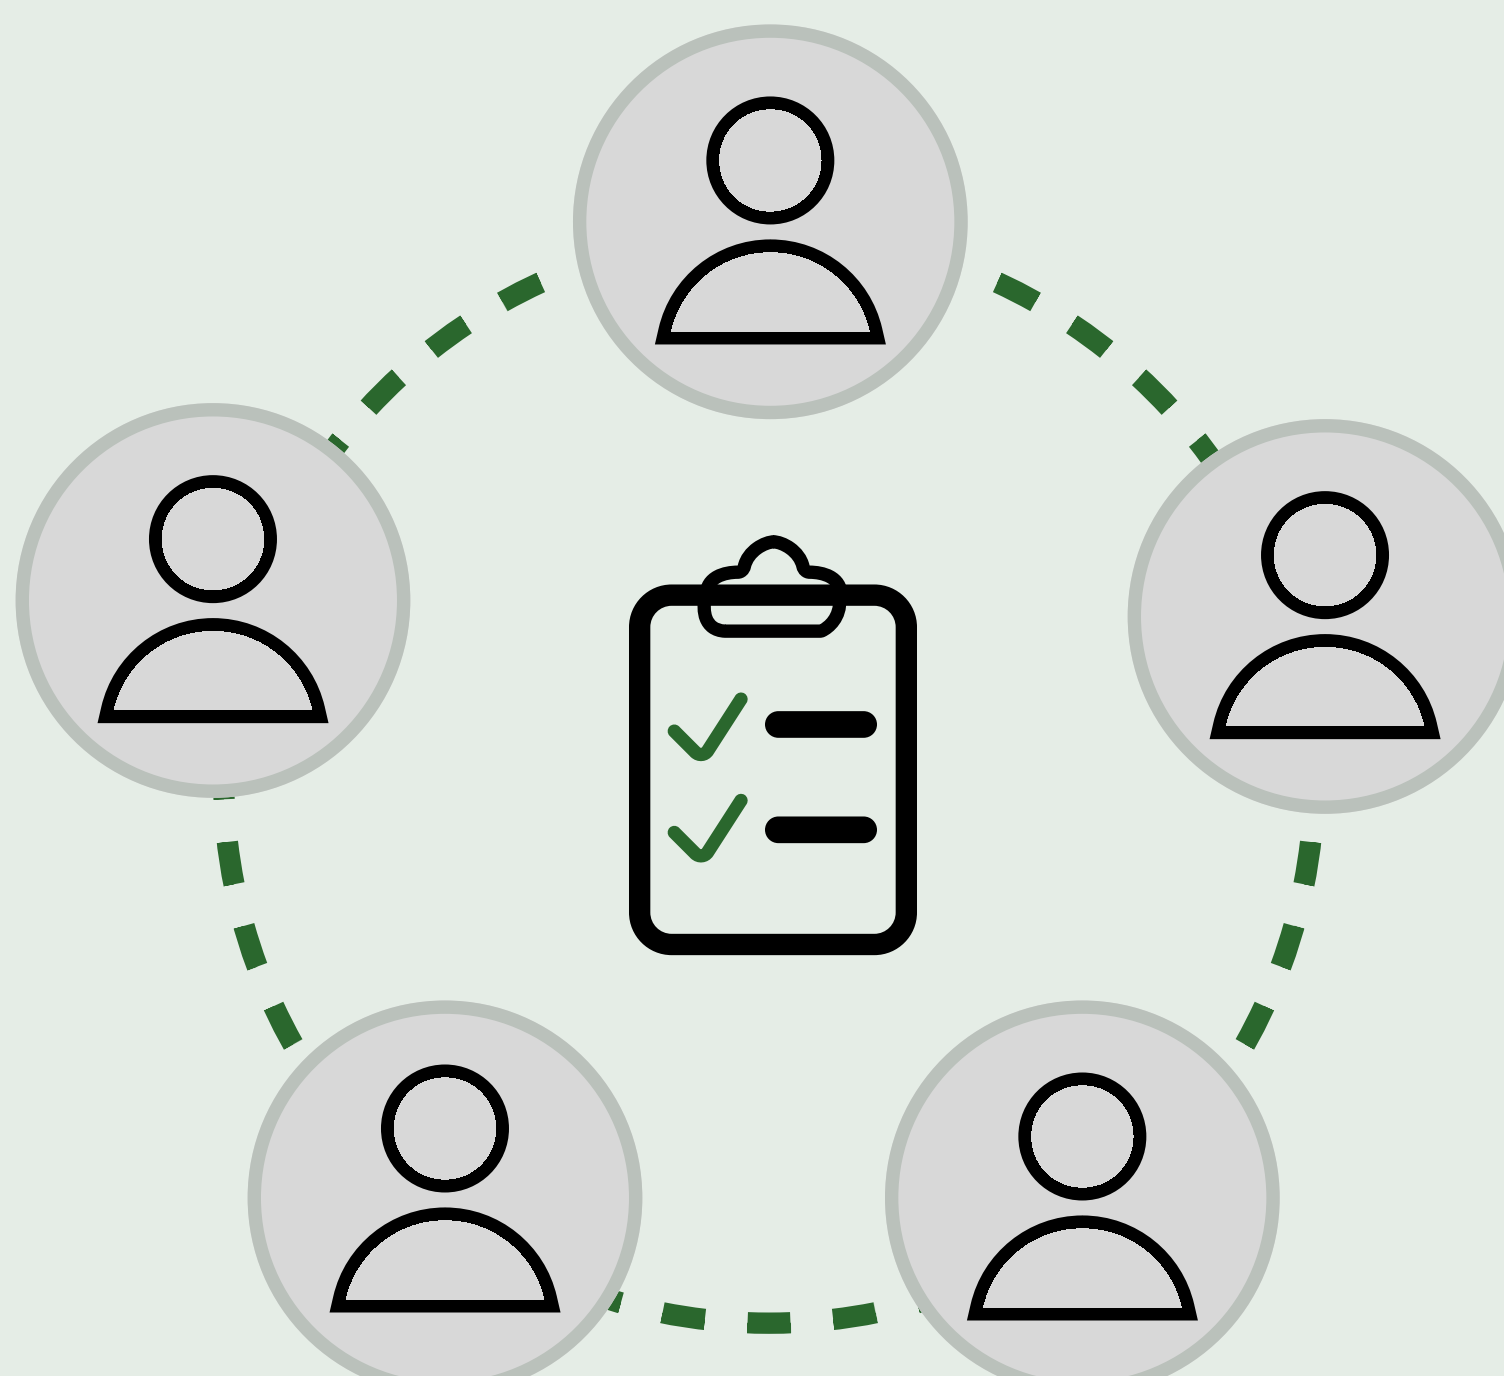

Labels in the Schwartz-10 space

4 Exact top-1 agreement

Only items with exact top-1 agreement between the two construction models are retained.

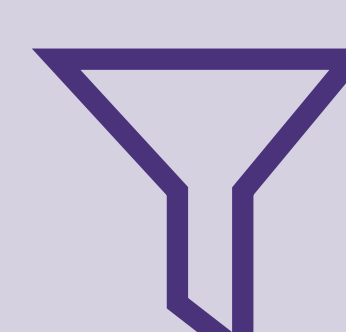

14,516 eligible candidates


5 Balanced reference set

Final dataset is strictly balanced across 10 values, 100 texts per value.



1,000 texts
10 values × 100 texts

Balanced reference set in the Schwartz-10 value space

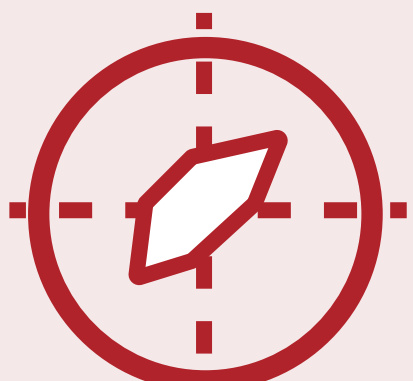

Self-Direction

100 texts



Stimulation

100 texts



Hedonism

100 texts



Achievement

100 texts



Power

100 texts



Security

100 texts



Conformity

100 texts



Tradition

100 texts



Benevolence

100 texts



Universalism

100 texts

10 values × 100 texts = 1,000 texts



All final labels are in the Schwartz-10 value space and do not depend on the original source category.