

Installing Tableau Server

in a Linux Environment on Google Cloud Platform

by Mohamad Ikhsan Nurulloh



Google Cloud

Disclaimer

- **No Endorsement:** I am not endorsed by any provider; I am sharing this information purely for fun and educational purposes.
- **Testing and Development Only:** This content is intended solely for testing and development purposes.
- **Refer to Official Tableau Documentation:** For production environments, always refer to the official Tableau documentation to ensure compliance with best practices and guidelines.
- **Proceed at Your Own Risk:** If you choose to follow this guide, you do so at your own risk. Ensure that you understand the implications of deploying software and services in a cloud environment.

Overview of Installing Tableau Server on GCP



Installing **Tableau Server** on **Google Cloud Platform (GCP)** provides organizations with a scalable and flexible solution for data visualization and analytics. By creating a Google Compute Engine (GCE) virtual machine (VM) with a compatible Linux distribution, users can leverage cloud capabilities while avoiding the overhead of physical servers. Key benefits include easy scalability, integration with Google Cloud services, and high availability, enabling organizations to enhance their data-driven decision-making in a robust cloud environment.

Before Installing Tableau Server on GCP

1 . Preparation

- Validating Your Server Deployment Plan

Consider Tableau Cloud for better performance. If self-hosting or using cloud provider, refer to the [Tableau Enterprise Deployment Guide](#) (EDG).

- Hardware Recommendations for Production Installations


Check the EDG for optimal hardware specifications for CPU, memory, and storage.

- Choosing the Tableau Server Version

Use the latest stable version for new features and security.

2 . Tableau Server Architecture

Architecture: Single Node Tableau Server

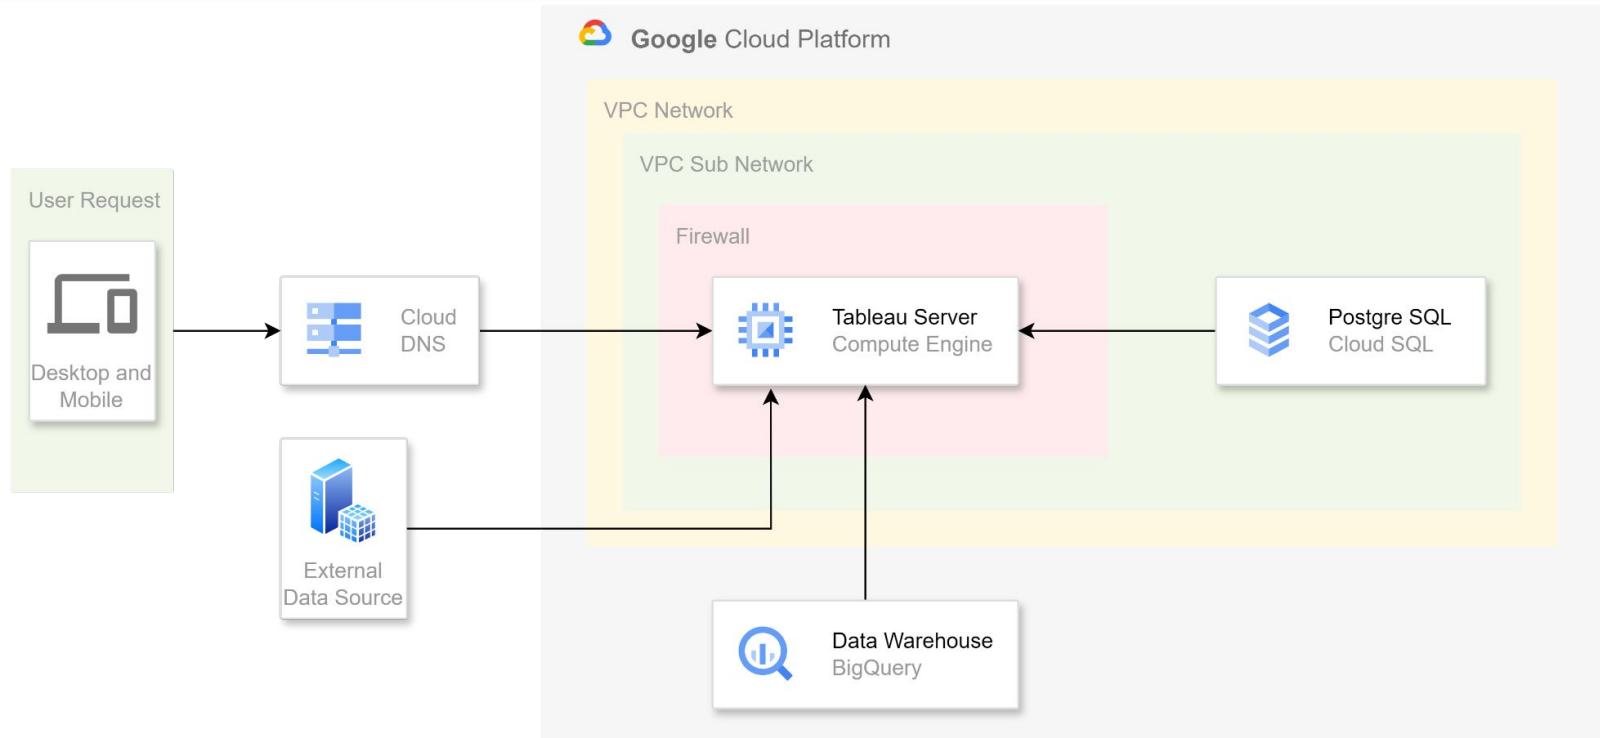

3 . Tableau Server Architecture Explanation

1. User Request:

- Desktop and Mobile: Users access Tableau Server from various devices.

2. Google Cloud Platform (GCP):

- VPC Network: Secure environment.
- VPC Sub Network: Hosting the Tableau Server.
- Firewall: Controls and monitors network traffic.

3. Tableau Server:

- Compute Engine: Instance running the Tableau Server for processing and visualization tasks.

4. Data Sources:

- PostgreSQL (Cloud SQL): Managed database for storing data.
- Data Warehouse (BigQuery): Scalable storage and fast querying capabilities.
- External Data Source: Additional data that can be integrated with Tableau Server.

5. Cloud DNS:


- Manages DNS configurations for accessing the Tableau Server.

4 . Tableau Server Architecture Workflow

1. **User Request Handling:** Users send requests from their devices via Cloud DNS to the Tableau Server.
2. **Data Processing and Visualization:** Tableau Server processes requests and interacts with PostgreSQL and BigQuery to fetch and analyze data.
3. **External Data Integration:** Tableau Server can also access and utilize additional external data sources.
4. **Firewall Security:** The firewall ensures only authorized traffic reaches the Tableau Server within the VPC network.

Installing Tableau Server on GCP

1 . Creating VPC

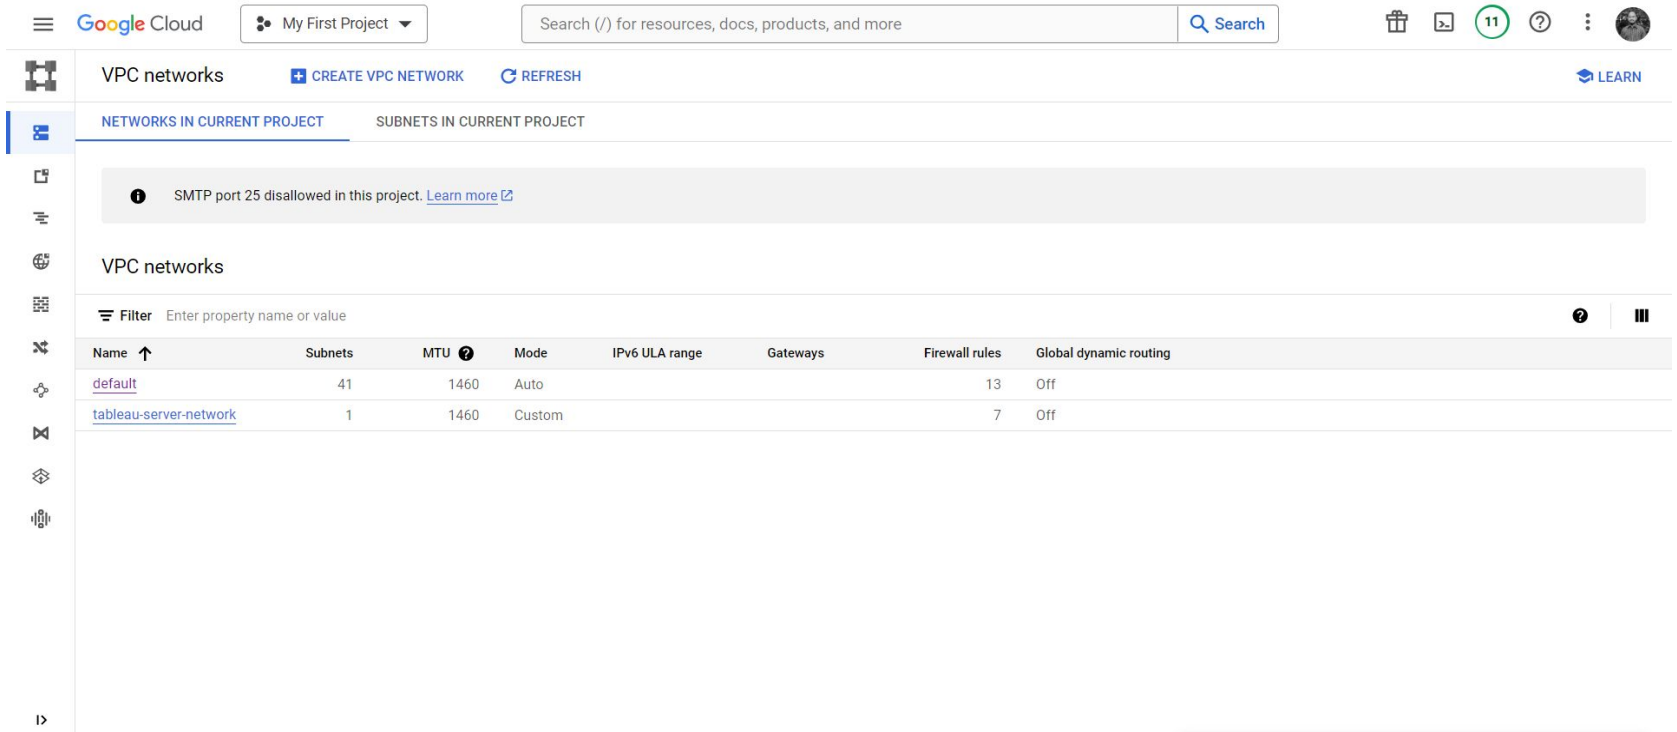

The screenshot displays the Google Cloud Platform console interface. At the top, the Google Cloud logo is visible alongside the project name 'My First Project'. A search bar is present for finding resources. The main navigation pane on the left includes icons for various services, with 'VPC networks' selected. The top navigation bar shows 'VPC networks' with options to 'CREATE VPC NETWORK' and 'REFRESH', along with a 'LEARN' link. Below this, tabs for 'NETWORKS IN CURRENT PROJECT' and 'SUBNETS IN CURRENT PROJECT' are shown, with the first tab active. A message banner indicates that 'SMTP port 25 is disallowed in this project' with a 'Learn more' link. The 'VPC networks' section features a filter input and a table listing the networks. The table has columns for Name, Subnets, MTU, Mode, IPv6 ULA range, Gateways, Firewall rules, and Global dynamic routing. Two networks are listed: 'default' and 'tableau-server-network'.

Name ↑	Subnets	MTU ?	Mode	IPv6 ULA range	Gateways	Firewall rules	Global dynamic routing
default	41	1460	Auto			13	Off
tableau-server-network	1	1460	Custom			7	Off

Establish a Virtual Private Cloud (VPC) to host Tableau Server, ensuring a secure and isolated network environment.

2 . Creating Subnet

Google Cloud My First Project Search (/) for resources, docs, products, and more Search

VPC network details DELETE VPC NETWORK SHOW INFO PANEL

tableau-server-network

< OVERVIEW SUBNETS STATIC INTERNAL IP ADDRESSES FIREWALLS FIREWALL ENDPOINTS ROUTES VPC NETWORK PEERING PRIVATE SERVICES ACCESS DNS CONF >

Subnets + ADD SUBNET FLOW LOGS

Filter Enter property name or value

☐	Name ↑	Region	Stack Type	Primary IPv4 range	Secondary IPv4 ranges	IPv6 ranges	Reserved internal ranges	Gateway	Private Google Access	Flow logs ?
☐	tableau-server-subnet	asia-southeast2	IPv4	10.184.0.0/20			None	10.184.0.1	Off	Off


Reserved proxy-only subnets for load balancing

☐	Name	Region ↑	IP address ranges	Gateway	Role	Purpose
No rows to display						

EQUIVALENT REST

Set up a subnet within the VPC to manage network traffic efficiently and segment the network for better security.

3 . Creating Firewall Rule

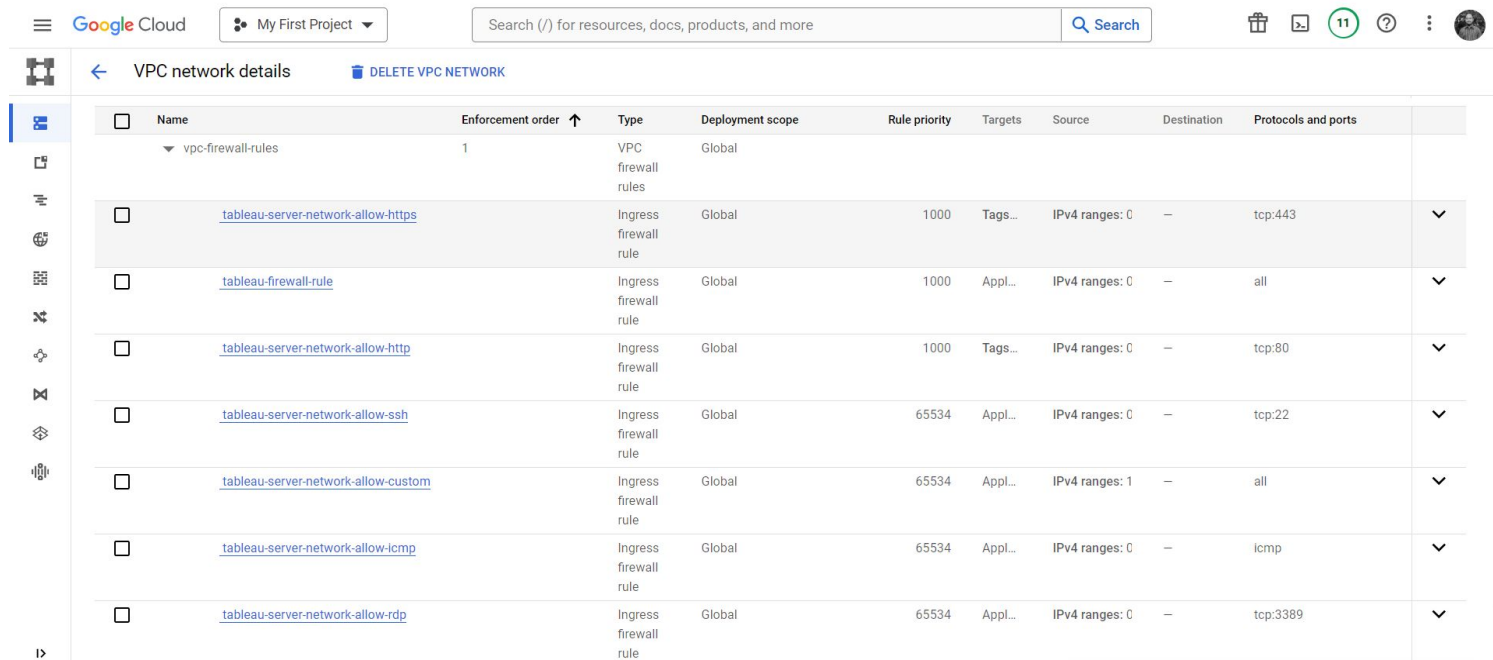

The screenshot shows the Google Cloud console interface for VPC network details. The top navigation bar includes the Google Cloud logo, a project dropdown menu set to 'My First Project', a search bar, and user account information. The left sidebar contains navigation icons for various cloud services. The main content area is titled 'VPC network details' and includes a 'DELETE VPC NETWORK' link. A table lists the firewall rules for the selected VPC network.

☐	Name	Enforcement order ↑	Type	Deployment scope	Rule priority	Targets	Source	Destination	Protocols and ports	
	▼ vpc-firewall-rules	1	VPC firewall rules	Global						
☐	tableau-server-network-allow-https		Ingress firewall rule	Global	1000	Tags...	IPv4 ranges: 0	—	tcp:443	▼
☐	tableau-firewall-rule		Ingress firewall rule	Global	1000	Appl...	IPv4 ranges: 0	—	all	▼
☐	tableau-server-network-allow-http		Ingress firewall rule	Global	1000	Tags...	IPv4 ranges: 0	—	tcp:80	▼
☐	tableau-server-network-allow-ssh		Ingress firewall rule	Global	65534	Appl...	IPv4 ranges: 0	—	tcp:22	▼
☐	tableau-server-network-allow-custom		Ingress firewall rule	Global	65534	Appl...	IPv4 ranges: 1	—	all	▼
☐	tableau-server-network-allow-icmp		Ingress firewall rule	Global	65534	Appl...	IPv4 ranges: 0	—	icmp	▼
☐	tableau-server-network-allow-rdp		Ingress firewall rule	Global	65534	Appl...	IPv4 ranges: 0	—	tcp:3389	▼


Create firewall rules to control access to the Tableau Server, ensuring that only authorized users can connect.

<https://help.tableau.com/current/server/en-us/ports.htm>

https://help.tableau.com/current/desktopdeploy/en-us/desktop_deploy_proxy.htm

4 . Creating Compute Engine VM

a . Machine Configuration

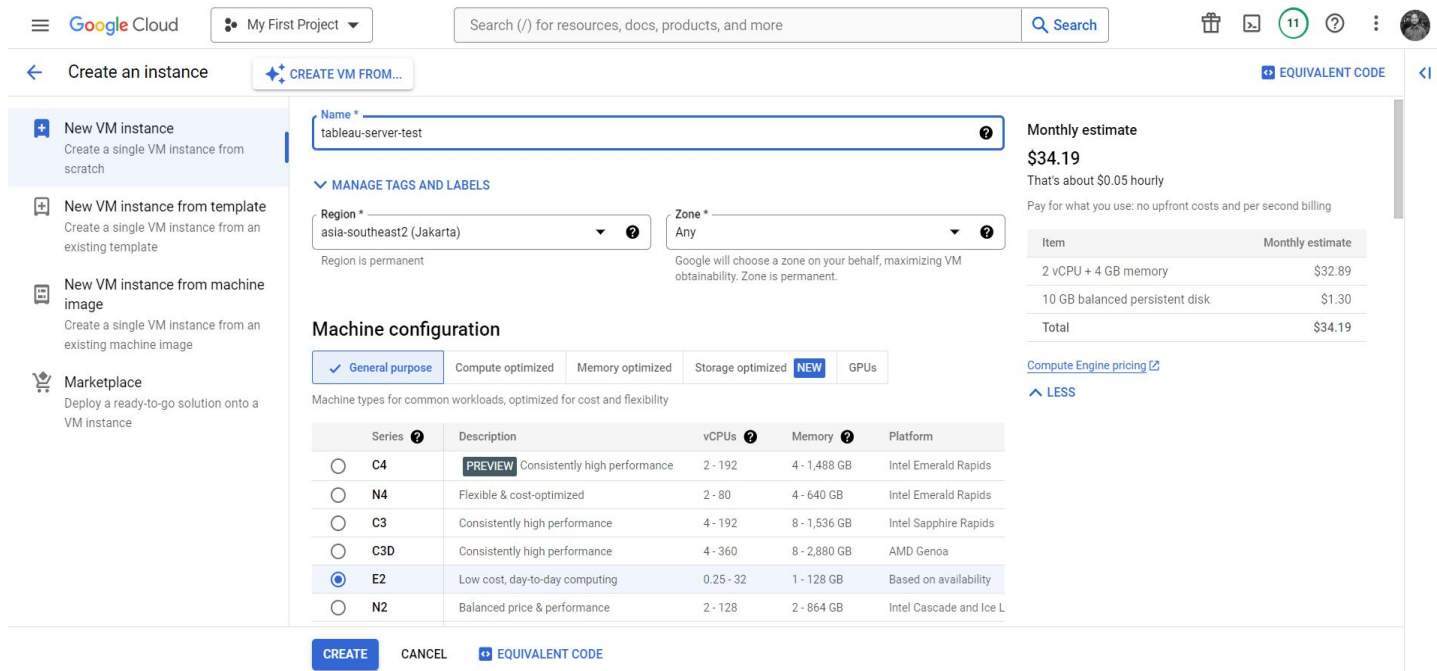

The screenshot shows the Google Cloud console interface for creating a new VM instance. The 'Machine configuration' tab is active, displaying a table of machine types. The 'E2' machine type is selected, which is described as 'Low cost, day-to-day computing'. The 'Monthly estimate' on the right shows a total of \$34.19, broken down into 2 vCPU + 4 GB memory (\$32.89) and 10 GB balanced persistent disk (\$1.30).

Machine configuration

Machine types for common workloads, optimized for cost and flexibility

Series	Description	vCPUs	Memory	Platform
C4	PREVIEW Consistently high performance	2 - 192	4 - 1,488 GB	Intel Emerald Rapids
N4	Flexible & cost-optimized	2 - 80	4 - 640 GB	Intel Emerald Rapids
C3	Consistently high performance	4 - 192	8 - 1,536 GB	Intel Sapphire Rapids
C3D	Consistently high performance	4 - 360	8 - 2,880 GB	AMD Genoa
E2	Low cost, day-to-day computing	0.25 - 32	1 - 128 GB	Based on availability
N2	Balanced price & performance	2 - 128	2 - 864 GB	Intel Cascade and Ice L

Monthly estimate

\$34.19

That's about \$0.05 hourly

Pay for what you use: no upfront costs and per second billing

Item	Monthly estimate
2 vCPU + 4 GB memory	\$32.89
10 GB balanced persistent disk	\$1.30
Total	\$34.19

[Compute Engine pricing](#)

[LESS](#)

Select an appropriate machine type based on your expected workload and performance needs .

4 . Creating Compute Engine VM

b . Custom Machine Type

The screenshot shows the Google Cloud console interface for creating a new VM instance. The 'Create an instance' wizard is active, with the 'CUSTOM' tab selected for the machine type. The configuration includes 8 vCPUs (4 cores) and 64 GB of memory. The monthly estimate is \$356.23, which is approximately \$0.49 per hour. The configuration also shows the VM provisioning model set to 'Standard'.

Machine type
Choose a machine type with preset amounts of vCPUs and memory that suit most workloads. Or, you can create a custom machine for your workload's particular needs. [Learn more](#)

PRESET CUSTOM

Creating a custom machine incurs additional costs

Cores
2 32
8 vCPU
(4 core)

☐ Shared core

Memory
4 64
64 GB

ADVANCED CONFIGURATIONS

Availability policies
VM provisioning model
Standard
Choose "Spot" to get a discounted, preemptible VM. Otherwise, stick to "Standard". [Learn more](#)

VM PROVISIONING MODEL ADVANCED SETTINGS

Monthly estimate
\$356.23
That's about \$0.49 hourly
Pay for what you use: no upfront costs and per second billing

Item	Monthly estimate
8 vCPU + 64 GB memory	\$354.93
10 GB balanced persistent disk	\$1.30
Total	\$356.23

[Compute Engine pricing](#)
[LESS](#)

CREATE CANCEL EQUIVALENT CODE

If necessary, configure a custom machine type to tailor resources to specific requirements .

4 . Creating Compute Engine VM

c . Boot disk

Google Cloud | My First Project | Search (/) for resources, docs, products, and more

Create an instance | CREATE VM FROM... | EQUIVALENT CODE

New VM instance
Create a single VM instance from scratch

New VM instance from template
Create a single VM instance from an existing template

New VM instance from machine image
Create a single VM instance from an existing machine image

Marketplace
Deploy a ready-to-go solution onto a VM instance

Container
Deploy a container image to this VM instance

DEPLOY CONTAINER

Boot disk

Name	tableau-server-test
Type	New balanced persistent disk
Size	100 GB
Snapshot schedule	No schedule selected
License type	Free
Image	Ubuntu 22.04 LTS

CHANGE

Identity and API access

Service accounts

Service account
Compute Engine default service account

Requires the Service Account User role (roles/iam.serviceAccountUser) to be set for users who want to access VMs with this service account. [Learn more](#)

Monthly estimate
\$367.93
That's about \$0.50 hourly
Pay for what you use: no upfront costs and per second billing

Item	Monthly estimate
8 vCPU + 64 GB memory	\$354.93
100 GB balanced persistent disk	\$13.00
Total	\$367.93

[Compute Engine pricing](#)

LESS

CREATE | CANCEL | EQUIVALENT CODE

Choose and configure the boot disk for the VM, ensuring it meets the installation requirements .
https://help.tableau.com/current/server/en-us/server_hardware_min.htm

4 . Creating Compute Engine VM

d . Firewall Configuration

Google Cloud My First Project Search (/) for resources, docs, products, and more Search

Create an instance CREATE VM FROM... EQUIVALENT CODE

New VM instance
Create a single VM instance from scratch

New VM instance from template
Create a single VM instance from an existing template

New VM instance from machine image
Create a single VM instance from an existing machine image

Marketplace
Deploy a ready-to-go solution onto a VM instance

Requires the Service Account User role (roles/iam.serviceAccountUser) to be set for users who want to access VMs with this service account. [Learn more](#)

Access scopes

- ☒ Allow default access
- ☐ Allow full access to all Cloud APIs
- ☐ Set access for each API

Firewall

Add tags and firewall rules to allow specific network traffic from the Internet

- ☒ Allow HTTP traffic
- ☒ Allow HTTPS traffic
- ☐ Allow Load Balancer Health Checks

Observability - Ops Agent

Monitor your system through collection of logs and key metrics.

- ☐ Install Ops Agent for Monitoring and Logging

Advanced options
Networking, disks, security, management, sole-tenancy

Monthly estimate
\$367.93
That's about \$0.50 hourly
Pay for what you use: no upfront costs and per second billing

Item	Monthly estimate
8 vCPU + 64 GB memory	\$354.93
100 GB balanced persistent disk	\$13.00
Total	\$367.93

[Compute Engine pricing](#)
[LESS](#)

CREATE CANCEL EQUIVALENT CODE

Set up firewall configurations to allow necessary traffic to the VM while blocking unauthorized access.

4 . Creating Compute Engine VM

e . Network Interface

The screenshot shows the Google Cloud console interface for creating a new VM instance. The left sidebar contains navigation options: 'New VM instance' (selected), 'New VM instance from template', 'New VM instance from machine image', and 'Marketplace'. The main content area is titled 'Network interfaces' and shows the configuration for a 'New network interface'. The 'Network' dropdown is set to 'tableau-server-network' and the 'Subnetwork' dropdown is set to 'tableau-server-subnet IPv4 (10.184.0.0/20)'. Below these, there is a note about IPv6 and a link to 'LEARN MORE'. The 'IP stack type' section has 'IPv4 (single-stack)' selected. The 'Primary internal IPv4 address' is set to 'Ephemeral (Automatic)'. At the bottom, there is a '+ ADD IP RANGE' button. On the right side, a 'Monthly estimate' section shows a total of \$367.93, broken down into vCPU + memory (\$354.93) and disk (\$13.00). A 'CREATE' button is at the bottom left of the configuration area.

Google Cloud My First Project Search (/) for resources, docs, products, and more Search

Create an instance CREATE VM FROM... EQUIVALENT CODE

New VM instance
Create a single VM instance from scratch

New VM instance from template
Create a single VM instance from an existing template

New VM instance from machine image
Create a single VM instance from an existing machine image

Marketplace
Deploy a ready-to-go solution onto a VM instance

Network interfaces ?
Network interface is permanent

New network interface

Network *
tableau-server-network

Subnetwork *
tableau-server-subnet IPv4 (10.184.0.0/20)

To use IPv6, you need an IPv6 subnet range. [LEARN MORE](#)

IP stack type
☒ IPv4 (single-stack)
☐ IPv4 and IPv6 (dual-stack)

Primary internal IPv4 address
Ephemeral (Automatic)

Alias IP ranges
[+ ADD IP RANGE](#)

Monthly estimate
\$367.93
That's about \$0.50 hourly
Pay for what you use: no upfront costs and per second billing

Item	Monthly estimate
8 vCPU + 64 GB memory	\$354.93
100 GB balanced persistent disk	\$13.00
Total	\$367.93


[Compute Engine pricing](#)
[LESS](#)

CREATE CANCEL EQUIVALENT CODE

Establish the network interface for the VM to facilitate communication with other services and users.

5 . Connect to Compute Engine VM

a . SSH to The VM

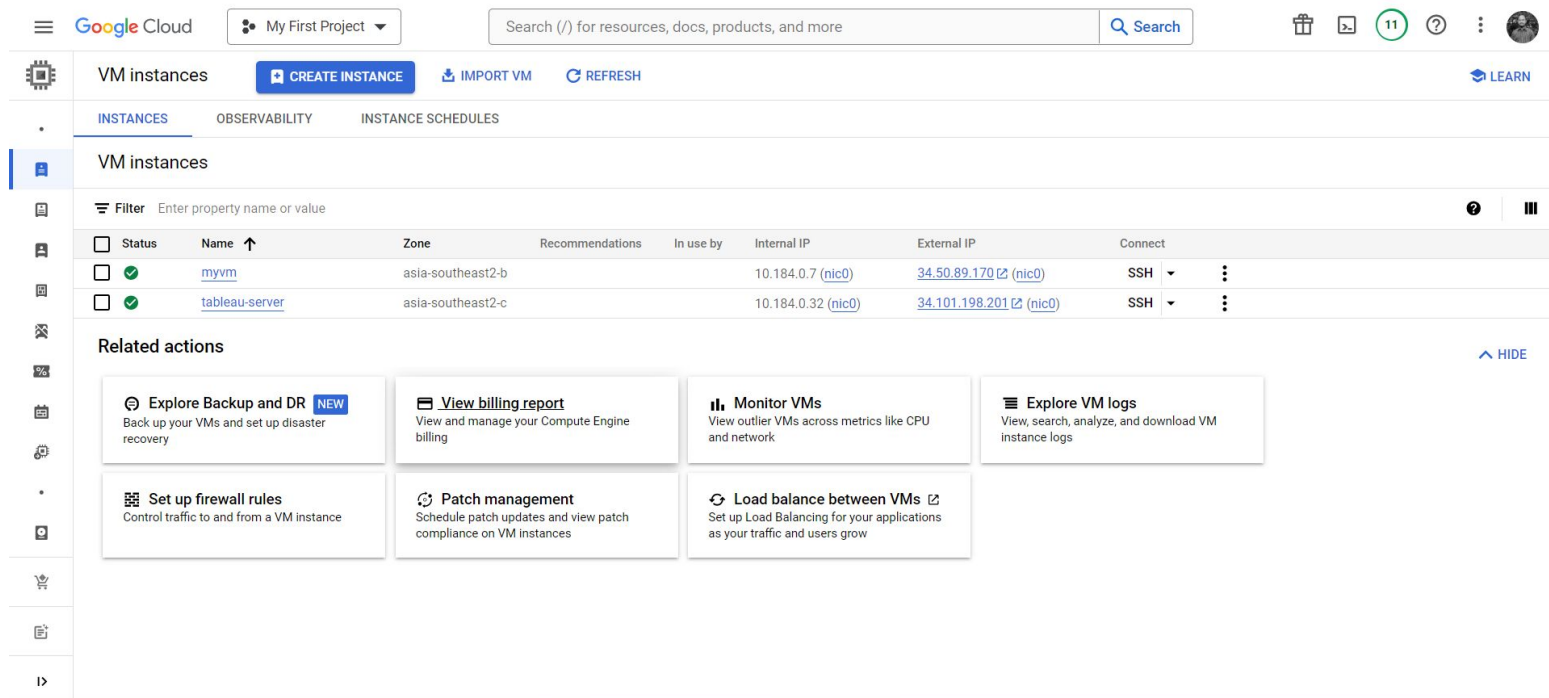

The screenshot shows the Google Cloud console interface for VM instances. At the top, there's a search bar and navigation tabs for INSTANCES, OBSERVABILITY, and INSTANCE SCHEDULES. The main section displays a table of VM instances:

Status	Name	Zone	Recommendations	In use by	Internal IP	External IP	Connect
☒	myvm	asia-southeast2-b			10.184.0.7 (nic0)	34.50.89.170 (nic0)	SSH
☒	tableau-server	asia-southeast2-c			10.184.0.32 (nic0)	34.101.198.201 (nic0)	SSH


Below the table, there are several 'Related actions' cards:

- Explore Backup and DR** (NEW): Back up your VMs and set up disaster recovery.
- View billing report**: View and manage your Compute Engine billing.
- Monitor VMs**: View outlier VMs across metrics like CPU and network.
- Explore VM logs**: View, search, analyze, and download VM instance logs.
- Set up firewall rules**: Control traffic to and from a VM instance.
- Patch management**: Schedule patch updates and view patch compliance on VM instances.
- Load balance between VMs**: Set up Load Balancing for your applications as your traffic and users grow.

Access the VM via SSH for direct management and configuration.

5 . Connect to Compute Engine VM

b . Authorize SSH

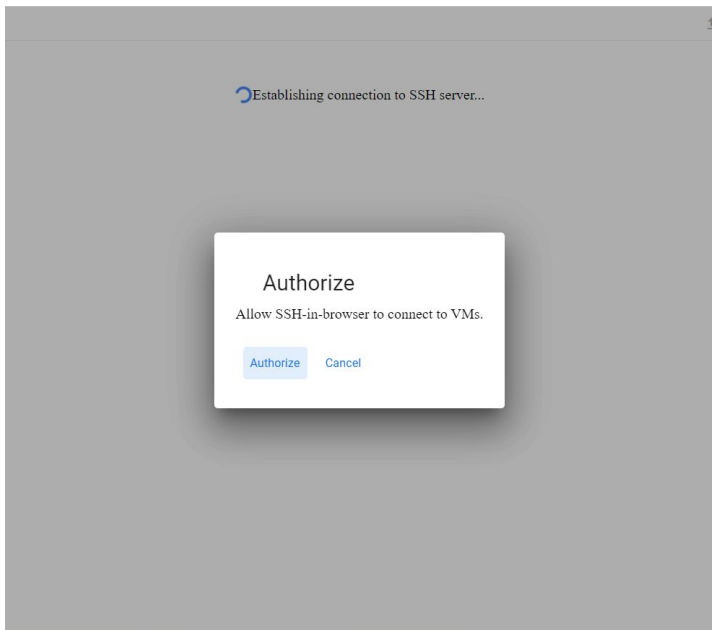

SSH-in-browser

```
Welcome to Ubuntu 22.04.4 LTS (GNU/Linux 6.5.0-1024-gcp x86_64)

* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:        https://ubuntu.com/pro

System information as of Thu Jul 25 12:48:21 UTC 2024

System load:  0.93           Processes:            246
Usage of /:   20.3% of 96.73GB Users logged in:      0
Memory usage: 35%           IPv4 address for ens4: 10.184.0.32
Swap usage:   0%

* Strictly confined Kubernetes makes edge and IoT secure. Learn how MicroK8s
  just raised the bar for easy, resilient and secure K8s cluster deployment.

https://ubuntu.com/engage/secure-kubernetes-at-the-edge

Expanded Security Maintenance for Applications is not enabled.

7 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Thu Jul 25 04:45:28 2024 from 35.235.245.65
ikhsannur1996@tableau-server:~$
```

Ensure SSH connections are authorized for secure access.

6 . Downloading Tableau Server

2024.2	Downloads
2023.3	Downloads
2023.1	Downloads
2022.3	Downloads

Download the Tableau Server installation package using the following command:

```
wget https://downloads.tableau.com/esdalt/2023.1.15/tableau-server-2023-1-15_amd64.deb
```

Refer to the Tableau releases page for the latest download links.
<https://www.tableau.com/support/releases/server>

Linux

- [tableau-tabcmd-2023-1-15.noarch.rpm \(17 MB\)](#)
SHA-1: 7056af6d82bd7bae252579e78374d182cc46b53f
SHA-256: 7f42d539b39c62b9ad76d2e5409ea73f64ce3088eb9225e2945c6f6d1704f956
MD5: 884184ef1b1956e17eb36b24b9ef8dd2
- [tableau-tabcmd-2023-1-15_all.deb \(17 MB\)](#)
SHA-1: b6b83f74a14ceaa193af1327685045bfb5f40243
SHA-256: 62cc1d647c9d359402ae8148cf769d928ee9e8c80466235279c5a57e42cee21f
MD5: e90d9965d540a33dad6358bd78e4ad80
- [tableau-server-2023-1-15.x86_64.rpm \(2971 MB\)](#)
SHA-1: 67ceea23ae80aa218f6373680461d59b73820427
SHA-256: 0b66fbcaab41e27dc095b6d5ff98d71a5bc9f2a288c3c643a909a1c5ffb6329
MD5: 52ebb1390fe74cc64cbeb35a7f30cdfc
- [tableau-server-2023-1-15_amd64.deb \(2956 MB\)](#)
SHA-1: 66a7cf6c102990243f63f228bf1d523762f3a1a3
SHA-256: a2389fa48067ec021517ebe7f74406850f5dfbeaa8997f31e3d9d81c8ab4fc00
MD5: e515cd7546e3403c95386d6790723045
- [tableau-server-container-setup-tool-2023.1.3.tar.gz \(Less than 1 MB\)](#)
SHA-1: ee7e7da3e0c00450b496a658e8d72e200a2a4ee1
SHA-256: 290709a6003f13c6e92cc8df2b5a6b623f0982849433403f38b8c716b0b203b5
MD5: 3b93e675c2d2d5f7831a8a8d2eec8905

7 . Installing Tableau Server

Execute the following commands to install Tableau Server:

```
sudo apt-get update
sudo apt-get upgrade
sudo apt-get -y install gdebi-core
sudo gdebi -n tableau-server-<version>_amd64.deb
sudo /opt/tableau/tableau_server/packages/script. tableau-server-<version>/initialize-tsm
--accepteula
```

```
Tableau Server runs best with at least 128 GB memory to run, but found only 63 GB of memory.
See: http://www.tableau.com/products/server/specs

*****
Locale 'C.UTF-8' is unsupported. Using en_US.UTF-8 as a fallback
*****

Creating 'tsmadmin' group for TSM admin authorization
Creating 'tableau' unprivileged user account
Creating environment file...
Creating directories and setting permissions...
Using '/var/opt/tableau/tableau_server' as the data directory.
Adding user 'ikhsannur1996' to group 'tableau'...
Adding user 'ikhsannur1996' to group 'tsmadmin'...
Added. Note: These group membership changes do not take effect in shells already open. For these to take effect
, log out of the shell and log back in.
Starting TSM services...
Updating repository version in Tableau Server Coordination Service.
TSM services started successfully
Use the 'tsm' command to continue setting up Tableau Server.
>> Tableau binary directory will be added to PATH for new shells. To get the
>> updated path, either start a new session, or for bash users run:
>> source /etc/profile.d/tableau_server.sh
The TSM administrative web interface (and REST API) is now available at
https://tableau-server:8850
You can continue the configuration and initialization of Tableau server using either the TSM command line inter
face,
or the web interface.
You will be prompted to authenticate, or can log in using the username 'ikhsannur1996', with the same password
you used to log into this session. You could also use any username, with its password, from the administrative
group in the domain.
Done.
```

8 . Creating TSM User Password

Establish a password for the Tableau Services Manager (TSM) user to secure access.

```
ikhsannur1996@tableau-server:~$ sudo passwd ikhsannur1996
New password:
Retype new password:
passwd: password updated successfully
ikhsannur1996@tableau-server:~$
```

9 . TSM Configuration - Activate

← → ↻ Not secure https://34.101.198.201:8850/#/ ☆ T ⋮

+ a b l e a u

Activate Register Setup Initialize

Enter your license product key to get started with Tableau Server.

Product Key

The key has 20 characters

0000-0000-0000-0000-000

[I can't find my product key.](#)

Tableau Server requires at least one product key that activates the server and specifies the number of license levels you can assign to users. You can access your product keys from the [Tableau Customer Portal](#).

Activated Product Keys
No product key currently activated

Activate Product Key Next

Try it free for 14 days

Start Tableau Server Trial

Questions? Check out the [Administrator Guide](#) or contact [Tableau Customer Service](#)

Activate/Start Trial the TSM service to manage Tableau Server.

10 . TSM Configuration - Register

← → ↻ Not secure https://34.101.198.201:8850/#/ 🔍 ☆ ⓘ

 + a b l e a u

Activate Register Setup Initialize

Register with Tableau. All fields are required.

Contact Information

First Name Last Name
Mohamad Ikhsan Nurulloh

Phone Number Email
083 ikhs

Company Information


Organization
My Company

Industry Company Size

Questions? Check out the [Administrator Guide](#) or contact [Tableau Customer Service](#)

Register the Tableau Server.

11. TSM Configuration - Setup

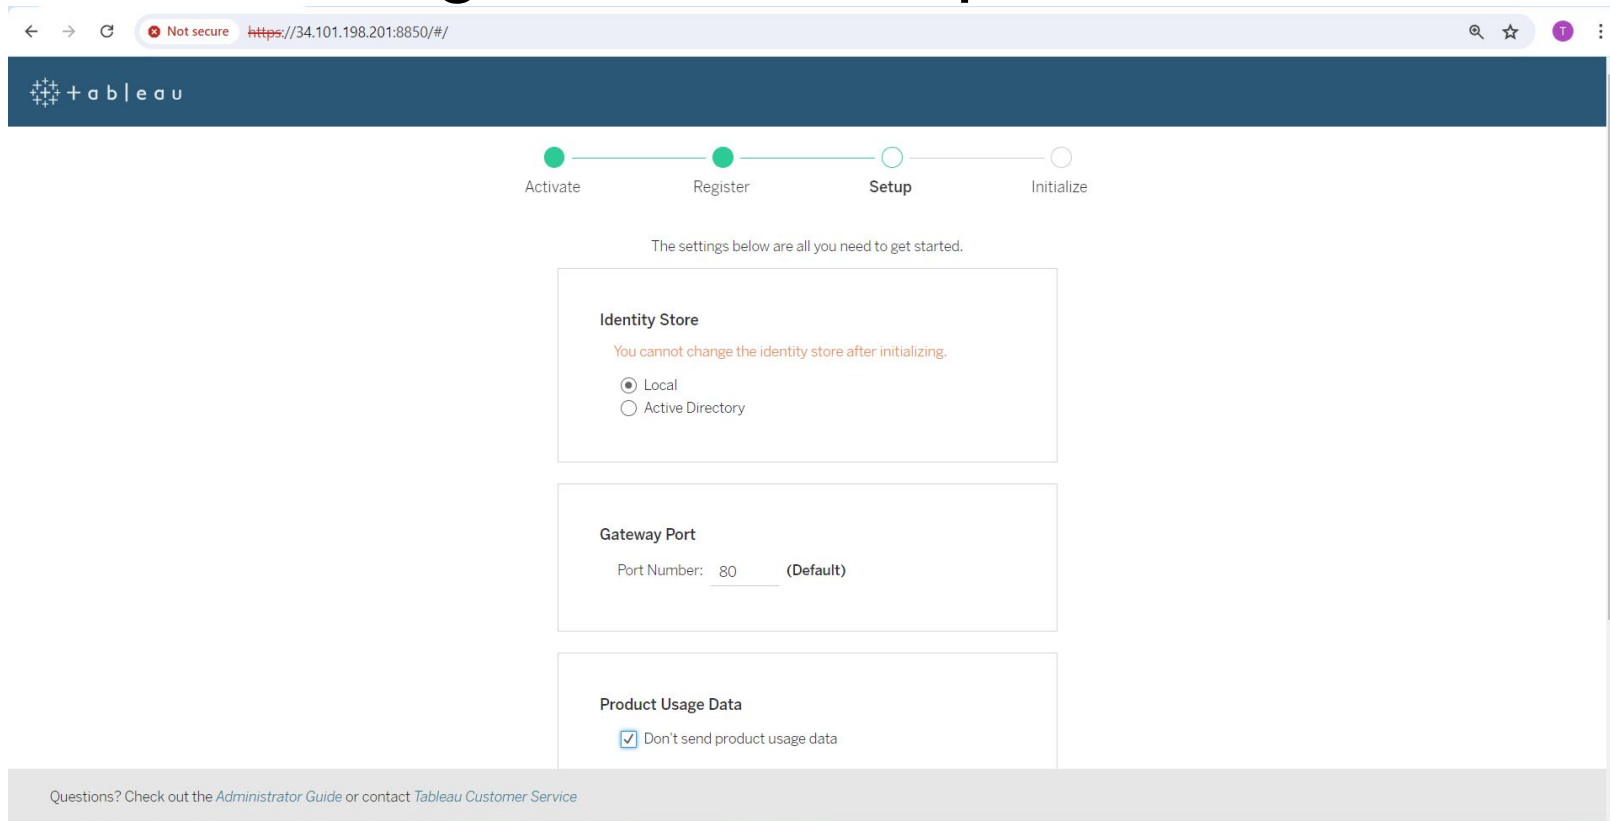

The screenshot shows the Tableau Server Setup page in a web browser. The browser's address bar displays "Not secure https://34.101.198.201:8850/#/". The Tableau logo is in the top left. A progress bar at the top indicates the current step: "Activate" (completed), "Register" (completed), "Setup" (current step), and "Initialize" (pending). Below the progress bar, a message states: "The settings below are all you need to get started." The setup section contains three configuration boxes:

- Identity Store**
You cannot change the identity store after initializing.
☒ Local
☐ Active Directory
- Gateway Port**
Port Number: (Default)
- Product Usage Data**
☒ Don't send product usage data

At the bottom, a footer link reads: "Questions? Check out the [Administrator Guide](#) or contact [Tableau Customer Service](#)".

Configure TSM settings according to your organizational needs.

12 . TSM Configuration - Initialize

← → ↻ Not secure https://34.101.198.201:8850/#/ ☆ T ⋮

tableau

Activate Register Setup Initialize

Initializing...

18% complete

Generating apigateway mutual SSL certificates.

```
10:54:38 AM succeeded: Checking control plane services.
10:54:38 AM succeeded: Validating that there are no pending changes.
10:54:38 AM succeeded: Updating Configuration.
10:54:39 AM succeeded: Setting the default identity services tables.
10:54:39 AM succeeded: Generating new asset key.
10:54:40 AM succeeded: Saving asset key.
10:54:41 AM succeeded: Generating passwords.
10:54:42 AM succeeded: Generating secret keys.
```

This process could take a while to finish.


Click [Learn more](#) about configuring your server deployment with Tableau Services Manager. The server will be running after the initialization is complete.

You will need to create a Tableau Server Administrator account when this process finishes.

Questions? Check out the [Administrator Guide](#) or contact [Tableau Customer Service](#)

TSM will begin the initialization process.


13 . TSM Configuration - Initialize Complete

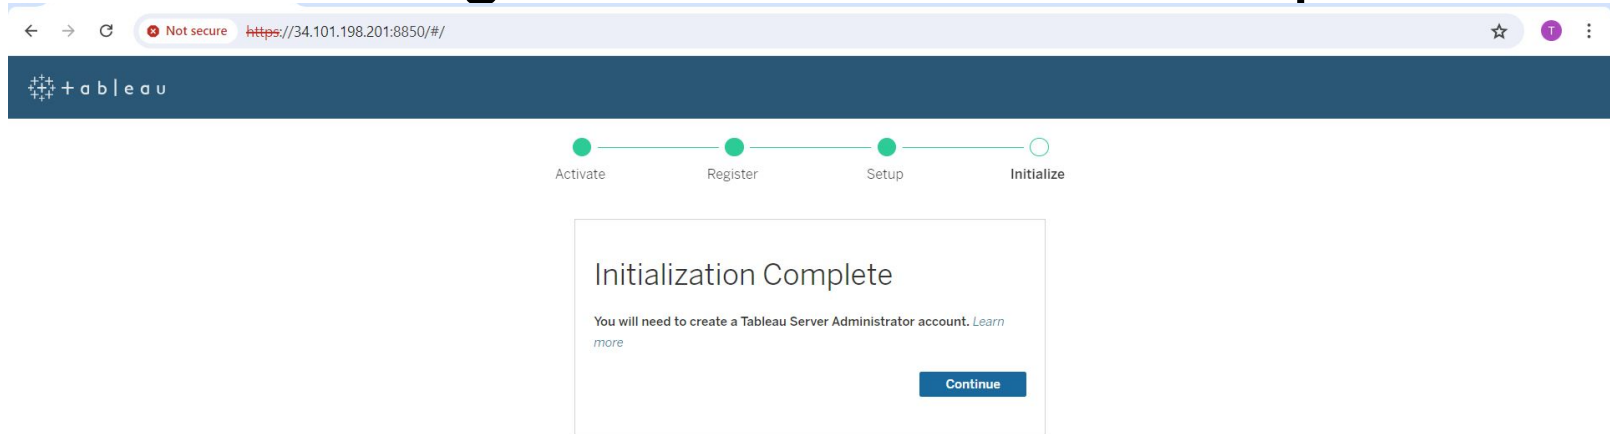

Questions? Check out the [Administrator Guide](#) or contact [Tableau Customer Service](#)


The initialization process for TSM has been completed.

14 . TSM GUI

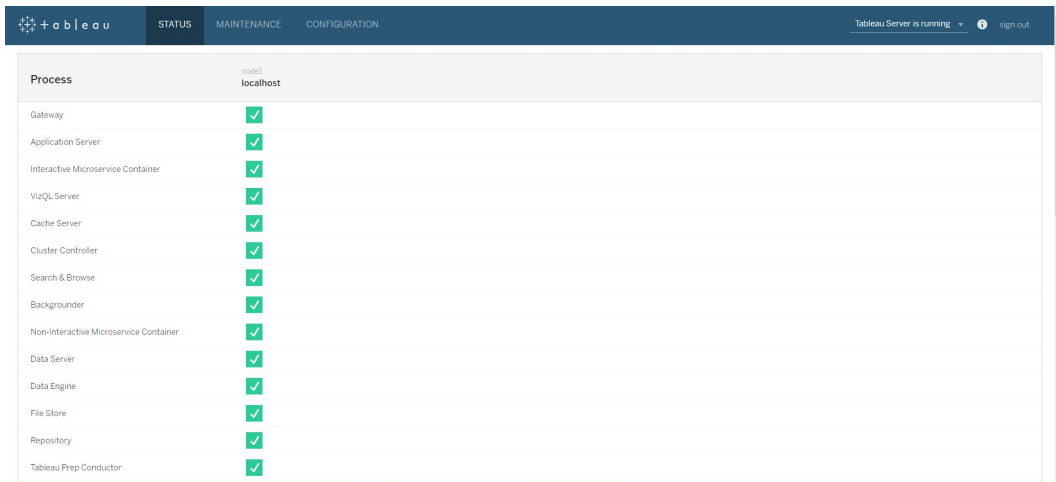

The screenshot shows the Tableau Server GUI with the STATUS tab selected. The header bar includes the Tableau logo, navigation tabs (STATUS, MAINTENANCE, CONFIGURATION), and a status indicator "Tableau Server is running" with a "sign out" link. The main content area displays a table of processes and their status.

Process	localhost
Gateway	✓
Application Server	✓
Interactive Microservice Container	✓
VizQL Server	✓
Cache Server	✓
Cluster Controller	✓
Search & Browse	✓
Backgrounder	✓
Non-Interactive Microservice Container	✓
Data Server	✓
Data Engine	✓
File Store	✓
Repository	✓
Tableau Prep Conductor	✓

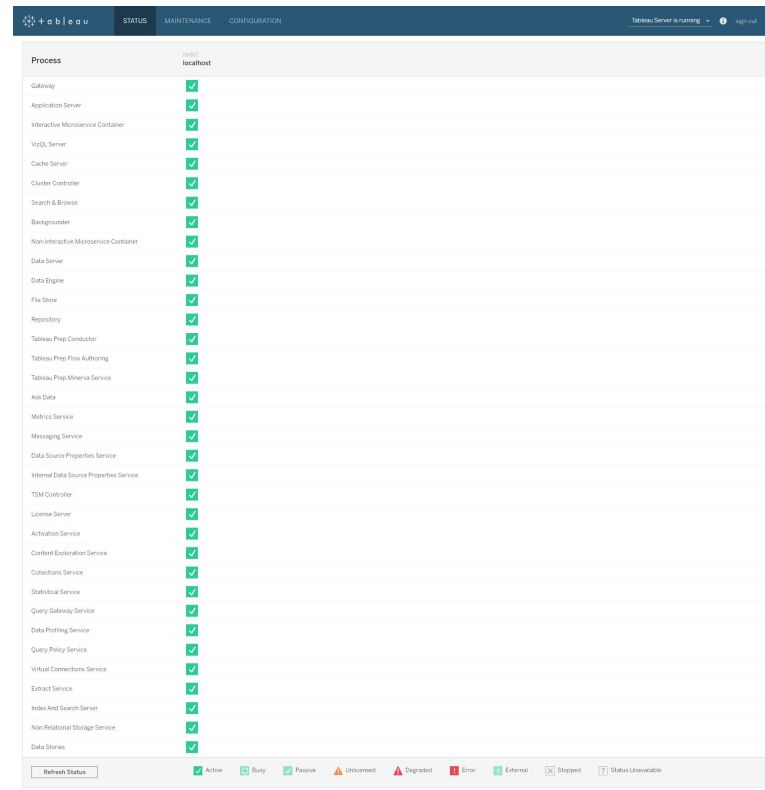

The screenshot shows the Tableau Server GUI with the STATUS tab selected. The header bar includes the Tableau logo, navigation tabs (STATUS, MAINTENANCE, CONFIGURATION), and a status indicator "Tableau Server is running" with a "sign out" link. The main content area displays a table of processes and their status.


Process	localhost
Gateway	✓
Application Server	✓
Interactive Microservice Container	✓
VizQL Server	✓
Cache Server	✓
Cluster Controller	✓
Search & Browse	✓
Backgrounder	✓
Non-Interactive Microservice Container	✓
Data Server	✓
Data Engine	✓
File Store	✓
Repository	✓
Tableau Prep Conductor	✓
Tableau Prep Flow Authoring	✓
Tableau Prep Minerva Service	✓
Ask Data	✓
Metrics Service	✓
Messaging Service	✓
Data Source Properties Service	✓
Internal Data Source Properties Service	✓
TSM Controller	✓
License Server	✓
Activation Service	✓
Content Exploration Service	✓
Collections Service	✓
Statistical Service	✓
Query Gateway Service	✓
Data Profiling Service	✓
Query Policy Service	✓
Virtual Connections Service	✓
Extract Service	✓
Index And Search Server	✓
Non-Relational Storage Service	✓
Data Stores	✓

Refresh Status

Active Busy Passive Unlicensed Upgraded Error External Stopped Status Unavailable

Open the TSM graphical user interface for management.

15 . TSM Configuration - Initial Tableau Server User

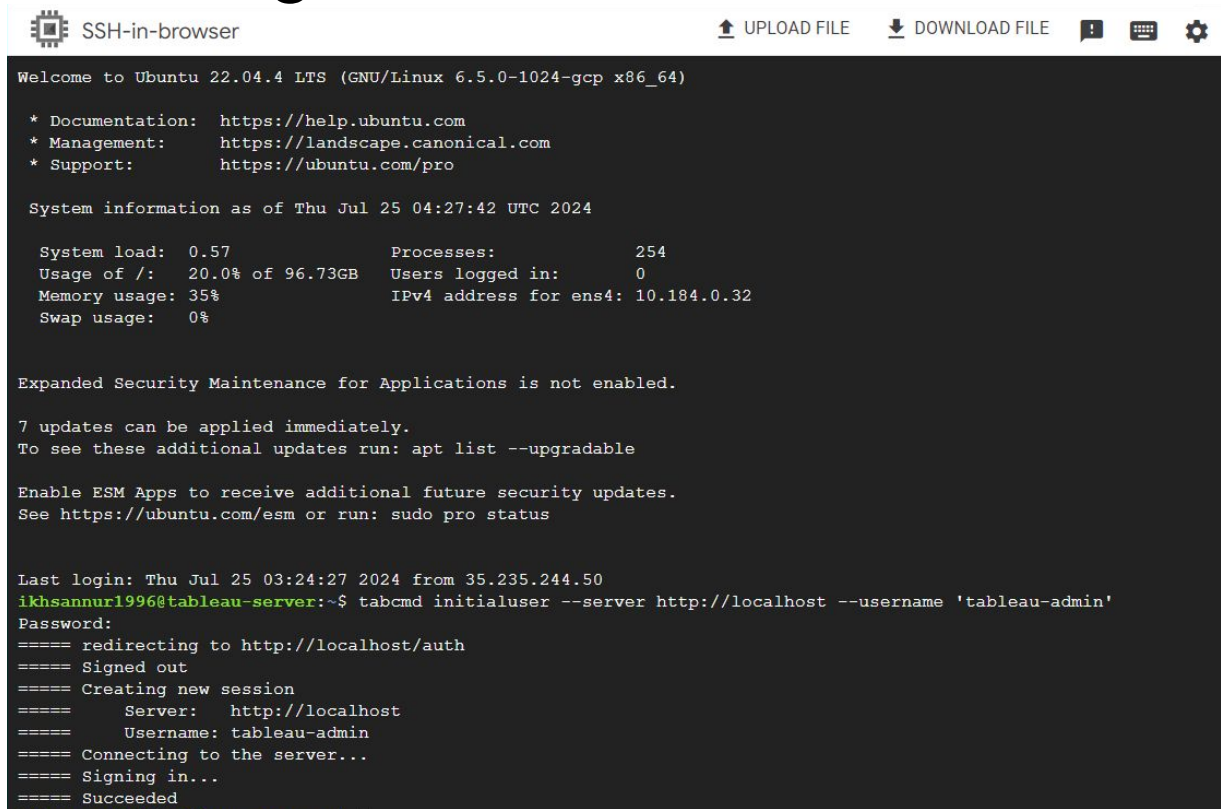

```
SSH-in-browser  UPLOAD FILE  DOWNLOAD FILE  !  [terminal icon]  [gear icon]

Welcome to Ubuntu 22.04.4 LTS (GNU/Linux 6.5.0-1024-gcp x86_64)

* Documentation:  https://help.ubuntu.com
* Management:    https://landscape.canonical.com
* Support:       https://ubuntu.com/pro

System information as of Thu Jul 25 04:27:42 UTC 2024

System load:  0.57               Processes:            254
Usage of /:   20.0% of 96.73GB   Users logged in:     0
Memory usage: 35%               IPv4 address for ens4: 10.184.0.32
Swap usage:   0%

Expanded Security Maintenance for Applications is not enabled.

7 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

Last login: Thu Jul 25 03:24:27 2024 from 35.235.244.50
ikhsannur1996@tableau-server:~$ tabcmd initialuser --server http://localhost --username 'tableau-admin'
Password:
===== redirecting to http://localhost/auth
===== Signed out
===== Creating new session
=====      Server:  http://localhost
=====      Username: tableau-admin
===== Connecting to the server...
===== Signing in...
===== Succeeded
```

Set up the initial user for Tableau Server login.

16 . Login to Tableau Server Using Initial User



The screenshot shows a web browser window with the address bar displaying "34.101.198.201/#/signin". The page features the Tableau logo, which consists of a grid of plus signs followed by the text "+ a b | e a u". Below the logo, there are two input fields: "Username" with the text "tableau-admin" and "Password" with masked characters "*****". A blue "Sign In" button is positioned below the password field.

← → ↻ ⚠ Not secure 34.101.198.201/#/signin 🔍 ☆ 1 ⋮

 + a b | e a u


Username
tableau-admin

Password

Sign In

Use the initial user credentials to access Tableau Server.

17 . Ensure Installation Was Successful

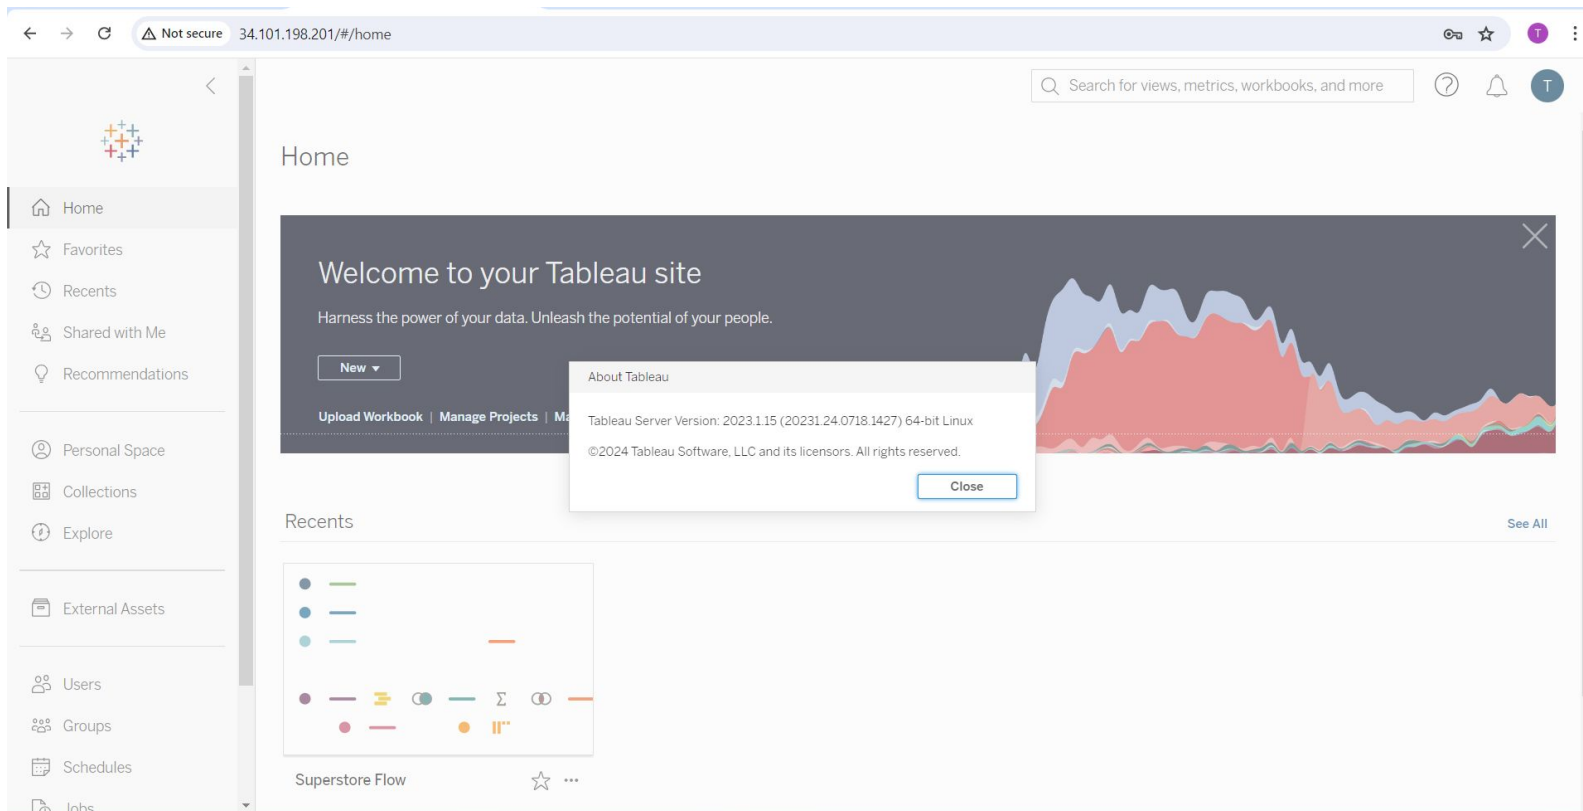

The screenshot shows the Tableau Server home page in a web browser. The address bar indicates the URL is 34.101.198.201/#/home. The page features a sidebar with navigation options: Home, Favorites, Recents, Shared with Me, Recommendations, Personal Space, Collections, Explore, External Assets, Users, Groups, Schedules, and Jobs. The main content area displays a 'Welcome to your Tableau site' message with a 'New' button and links for 'Upload Workbook', 'Manage Projects', and 'Manage My Tableau'. A large area chart is visible in the background. An 'About Tableau' dialog box is open in the center, displaying the following information:

About Tableau

Tableau Server Version: 2023.1.15 (20231.24.0718.1427) 64-bit Linux

©2024 Tableau Software, LLC and its licensors. All rights reserved.

Close

Below the dialog box, the 'Recents' section shows a 'Superstore Flow' visualization with a star icon and a 'See All' link.

Verify that Tableau Server has been installed successfully.

Driver Installation

1 . Installing Data Connectors Driver

Download and install necessary data connector drivers for Tableau from the official Tableau website .



PostgreSQL

Tableau Server: 2021.1 - 2024.2

Complete the following steps to install the PostgreSQL driver.

1. Download the Java 8 JDBC driver from <https://jdbc.postgresql.org/download/>
2. Copy the .jar file to the following folder (you may have to create it manually).

```
/opt/tableau/tableau_driver/jdbc
```

Resources

- [Database Drivers](#)

Tableau Bridge:

Complete the following steps to install the PostgreSQL driver.

1. Download the Java 8 JDBC driver from <https://jdbc.postgresql.org/download/>
2. Copy the .jar file to the following folder (you may have to create it manually).

```
/opt/tableau/tableau_driver/jdbc
```

<https://www.tableau.com/support/drivers>

2 . Restarting TSM


The screenshot shows the Tableau Server Administration console. The top navigation bar includes the Tableau logo, 'STATUS', 'MAINTENANCE', and 'CONFIGURATION' tabs. The right side of the bar shows 'Tableau Server is running' and a 'sign out' link. The left sidebar contains a menu with 'Topology', 'Security', 'User Identity & Access' (selected), 'Notifications', and 'Licensing'. The main content area is titled 'User Identity & Access' and contains sub-tabs for 'Identity Store', 'Authentication Method', 'Trusted Authentication' (selected), and 'Authorization Server'. Under 'Trusted Authentication', there is a description and a 'Trusted hosts' field with the value '103.23.198.4'. Below this is a 'Token Length' field with the value '24'. A modal dialog titled 'Applying Changes in Progress' is overlaid on the page. It shows a progress bar at 77% complete and a log of system messages. The log messages are as follows:

```
12:02:23 PM succeeded: Retrieving the configuration to deploy.  
12:02:26 PM succeeded: Validating the new topology.  
12:02:26 PM succeeded: Determining if server needs to be started.  
12:02:26 PM succeeded: Disabling all services.  
12:04:27 PM succeeded: Waiting for the services to stop.  
12:04:28 PM succeeded: Updating nodes to new topology.  
12:04:28 PM succeeded: Waiting for topology to be applied.  
12:04:28 PM succeeded: Updating nodes to new configuration.  
12:04:29 PM succeeded: Reconfiguring services.
```

Below the log, it states: 'We don't have information about how long this job runs. [Learn more](#) about running jobs with Tableau Services Manager.'


Restart TSM to apply changes after driver installation.

3 . Data Connectors Driver Testing

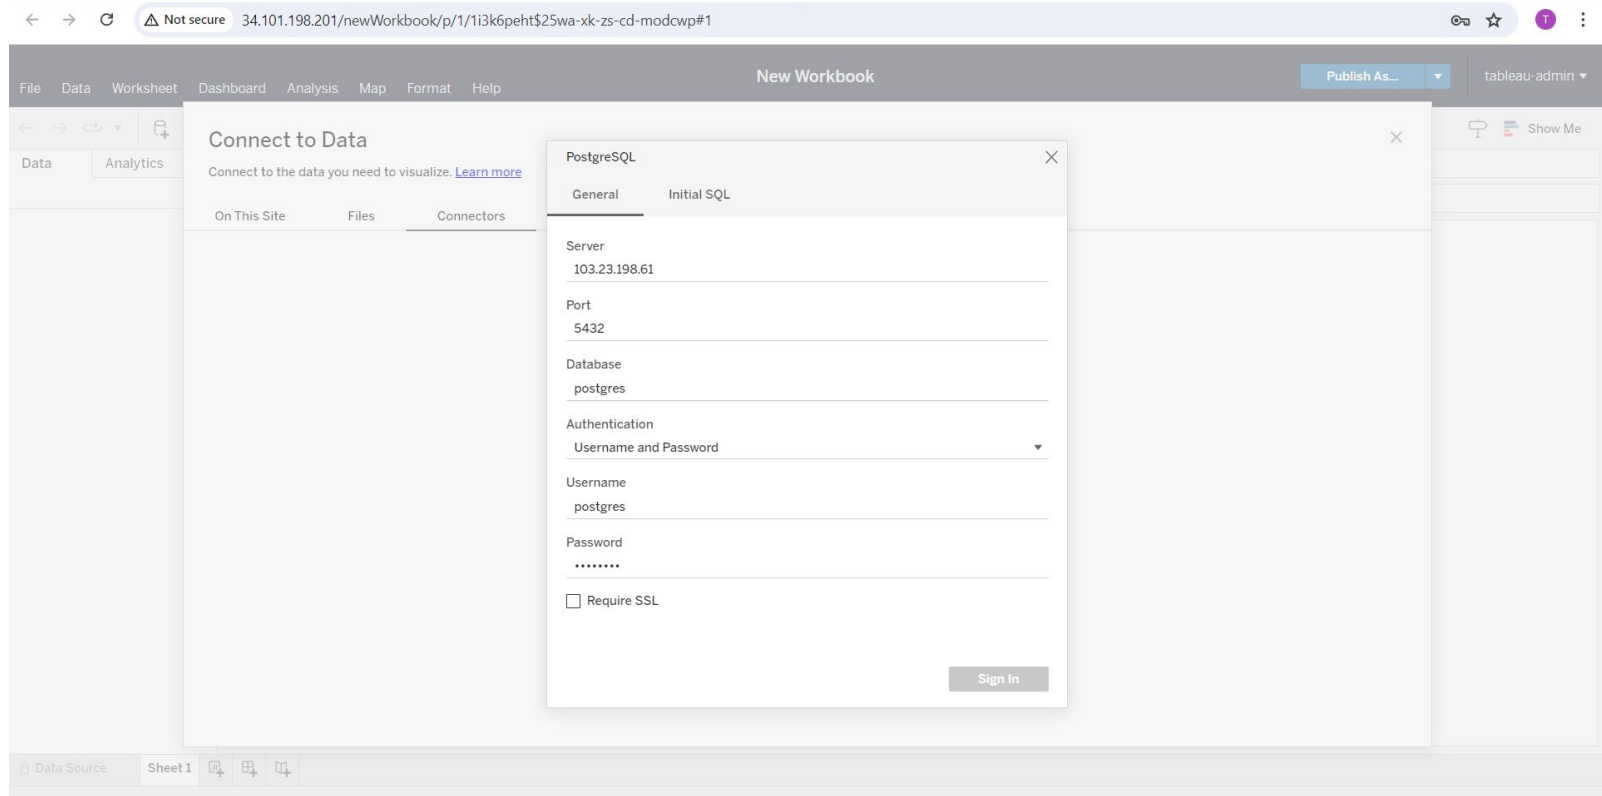

Ensure that the installed data connectors function correctly by performing tests.


4 . Ensuing The Data Connection Was Successful

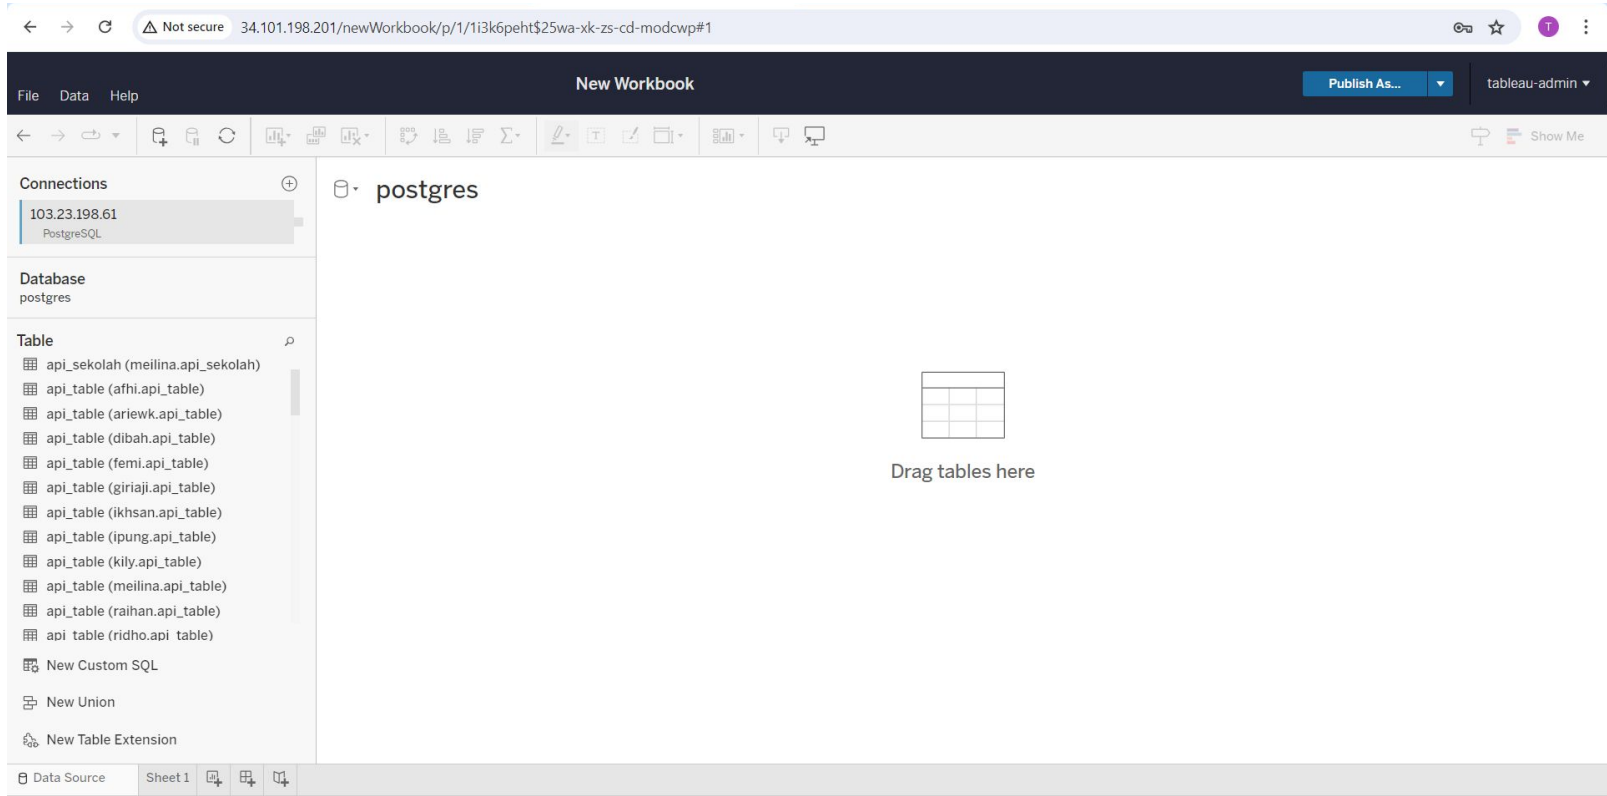

Data Connectors Driver Testing Success

DNS Configuration

1 . Configuring Cloud DNS

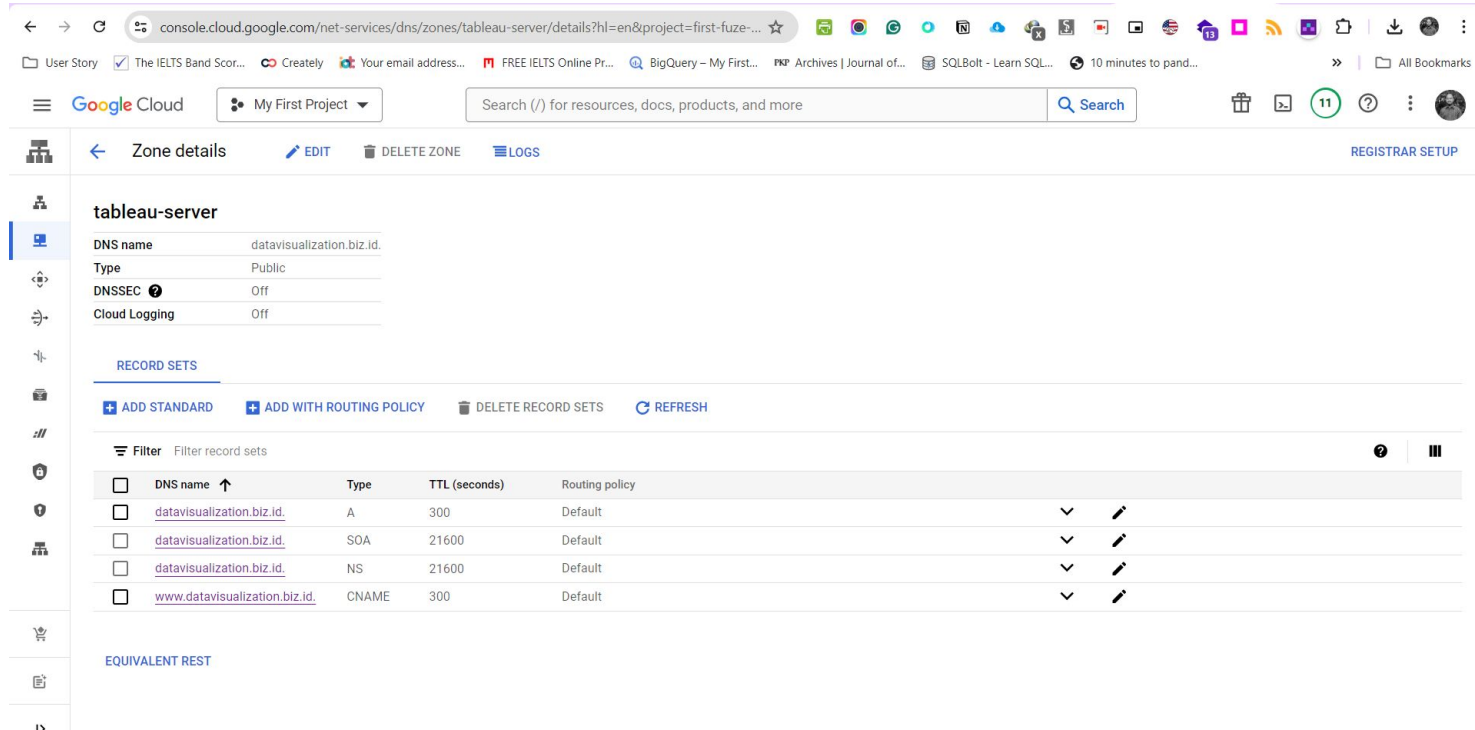

The screenshot shows the Google Cloud console interface for managing DNS zones. The browser address bar displays the URL: `console.cloud.google.com/net-services/dns/zones/tableau-server/details?hl=en&project=first-fuze-...`. The page title is "Zone details" for the "tableau-server" zone. The left sidebar shows the navigation menu with "DNS" selected. The main content area displays the zone details and a table of record sets.

Zone details:

- DNS name: `datavisualization.biz.id.`
- Type: Public
- DNSSEC: Off
- Cloud Logging: Off

RECORD SETS

Buttons: ADD STANDARD, ADD WITH ROUTING POLICY, DELETE RECORD SETS, REFRESH

Filter: Filter record sets

☐	DNS name ↑	Type	TTL (seconds)	Routing policy		
☐	datavisualization.biz.id.	A	300	Default	▼	✎
☐	datavisualization.biz.id.	SOA	21600	Default	▼	✎
☐	datavisualization.biz.id.	NS	21600	Default	▼	✎
☐	www.datavisualization.biz.id.	CNAME	300	Default	▼	✎

EQUIVALENT REST

Set up Cloud DNS for domain name management, following the guidelines provided by Google .
<https://cloud.google.com/dns/docs/set-up-dns-records-domain-name>
<https://www.youtube.com/watch?v=g1KKI7JVJH8>

2 . Configuring Cloud DNS

This screenshot shows the 'Resource record set details' page for a standard NS record. The DNS name is 'datavisualization.biz.id.', the type is 'NS', and the TTL is '21600'. The routing data table lists four NS records pointing to 'ns-cloud-e1.googledomains.com.' through 'ns-cloud-e4.googledomains.com.'. An 'EQUIVALENT REST' link is visible at the bottom.

DNS name	datavisualization.biz.id.
Type	NS
TTL(seconds)	21600

Routing data

Filter	Data
Filter routing data	ns-cloud-e1.googledomains.com.
	ns-cloud-e2.googledomains.com.
	ns-cloud-e3.googledomains.com.
	ns-cloud-e4.googledomains.com.

[EQUIVALENT REST](#)

This screenshot shows the 'Resource record set details' page for a SOA record. The DNS name is 'datavisualization.biz.id.', the type is 'SOA', and the TTL is '21600'. The routing data table shows a single SOA record pointing to 'ns-cloud-e1.googledomains.com. cloud-dns-hostmaster.google.com. 1 21600 3600 259200 300'. An 'EQUIVALENT REST' link is visible at the bottom.

DNS name	datavisualization.biz.id.
Type	SOA
TTL(seconds)	21600

Routing data

Filter	Data
Filter routing data	ns-cloud-e1.googledomains.com. cloud-dns-hostmaster.google.com. 1 21600 3600 259200 300

[EQUIVALENT REST](#)

This screenshot shows the 'Resource record set details' page for a CNAME record. The DNS name is 'www.datavisualization.biz.id.', the type is 'CNAME', and the TTL is '300'. The routing data table shows a single CNAME record pointing to 'datavisualization.biz.id.'. An 'EQUIVALENT REST' link is visible at the bottom.

DNS name	www.datavisualization.biz.id.
Type	CNAME
TTL(seconds)	300

Routing data

Filter	Data
Filter routing data	datavisualization.biz.id.

[EQUIVALENT REST](#)

This screenshot shows the 'Resource record set details' page for an A record. The DNS name is 'datavisualization.biz.id.', the type is 'A', and the TTL is '300'. The routing data table shows a single A record pointing to the IP address '34.101.198.201'. An 'EQUIVALENT REST' link is visible at the bottom.


DNS name	datavisualization.biz.id.
Type	A
TTL(seconds)	300

Routing data

Filter	Data
Filter routing data	34.101.198.201

[EQUIVALENT REST](#)

3. Configuring Name Server on Your DNS Provider

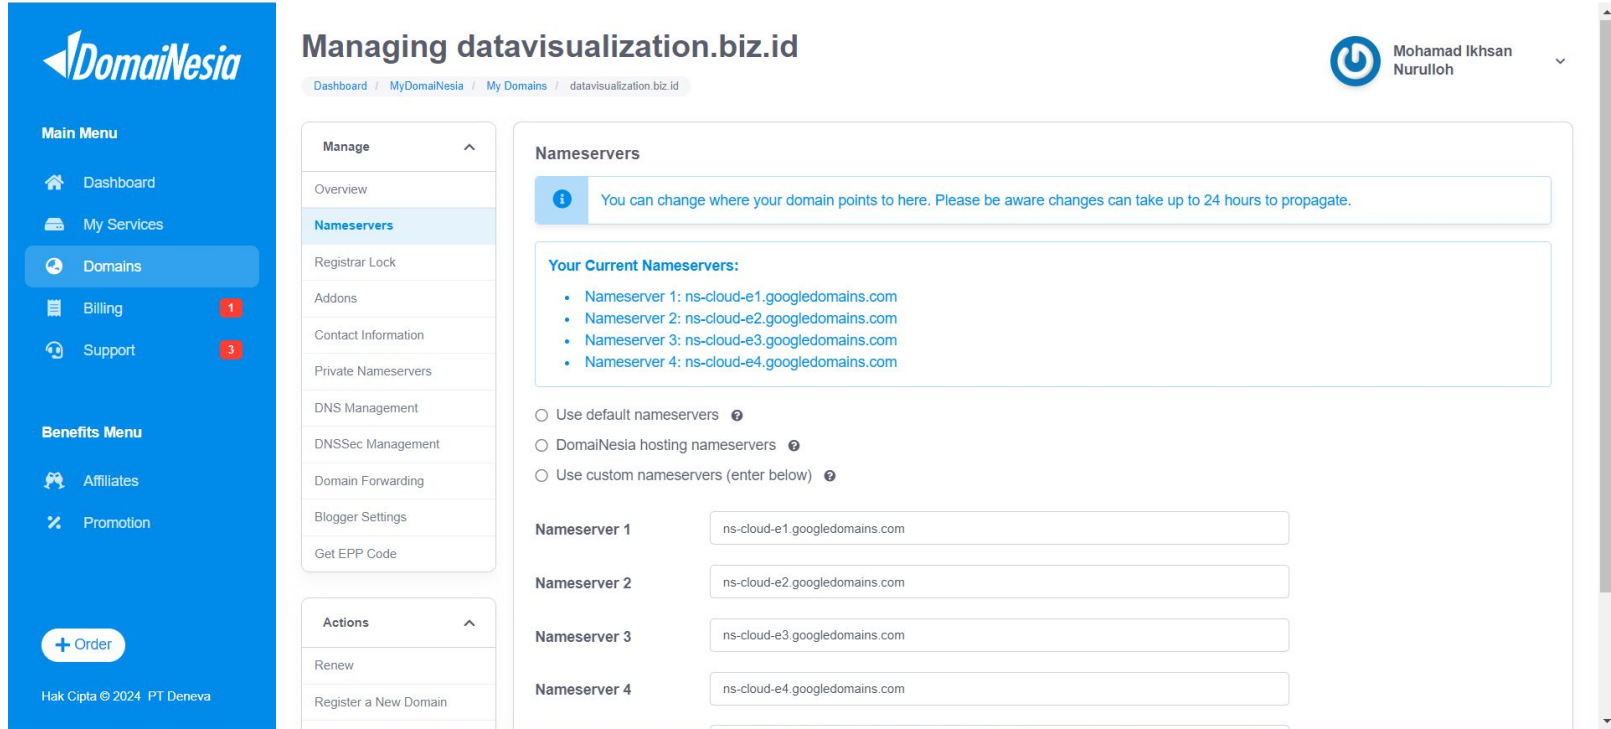

The screenshot displays the DomaiNesia dashboard interface. On the left is a blue sidebar with a 'Main Menu' containing links to Dashboard, My Services, Domains (highlighted), Billing, and Support. Below this is a 'Benefits Menu' with links to Affiliates and Promotion. The main content area is titled 'Managing datavisualization.biz.id' and includes a breadcrumb trail: Dashboard / MyDomaiNesia / My Domains / datavisualization.biz.id. A user profile for 'Mohamad Ikhsan Nurulloh' is in the top right. The central panel shows the 'Nameservers' configuration for the domain. It includes an information box stating that changes can take up to 24 hours to propagate. Below this, 'Your Current Nameservers' are listed as four Google Domains servers. Three radio buttons are present: 'Use default nameservers', 'DomaiNesia hosting nameservers', and 'Use custom nameservers (enter below)'. The 'Use custom nameservers' option is selected. Four input fields are provided, each containing one of the Google Domains nameserver addresses.

Nameservers

You can change where your domain points to here. Please be aware changes can take up to 24 hours to propagate.

Your Current Nameservers:

- Nameserver 1: ns-cloud-e1.googledomains.com
- Nameserver 2: ns-cloud-e2.googledomains.com
- Nameserver 3: ns-cloud-e3.googledomains.com
- Nameserver 4: ns-cloud-e4.googledomains.com

☐ Use default nameservers

☐ DomaiNesia hosting nameservers

☒ Use custom nameservers (enter below)

Nameserver 1: ns-cloud-e1.googledomains.com

Nameserver 2: ns-cloud-e2.googledomains.com

Nameserver 3: ns-cloud-e3.googledomains.com

Nameserver 4: ns-cloud-e4.googledomains.com

Configure the name server with your DNS provider to ensure proper domain resolution. Use services like DomaiNesia for DNS management. Get DNS and SSL: <https://www.domainesia.com/>

4 . Ping Testing

```
Windows PowerShell
PS C:\Users\user> ping 34.101.198.201

Pinging 34.101.198.201 with 32 bytes of data:
Reply from 34.101.198.201: bytes=32 time=24ms TTL=57
Reply from 34.101.198.201: bytes=32 time=78ms TTL=57
Reply from 34.101.198.201: bytes=32 time=282ms TTL=57
Reply from 34.101.198.201: bytes=32 time=123ms TTL=57


Ping statistics for 34.101.198.201:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 24ms, Maximum = 282ms, Average = 126ms
PS C:\Users\user> ping datavisualization.biz.id

Pinging datavisualization.biz.id [34.101.198.201] with 32 bytes of data:
Reply from 34.101.198.201: bytes=32 time=68ms TTL=57
Reply from 34.101.198.201: bytes=32 time=43ms TTL=57
Reply from 34.101.198.201: bytes=32 time=28ms TTL=57
Reply from 34.101.198.201: bytes=32 time=38ms TTL=57

Ping statistics for 34.101.198.201:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 28ms, Maximum = 68ms, Average = 44ms
```

Conduct ping tests to verify DNS configuration and connectivity.

5 . DNS Change Success

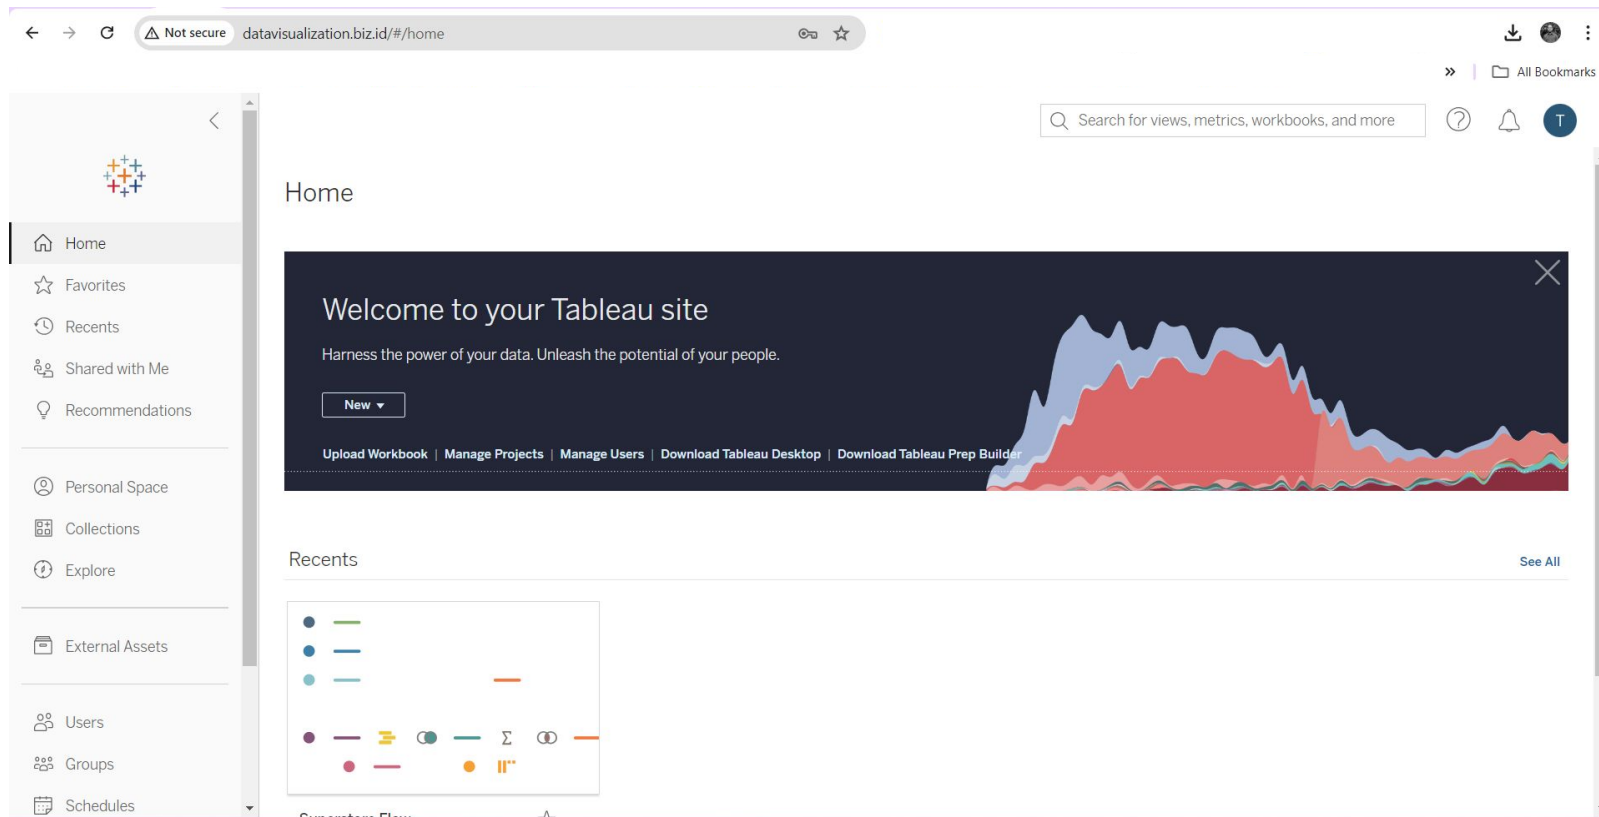

Ensure that DNS changes have been successfully implemented.

SSL Configuration

1 . Upload The Certificate and Key on TSM

The screenshot shows the Tableau Server configuration interface. The browser address bar indicates a 'Not secure' connection to `https://34.101.198.201:8850/#/configuration/security/external-ssl`. The navigation bar includes the Tableau logo, 'STATUS', 'MAINTENANCE', and 'CONFIGURATION' tabs. The 'CONFIGURATION' tab is active, and the 'Tableau Server is running' status is shown. The left sidebar lists 'Topology', 'Security', 'User Identity & Access', 'Notifications', and 'Licensing'. The 'Security' section is expanded, showing 'External SSL' and 'Repository SSL' tabs. The 'External SSL' tab is selected, displaying the 'External web server SSL' configuration. It includes a checkbox for 'Enable SSL for server communication' which is checked. Below this are fields for 'SSL certificate file (Required)' and 'SSL certificate key file (Required)', both with 'Select File' buttons. There is also an 'Optional' field for 'SSL certificate key passphrase' and a 'Select File' button for 'SSL certificate chain file'. A note at the bottom states: 'After you have configured external SSL, you can enable and configure mutual SSL authentication on Tableau Server. [Click here to configure mutual SSL.](#)' At the bottom of the configuration area are 'Cancel' and 'Save Pending Changes' buttons.

← → ↻ Not secure https://34.101.198.201:8850/#/configuration/security/external-ssl ☆ ⓘ T ⋮

Tableau STATUS MAINTENANCE **CONFIGURATION** Tableau Server is running ⓘ sign out

Topology

Security

User Identity & Access

Notifications

Licensing

Security

External SSL Repository SSL

External web server SSL

Configure SSL for encrypted communication between Tableau Server and clients. [Learn more](#)

☒ Enable SSL for server communication

SSL certificate file (Required) **datavisualization_biz_id.crt**

SSL certificate key file (Required) **datavisualization_biz_id.key**

SSL certificate key passphrase

SSL certificate chain file

After you have configured external SSL, you can enable and configure mutual SSL authentication on Tableau Server. [Click here to configure mutual SSL.](#)

Securely upload the SSL certificate and key to TSM to enable HTTPS.

2. Restart TSM

The screenshot shows the Tableau Server Configuration page for External SSL. The page is titled "Security" and "External SSL". It includes a sidebar with navigation links: Topology, Security, User Identity & Access, Notifications, and Licensing. The main content area shows the "External web server SSL" configuration. A modal dialog box titled "Applying Changes in Progress" is displayed in the foreground, showing a progress bar at 77% complete. The dialog box contains a log of the configuration process, including steps like "Retrieving the configuration to deploy", "Validating the new topology", "Determining if server needs to be started", "Disabling all services", "Waiting for the services to stop", "Updating nodes to new topology", "Waiting for topology to be applied", "Updating nodes to new configuration", and "Reconfiguring services". The log indicates that the last successful run of this job took 21 minute(s).

Tableau Server Configuration - External SSL

Security

External SSL

External web server SSL

Configure SSL for encrypted communication between Tableau Server and external web servers.

☒ Enable SSL for server communication.

SSL certificate file (Required) **datavisualization**

SSL certificate key file (Required) **datavisualization**

SSL certificate key passphrase

SSL certificate chain file

After you have configured external SSL, you can click the **Reset** button to restart the configuration process.

Applying Changes in Progress

77% complete

Waiting for services to reconfigure.


```
2:04:39 PM succeeded: Retrieving the configuration to deploy.
2:04:39 PM succeeded: Validating the new topology.
2:04:39 PM succeeded: Determining if server needs to be started.
2:04:40 PM succeeded: Disabling all services.
2:05:55 PM succeeded: Waiting for the services to stop.
2:05:55 PM succeeded: Updating nodes to new topology.
2:05:56 PM succeeded: Waiting for topology to be applied.
2:05:56 PM succeeded: Updating nodes to new configuration.
2:05:56 PM succeeded: Reconfiguring services.
```

The last successful run of this job took 21 minute(s).
[Learn more about running jobs with Tableau Services Manager.](#)

Cancel **Reset**

Restart TSM to apply SSL configurations.

3 . Check SSL on Tableau Server

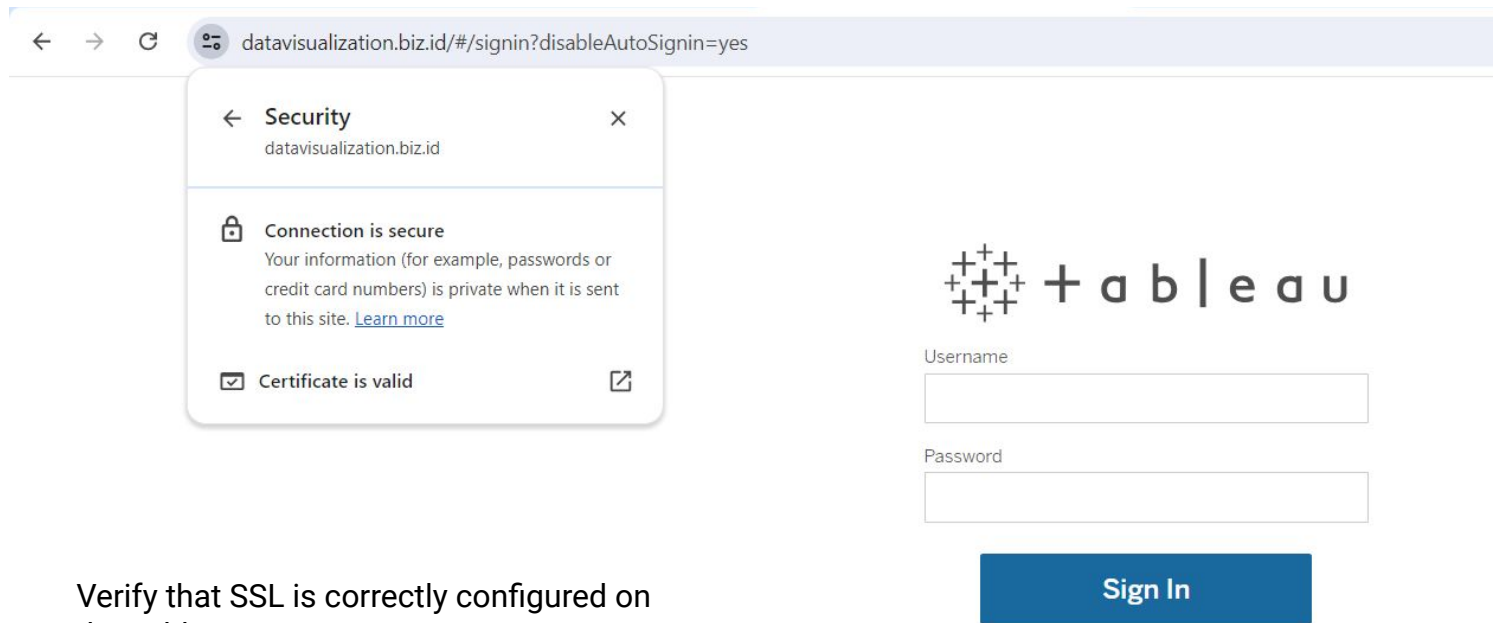

The screenshot shows a web browser window with the address bar displaying `datavisualization.biz.id/#/signin?disableAutoSignIn=yes`. A security warning dialog box is open, titled "Security" with a back arrow and a close button. It shows the URL `datavisualization.biz.id` and states "Connection is secure" with a lock icon, explaining that information is private and providing a [Learn more](#) link. It also indicates "Certificate is valid" with a checkmark icon and an external link icon. To the right of the dialog is the Tableau login page, featuring the Tableau logo (a grid of plus signs followed by the text "+ a b | e a u"). Below the logo are input fields for "Username" and "Password", and a blue "Sign In" button.

Verify that SSL is correctly configured on the Tableau Server.

Connect to BigQuery


1. Add User to OAuth consent screen

The screenshot shows the Google Cloud console interface for configuring an OAuth consent screen. The top navigation bar includes the Google Cloud logo, the project name 'My First Project', a search bar, and various utility icons. The left sidebar shows the 'API' section selected. The main content area is titled 'OAuth consent screen' and contains the following elements:

- A '+ ADD USERS' button.
- A 'Filter' input field with the placeholder text 'Enter property name or value'.
- A 'User information' section showing the email address 'ikhsannur1996@gmail.com' and a trash icon for deletion.
- A 'SHOW LESS' link.
- A section titled 'OAuth rate limits' with a sub-header 'Your token grant rate'.
- Explanatory text: 'Token grant rates limit how quickly your application can get new users. Your current per day token grant rate limit is 10,000 grants per day. The per day token grant rate resets every day. [Raise daily token limit](#)'.
- Rate limit selection: '5 minutes' and '1 day' (selected) buttons.
- A line chart showing the grant rate limit over time. The y-axis ranges from 0 to 10,001. A red dashed line at 10,000 indicates the current limit. A message on the chart states: 'No data is available for the selected time frame.' The x-axis shows a timeline from 12 PM to 9 AM on Monday, 29th.

Configure user access for OAuth authentication with Google services.

2 . Add Credential Client ID for Web application

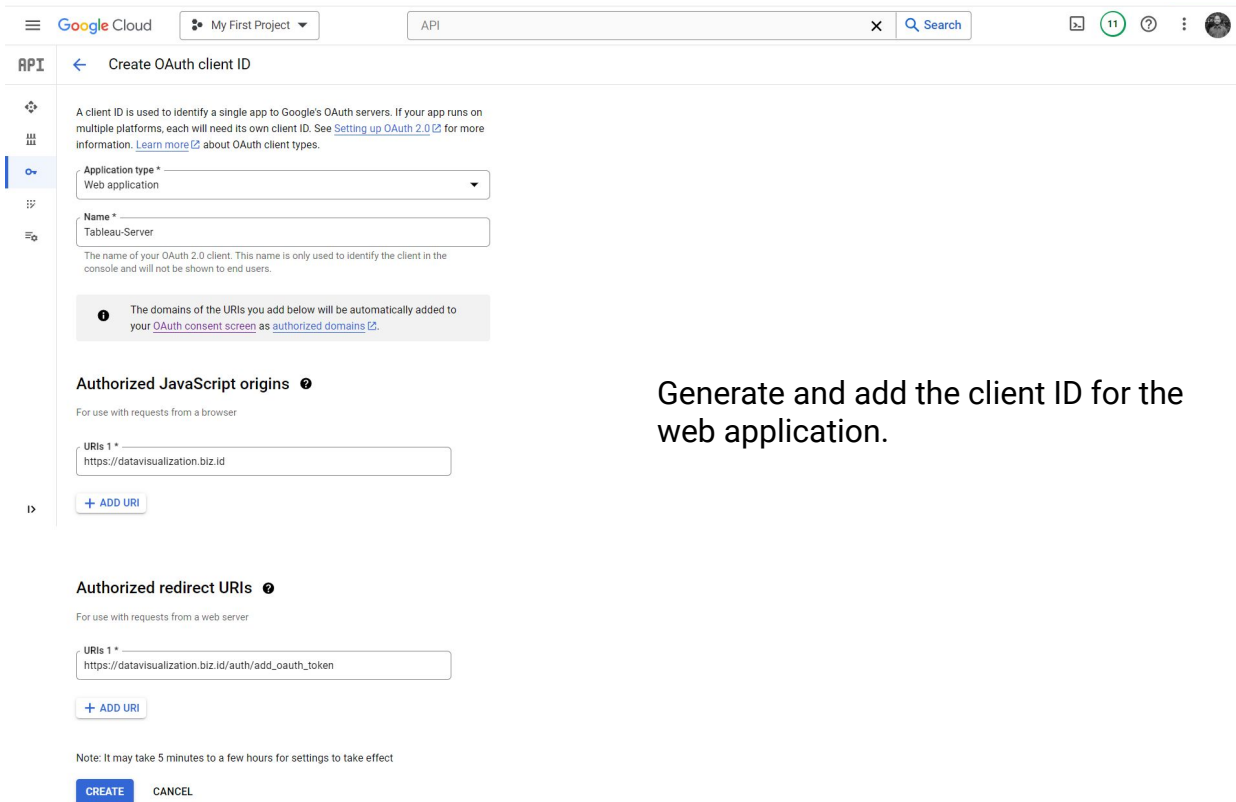

The screenshot shows the 'Create OAuth client ID' page in the Google Cloud console. The page is for 'My First Project' and is titled 'Create OAuth client ID'. It includes a sidebar with navigation icons and a main content area with the following sections:

- Application type ***: A dropdown menu set to 'Web application'.
- Name ***: A text input field containing 'Tableau-Server'.
- Authorized JavaScript origins**: A section for browser requests with a text input field containing 'https://datavisualization.biz.id' and a '+ ADD URI' button.
- Authorized redirect URIs**: A section for web server requests with a text input field containing 'https://datavisualization.biz.id/auth/add_oauth_token' and a '+ ADD URI' button.

At the bottom, there is a note: 'Note: It may take 5 minutes to a few hours for settings to take effect'. Below the note are two buttons: 'CREATE' and 'CANCEL'.

Generate and add the client ID for the web application.

3 . Get Client ID and Client Secret

Additional information

Client ID	399288505099-u3t801086h6juiv1sf4khvbsd7cvugr.apps.googleusercontent.com
Creation date	July 26, 2024 at 10:46:04 AM GMT+7

Client secrets

If you are in the process of changing client secrets, you can manually rotate them without downtime. [Learn more](#)

Client secret	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	 
Creation date	July 26, 2024 at 10:46:04 AM GMT+7	
Status	 Enabled	

Retrieve the necessary credentials for OAuth connections.

4 . Add OAuth Clients Registry on Tableau Server


The screenshot displays the Tableau Server Admin interface. On the left is a sidebar with navigation options: Favorites, Recents, Shared with Me, Recommendations, Personal Space, Collections, Explore, External Assets, Users, Groups, Schedules, Jobs, Tasks, Server Status, and Settings. The main content area is titled 'General' and includes tabs for Licenses, Extensions, Customization, Integrations, Resource Limits, Connected Apps, Add a Site, and Mobile. A 'Create OAuth Client' dialog box is open in the center, containing the following fields:

- Connection Type: Google BigQuery
- OAuth Instance URL: Optional
- Client ID: 399288505099-u3t801086h6juiv1sf4khvbsd7cvug
- Client Secret: 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
- Redirect URL: https://datavisualization.biz.id/auth/add_oauth_tok

At the bottom of the dialog are 'Close' and 'Add OAuth Client' buttons. In the background, the 'OAuth Clients Registry' section is visible, showing a 'Register OAuth Clients to be used on this site' link and an 'Add OAuth Client' button.

Register OAuth clients on Tableau Server for secure data access.

5 . Testing Connection to BigQuery

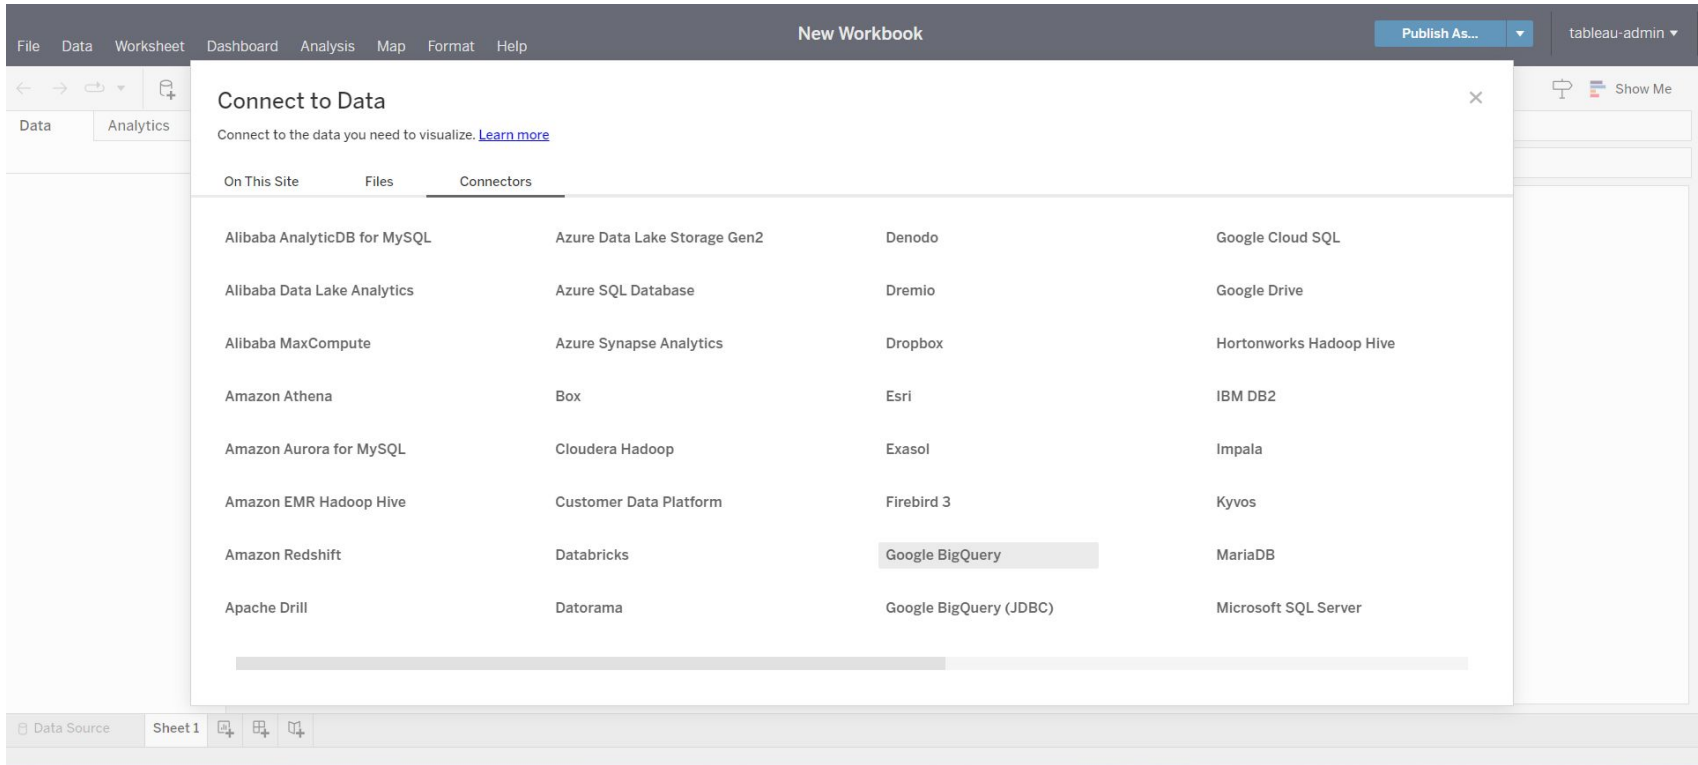

Verify the connection to BigQuery to ensure successful integration.

6 . Confirm BigQuery Connection

The screenshot shows the Tableau interface with a 'New Workbook' header. The left sidebar contains a 'Connections' panel with 'BigQuery' selected, and a 'Table' panel listing 'shakespeare', 'trigrams', and 'wikipedia'. The main workspace displays a 'wikipedia (samples)' connection with a 'Need more data?' message. Below this, a table view shows the 'wikipedia' table with columns: Title, Id, Language, Wp Namespace, Is Redirect, Revision Id, Contributor Ip, and Con. The bottom of the interface shows a 'Data Source' tab and a 'Sheet 1' tab.

Connections

- BigQuery (Google BigQuery)

Billing Project: My First Project

Project: publicdata

Dataset: samples

Table: wikipedia

Need more data? Drag tables here to relate them. [Learn more](#)

Name	Type	Field Name	Physical Table	Rem...
wikipedia				


Update Now

Update Automatically

Ensure that the connection to BigQuery is functioning as expected.

Testing Publish Tableau Workbook

1. Open Tableau Desktop

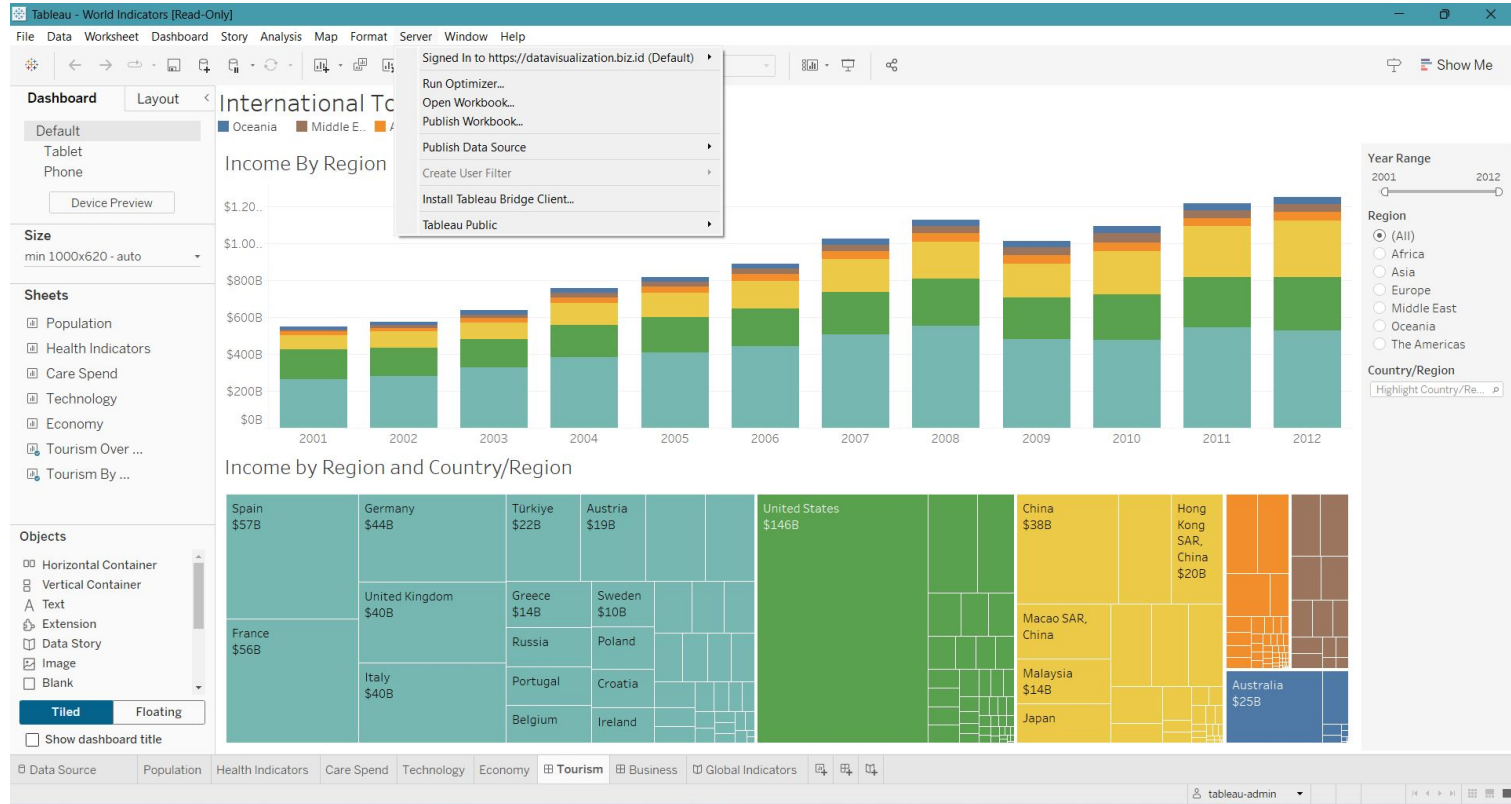

Launch Tableau Desktop to prepare for publishing.

2 . Publish Dashboard

Tableau - World Indicators [Read-Only]

File Data Worksheet Dashboard Story Analysis Map Format Server Window Help

Dashboard Layout

Default
Tablet
Phone

Device Preview

Size
min 1000x620 - auto

Sheets

- Population
- Health Indicators
- Care Spend
- Technology
- Economy
- Tourism Over ...
- Tourism By ...

Objects

- Horizontal Container
- Vertical Container
- Text
- Extension
- Data Story
- Image
- Blank

Tiled Floating

Show dashboard title

International Tourism

Income By Region

Income by Region and Country/Region

Publish Workbook to Tableau Server

Location
Default

Name
World Indicators - Testing

Description

Tags
Add

Sheets
All Edit

Permissions
Same as project (Default) Edit

Data Sources
1 embedded in workbook Edit

More Options

- ☐ Show sheets as tabs
- ☒ Show selections
- ☒ Include external files

Warning:
Server is running an older version than your copy of Tableau Desktop. The workbook will be downgraded on the server and may lose some functionality. All datasources must be embedded in the workbook.

Workbook Optimizer

Publish

Year Range
2001 2012

Region
☒ (All)
☐ Africa
☐ Asia
☐ Europe
☐ Middle East
☐ Oceania
☐ The Americas

Country/Region
Highlight Country/Region


China \$38B
Hong Kong SAR, China \$20B
Macao SAR, China
Malaysia \$14B
Japan
Australia \$25B
France \$56B
Germany \$44B
United Kingdom \$40B
Italy \$40B
Spain \$57B

Data Source Population Health Indicators Care Spend Technology Economy Tourism Business Global Indicators

tableau-admin

Execute the process to publish your dashboard from Tableau Desktop to the Tableau Server.

3 . Dashboard Has Been Published

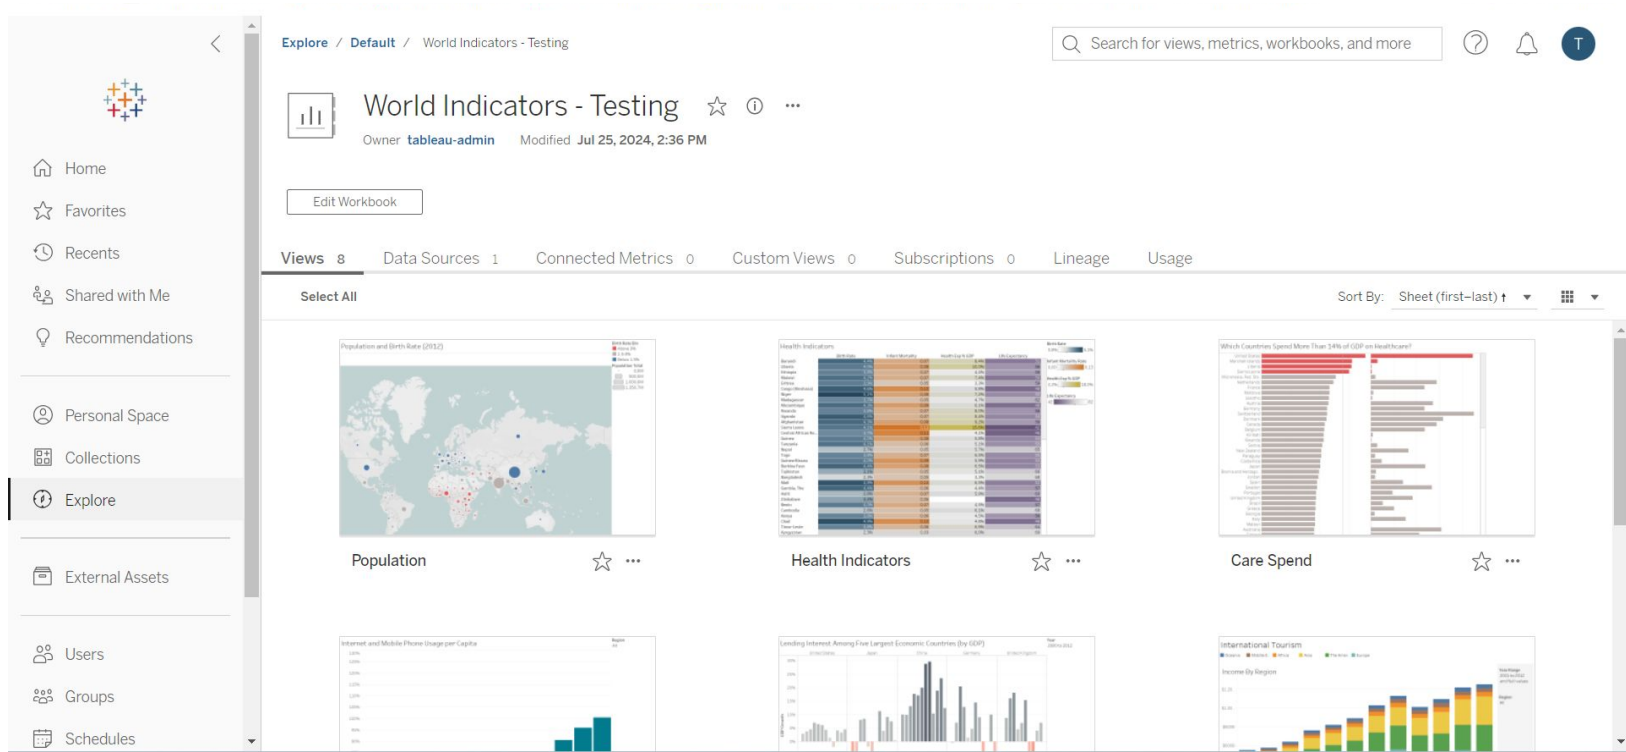

Verify that the dashboard has been successfully published.

References

- <https://help.tableau.com/current/server-linux/en-us/setup.htm>
- https://help.tableau.com/current/offline/en-us/tableau_server_enterprise_deployment_guide.pdf
- <https://www.tableau.com/support/releases/server>
- https://help.tableau.com/current/server/en-us/server_hardware_min.htm
- <https://www.tableau.com/support/drivers>
- https://help.tableau.com/current/server-linux/en-us/startup.htm?_gl=1*1a0hdx7*_ga*MjA4MTc5OTMxNS4xNjk4OTEwNTYz*_ga_8YLN0SNXVS*MTcyMTg3OTkxMy45Ni4xLjE3MjE4ODE1NzguMC4wLjA
- <https://www.tableau.com/learn/whitepapers/google-bigquery-tableau-best-practices#form>
- <https://help.tableau.com/current/server/en-us/ports.htm>
- https://help.tableau.com/current/desktopdeploy/en-us/desktop_deploy_proxy.htm
- <https://www.tableau.com/support/drivers>
- <https://cloud.google.com/dns/docs/set-up-dns-records-domain-name>
- <https://www.youtube.com/watch?v=g1KKI7JVJH8>
- https://help.tableau.com/current/server/en-us/ssl_config.htm
- <https://www.domainesia.com/>

Thank You