
A01 | Accident (dataset label) | t = 8.44 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

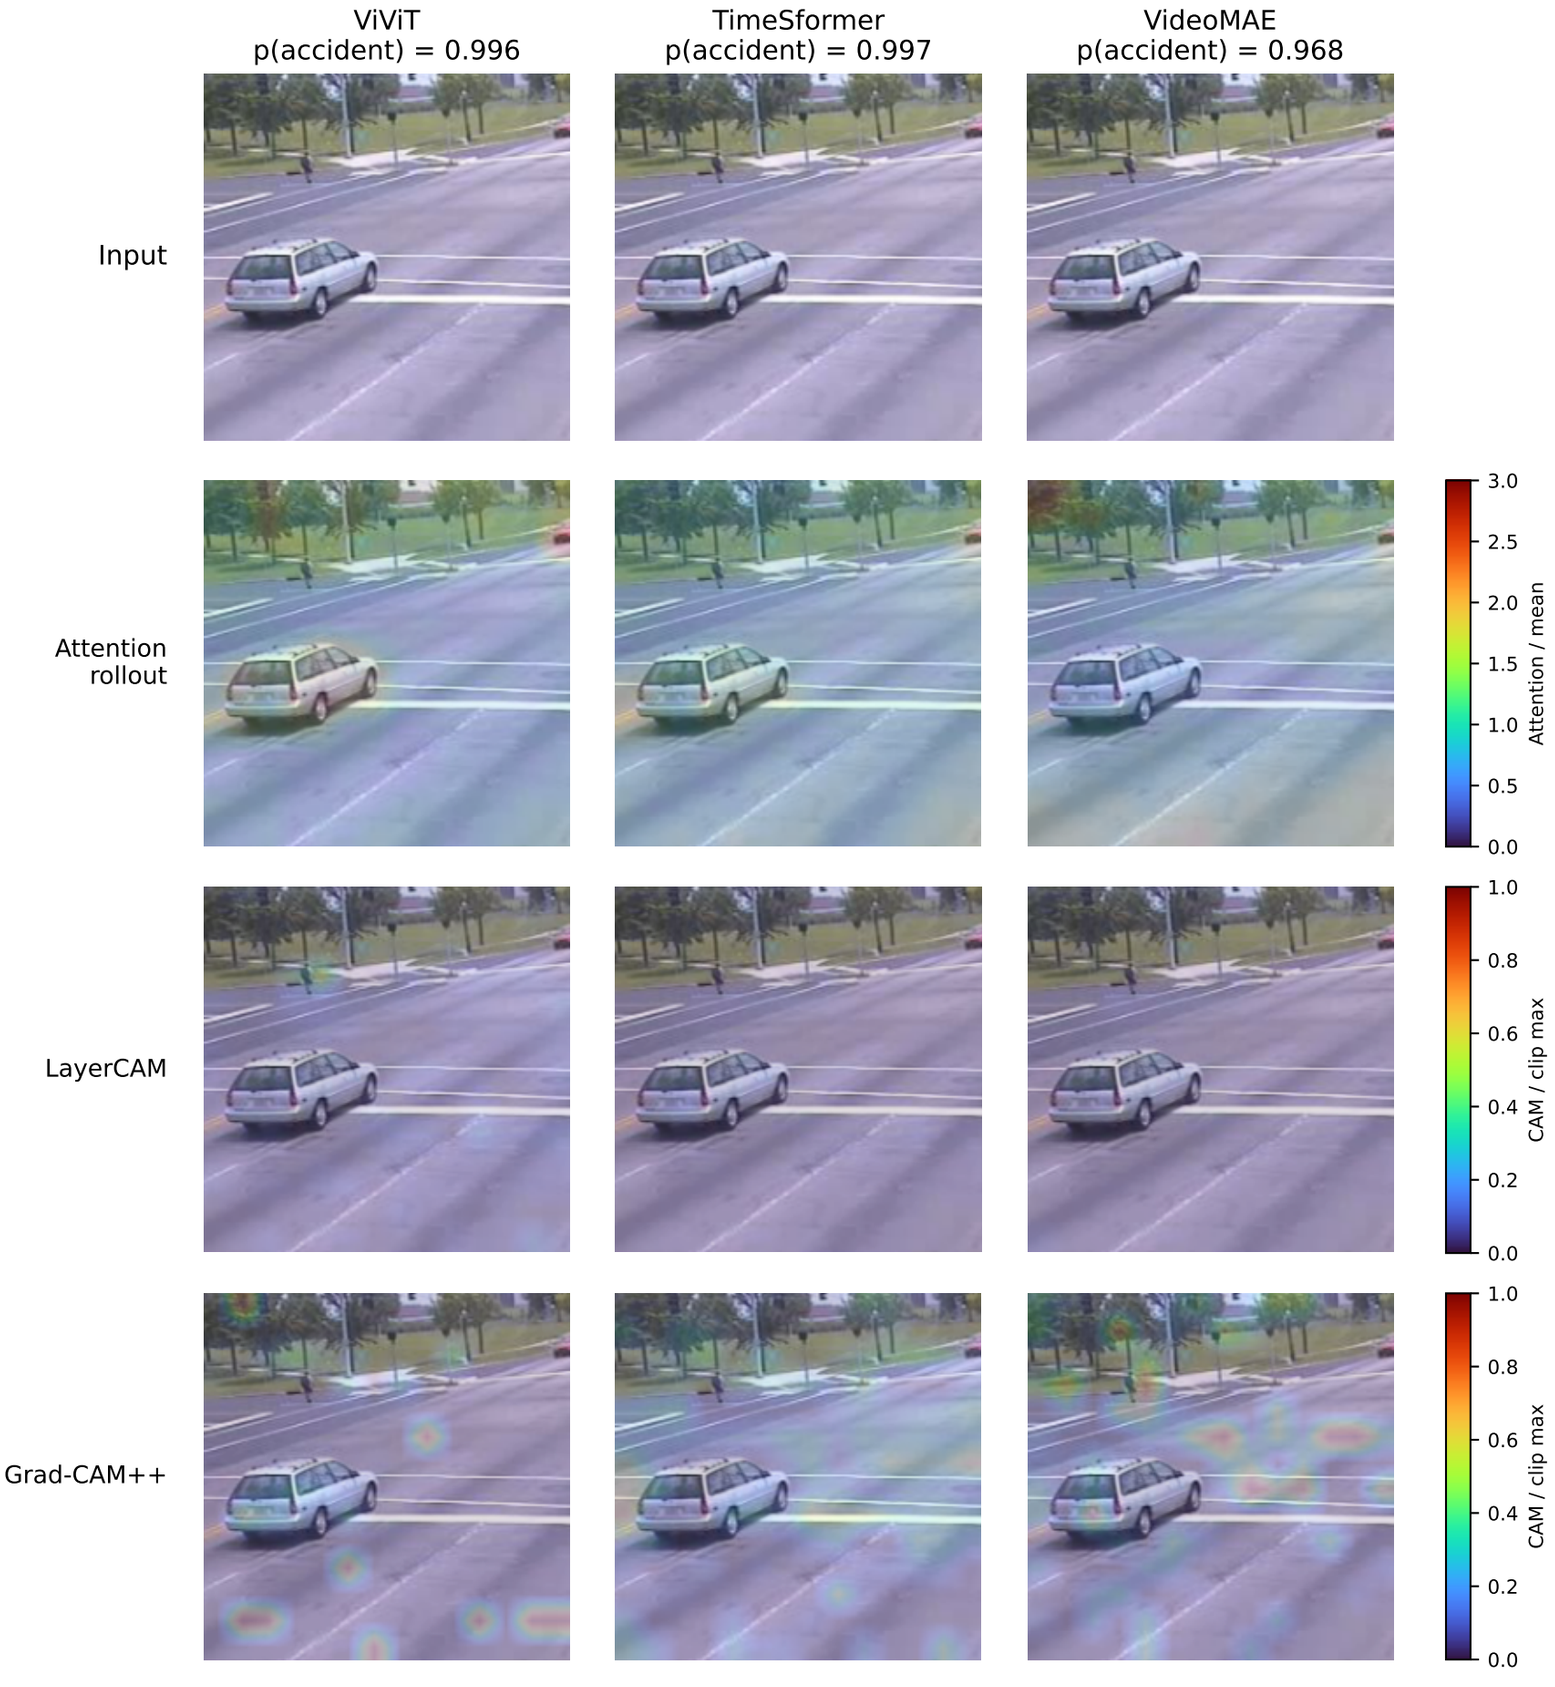

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A02 | Accident (dataset label) | t = 29.46 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

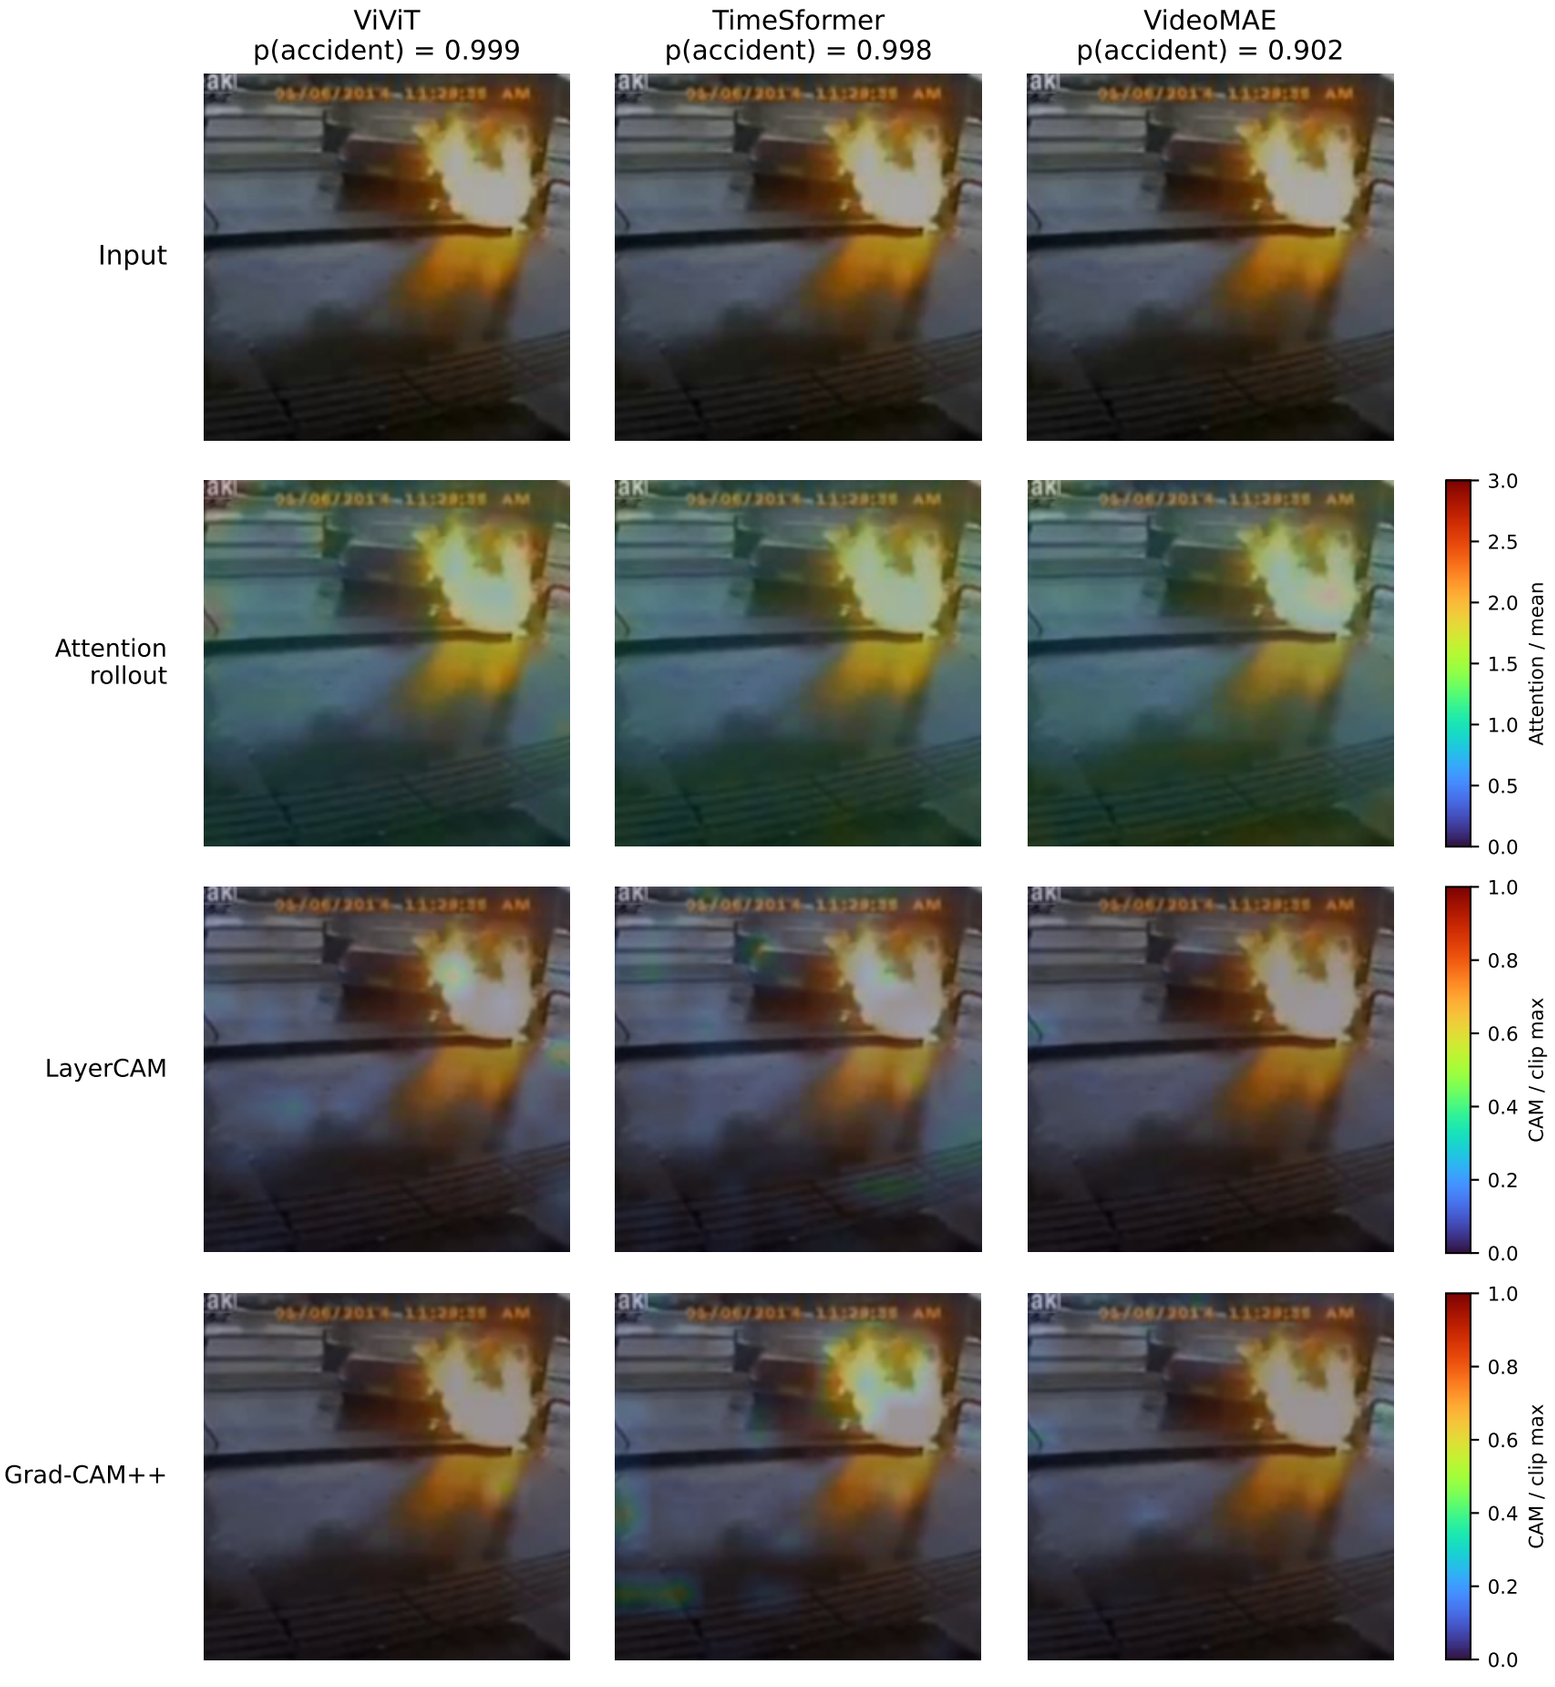

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A03 | Accident (dataset label) | t = 22.54 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

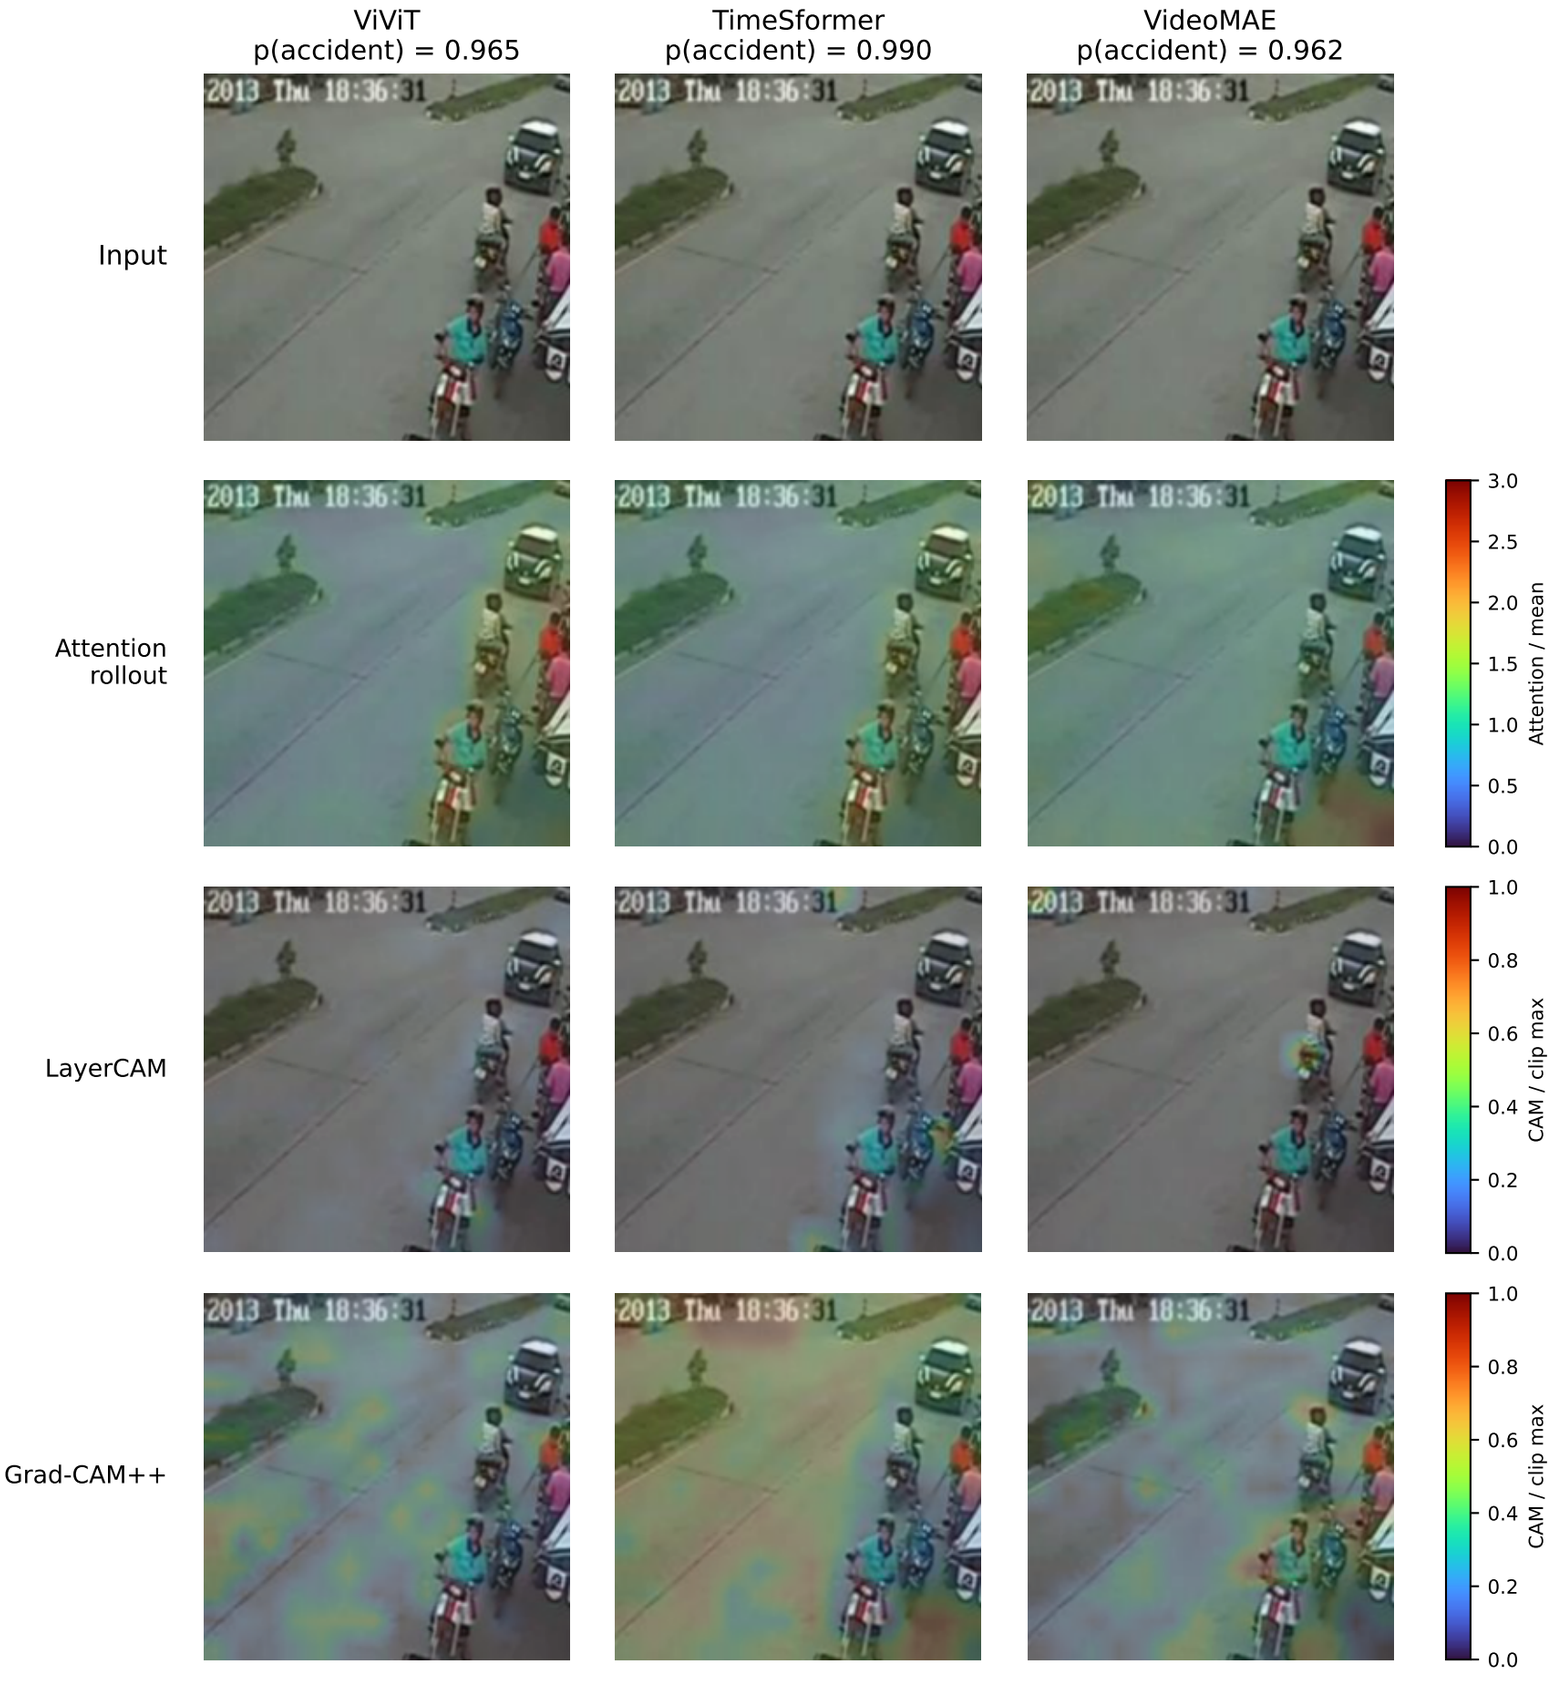

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A04 | Accident (dataset label) | t = 2.29 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

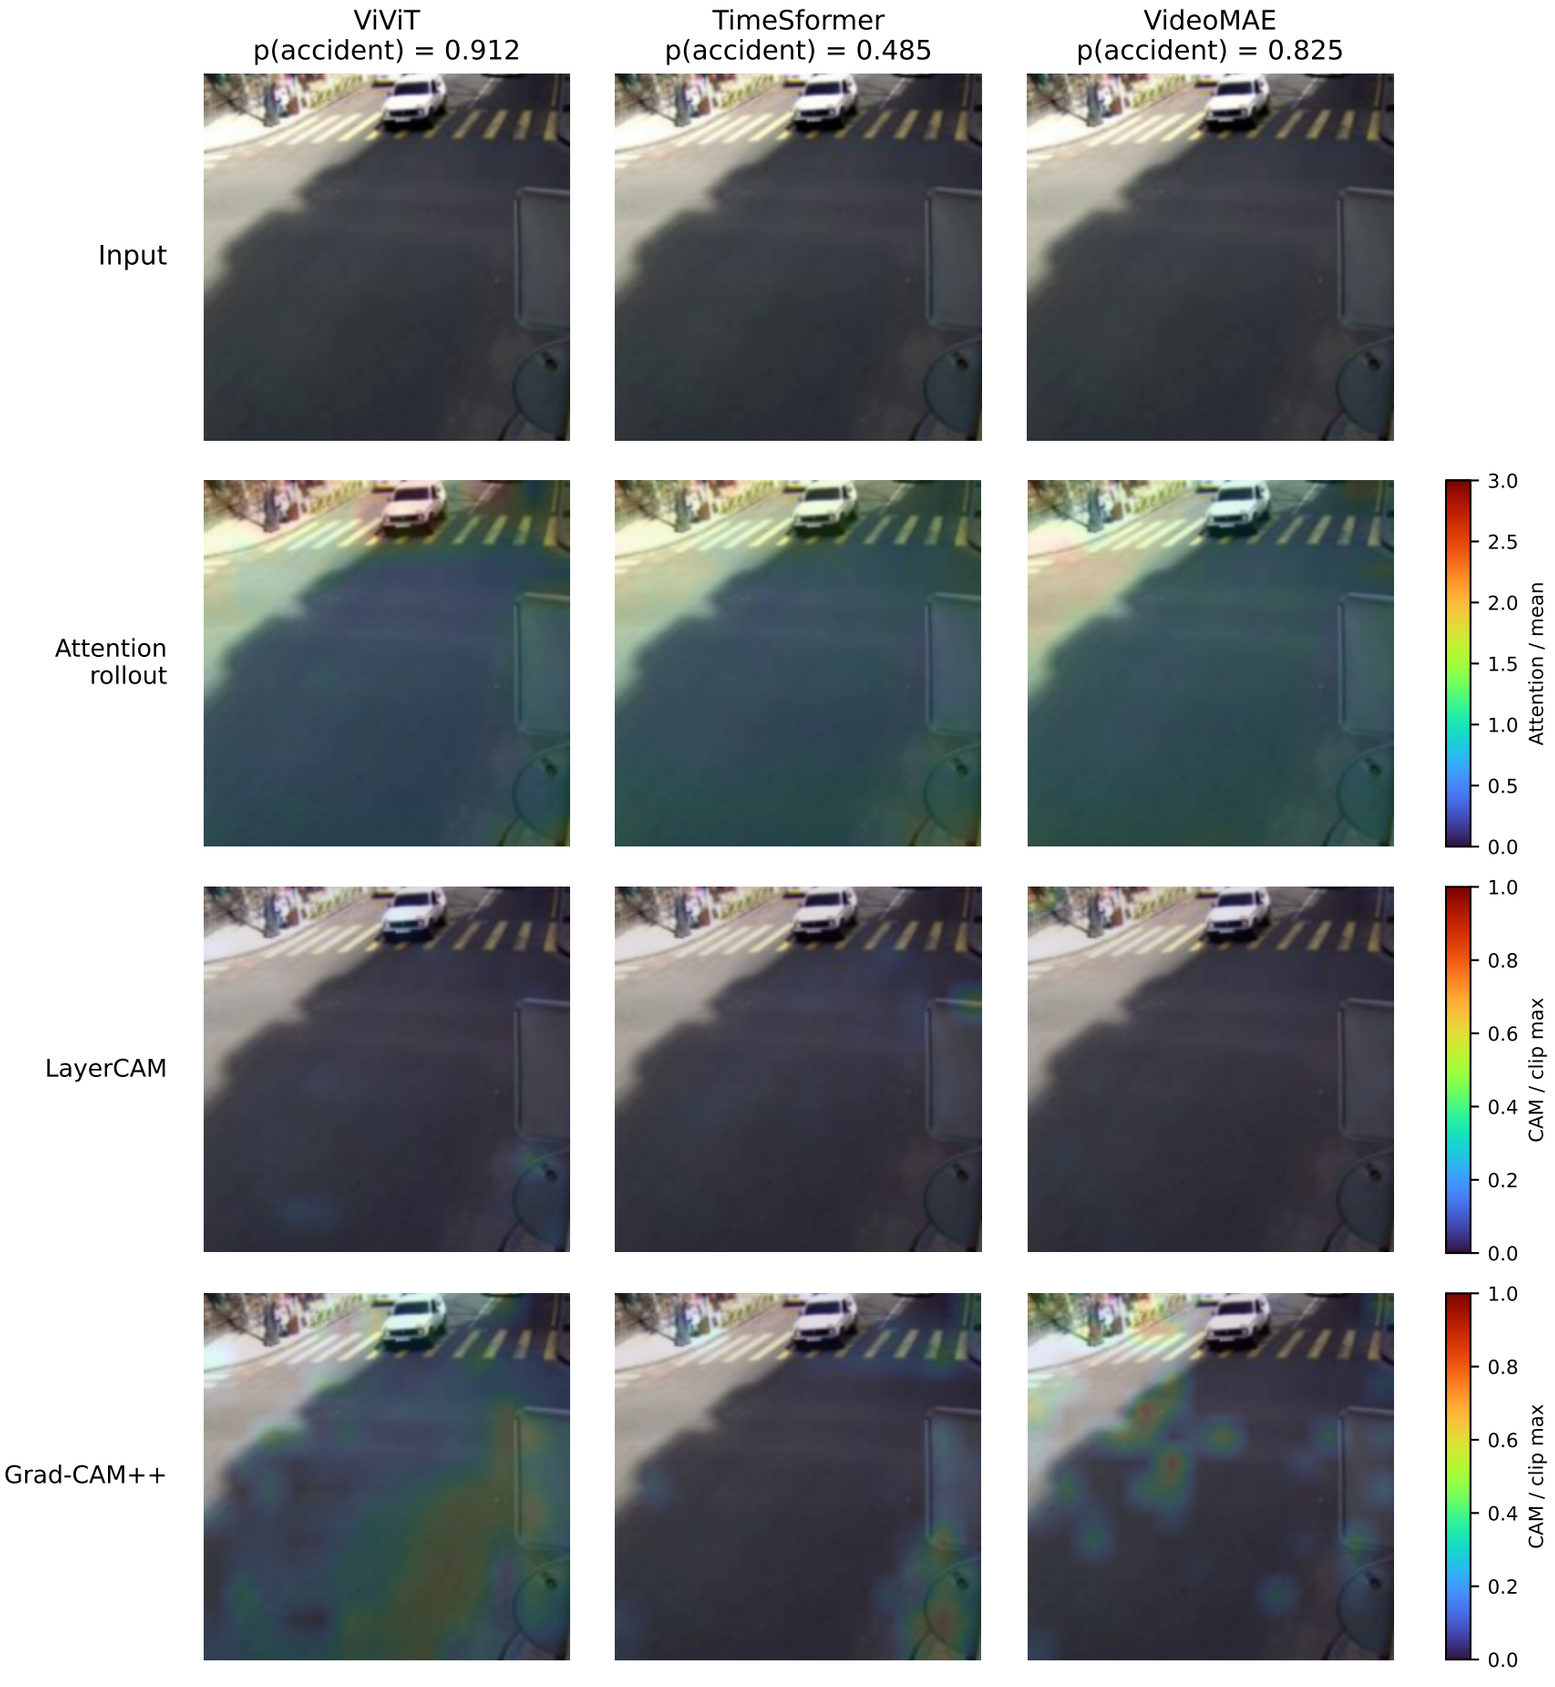

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A05 | Accident (dataset label) | t = 22.14 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

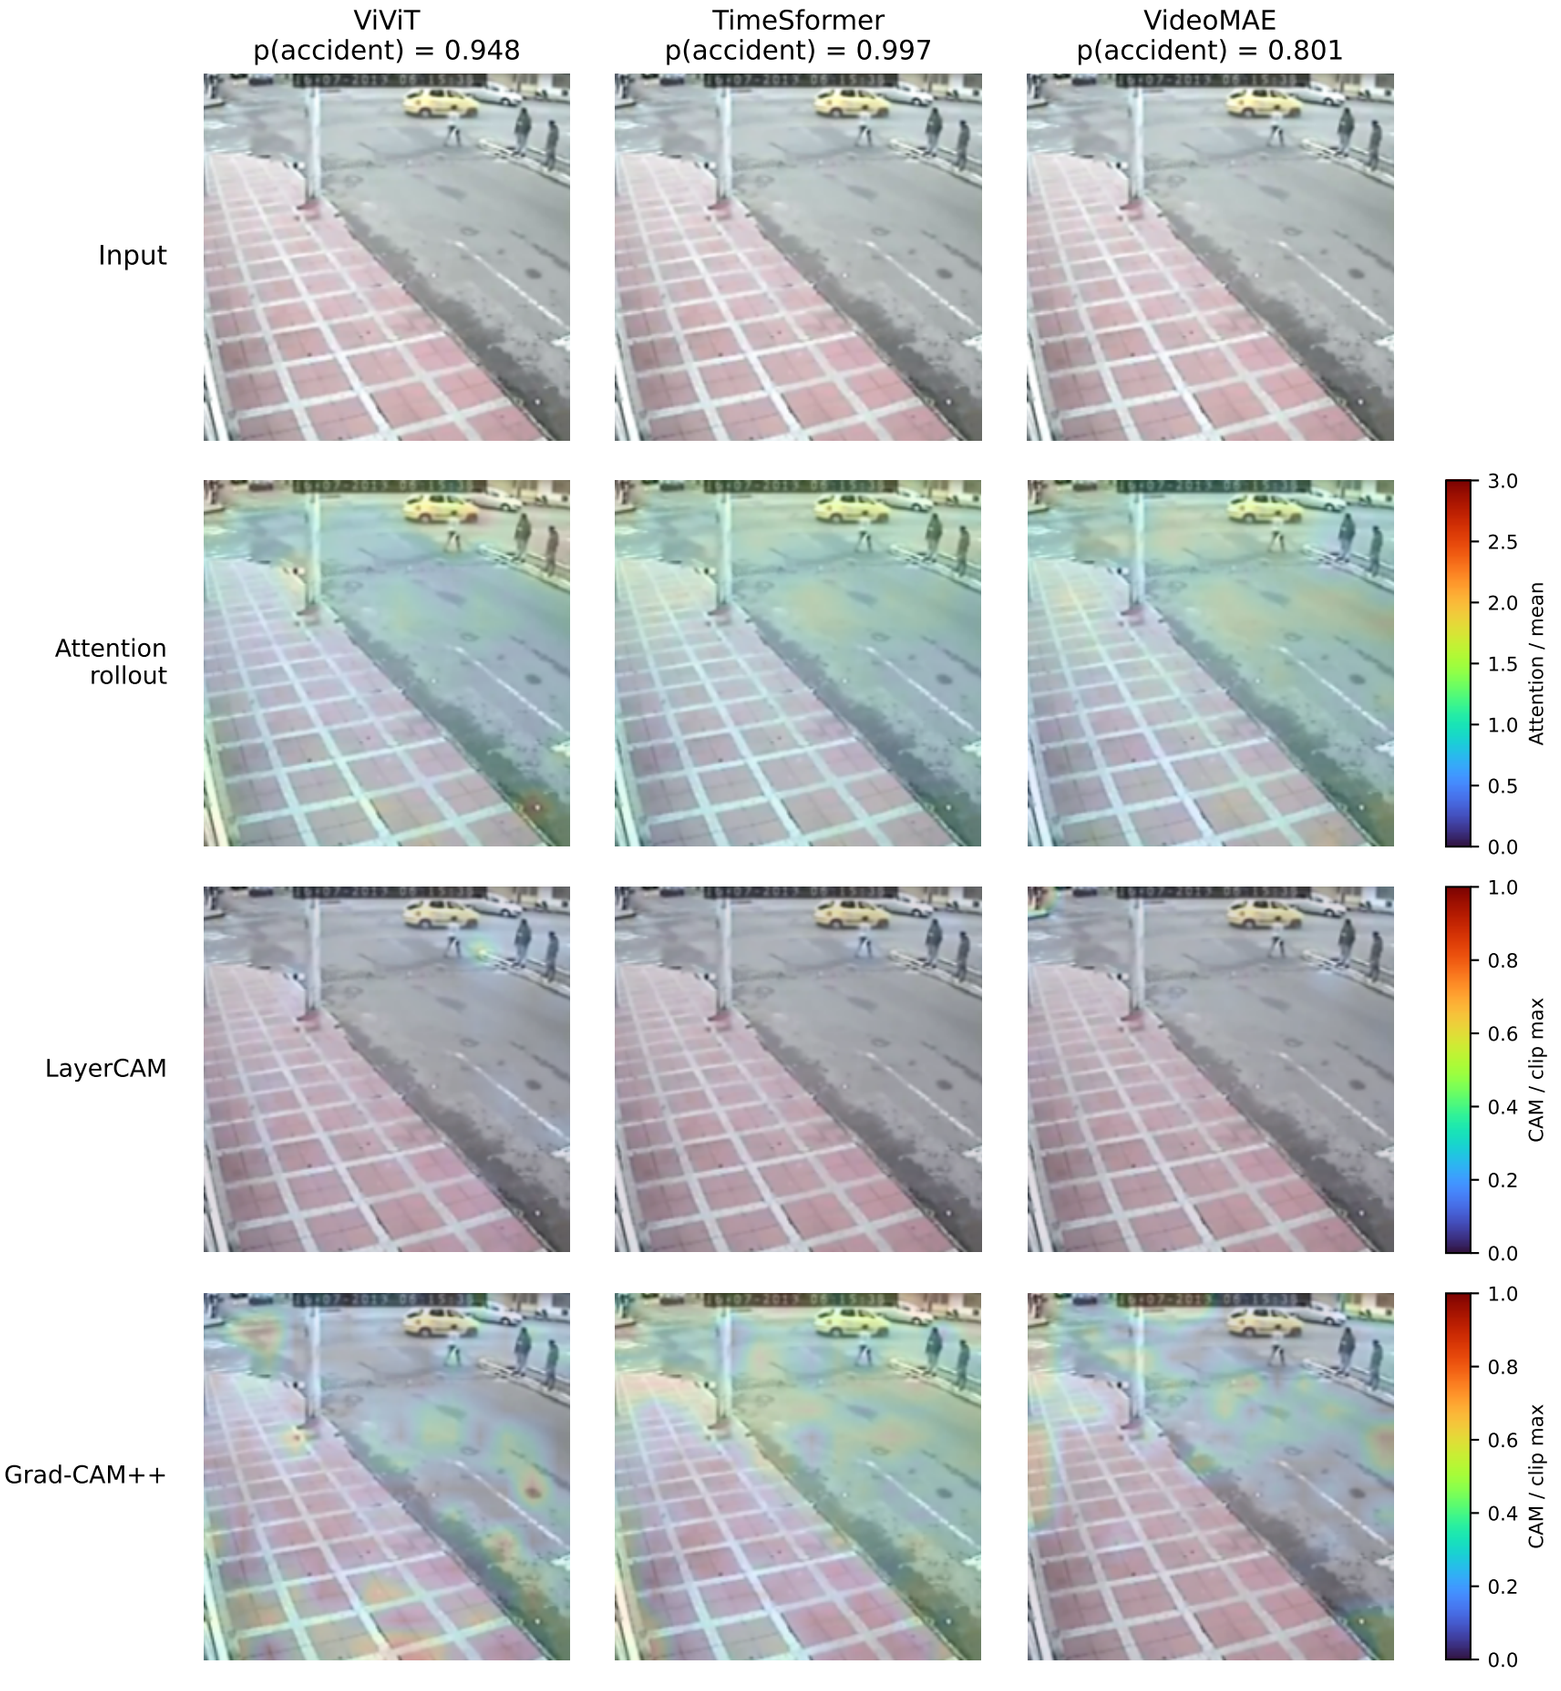

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A06 | Accident (dataset label) | t = 38.33 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

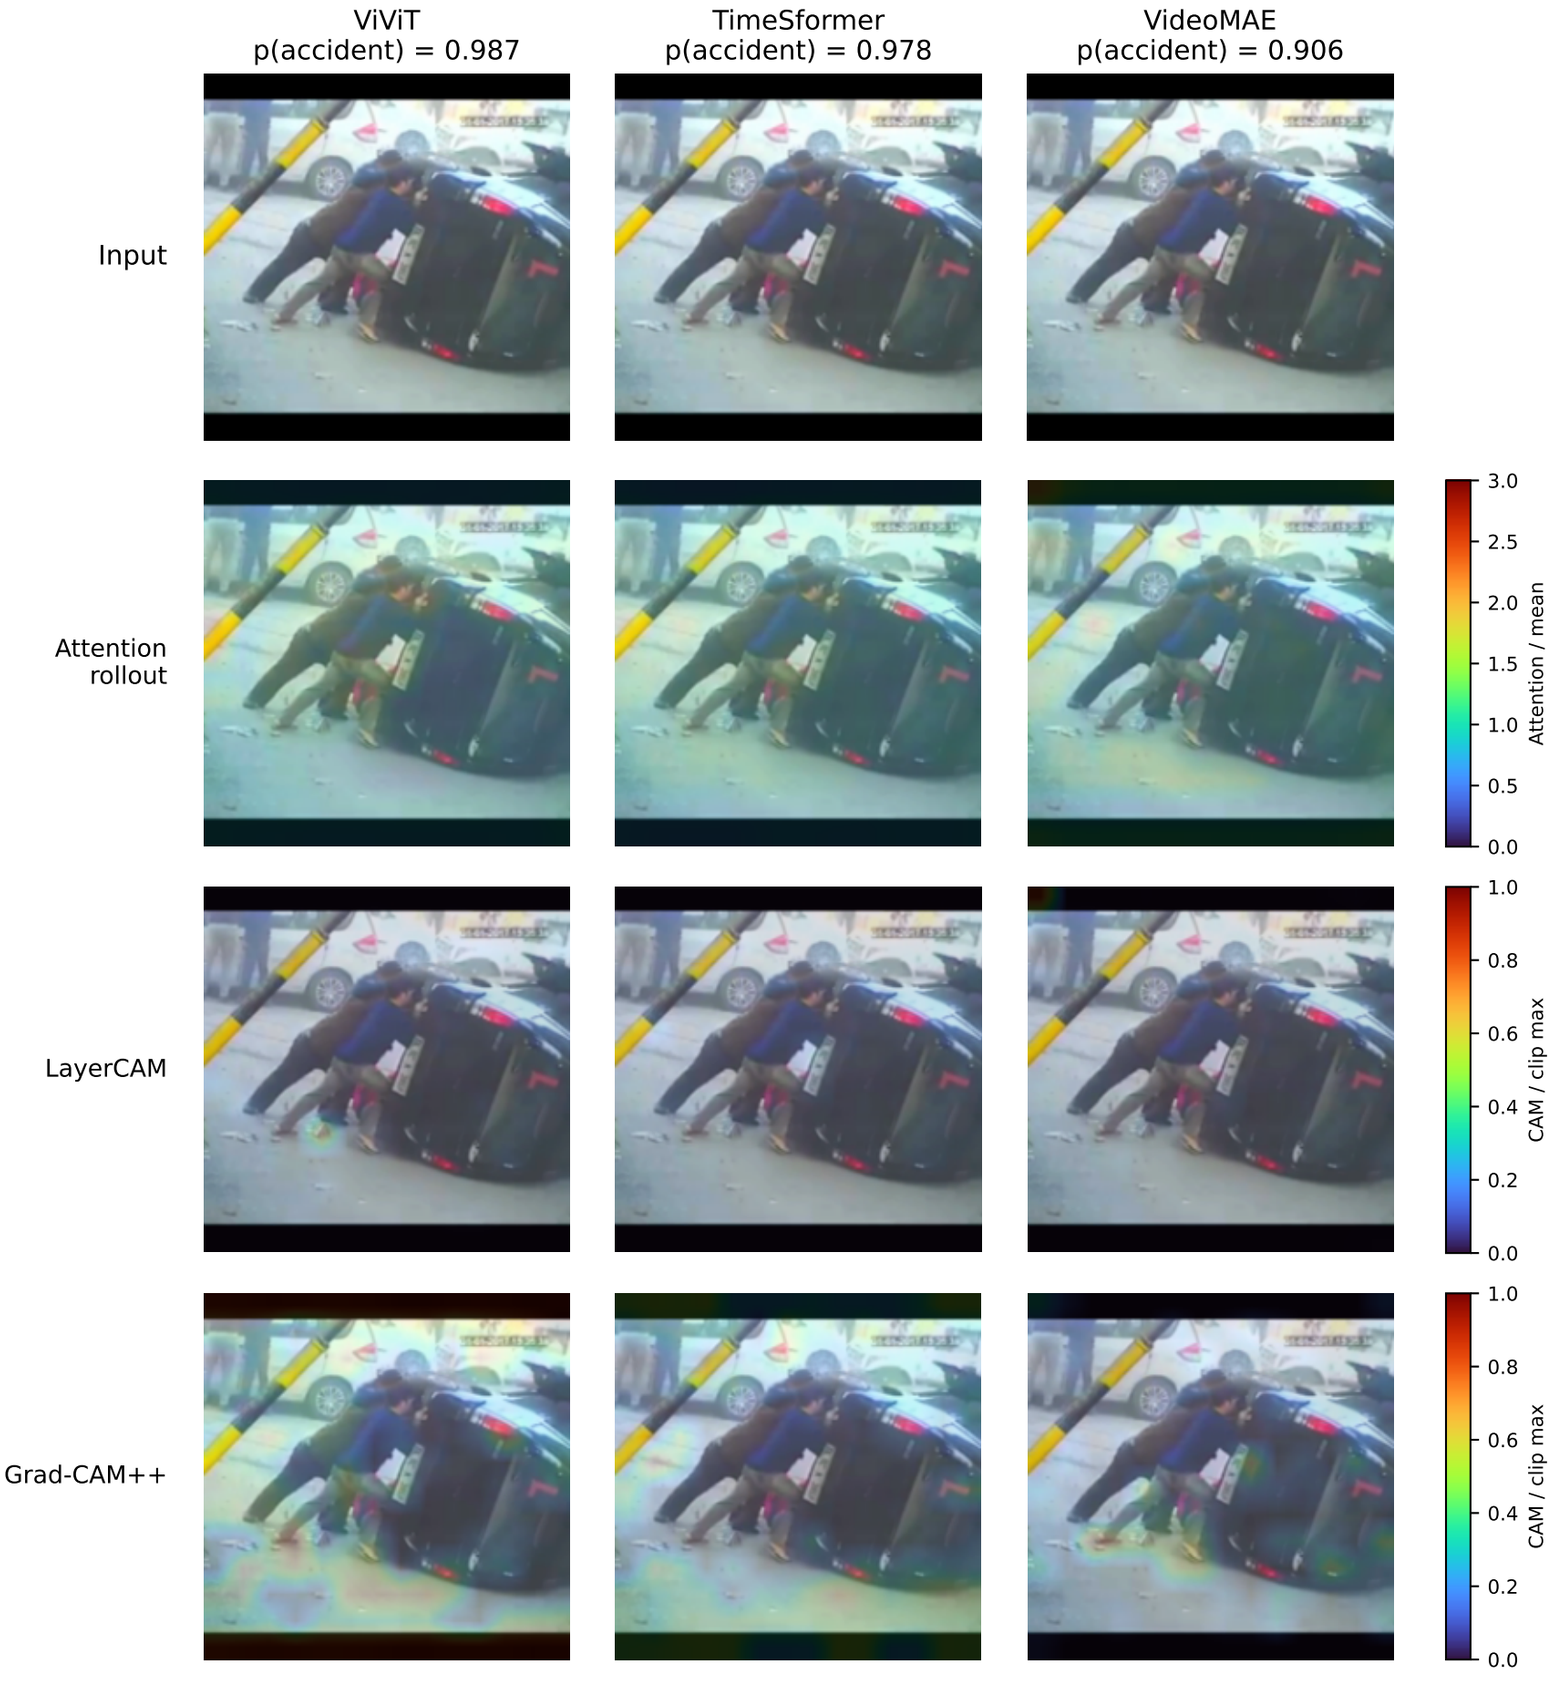

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A07 | Accident (dataset label) | t = 10.43 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

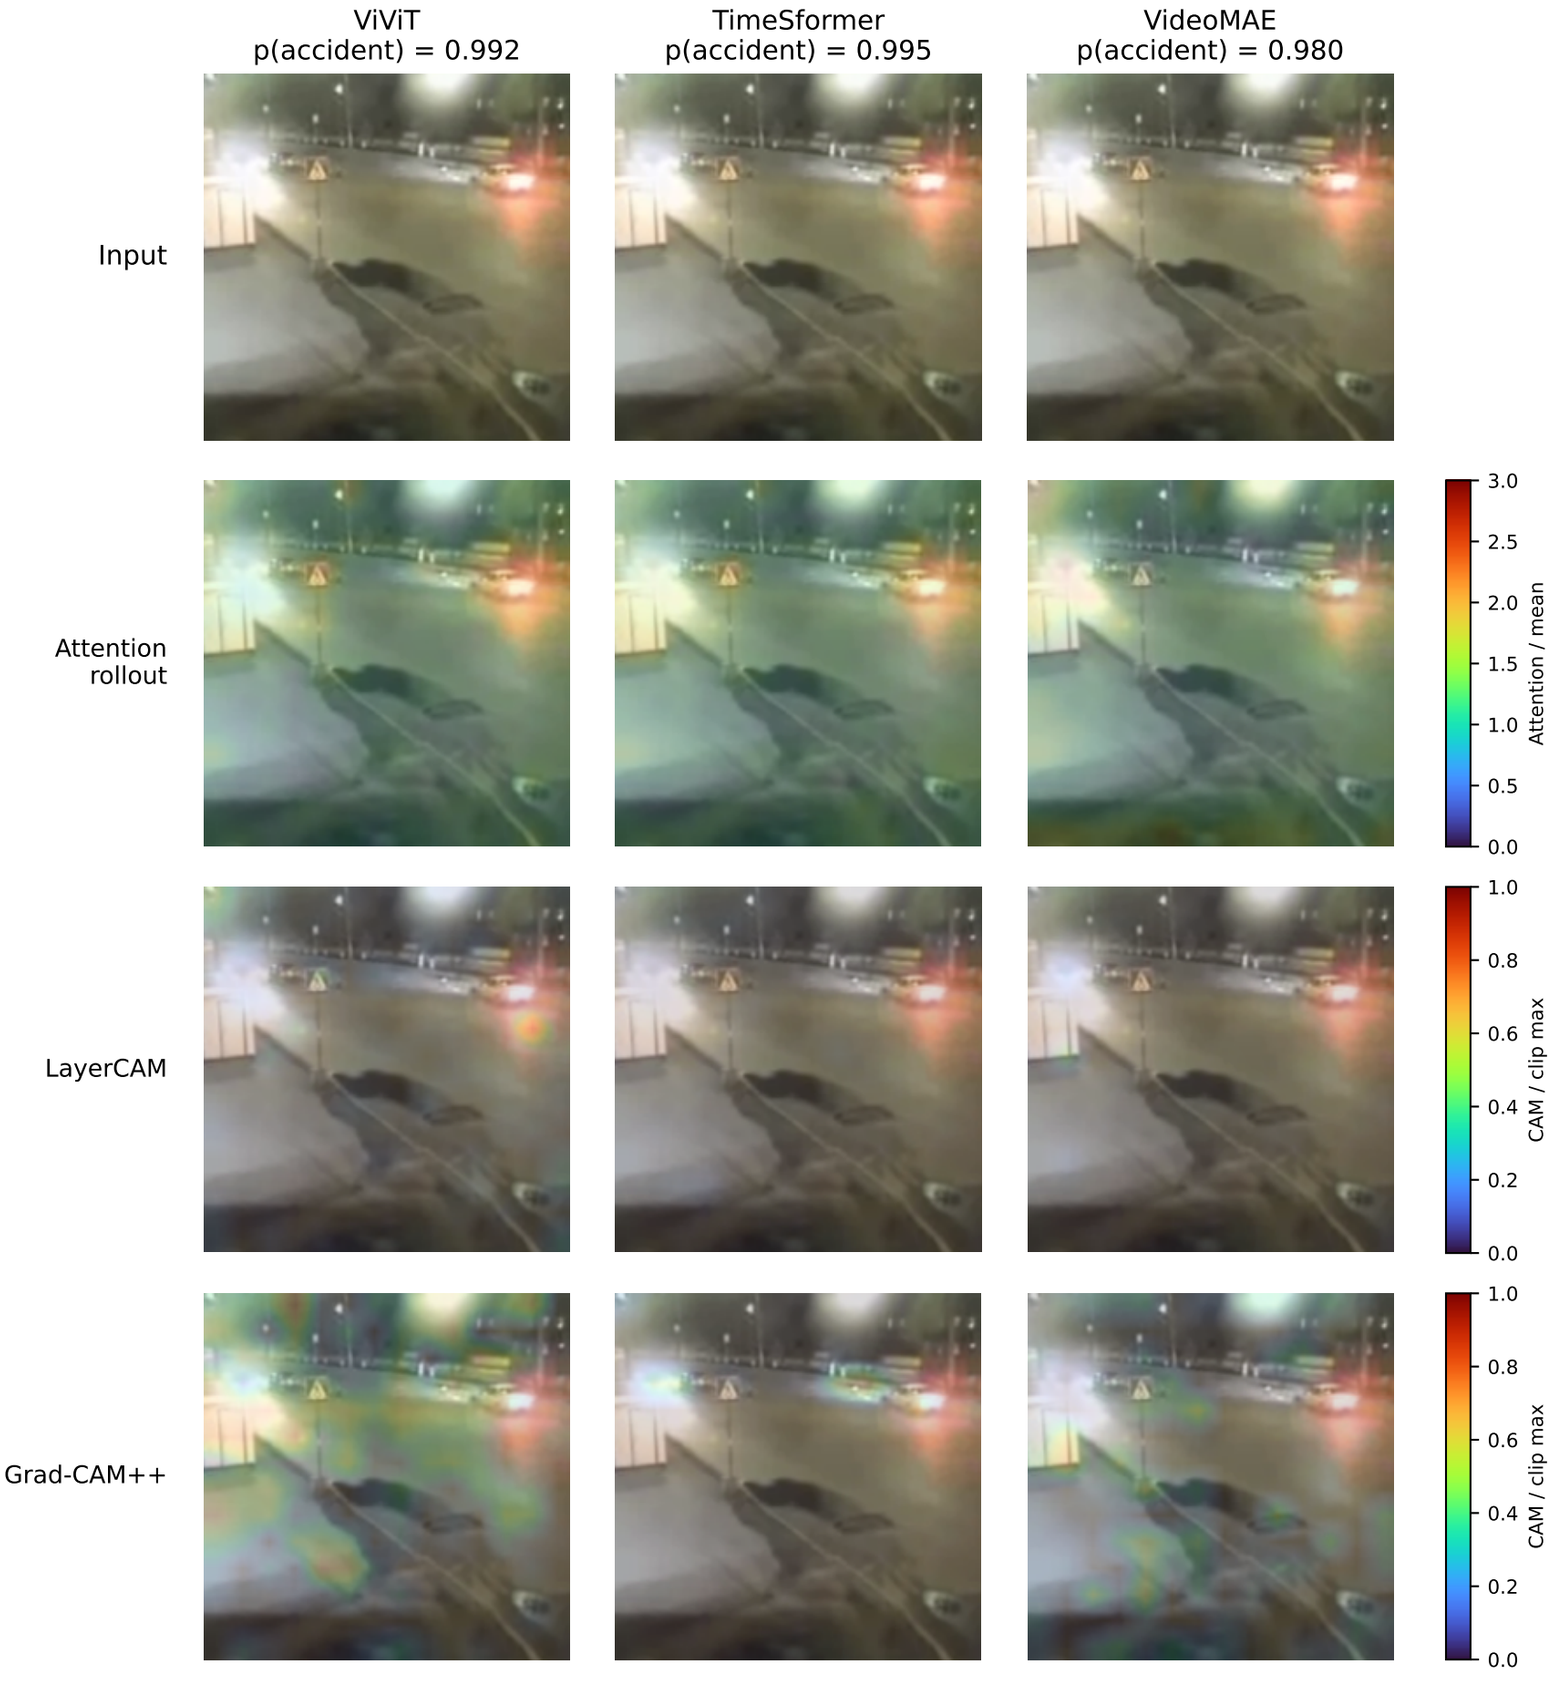

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A08 | Accident (dataset label) | t = 29.63 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

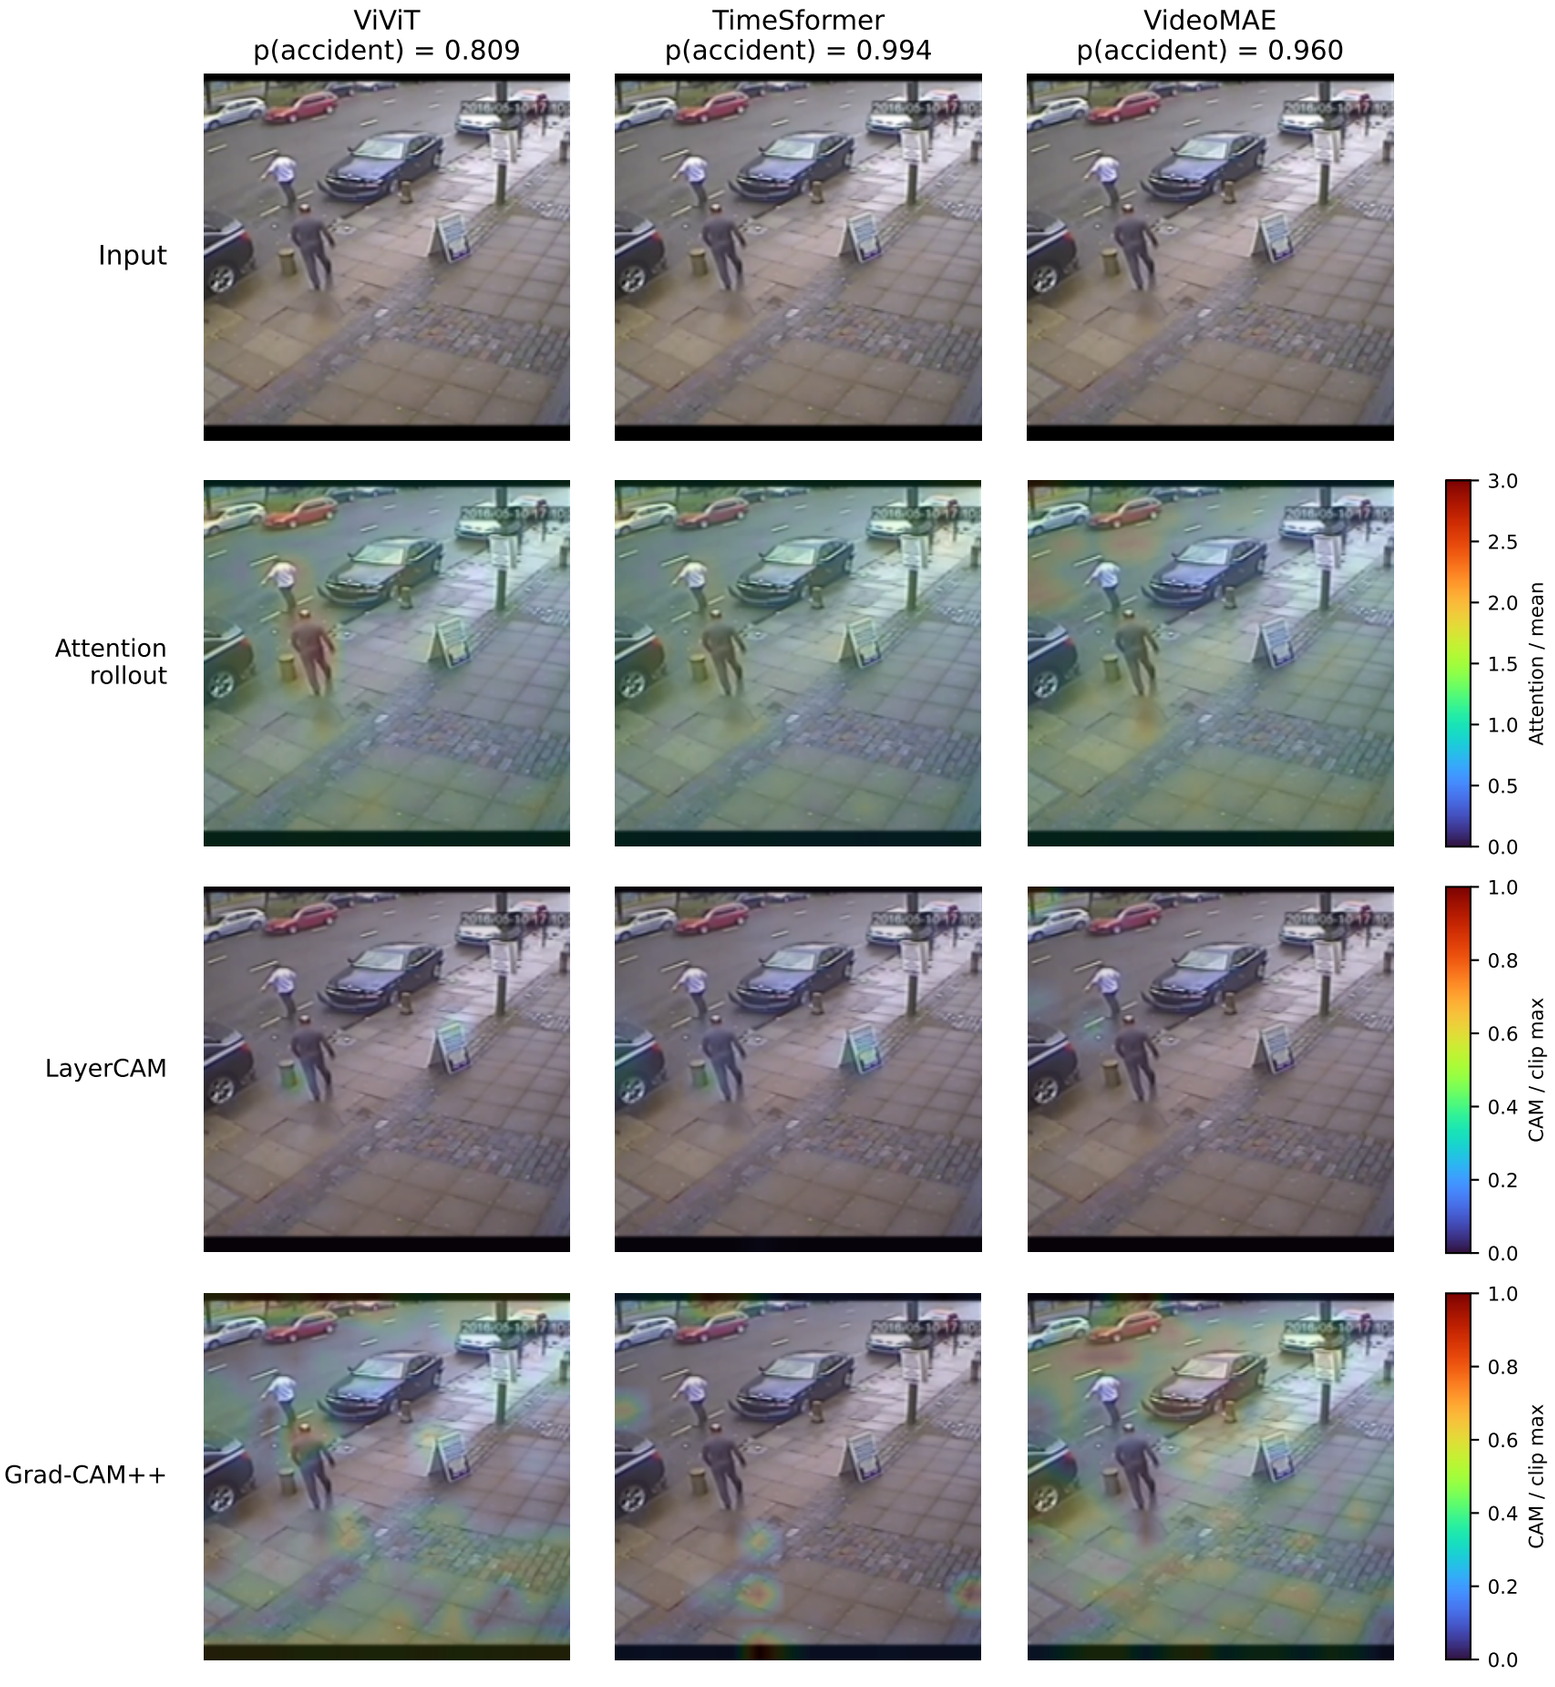

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A09 | Accident (dataset label) | t = 22.56 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

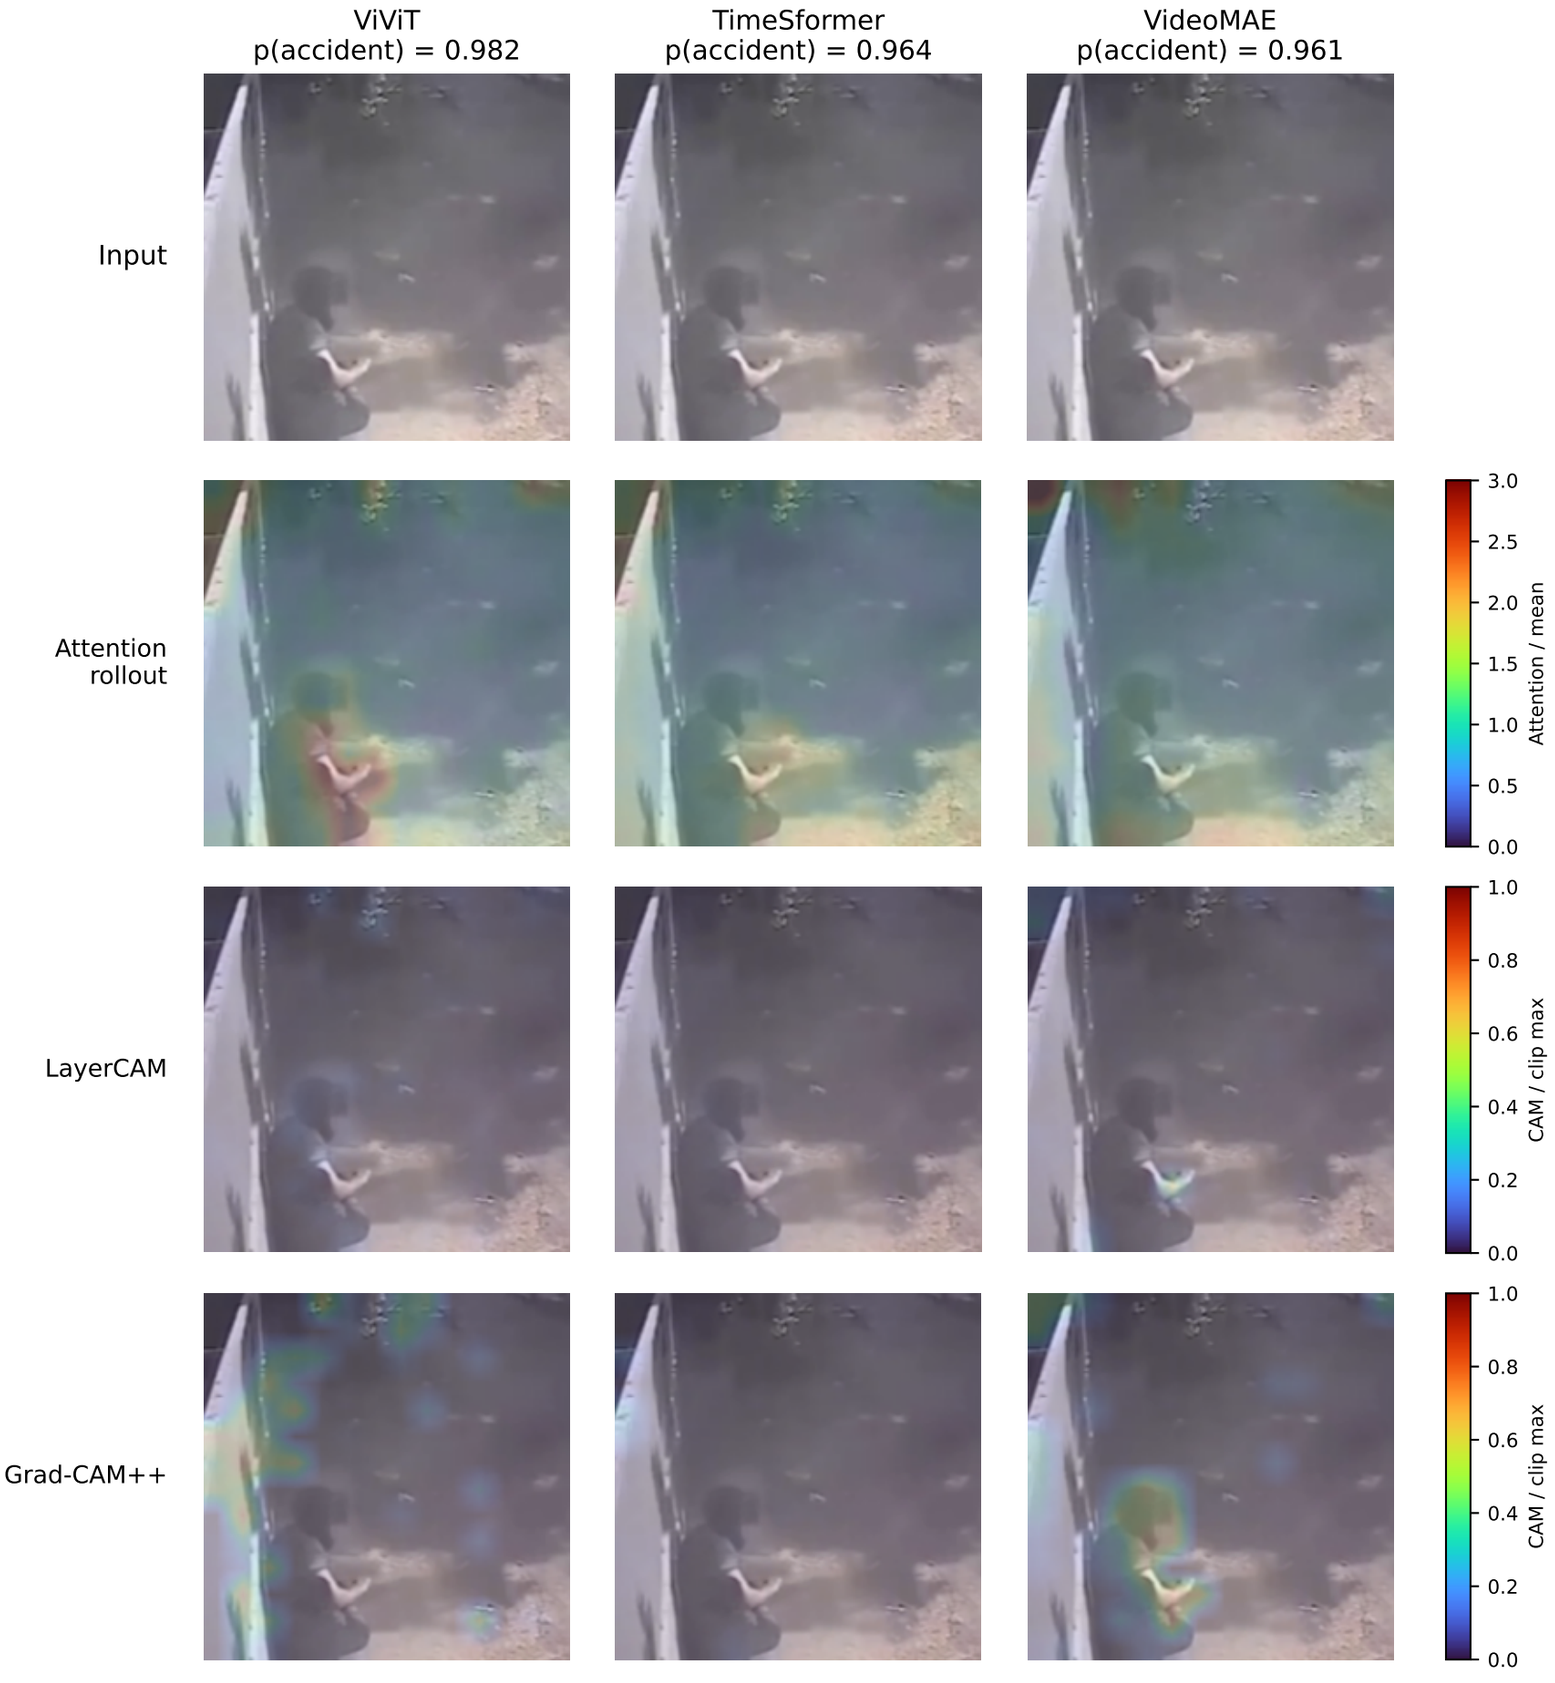

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

A10 | Accident (dataset label) | t = 37.13 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

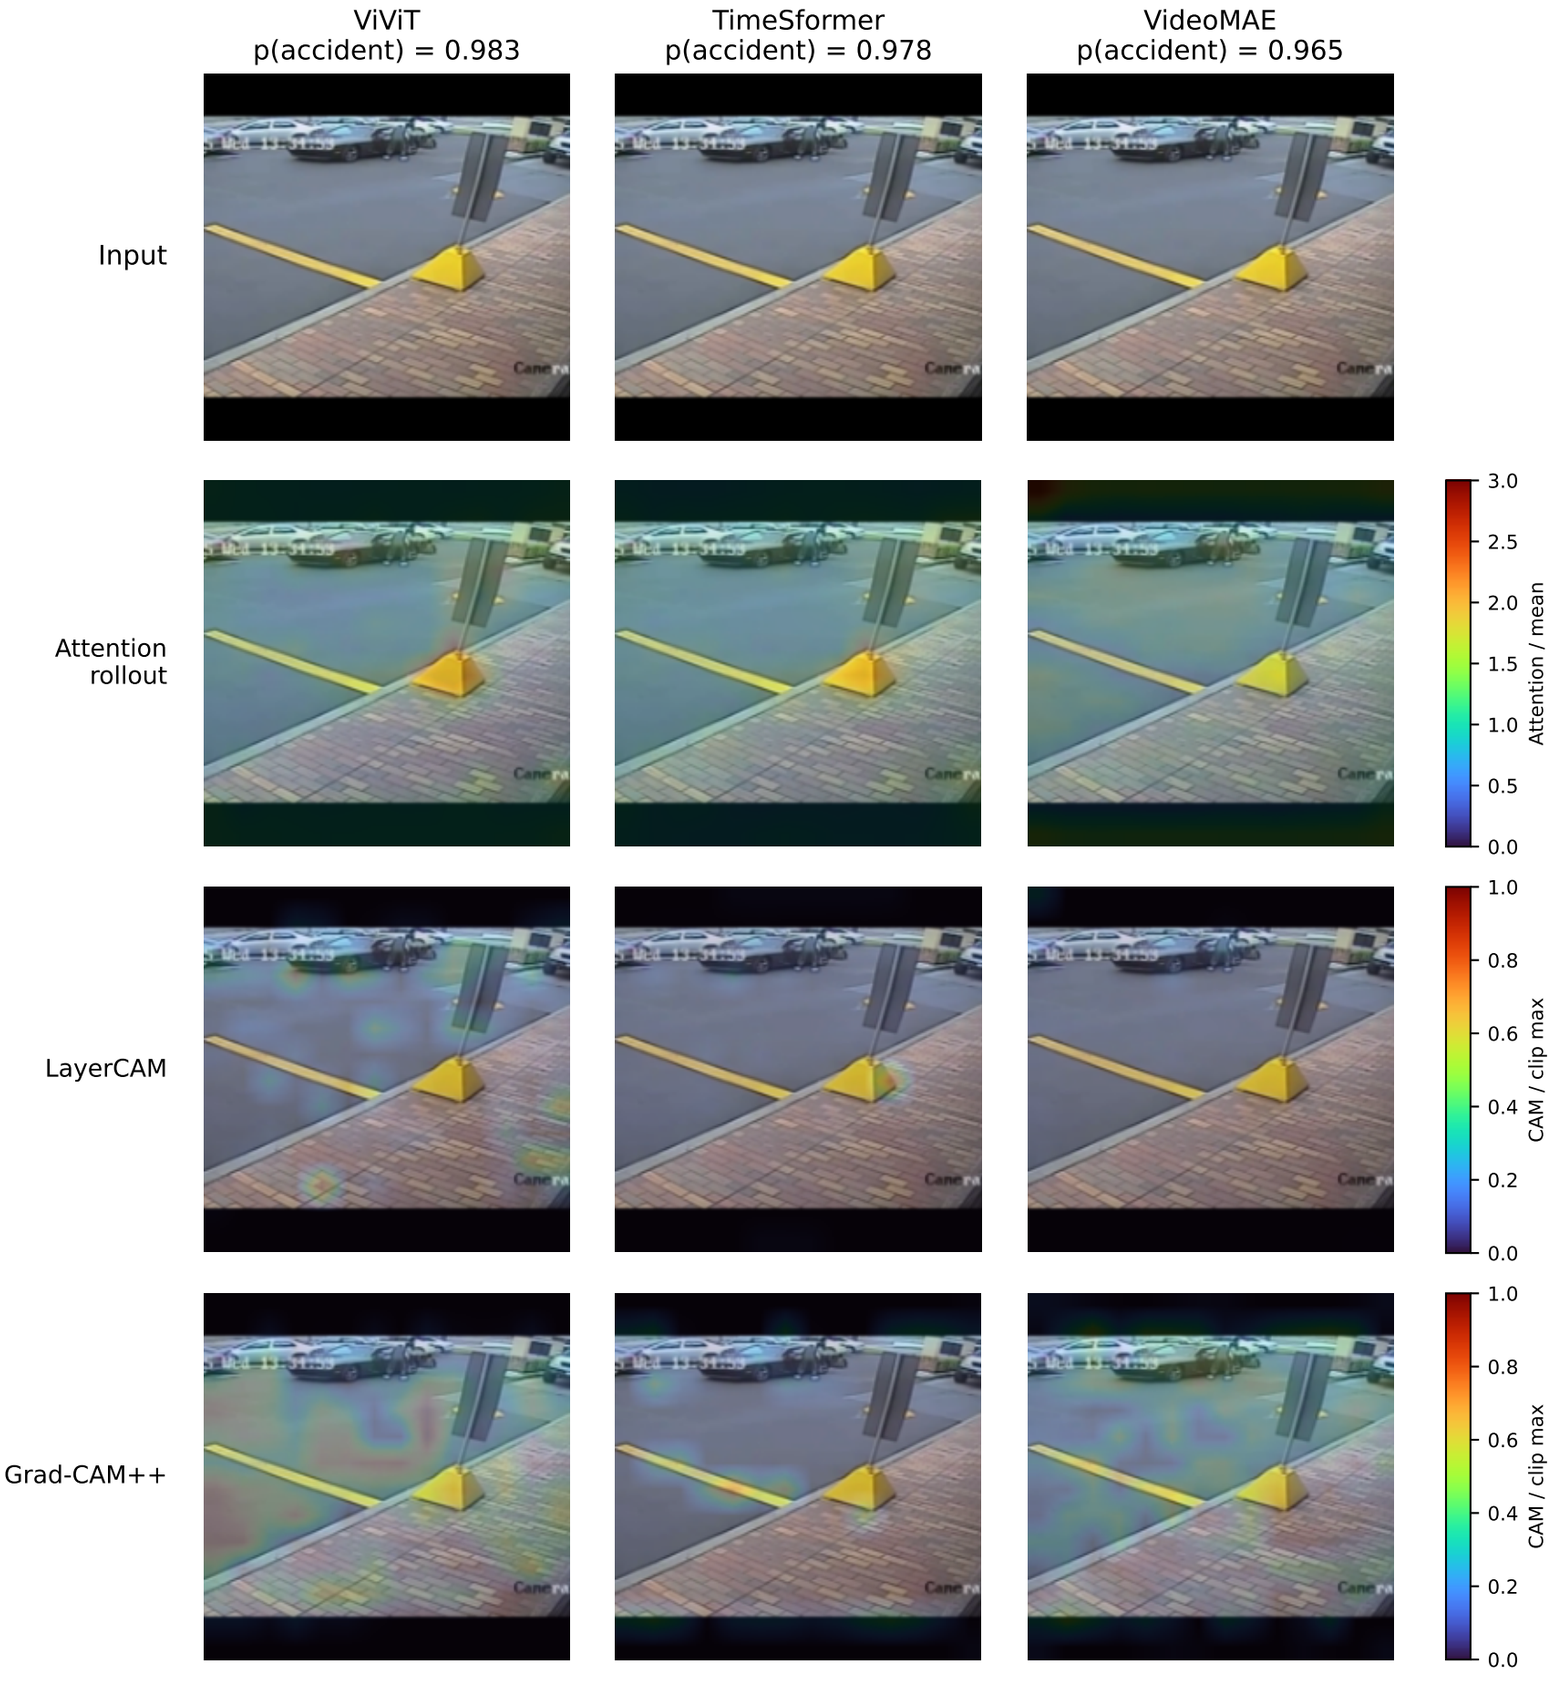

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N01 | Non-accident (dataset label) | t = 8.14 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

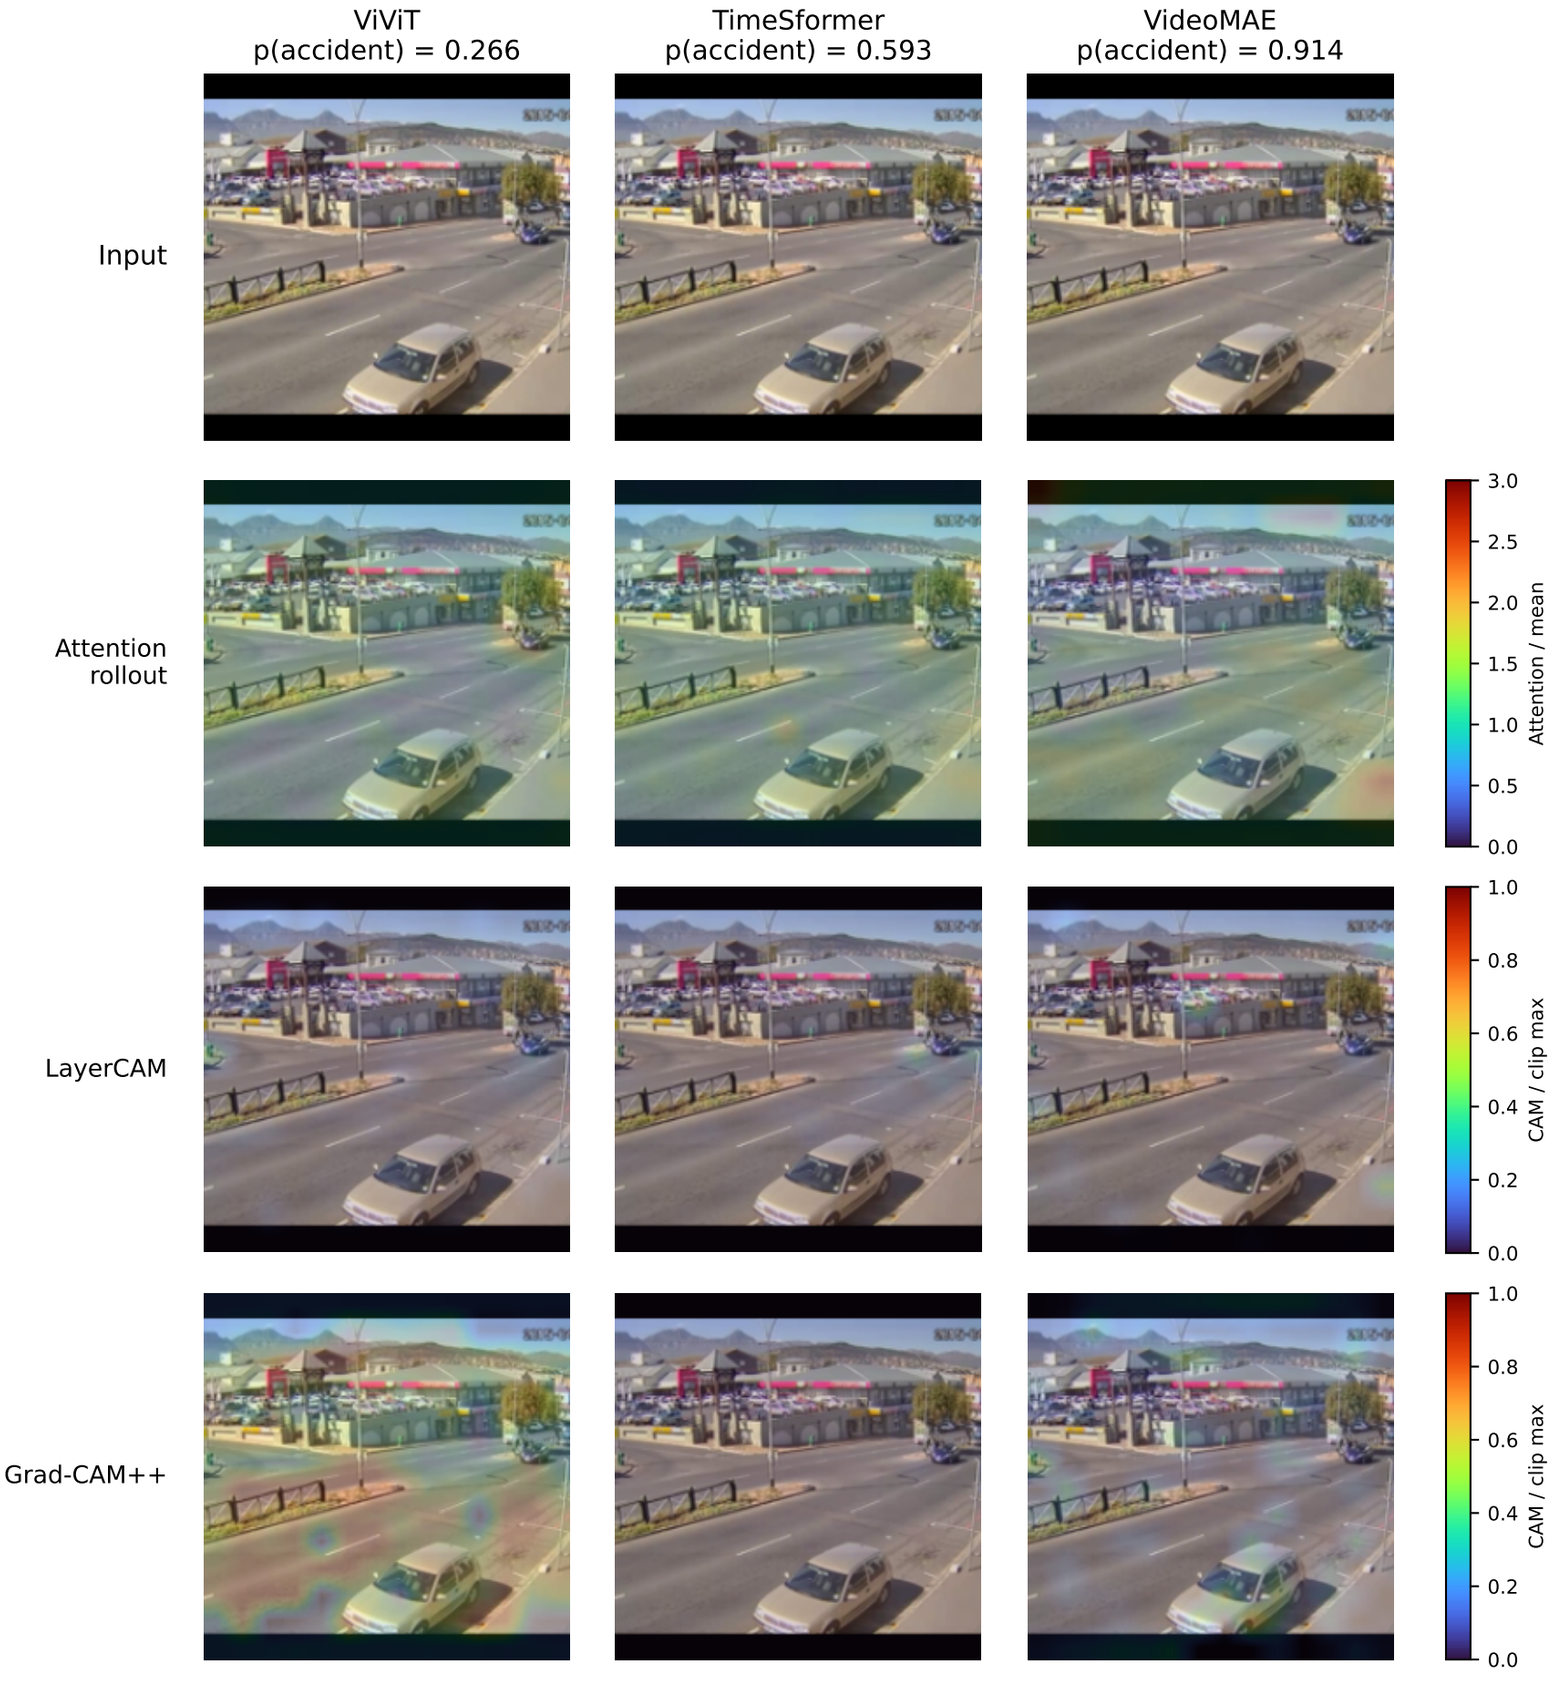

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N02 | Non-accident (dataset label) | t = 22.61 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

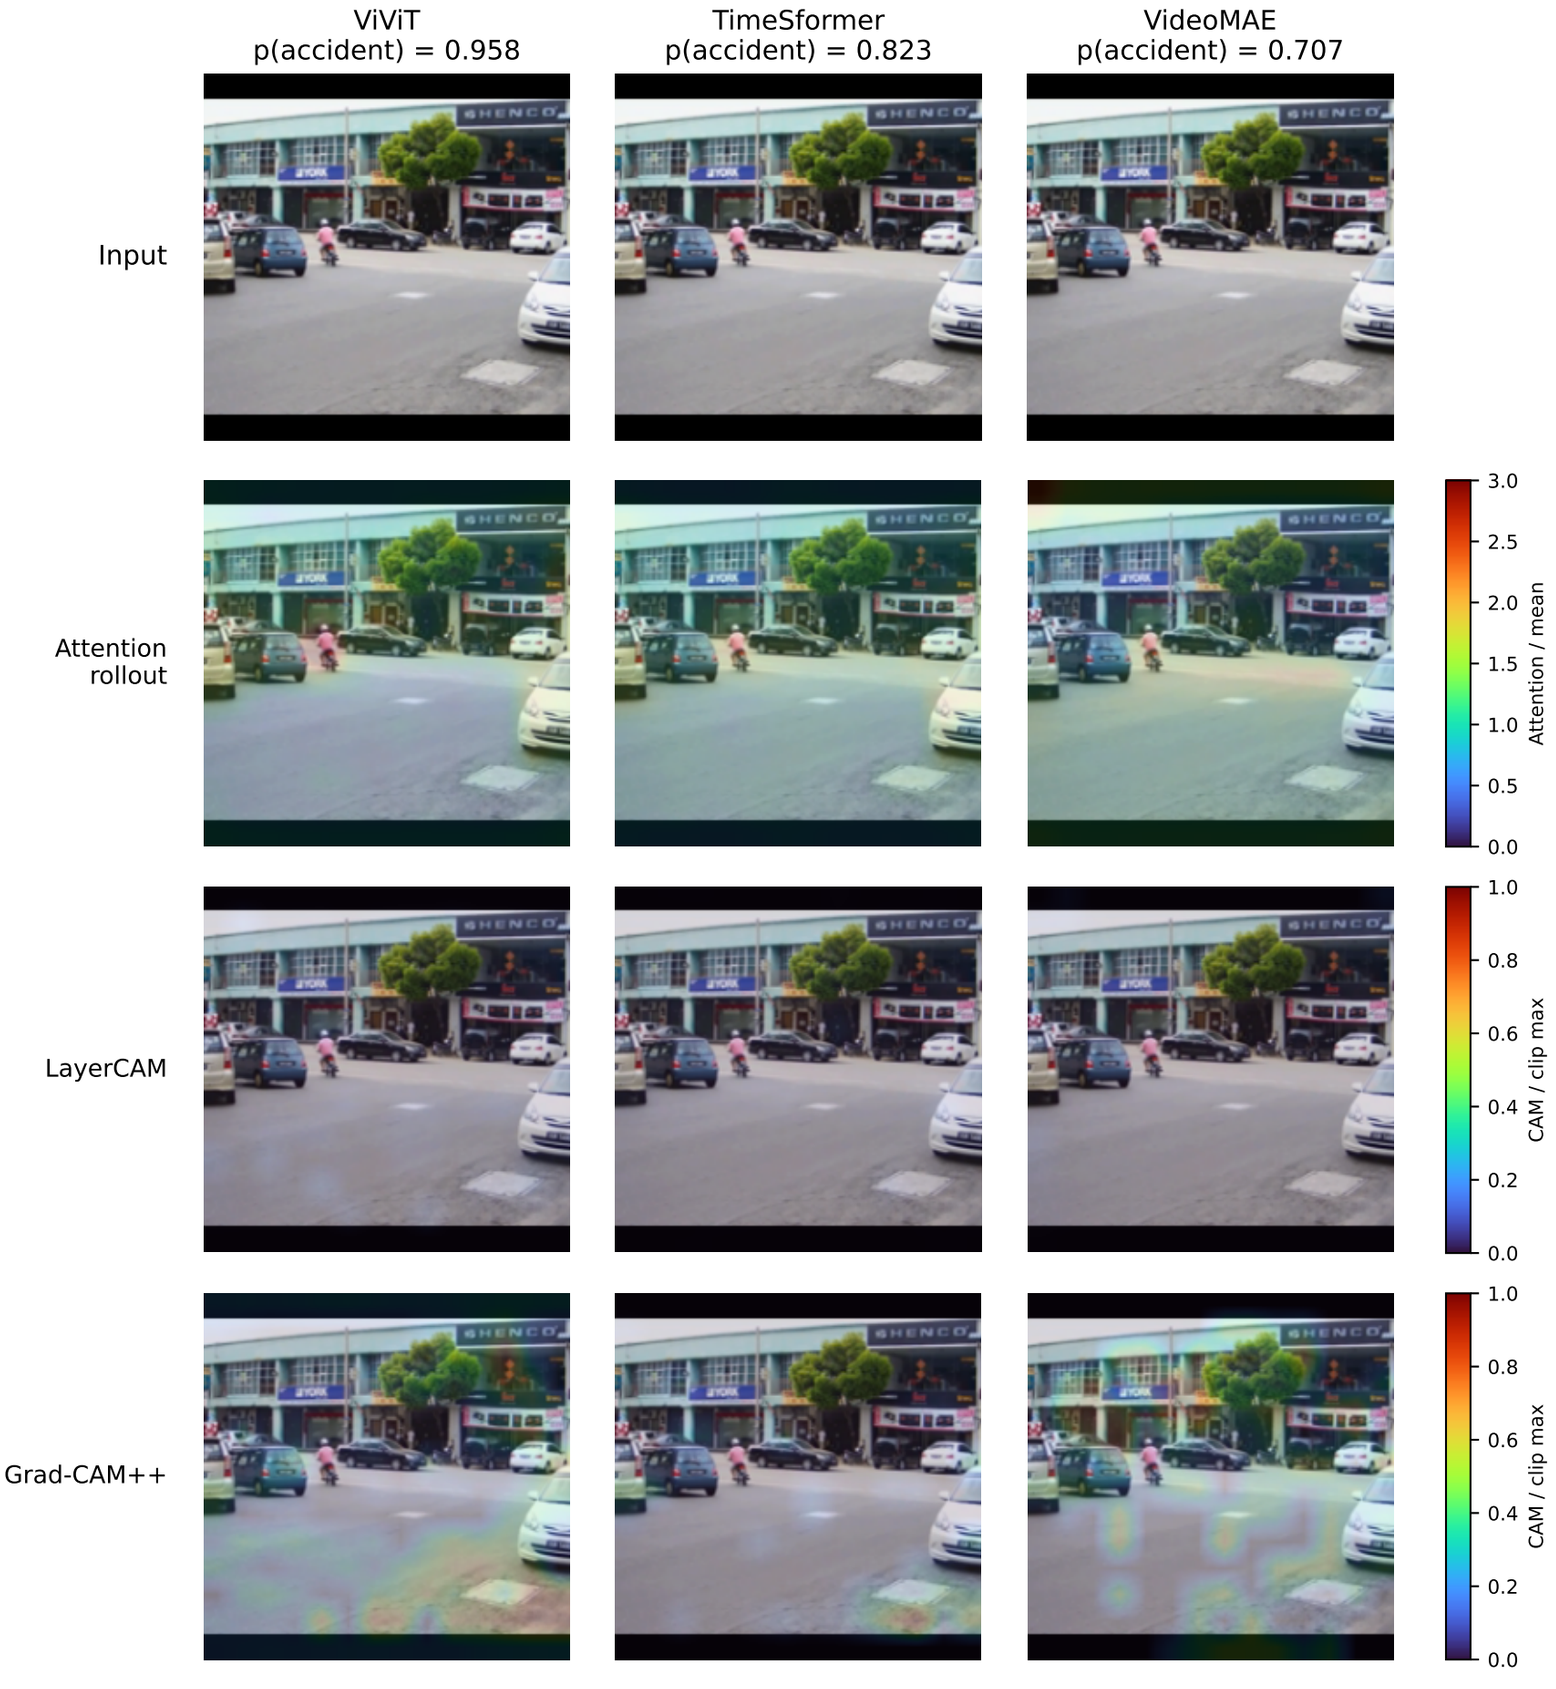

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N03 | Non-accident (dataset label) | t = 70.61 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

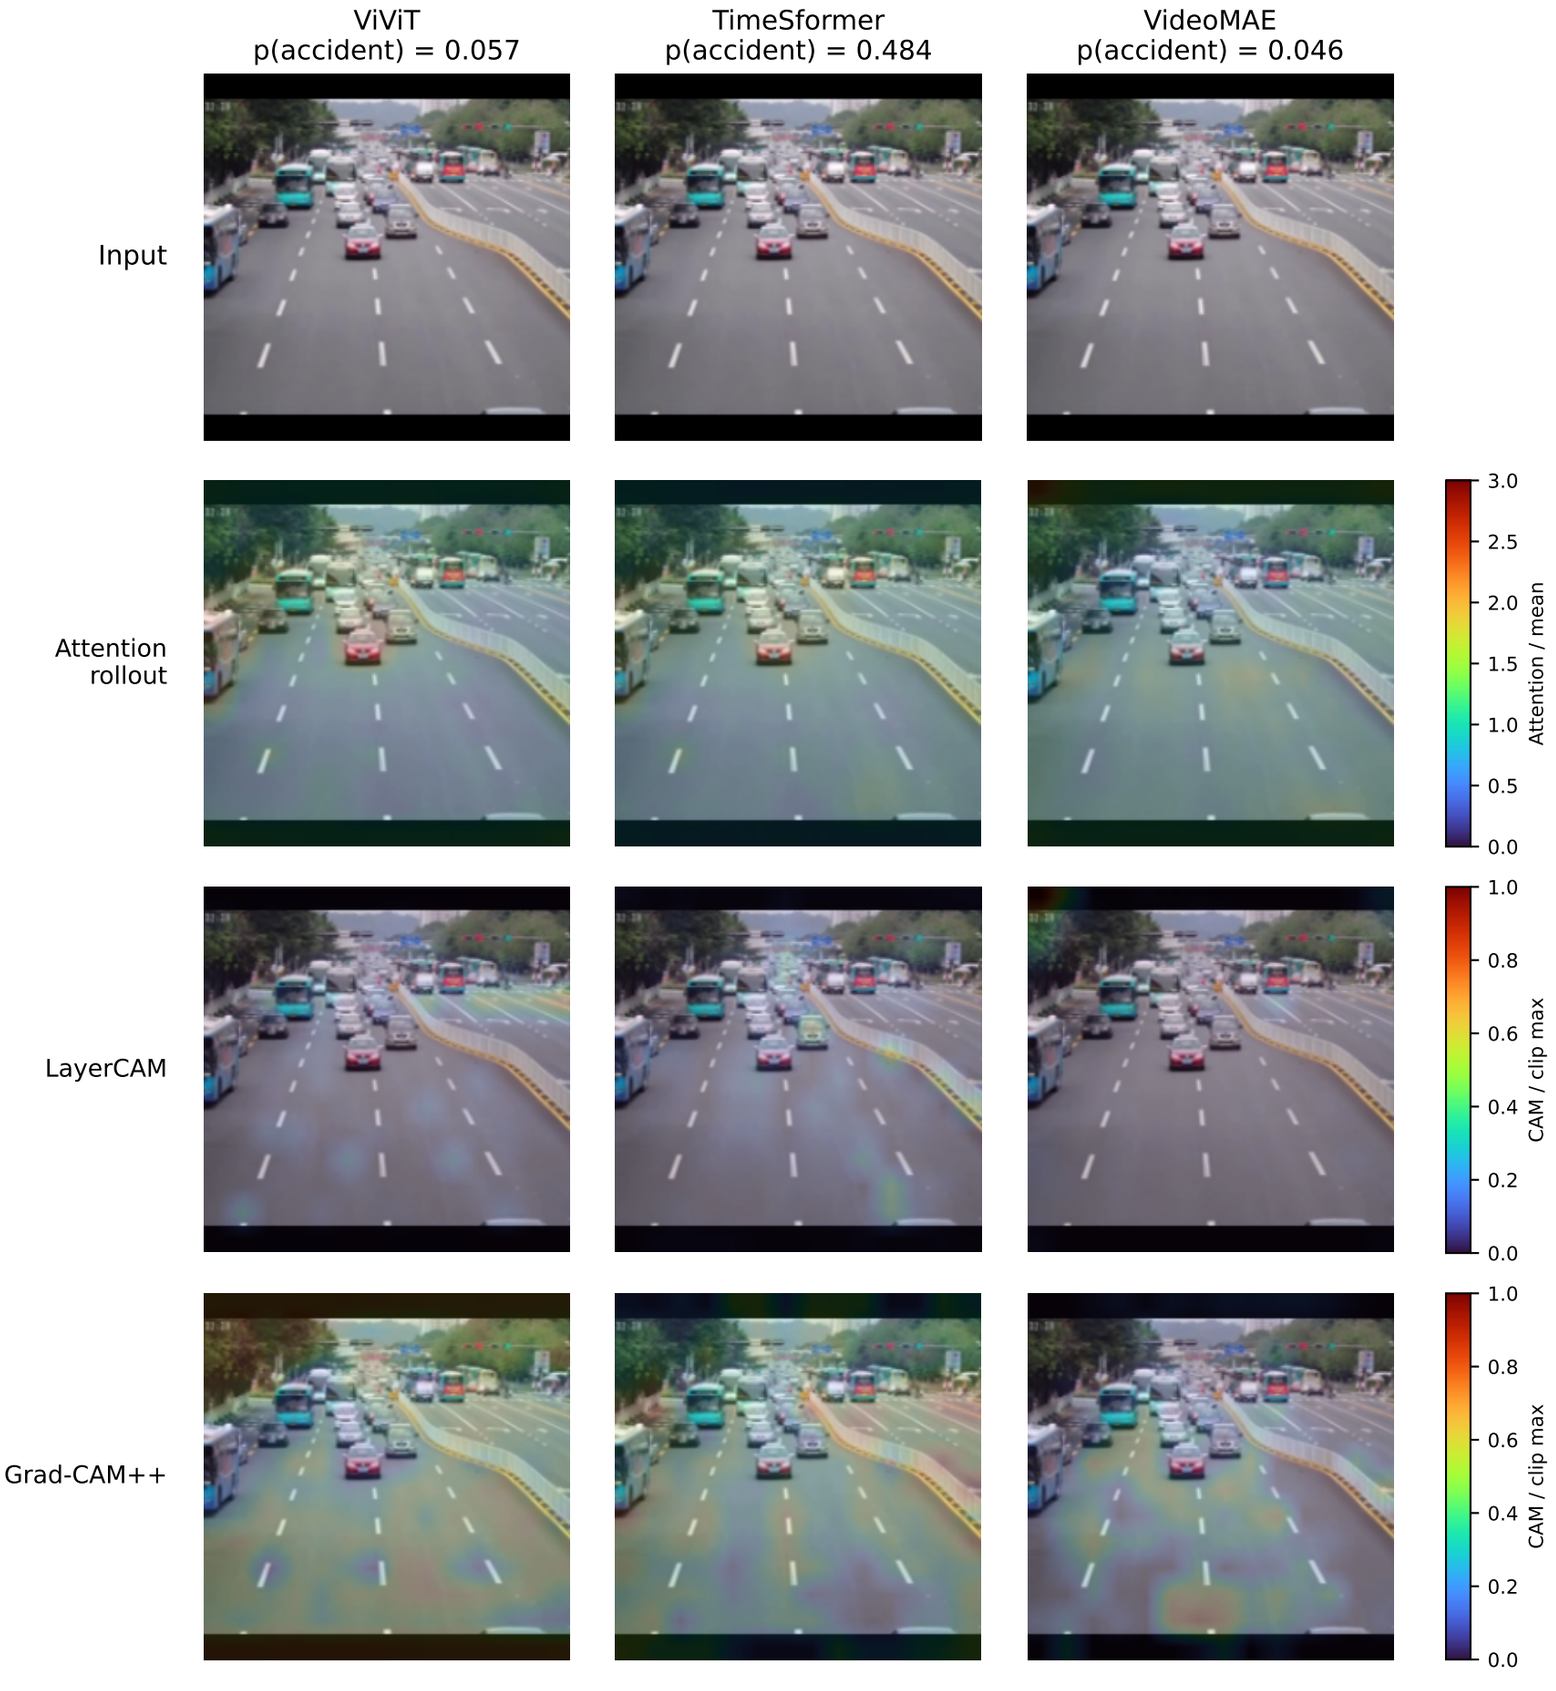

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N04 | Non-accident (dataset label) | t = 39.94 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

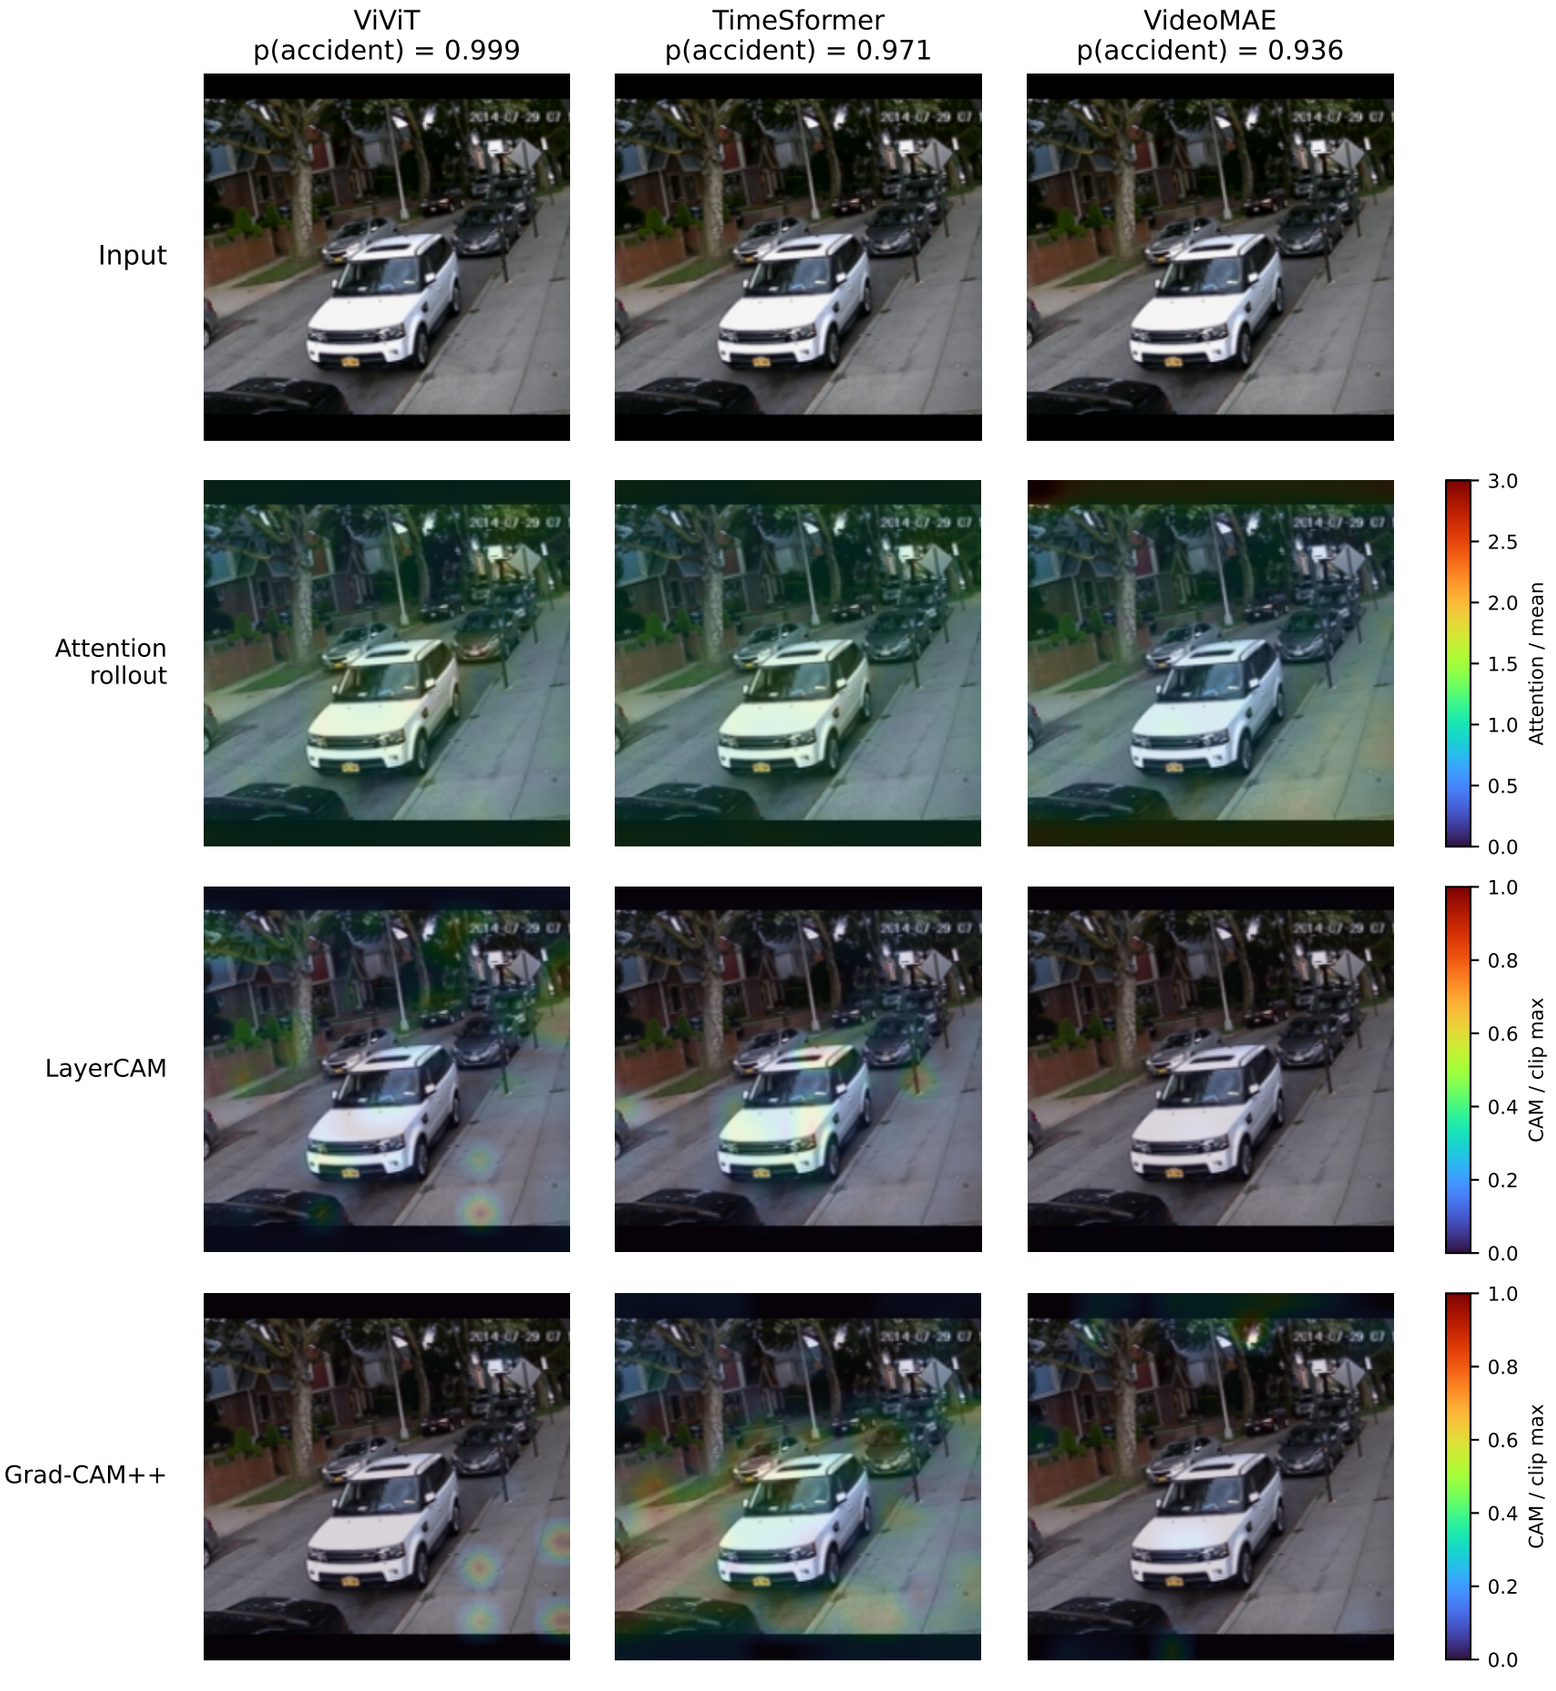

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N05 | Non-accident (dataset label) | t = 29.64 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

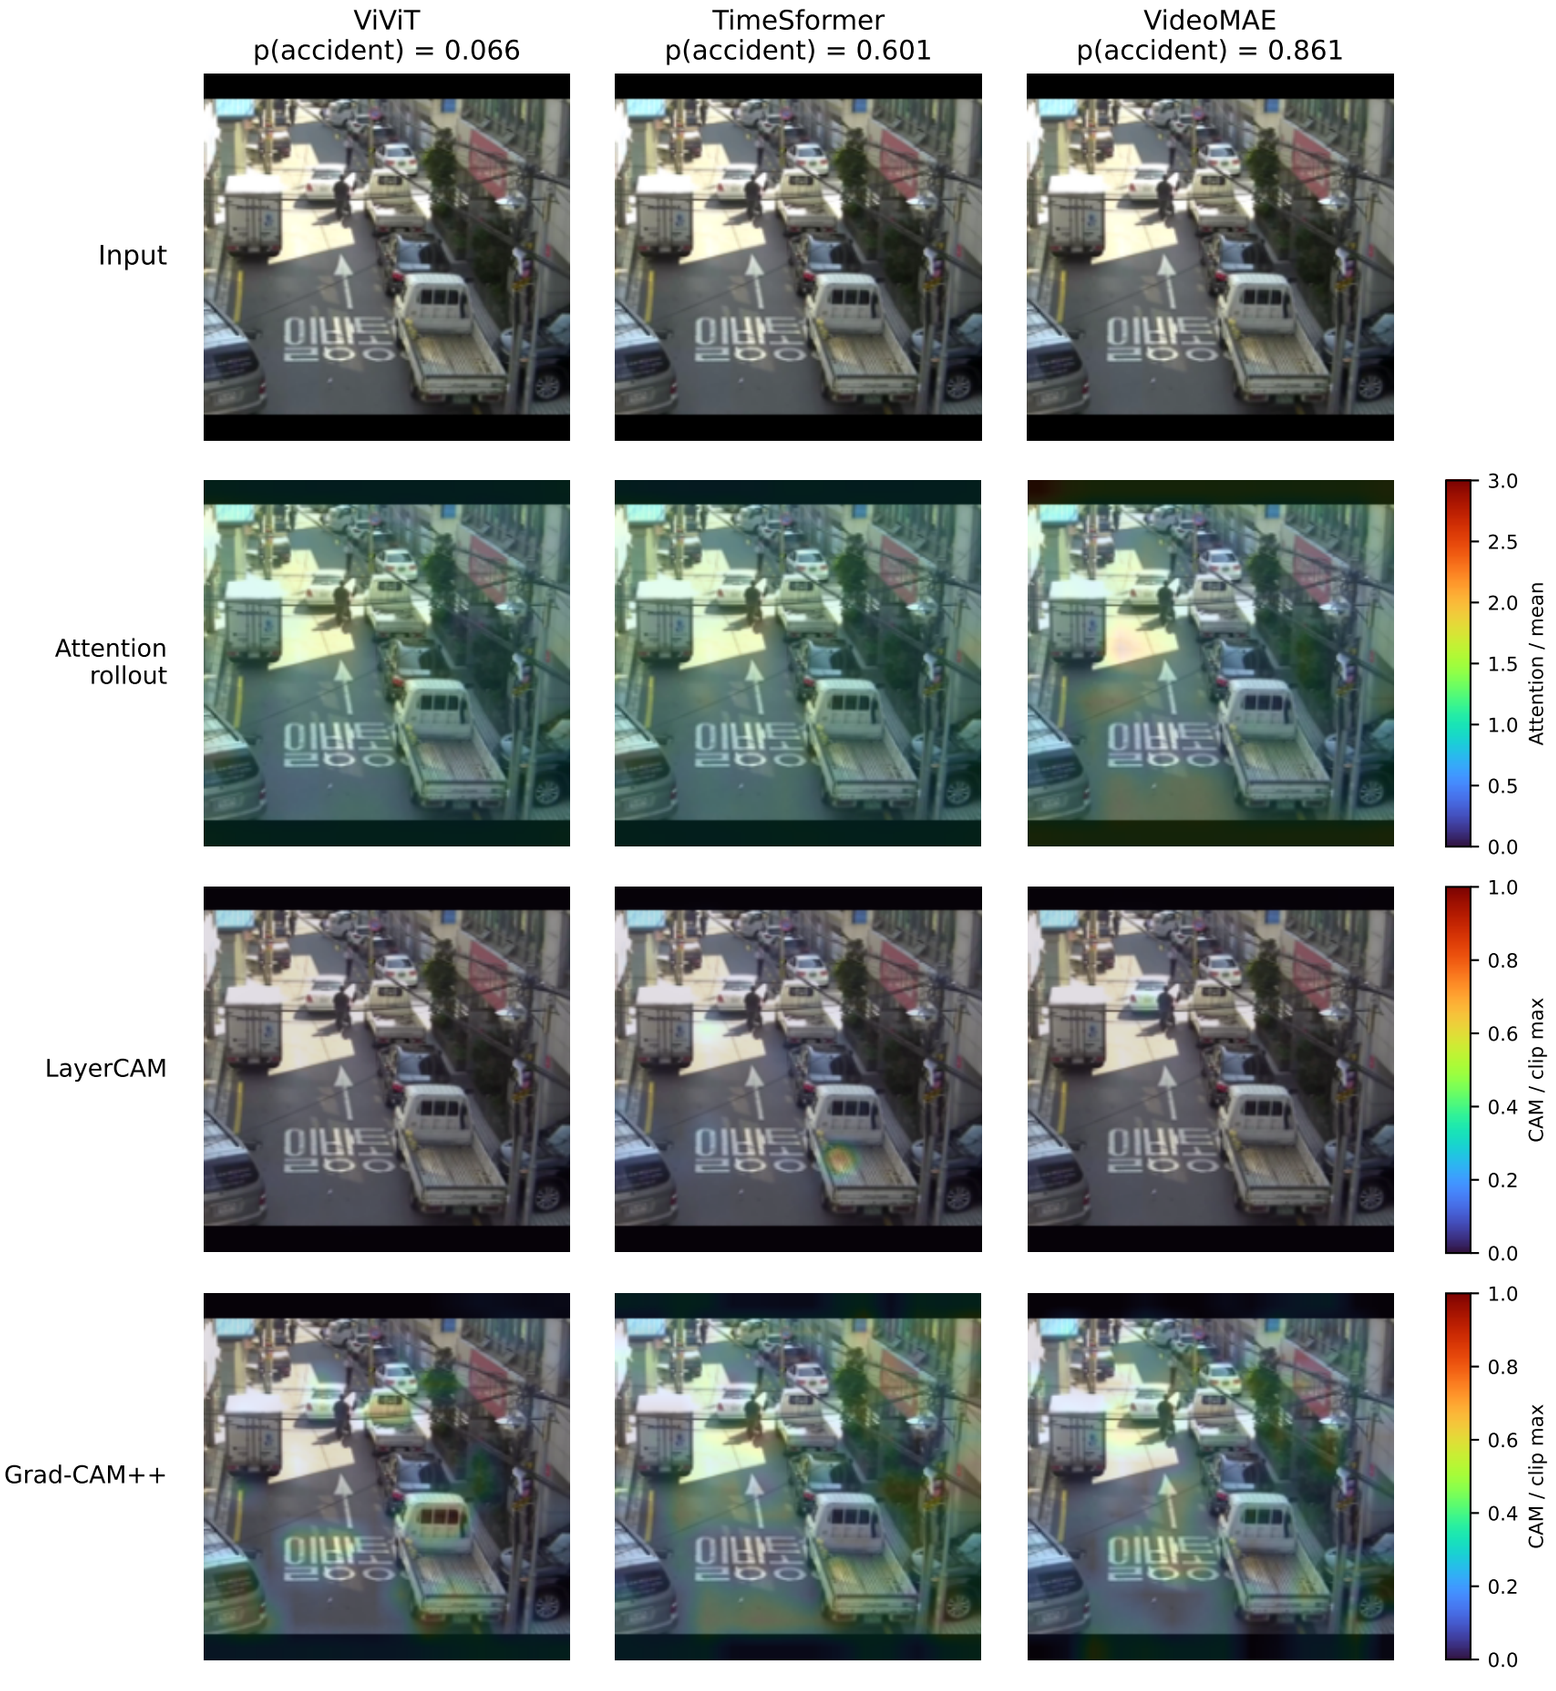

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N06 | Non-accident (dataset label) | t = 12.93 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

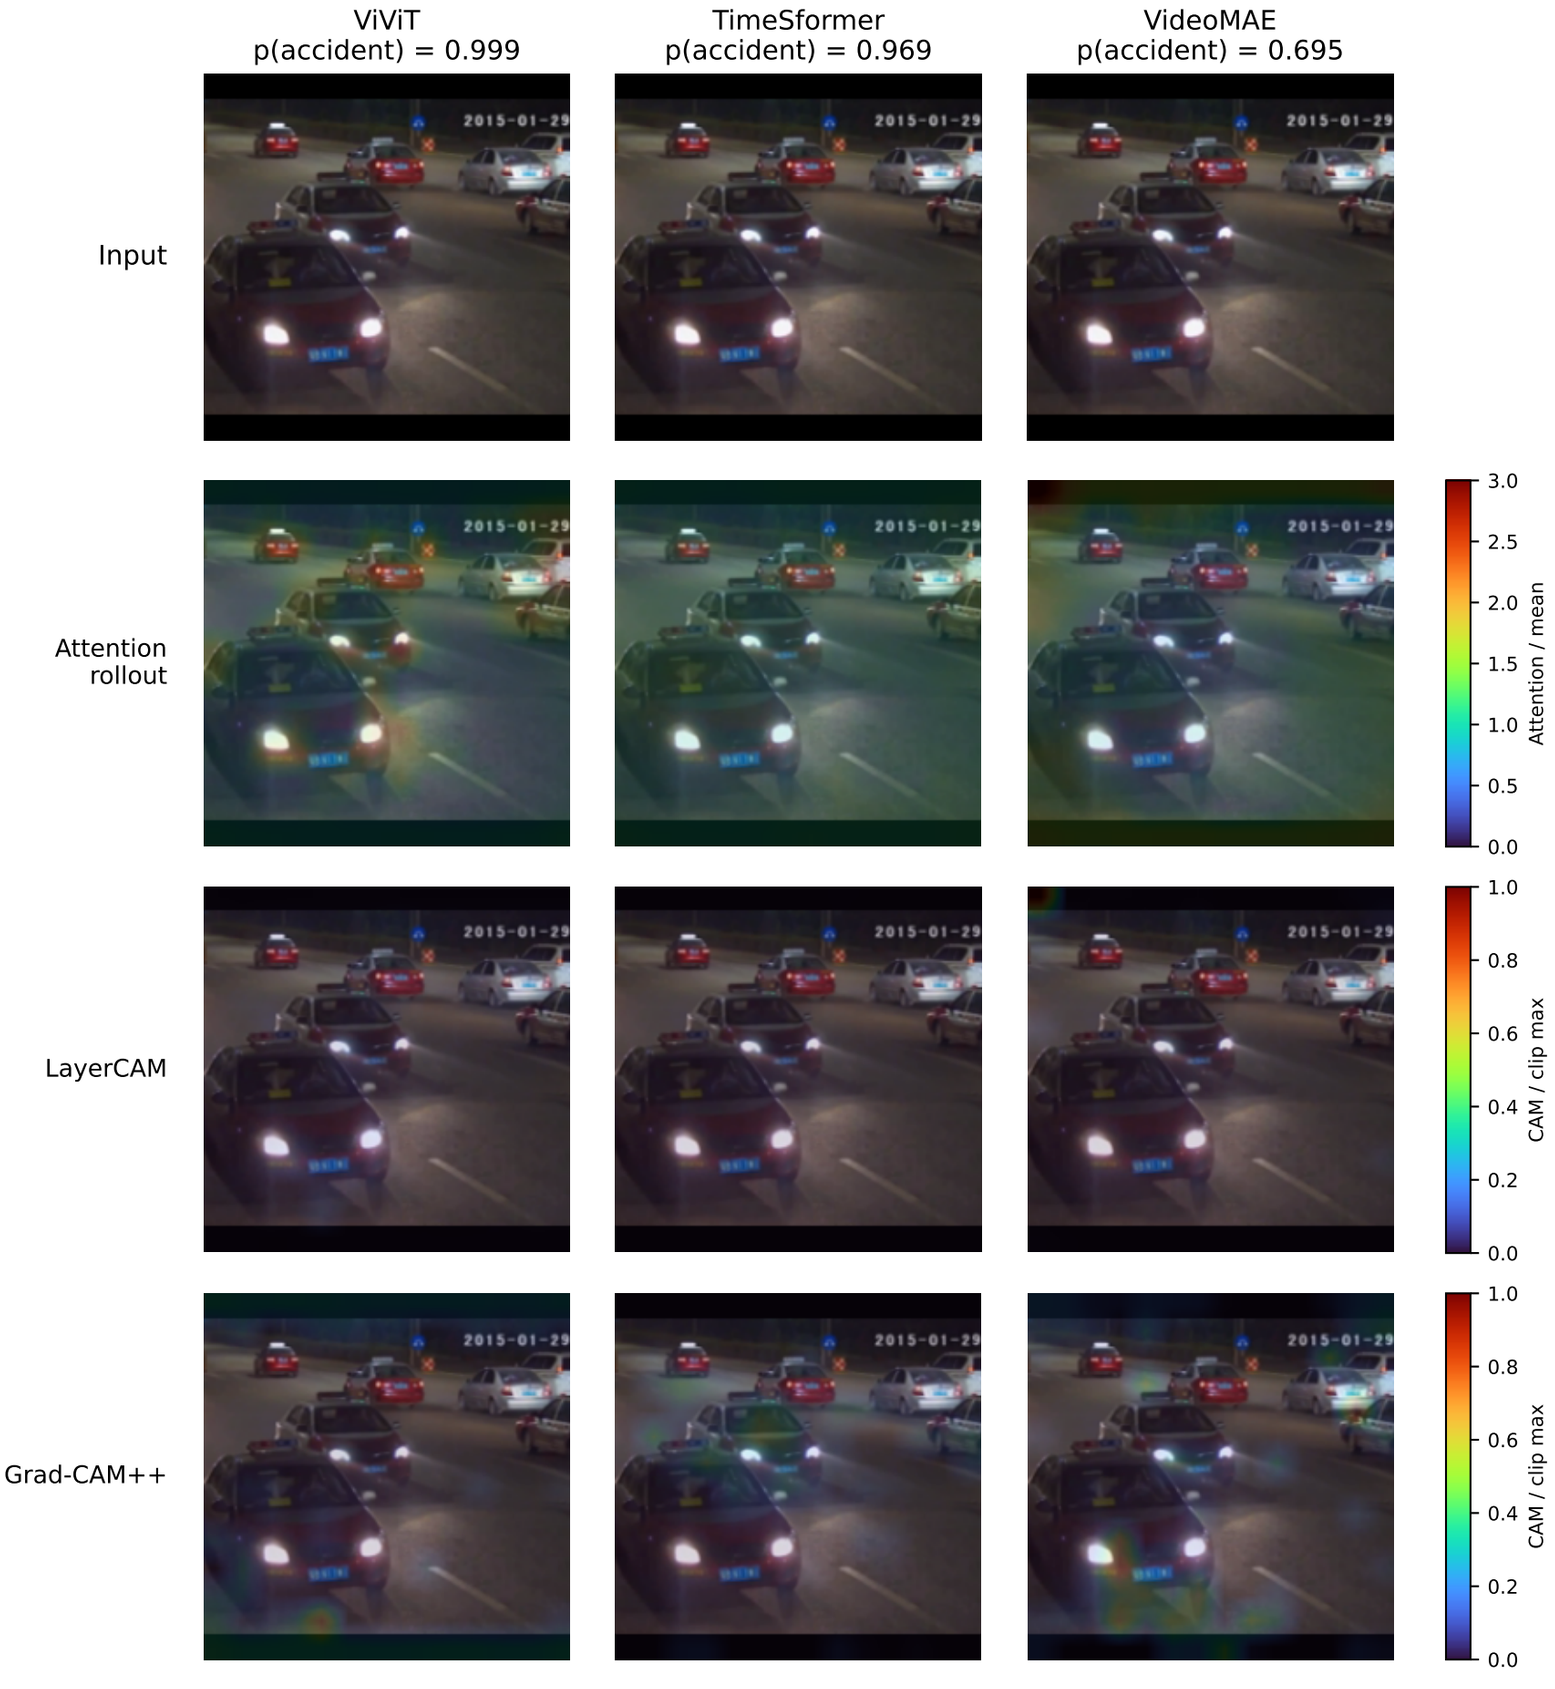

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N07 | Non-accident (dataset label) | t = 43.49 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

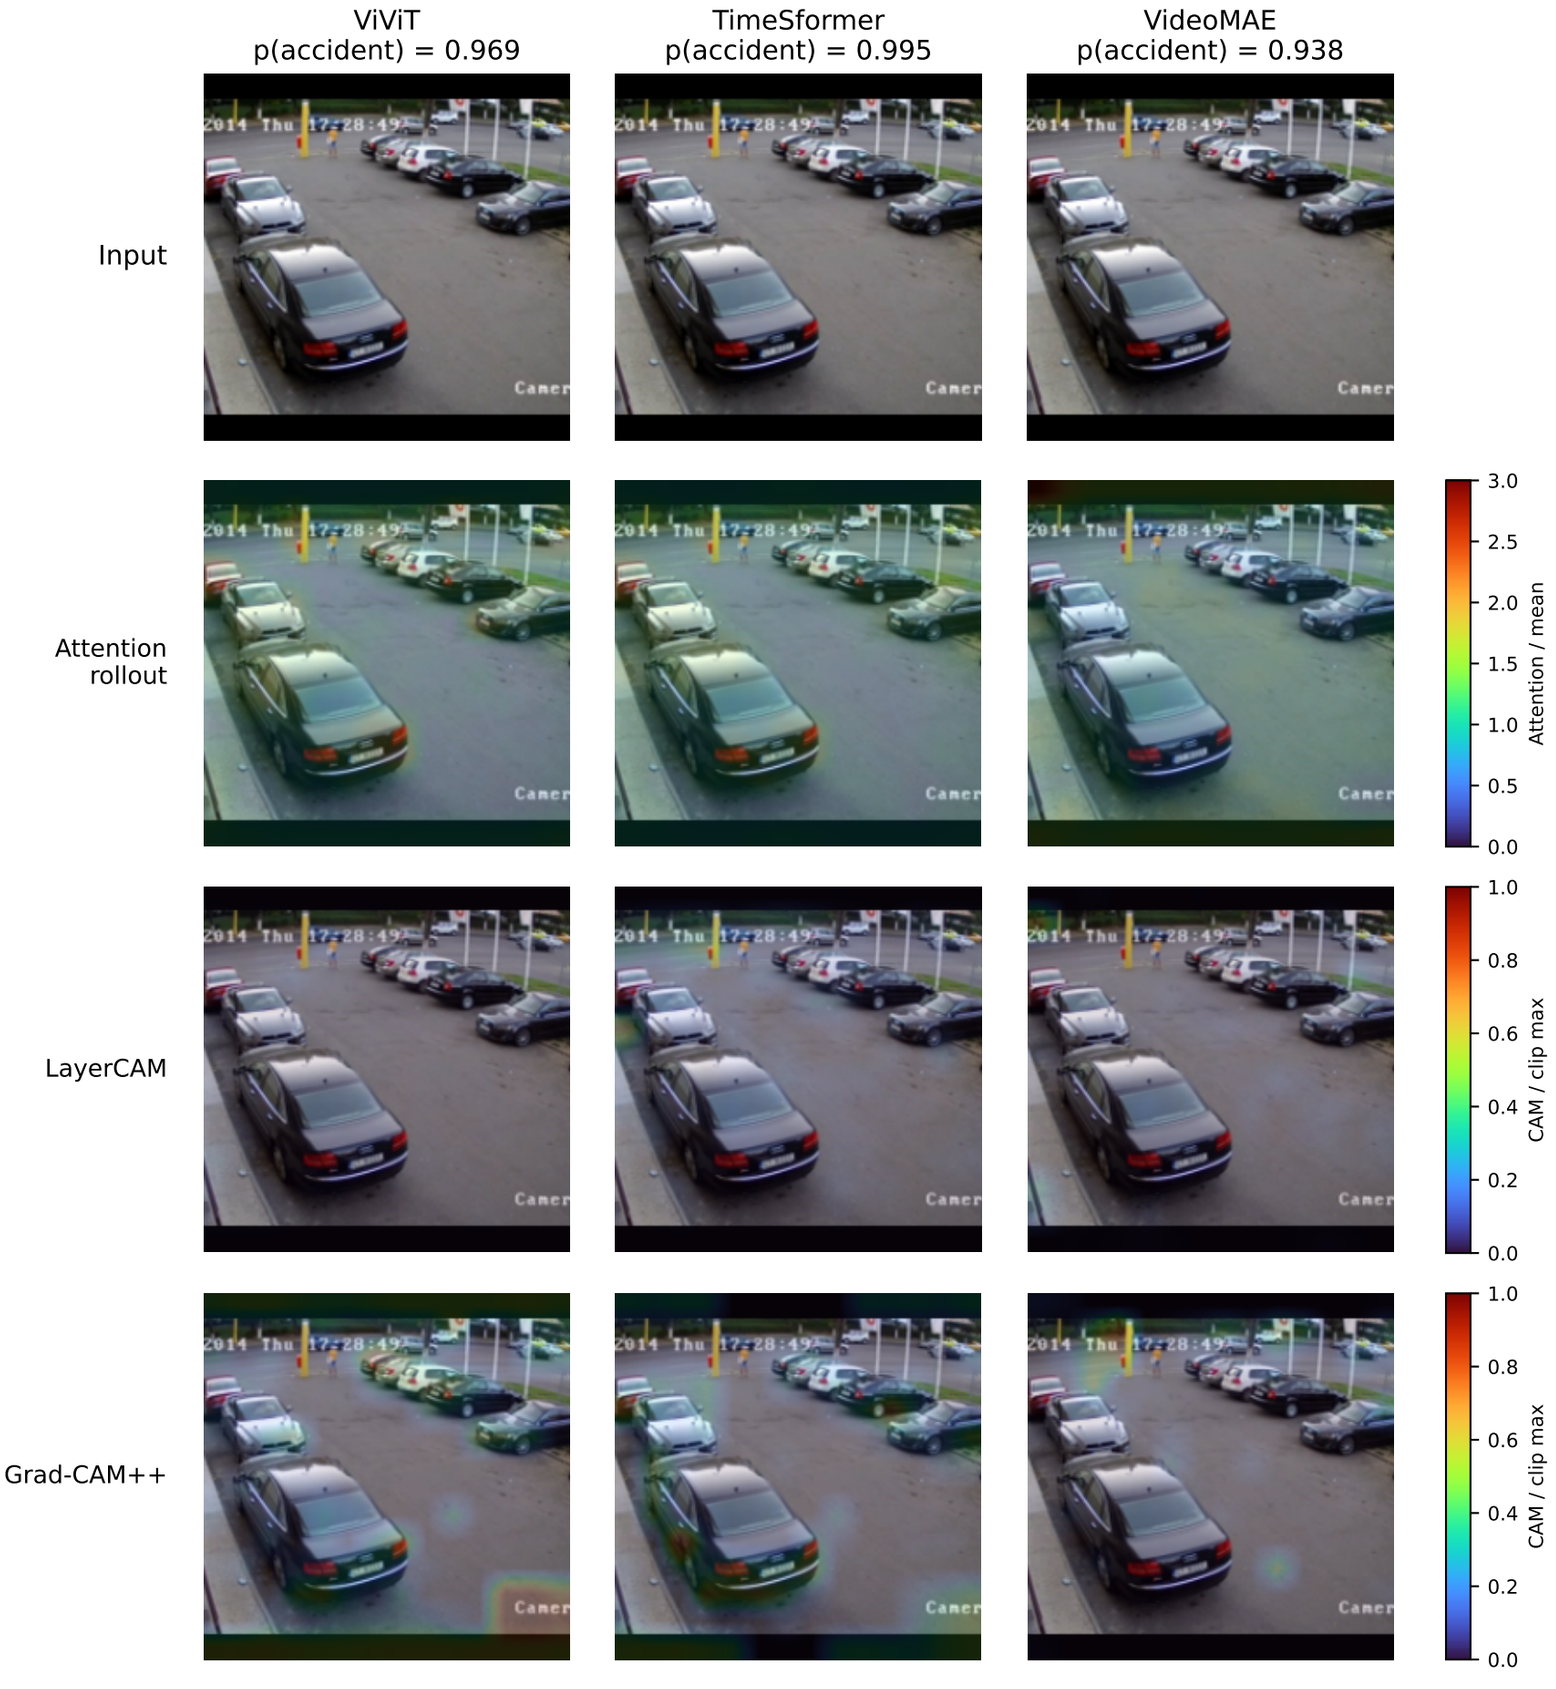

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N08 | Non-accident (dataset label) | t = 90.78 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

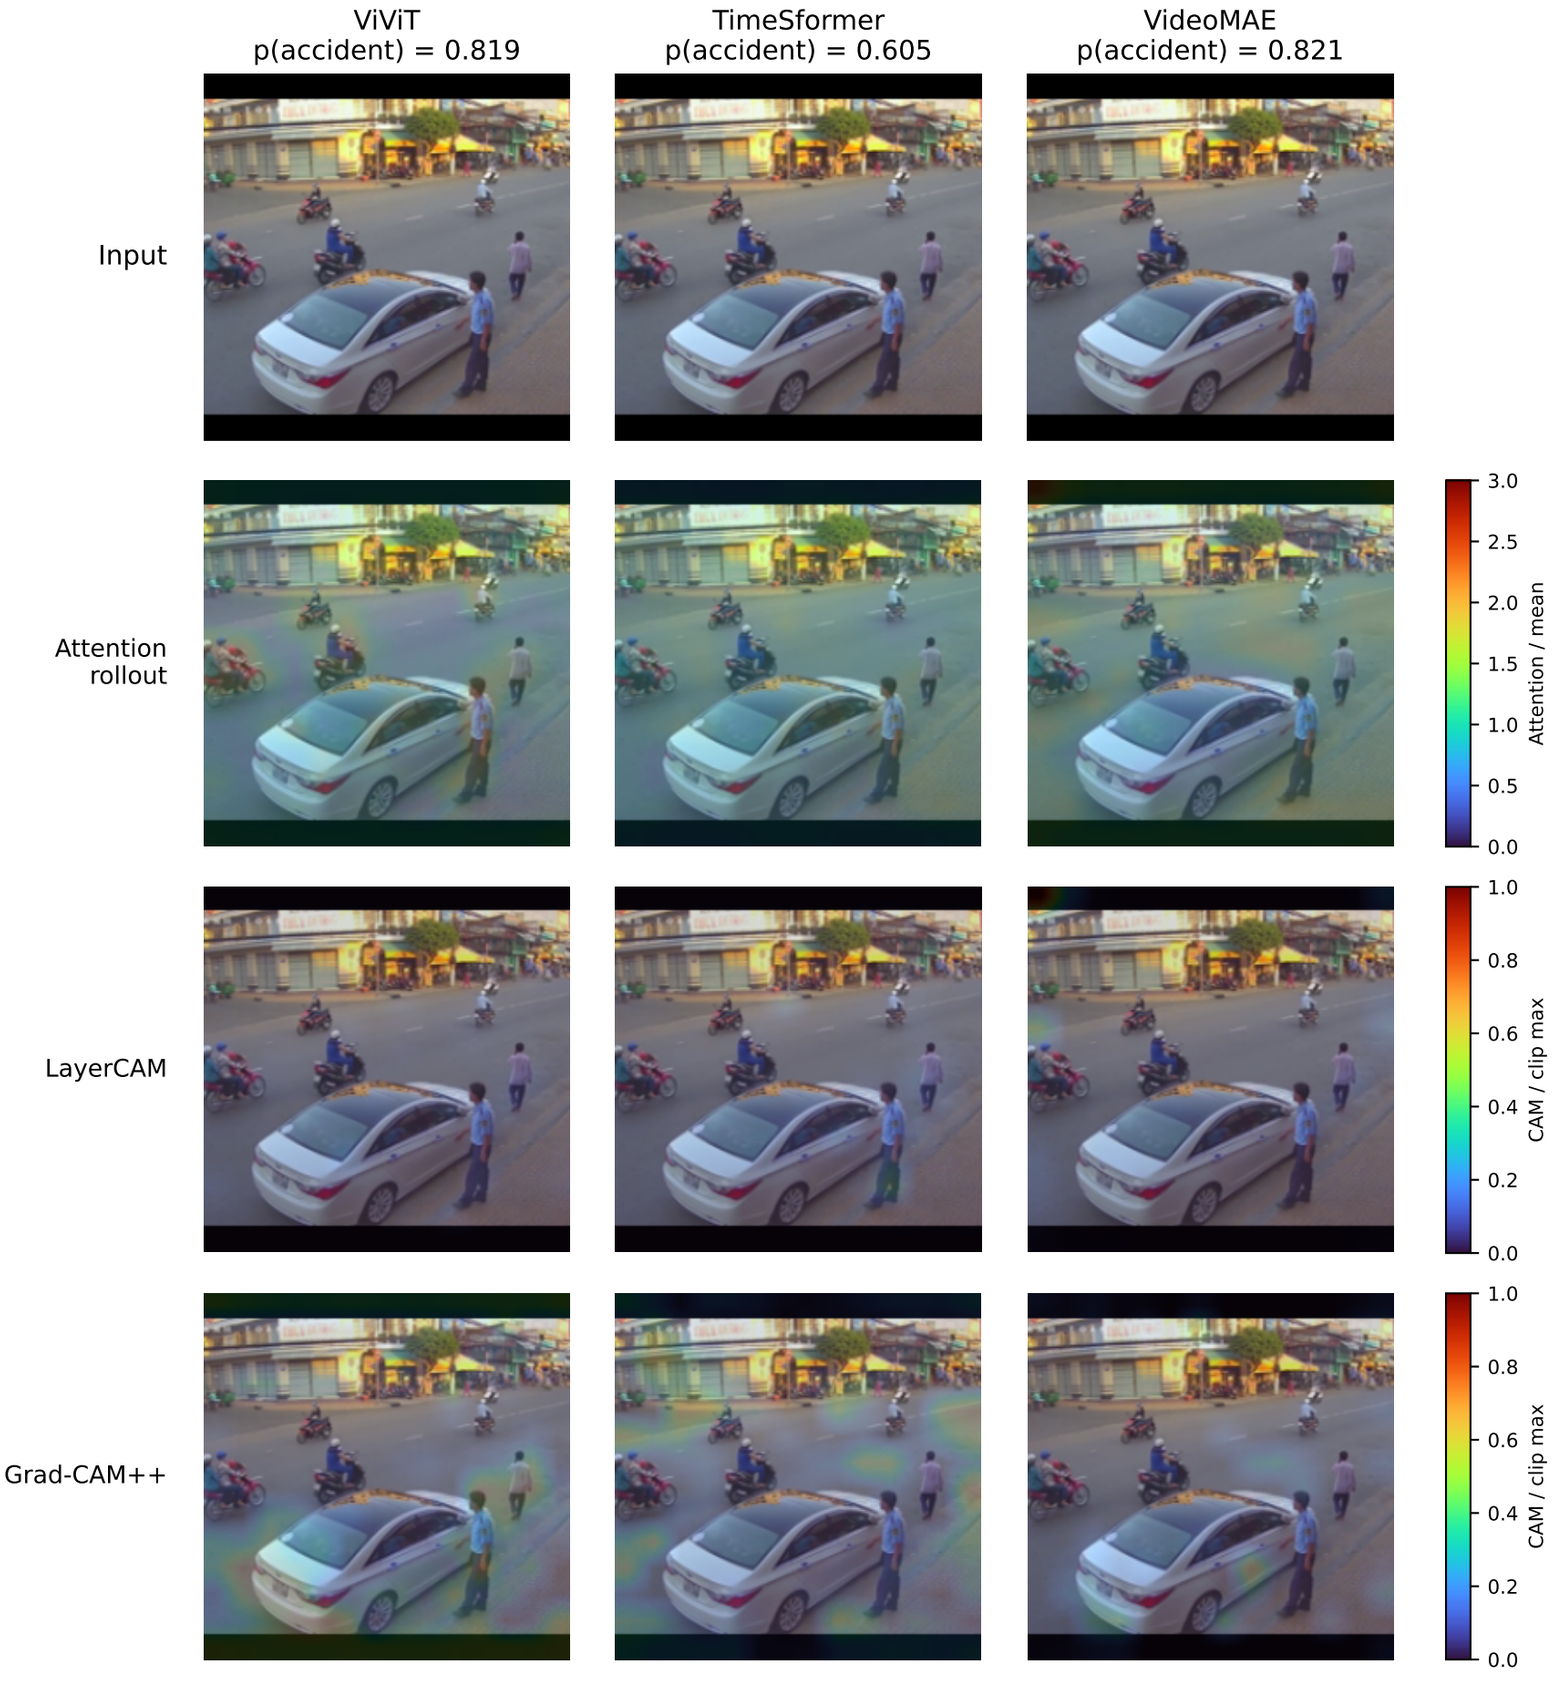

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N09 | Non-accident (dataset label) | t = 75.68 s


Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

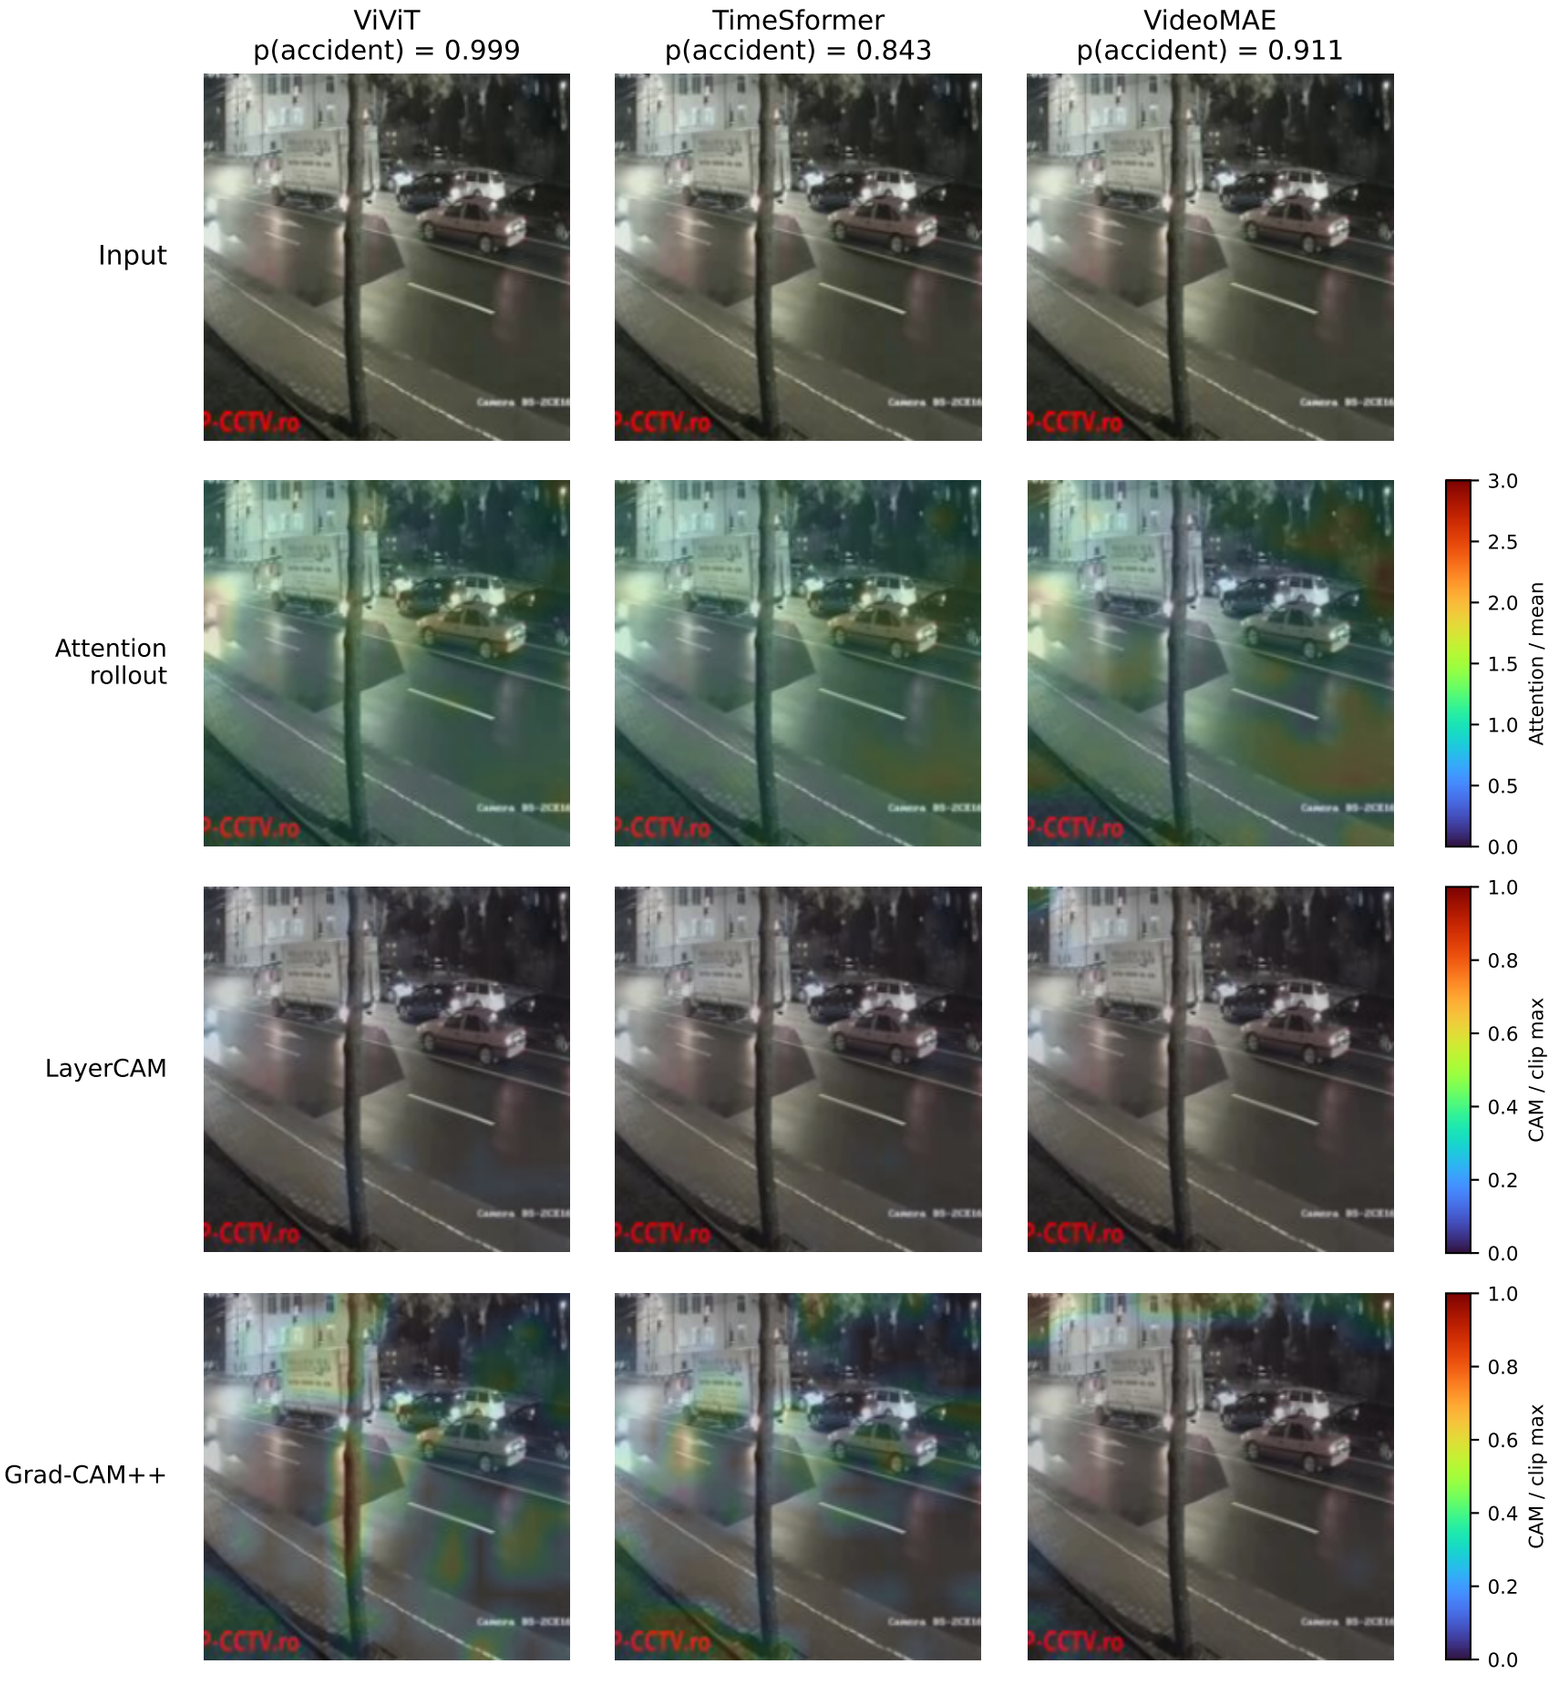

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.

N10 | Non-accident (dataset label) | t = 188.56 s

Grouped retraining, seed 42 | same displayed RGB frame | fixed center 4-second input

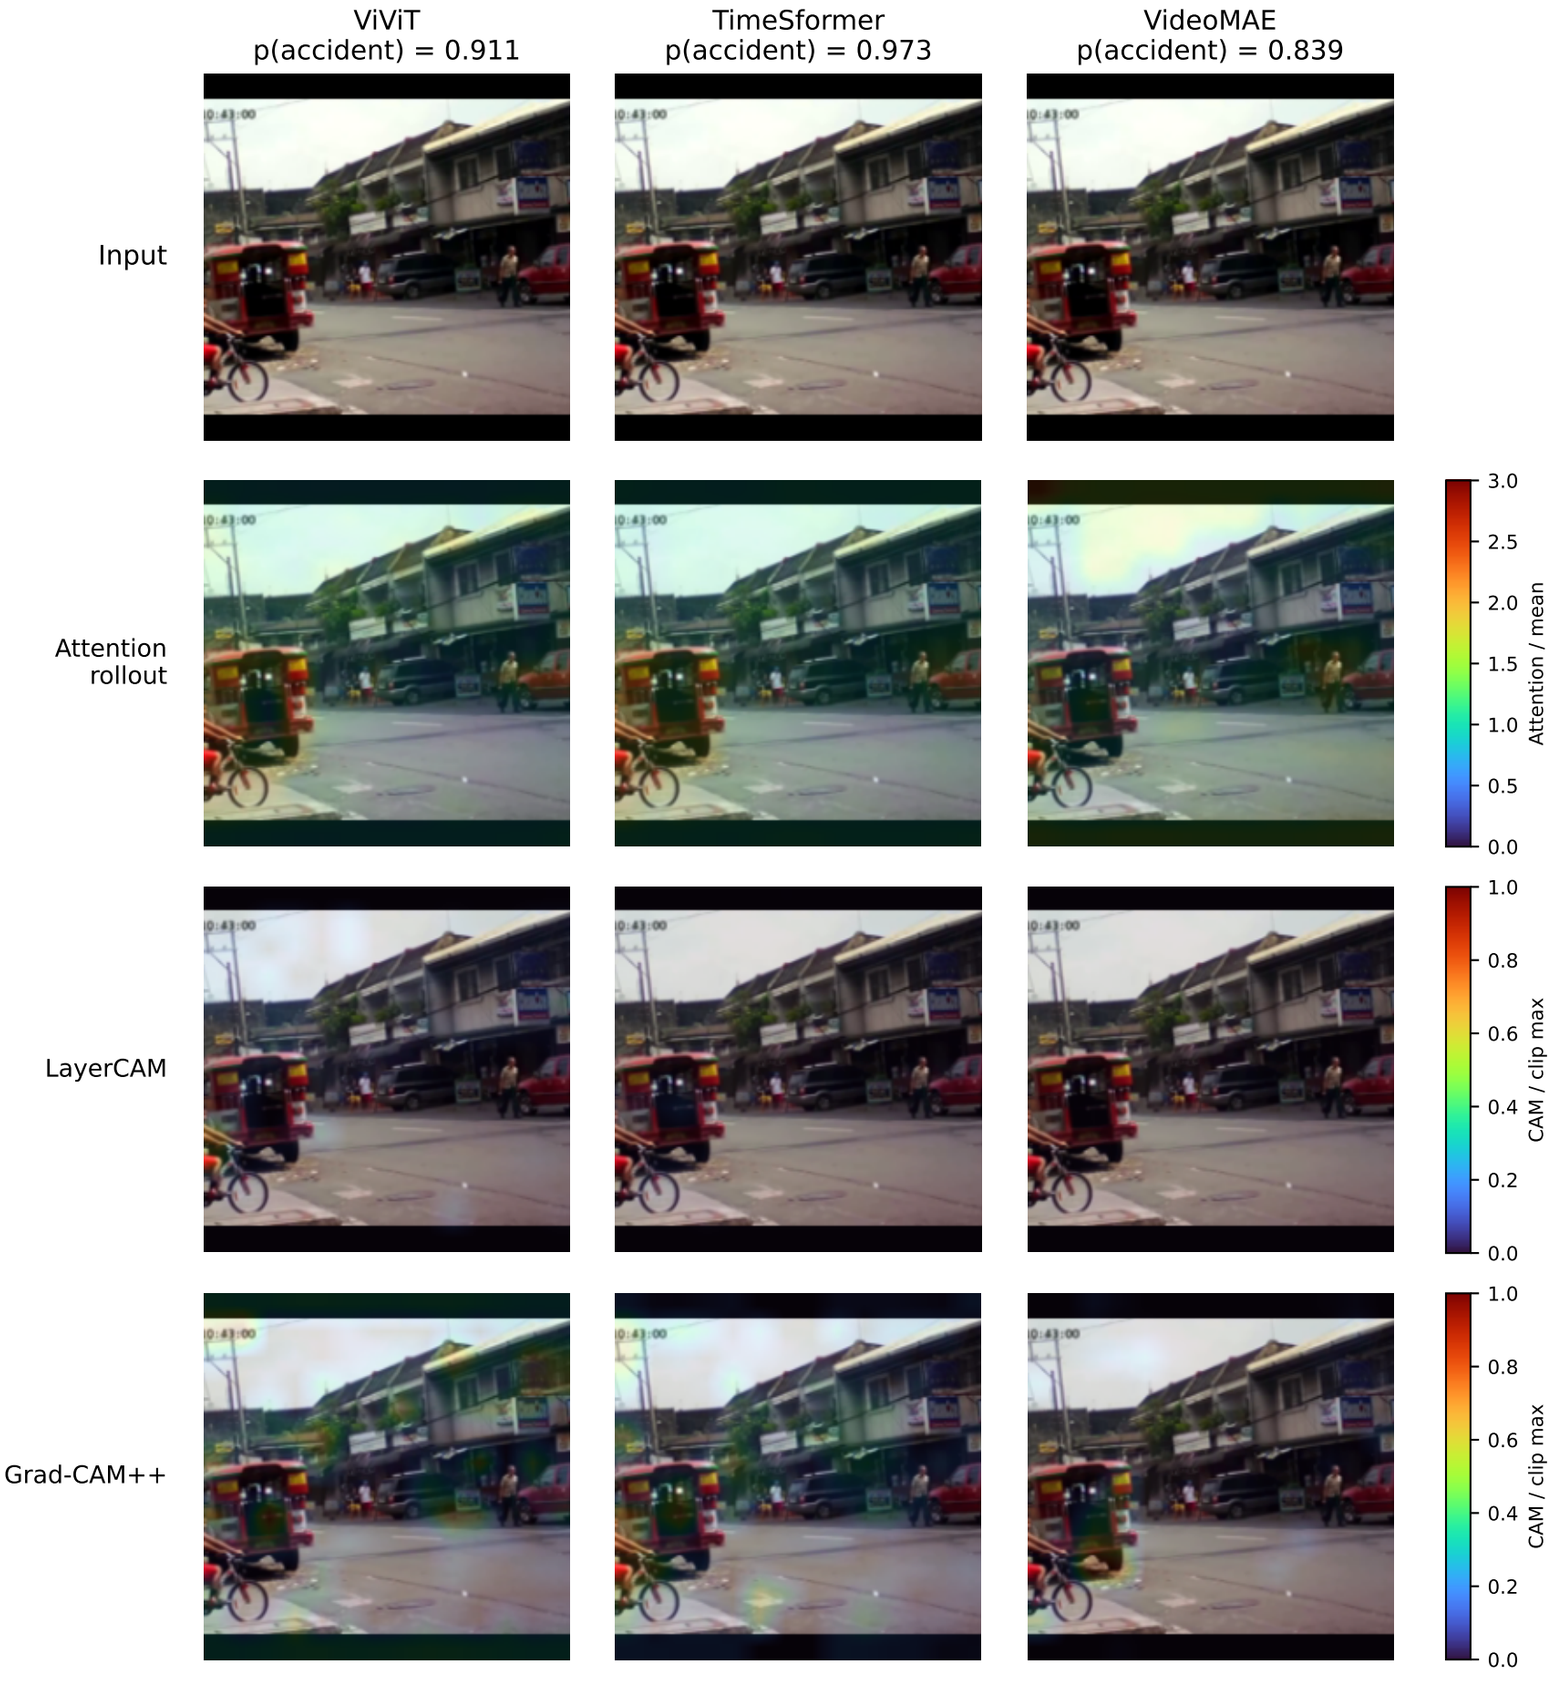

LayerCAM / Grad-CAM++ target: accident logit, for both labels. Rollout is not class-specific.
Maps are interpolated in time for display. Each CAM uses its own full-clip maximum.
TimeSformer rollout: spatial + temporal flow; checkpoint config 8 / input 32 frames preserved.
No onset / object-box annotations. TimeSformer requires a corrected-config retraining control.