



UNIVERSITI KUALA LUMPUR

MALAYSIAN INSTITUTE OF INFORMATION TECHNOLOGY

PROJECT:

Deploying a Web Application with AWS VPC, EC2, and RDS (MySQL).

COURSE: IIB43203 - CLOUD COMPUTING

PREPARED BY:

No.	Name	ID	Lab
1.	MOHAMAD SYAMIL AIMULLAH BIN MOHAMAD SALIHIN	52227124721	L01-B01
2.	AKMAL QAYYUM BIN AHMAD RAIS	52224124785	L01-B01
3.	MOHAMAD ISYRAF HARIRI BIN MOHMAD SOFIAN	52227124240	L01-B01
4.	ILHAM HAKIMI BIN KAMARZAMAN	52227124183	L01-B01


PREPARED FOR:

Dr. Megat Norulazmi Bin Megat Mohamed Noor


1.0 AWS VPC Setup

1.1 Create VPC

a) On the search bar, search VPC and then click on it.

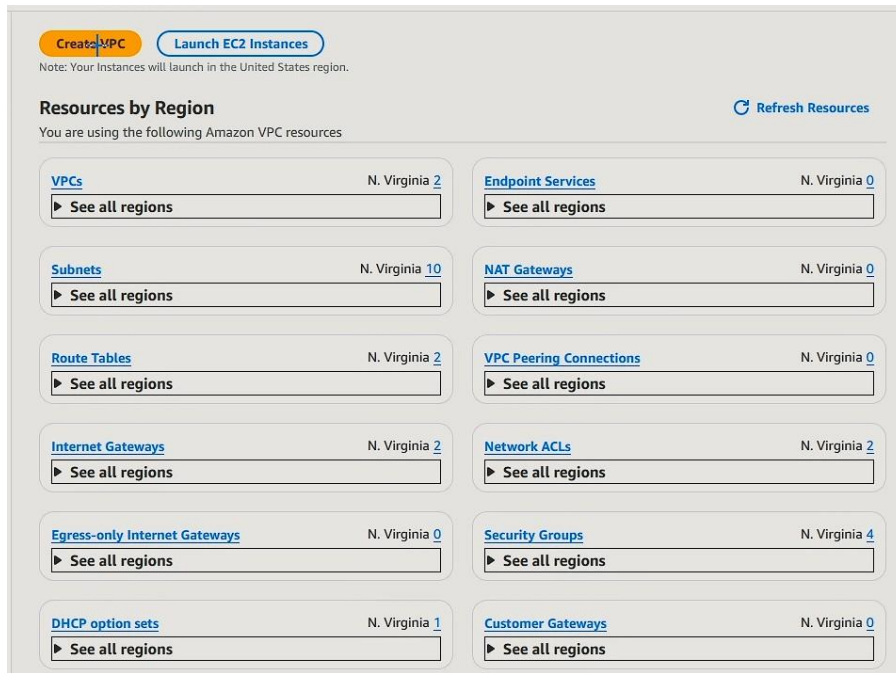

b) Click on Create VPC button.

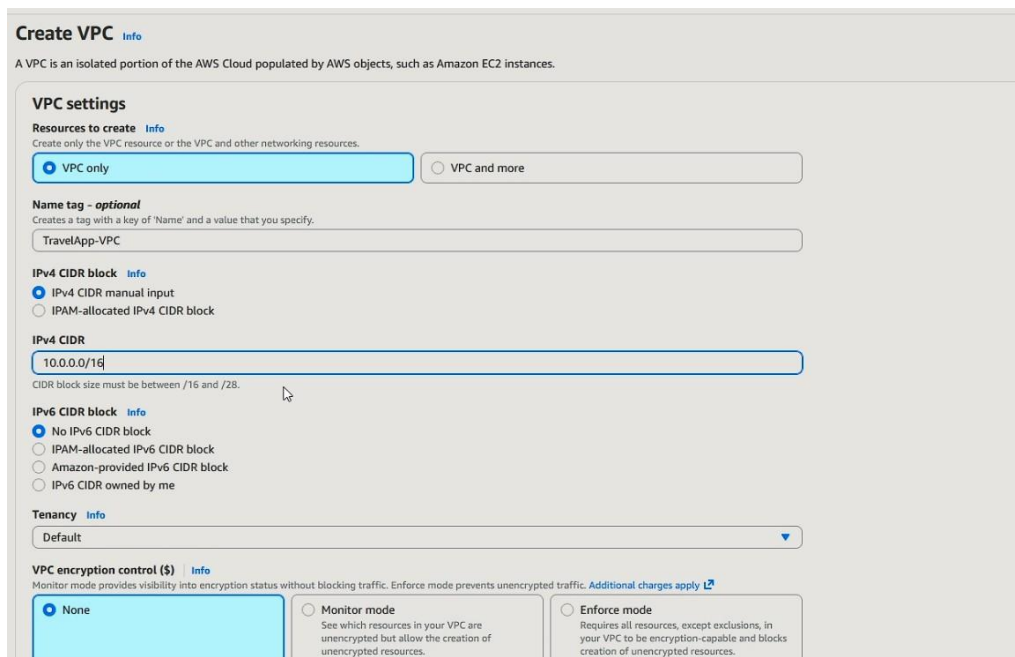

Create VPC [Info](#)

A VPC is an isolated portion of the AWS Cloud populated by AWS objects, such as Amazon EC2 instances.

VPC settings

Resources to create [Info](#)
Create only the VPC resource or the VPC and other networking resources.

☒ VPC only ☐ VPC and more

Name tag - optional
Creates a tag with a key of 'Name' and a value that you specify.

TravelApp-VPC

IPv4 CIDR block [Info](#)
☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR
10.0.0.0/16
CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)
☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

Tenancy [Info](#)
Default

VPC encryption control (\$) [Info](#)
Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. [Additional charges apply](#)

☒ None ☐ Monitor mode ☐ Enforce mode

c) Select VPC only.

d) Name the name tag as "TravelApp-VPC".

e) Select IPv4 CIDR manual input and then type 10.0.0.0/16.

IPv4 CIDR block [Info](#)

☒ IPv4 CIDR manual input
☐ IPAM-allocated IPv4 CIDR block

IPv4 CIDR

10.0.0.0/16

CIDR block size must be between /16 and /28.

IPv6 CIDR block [Info](#)

☒ No IPv6 CIDR block
☐ IPAM-allocated IPv6 CIDR block
☐ Amazon-provided IPv6 CIDR block
☐ IPv6 CIDR owned by me

Tenancy [Info](#)

Default

VPC encryption control (\$) [Info](#)

Monitor mode provides visibility into encryption status without blocking traffic. Enforce mode prevents unencrypted traffic. [Additional charges apply](#)

☒ **None**

☐ **Monitor mode**
See which resources in your VPC are unencrypted but allow the creation of unencrypted resources.

☐ **Enforce mode**
Requires all resources, except exclusions, in your VPC to be encryption-capable and blocks creation of unencrypted resources.

Tags

A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key

Q Name X

Value - optional

Q TravelApp-VPC X Remove tag


Add tag

You can add 49 more tags

Cancel Preview code **Create VPC**

f) Click Create VPC.

1.2 Create Subnets

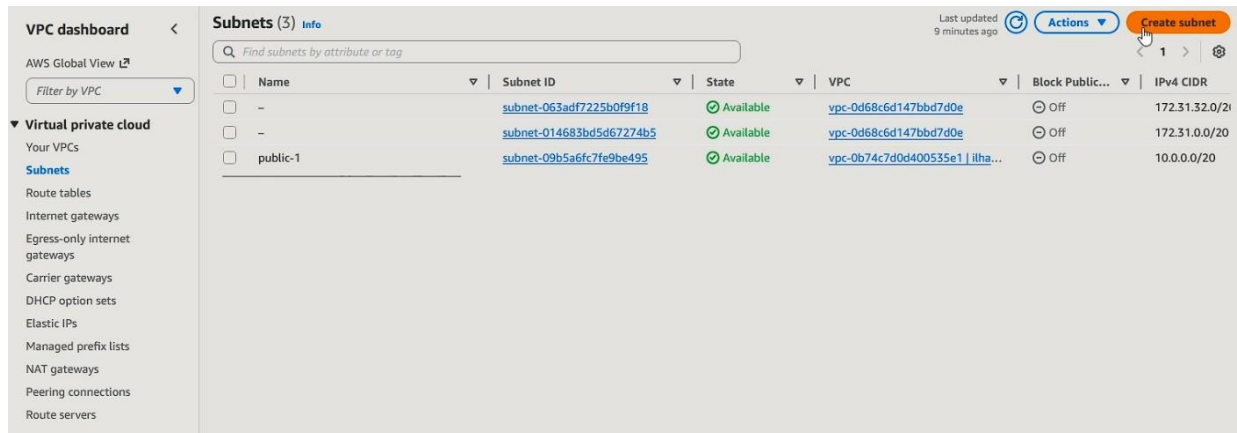

a) At the left side menu, click Subnets and then click Create Subnet.

The screenshot shows the 'Create subnet' wizard in the AWS console. The 'VPC ID' is set to 'vpc-0163f42cbbbeb80a8 (TravelApp-VPC)'. The 'Associated VPC CIDRs' section shows 'IPv4 CIDRs' with '10.0.0.0/16'. The 'Subnet settings' section is active, showing 'Subnet 1 of 1' with the following fields:

- Subnet name:** TravelApp-Public-Subnet-1
- Availability Zone:** United States (N. Virginia) / use1-az1 (us-east-1a)
- IPv4 VPC CIDR block:** 10.0.0.0/16
- IPv4 subnet CIDR block:** 10.0.2.0/24 (256 IPs)

- b) For VPC ID, select TravelApp-VPC you just created.
- c) Rename the subnet as TravelApp-Public-Subnet-1.
- d) Select the first one listed in the Availability Zone (us-east-1a).
- e) Change IPv4 subnet CIDR block to 10.0.1.0/24.

Subnet 2 of 2

Subnet name
Create a tag with a key of 'Name' and a value that you specify.
TravelApp-Public-Subnet-2
The name can be up to 256 characters long.

Availability Zone [Info](#)
Choose the zone in which your subnet will reside, or let Amazon choose one for you.
United States (N. Virginia) / us-east-1b

IPv4 VPC CIDR block [Info](#)
Choose the VPC's IPv4 CIDR block for the subnet. The subnet's IPv4 CIDR must lie within this block.
10.0.0.0/16

IPv4 subnet CIDR block
10.0.2.0/24 256 IPs

Tags - optional

Key Value - optional
Q Name X Q TravelApp-Public-Subnet-2 X Remove

Add new tag
You can add 49 more tags.

Remove

- f) Click Add new subnet. Rename the subnet as TravelApp-Public-Subnet-2.
- g) Select the second listed in the Availability Zone (us-east-1b).
- h) Change IPv4 subnet CIDR block to 10.0.2.0/24.
- i) Scroll to the bottom, then click Create Subnet.

You have successfully created 2 subnets: subnet-07747db612d07cc32, subnet-02f5232d99d59dcc7

Subnets (1/2) [Info](#) Last updated less than a minute ago [Actions](#) [Create subnet](#)

Find subnets by attribute or tag

Subnet ID : subnet-07747db612d07cc32 X Subnet ID : subnet-02f5232d99d59dcc7 X [Clear filters](#)

	Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR
☐	TravelApp-Public-Subnet-2	subnet-02f5232d99d59dcc7	Available	vpc-0163f42cbbbeb80a8 Trav...	Off	10.0.2.0/24
☒	TravelApp-Public-Subnet-1	subnet-07747db612d07cc32	Available	vpc-0163f42cbbbeb80a8 Trav...	Off	10.0.1.0/24

subnet-07747db612d07cc32 / TravelApp-Public-Subnet-1

[Details](#) [Flow logs](#) [Route table](#) [Network ACL](#) [CIDR reservations](#) [Sharing](#) [Tags](#)

Details

Subnet ID subnet-07747db612d07cc32	Subnet ARN arn:aws:ec2:us-east-1:458443190309:subnet/subnet-07747db612d07cc32	State Available	Block Public Access Off
IPv4 CIDR 10.0.1.0/24	Available IPv4 addresses 251	IPv6 CIDR -	IPv6 CIDR association ID -
Availability Zone	VPC	Route table	

✓ You have successfully created 2 subnets: subnet-07747db612d07cc32, subnet-02f5232d99d59dcc7

Subnets (1/2) Info Last updated 1 minute ago Actions Create subnet

Find subnets by attribute or tag

Subnet ID: subnet-07747db612d07cc32 Subnet ID: subnet-02f5232d99d59dcc7 Clear filters

Name	Subnet ID	State	VPC	Block Public...	IPv4 CIDR
☒ TravelApp-Public-Subnet-2	subnet-02f5232d99d59dcc7	Available	vpc-0163f42cbbbeb80a8 Trav...	Off	10.0.2.0/24
☐ TravelApp-Public-Subnet-1	subnet-07747db612d07cc32	Available	vpc-0163f42cbbbeb80a8 Trav...	Off	10.0.1.0/24

subnet-02f5232d99d59dcc7 / TravelApp-Public-Subnet-2

Details Flow logs Route table Network ACL CIDR reservations Sharing Tags

Details

Subnet ID subnet-02f5232d99d59dcc7	Subnet ARN arn:aws:ec2:us-east-1:458443190309:subnet/subnet-02f5232d99d59dcc7	State Available	Block Public Access Off
IPv4 CIDR 10.0.2.0/24	Available IPv4 addresses 251	IPv6 CIDR -	IPv6 CIDR association ID -
Availability Zone	VPC	Route table	

j) Check both subnets created.

VPC dashboard Global View Filter by VPC

Virtual private cloud

- Your VPCs
- Subnets**
- Route tables
- Internet gateways
- Egress-only internet gateways
- Carrier gateways
- DHCP option sets
- Elastic IPs
- Managed prefix lists
- NAT gateways
- Peering connections
- Route servers

Security

- Network ACLs
- Security groups

PrivateLink and Lattice

- Getting started
- Endpoints
- Endpoint services
- Service networks
- Lattice services

Subnets (1/5) Info Last updated 15 minutes ago Actions Create subnet

Find subnets by attribute or tag

Name	Subnet ID	State	VPC	IPv4 CIDR
-	subnet-063adf7225b0f9f18	Available	vpc-0d68c6d147bbc	172.31.32.0/24
-	subnet-014683bd5d67274b5	Available	vpc-0d68c6d147bbc	172.31.0.0/20
public-1	subnet-09b5a6fc7fe9be495	Available	vpc-0b74c7d0d4005	10.0.0.0/20
TravelApp-Public-Subnet-2	subnet-02f5232d99d59dcc7	Available	vpc-0163f42cbbbeb	10.0.2.0/24
☒ TravelApp-Public-Subnet-1	subnet-07747db612d07cc32	Available	vpc-0163f42cbbbeb	10.0.1.0/24

subnet-07747db612d07cc32 / TravelApp-Public-Subnet-1

Details Flow logs Route table Network ACL CIDR reservations Sharing Tags

Details

Subnet ID subnet-07747db612d07cc32	Subnet ARN arn:aws:ec2:us-east-1:458443190309:subnet/subnet-07747db612d07cc32	State Available	Block Public Access Off
--	---	---------------------------	-----------------------------------

k) Select TravelApp-Public-Subnet-1. Click Action and then click Edit subnet settings.

Edit subnet settings [Info](#)

Subnet

Subnet ID: [subnet-07747db612d07cc32](#) Name: [TravelApp-Public-Subnet-1](#)

Auto-assign IP settings [Info](#)

Enable AWS to automatically assign a public IPv4 or IPv6 address to a new primary network interface for an instance in this subnet.

☒ Enable auto-assign public IPv4 address [Info](#)

☐ Enable auto-assign customer-owned IPv4 address [Info](#)
Option disabled because no customer owned pools found.

Resource-based name (RBN) settings [Info](#)

Specify the hostname type for EC2 instances in this subnet and optional RBN DNS query settings.

☐ Enable resource name DNS A record on launch [Info](#)

☐ Enable resource name DNS AAAA record on launch [Info](#)

Hostname type [Info](#)

☐ Resource name

☒ IP name

DNS64 settings

Enable DNS64 to allow IPv6-only services in Amazon VPC to communicate with IPv4-only services and networks.

☐ Enable DNS64 [Info](#)

[Cancel](#) [Save](#)

- I) Check the box for Enable auto-assign public IPv4 address to ensure EC2 instance gets public web address later on.

1.3 Create Internet Gateway

VPC dashboard [AWS Global View i2](#)

Filter by VPC

Virtual private cloud

- Your VPCs
- Subnets
- Route tables
- Internet gateways**
- Egress only Internet gateways
- Carrier gateways
- DHCP option sets
- Elastic IPs
- Managed prefix lists
- NAT gateways
- Peering connections
- Route servers

Internet gateways (2) [Info](#)

[Find Internet gateways by attribute or tag](#)

[Actions](#) [Create internet gateway](#)

☐	Name	Internet gateway ID	State	VPC ID	Owner
☐	allamlakini-igw	igw-0353115687ed65939	Attached	vpc-0b74c710d100535e7	allamlakini... 458413190309
☐	-	igw-01eb73effe5fcd10f	Attached	vpc-0d688c5d147bhd7dfe	458441190309

- a) On the left menu, click Internet gateway.
- b) Click Create Internet Gateway.

VPC > Internet gateways > Create internet gateway

Create internet gateway Info

An internet gateway is a virtual router that connects a VPC to the internet. To create a new internet gateway specify the name for the gateway below.

Internet gateway settings

Name tag
Creates a tag with a key of 'Name' and a value that you specify.

TravelApp-IGW

Tags - optional
A tag is a label that you assign to an AWS resource. Each tag consists of a key and an optional value. You can use tags to search and filter your resources or track your AWS costs.

Key **Value - optional**

Q Name X Q TravelApp-IGW X Remove

Add new tag

You can add 49 more tags.

Cancel Create internet gateway

c) Set Name tag as TravelApp-IGW.

d) Click Create Internet Gateway.

The following internet gateway was created: igw-024444fffdcc2c10d - TravelApp-IGW. You can now attach to a VPC to enable the VPC to communicate with the internet. Attach to a VPC X

igw-024444fffdcc2c10d / TravelApp-IGW

Actions

Details Info

Internet gateway ID
igw-024444fffdcc2c10d

State
Detached

VPC ID
-

Owner
458443190309

Tags (1)

Search tags

Key	Value
Name	TravelApp-IGW

Manage tags

< 1 > ⚙

e) On the success green bar, click the Attach to VPC.

The following internet gateway was created: igw-024444fffdcc2c10d - TravelApp-IGW. You can now attach to a VPC to enable the VPC to communicate with the internet. Attach to a VPC X

Attach to VPC (igw-024444fffdcc2c10d) Info

VPC
Attach an internet gateway to a VPC to enable the VPC to communicate with the internet. Specify the VPC to attach below.

Available VPCs
Attach the internet gateway to this VPC.

Q vpc-0163f42cbbbeb80a8 X

Use: "vpc-0163f42cbbbeb80a8"

vpc-0163f42cbbbeb80a8 - TravelApp-VPC

Cancel Attach internet gateway

Internet gateway igw-024444fffdcc2c10d successfully attached to vpc-0163f42cbbbeb80a8

igw-024444fffdcc2c10d / TravelApp-IGW

Actions

Details Info

Internet gateway ID
igw-024444fffdcc2c10d

State
Attached

VPC ID
vpc-0163f42cbbbeb80a8 | TravelApp-VPC

Owner
458443190309

Tags (1)

Search tags

Key	Value
Name	TravelApp-IGW

Manage tags

< 1 > ⚙

f) Select TravelApp-VPC you have created before and click Attach Internet gateway.

1.4 Configure the Route Table

Route tables (1/3) info

Last updated 4 minutes ago

Find route tables by attribute or tag

Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC
-	rtb-0aeb6ca38216862b2	-	-	Yes	vpc-0d58ced147b0d7d0e
-	rtb-051e0b4a920dd8a6f	-	-	Yes	vpc-43b74c7d0d4d01535e1
✓	rtb-0896af3b8dfa33653	-	-	Yes	vpc-0153f42cbbcbcb80a8 Trav

rtb-0896af3b8dfa33653

Details Routes Subnet associations Edge associations Route propagation Tags

Routes (1)

Filter routes

Destination	Target	Status	Propagated	Route Origin
10.0.0.0/16	local	Active	No	Create Route Table

- On the left menu, click Route Table.
- Search for the route table that associates with TravelApp-VPC.

VPC > Route tables

Virtual private cloud

Route tables

Route tables (1/3) info

Last updated 4 minutes ago

Find route tables by attribute or tag

Name	Route table ID	Explicit subnet associ...	Edge associations	Main	VPC
-	rtb-0aeb6ca38216862b2	-	-	Yes	vpc-0d58ced147b0d7d0e
-	rtb-051e0b4a920dd8a6f	-	-	Yes	vpc-43b74c7d0d4d01535e1
✓	rtb-0896af3b8dfa33653	-	-	Yes	vpc-0153f42cbbcbcb80a8 Trav

rtb-0896af3b8dfa33653

Details Routes Subnet associations Edge associations Route propagation Tags

Details

Route table ID

rtb-0896af3b8dfa33653

VPC

Main

Owner ID


Explicit subnet associations

Edge associations

Actions


- View details
- Set main route table
- Edit subnet associations
- Edit edge associations
- Edit route propagation
- Edit routes
- Manage tags
- Delete route table

- Click Action and then click Edit routes.

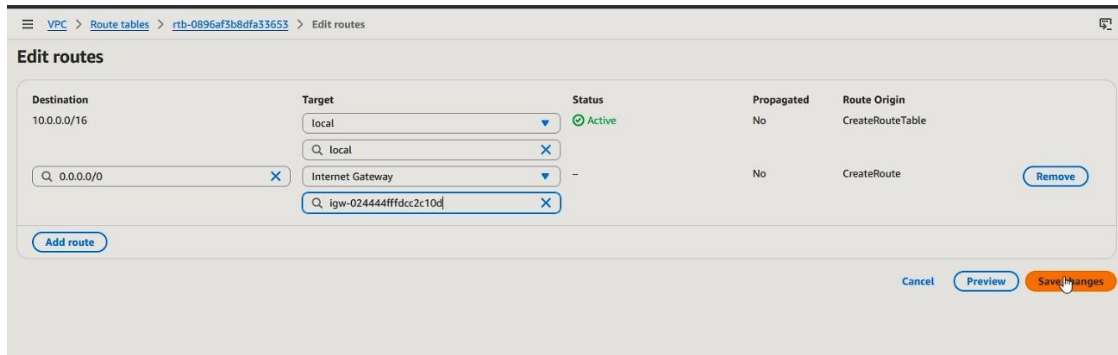

- d) Click Add route.
- e) Change the destination to 0.0.0.0/0. Set target to TravelApp-IGW by selecting Internet Gateway option.
- f) Click Save Changes.

1.5 Create the Security Groups

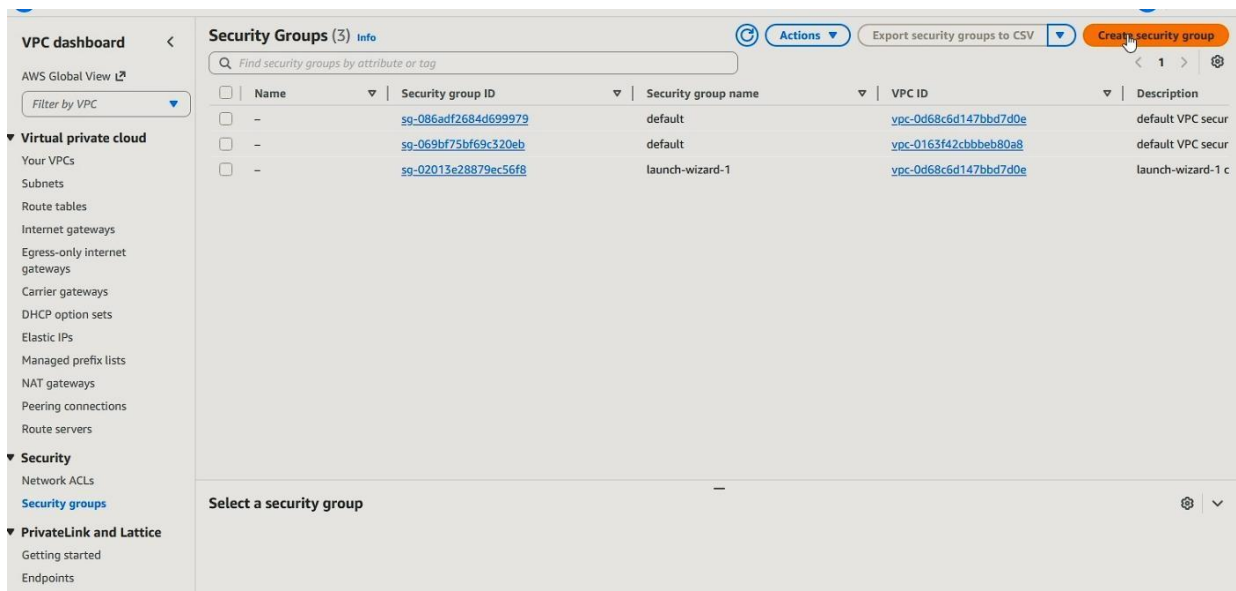

- a) On the left menu, click on Security Groups. The click Create Security Groups.

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

EC2-Web-SG

Name cannot be edited after creation.

Description [Info](#)

Allows HTTP and SSH traffic

VPC [Info](#)

vpc-0163f42cbbbeb80a8 (TravelApp-VPC)

Inbound rules [Info](#)

Type	Protocol	Port range	Source	Description - optional	
HTTP	TCP	80	Anywhere...		Delete
SSH	TCP	22	My IP		Delete

[Add rule](#)

Rules with source of 0.0.0.0/0 or ::/0 allow all IP addresses to access your instance. We recommend setting security group rules to allow access from known IP addresses only.

Outbound rules [Info](#)

- Name the security group name as EC2-Web-SG.
- Change the description as Allow HTTP and SSH traffic.
- On the inbound rules, add 2 rules.
- Set the first rule type to HTTP, Source as Anywhere-IPv4.
- Set the second rule to SSH, Source as My IP to allow only my team to log into the backend of the website.
- Scroll to the bottom and click Create Security Groups.

VPC dashboard [AWS Global View](#)

Filter by VPC

Virtual private cloud

- Your VPCs
- Subnets
- Route tables
- Internet gateways
- Egress-only internet gateways
- Carrier gateways
- DHCP option sets
- Elastic IPs
- Managed prefix lists
- NAT gateways
- Peering connections
- Route servers

Security

- Network ACLs
- Security groups**

PrivateLink and Lattice

- Getting started
- Endpoints
- Endpoint services
- Service networks

Security group (sg-0407ba7f75c26a9a0 | EC2-Web-SG) was created successfully

sg-0407ba7f75c26a9a0 - EC2-Web-SG [Actions](#)

Details

Security group name EC2-Web-SG	Security group ID sg-0407ba7f75c26a9a0	Description Allows HTTP and SSH traffic	VPC ID vpc-0163f42cbbbeb80a8
Owner 458443190309	Inbound rules count 2 Permission entries	Outbound rules count 1 Permission entry	

Inbound rules | Outbound rules | Sharing | VPC associations | Related resources - new | Tags

Inbound rules (2) [Manage tags](#) [Edit inbound rules](#)

	Name	Security group rule ID	IP version	Type	Protocol	Port range
☐	-	sgr-0a4181eda691178f4	IPv4	SSH	TCP	22
☐	-	sgr-03aa6099bc18555a3	IPv4	HTTP	TCP	80

- Click Security Group on the left menu again to create second security group for database.

Create security group [Info](#)

A security group acts as a virtual firewall for your instance to control inbound and outbound traffic. To create a new security group, complete the fields below.

Basic details

Security group name [Info](#)

Name cannot be edited after creation.

Description [Info](#)

VPC [Info](#)

Inbound rules [Info](#)

Type	Protocol	Port range	Source	Description - optional	
MySQL/Aurora	TCP	3306	Custom		Delete
			sg-0407ba7f75c26a9a0		

[Add rule](#)

Outbound rules [Info](#)

Type	Protocol	Port range	Destination	Description - optional	
All traffic	All	All	Custom		Delete
			0.0.0.0/0		

[Add rule](#)

Rules with destination of 0.0.0.0/0 or ::/0 allow your instances to send traffic to any IPv4 or IPv6 address. We recommend setting security group rules to be more restrictive and to only allow traffic to specific known IP addresses.

- i) Rename the security group name as RDS-DB-SG.
- j) Change the description as Allow traffic only from the EC2 instance.
- k) Select TravelApp-VPC as your VPC.
- l) On the inbound rules, click Add rule.
- m) Set the rule type as MySQL/Aurora and source search for EC2-Web-SG.
- n) This step prevents the public internet from touching the database directly.
- o) Scroll down to the bottom, click Create Security Group.

VPC dashboard < sg-073b60c05198d5602 - RDS-DB-SG

Security group (sg-073b60c05198d5602) [RDS-DB-SG] was created successfully

sg-073b60c05198d5602 - RDS-DB-SG [Actions](#)

Details

Security group name RDS-DB-SG	Security group ID sg-073b60c05198d5602	Description Allow traffic only from the EC2 instance	VPC ID vpc-0163f42cbbbeb80a8
Owner 458443190309	Inbound rules count 1 Permission entry	Outbound rules count 1 Permission entry	

Inbound rules | Outbound rules | Sharing | VPC associations | Related resources - new | Tags


Inbound rules (1) [Manage tags](#) [Edit inbound rules](#)

Name	Security group rule ID	IP version	Type	Protocol	Port range
-	sg-0bf71b7cec7496871	-	MySQL/Aurora	TCP	3306


2.0 Database Setup

2.1 Create the Amazon S3 Bucket


- a. In the top search bar of the AWS Console, search for S3 and click it.

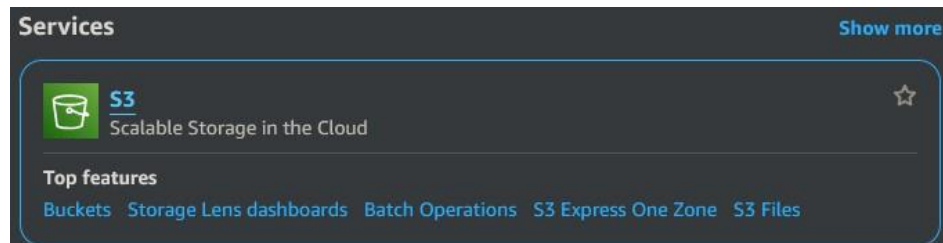

- b. Click the orange Create bucket button.

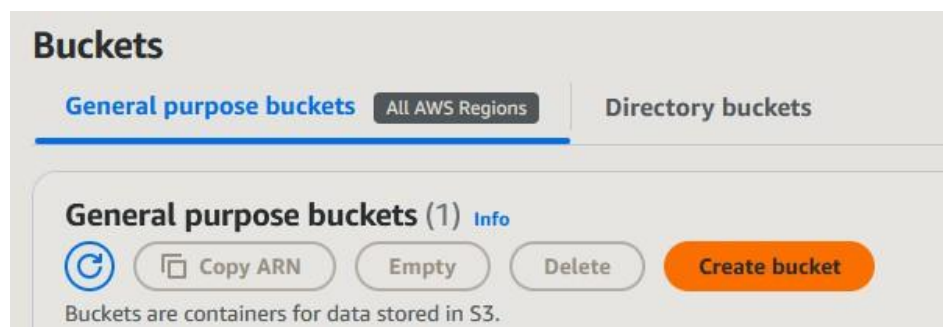

- c. Bucket name: Type a unique name in all lowercase
- d. AWS Region: Keep it the same region as your VPC
- e. Object Ownership: Select ACLs enabled and choose Bucket owner preferred.

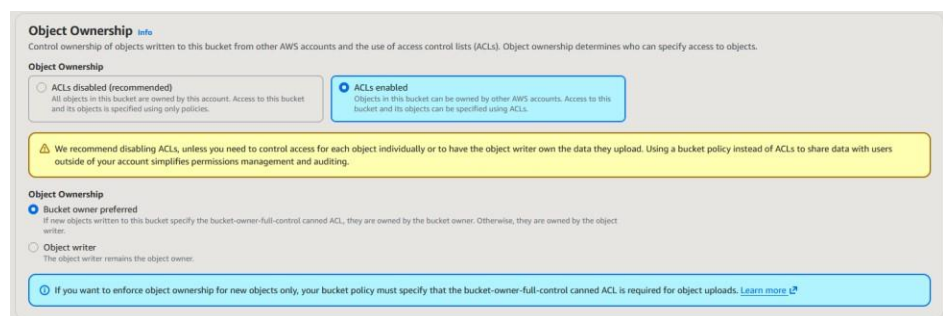

- f. Block Public Access settings for this bucket: Uncheck the box that says, "Block all public access."

Block Public Access settings for this bucket


Public access is granted to buckets and objects through access control lists (ACLs), bucket policies, access point policies, or all. In order to ensure that public access to this bucket and its objects is blocked, turn on Block all public access. These settings apply only to this bucket and its access points. AWS recommends that you turn on Block all public access, but before applying any of these settings, ensure that your applications will work correctly without public access. If you require some level of public access to this bucket or objects within, you can customize the individual settings below to suit your specific storage use cases. [Learn more](#)

- ☐ **Block all public access**
Turning this setting on is the same as turning on all four settings below. Each of the following settings are independent of one another.
- ☐ **Block public access to buckets and objects granted through new access control lists (ACLs)**
S3 will block public access permissions applied to newly added buckets or objects, and prevent the creation of new public access ACLs for existing buckets and objects. This setting doesn't change any existing permissions that allow public access to S3 resources using ACLs.
- ☐ **Block public access to buckets and objects granted through any access control lists (ACLs)**
S3 will ignore all ACLs that grant public access to buckets and objects.
- ☐ **Block public access to buckets and objects granted through new public bucket or access point policies**
S3 will block new bucket and access point policies that grant public access to buckets and objects. This setting doesn't change any existing policies that allow public access to S3 resources.
- ☐ **Block public and cross-account access to buckets and objects through any public bucket or access point policies**
S3 will ignore public and cross-account access for buckets or access points with policies that grant public access to buckets and objects.

Turning off block all public access might result in this bucket and the objects within becoming public
AWS recommends that you turn on block all public access, unless public access is required for specific and verified use cases such as static website hosting.


☒ I acknowledge that the current settings might result in this bucket and the objects within becoming public.

- g. Leave everything else as default, scroll to the bottom, and click Create bucket.




2.2 Create the RDS DB Subnet Group

- a. In the top search bar, search for RDS and click on it.

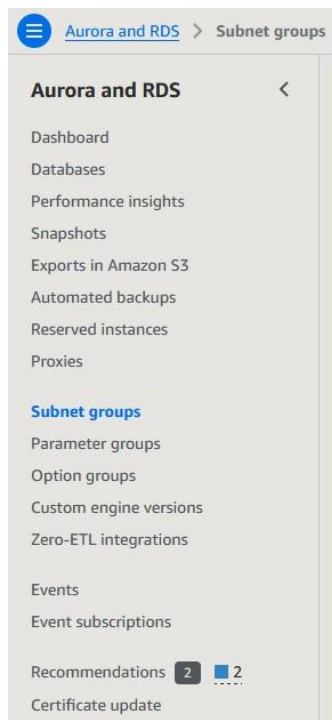

- b. In the left-hand menu, click Subnet groups, then click Create DB subnet group.



- c. Name: travelapp-db-subnet-group
- d. Description: Subnet group for Travel App Database.
- e. VPC: Select your TravelApp-VPC.

Create DB subnet group
To create a new subnet group, give it a name and a description, and choose an existing VPC. You will then be able to add subnets related to that VPC.

Subnet group details

Name
You won't be able to modify the name after your subnet group has been created.
travelapp-db-subnet-group

Description
Must contain from 1 to 255 characters. Alphanumeric characters, spaces, hyphens, underscores, and periods are allowed.
Subnet group for Travel App Database

VPC
Choose a VPC identifier that corresponds to the subnets you want to use for your DB subnet group. You won't be able to choose a different VPC identifier after your subnet group has been created.
TravelApp-VPC (vpc-0163f42cbbbeb80a8)
2 Subnets, 2 Availability Zones

- f. Availability Zones: Select the two zones you used in Phase 1.
- g. Subnets: Check the boxes for your two subnets (10.0.1.0/24 and 10.0.2.0/24).
- h. Click Create.

Add subnets

Availability Zones
Choose the Availability Zones that include the subnets you want to add.
Choose an availability zone
us-east-1a X us-east-1b X

Subnets
Choose the subnets that you want to add. The list includes the subnets in the selected Availability Zones.
Select subnets
TravelApp-Public-Subnet-2 X TravelApp-Public-Subnet-1 X
Subnet ID: subnet-02f5232d99d59dc7 CIDR: 10.0.2.0/24 Subnet ID: subnet-07747db612d07cc32 CIDR: 10.0.1.0/24

For Multi-AZ DB clusters, you must select 3 subnets in 3 different Availability Zones.

Subnets selected (2)

Availability zone	Subnet name	Subnet ID	CIDR block
us-east-1b	TravelApp-Public-Subnet-2	subnet-02f5232d99d59dc7	10.0.2.0/24
us-east-1a	TravelApp-Public-Subnet-1	subnet-07747db612d07cc32	10.0.1.0/24

Cancel Create

Successfully created travelapp-db-subnet-group. View subnet group


Subnet groups (2)

Filter by subnet group

☐	Name	Description	Status	VPC
☐	default-vpc-0d68c6d147bbd7d0e	Created from the RDS Management Console	Complete	vpc-0d68c6d147bbd7d0e
☐	travelapp-db-subnet-group	Subnet group for Travel App Database	Complete	vpc-0163f42cbbbeb80a8

2.3 Launch the RDS MySQL Database

- a. In the RDS left-hand menu, click Databases, then Create database.

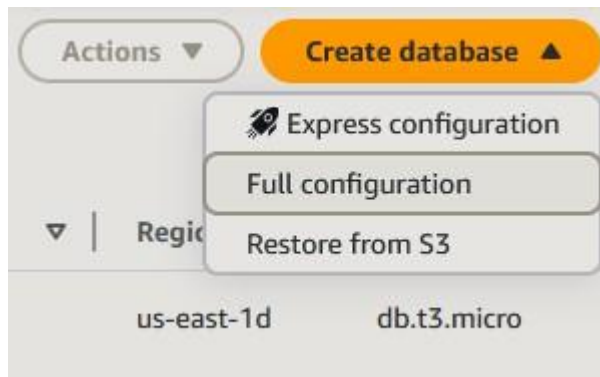

- b. Choose a database creation method: Select Standard create.
- c. Engine options: Select MySQL.




- d. Templates: **CRITICAL STEP:** Select *Free Tier.
- e. Settings:

DB instance identifier: travelapp-database

Master username: admin

Master password: Choose a secure password

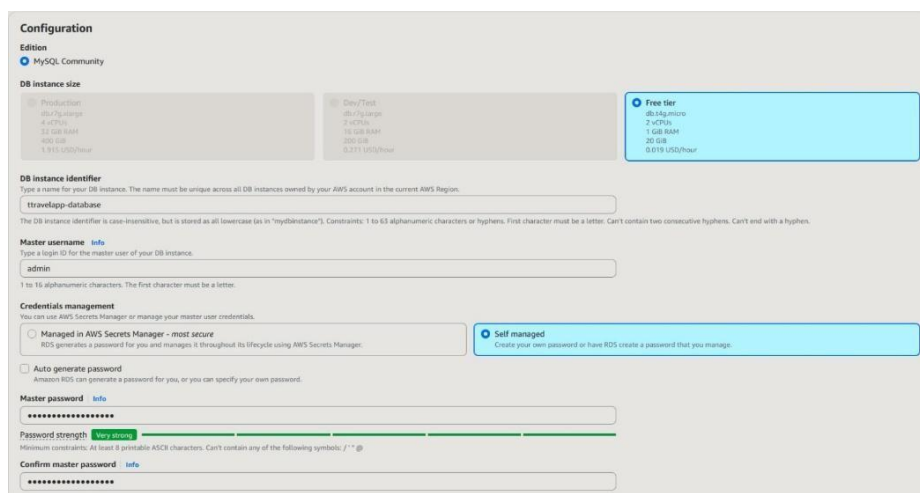

- f. Connectivity:

Compute resource: Select Don't connect to an EC2 compute resource.

Network type: IPv4

Virtual private cloud (VPC):vSelect TravelApp-VPC.

DB subnet group: It should automatically select travelapp-db-subnet-group.

Public access: Select No.

Existing VPC security groups: Remove the default security group and select RDS-DB-SG.

▼ **Set up EC2 connection - optional**
You can also set up a connection to an EC2 instance after creating the database. Go to the database list page or the database details page, choose Actions, and then choose Set up to EC2 connection.

Compute resource
Choose whether to set up a connection to a compute resource for this database. Setting up a connection will automatically change connectivity settings so that the compute resource can connect to this database.

☐ Don't connect to an EC2 compute resource
Don't set up a connection to a compute resource for this database. You can manually set up a connection to a compute resource later.

☒ **Connect to an EC2 compute resource**
Set up a connection to an EC2 compute resource for this database.

EC2 instance Info
Choose the EC2 instance to add as the compute resource for this database. A VPC security group is added to this EC2 instance. A VPC security group is also added to the database with an inbound rule that allows the EC2 instance to access the database.

i-0940767bc745e5865
TravelApp-WebServer

ⓘ **Some VPC settings can't be changed when a compute resource is added**
Adding an EC2 compute resource automatically selects the VPC, DB subnet group, and public access settings for this database. To allow the EC2 instance to access the database, a VPC security group rds-ec2-X is added to the database and another called ec2-rds-X to the EC2 instance. You can remove the new security group for the database only by removing the compute resource.

g. Additional configuration:

Click to expand Additional configuration.

Initial database name: Type travelddb.

▼ **View default settings for Easy create**
Easy create sets the following configurations to their default values, some of which can be changed later. If you want to change any of these settings now, use Standard create.

Configuration	Value	Editable after database is created
Encryption	Enabled	No
VPC	Default VPC (vpc-0d68c6d147bbd7d0e)	No
Multi-AZ	No	Yes
Option group	default:mysql-8-4	Yes
Subnet group	rds-ec2-db-subnet-group-1	Yes
Automatic backups	Enabled	Yes
VPC security group	rds-ec2-2	Yes
Publicly accessible	No	Yes
Database port	3306	Yes
DB instance identifier	ttravelapp-database	Yes
DB engine version	8.4.8	Yes
DB parameter group	default:mysql8.4	Yes
Monitoring type	Database Insights - Standard	Yes
Performance insights	Not enabled	Yes
Monitoring	Not enabled	Yes
Maintenance	Auto minor version upgrade enabled	Yes
Delete protection	Not enabled	Yes

h. Scroll to the bottom and click Create database.

Creating database **travelapp-database**
Your database might take a few minutes to launch. You can use settings from travelapp-database to simplify configuration of suggested database add-ons while we finish creating your DB for you. [View connection details](#)

Databases (2) Group resources Modify Actions Create database

Filter by databases

DB identifier	Status	Role	Engine	Upgrade rollout order	Region	Size
ilhamhakimi-db	Available	Instance	MySQL Co...	SECOND	us-east-1d	db.t3.micro
travelapp-database	Creating	Instance	MySQL Co...	SECOND	-	db.t4g.micro

2.4 Grab your Database Endpoint

- a. Once the status turns green and says Available, click on travelapp-database.

▼ View default settings for Easy create
Easy create sets the following configurations to their default values, some of which can be changed later. If you want to change any of these settings now, use Standard create.

Configuration	Value	Editable after database is created
Encryption	Enabled	No
VPC	Default VPC (vpc-0d68c6d147bbd7d0e)	No
Multi-AZ	No	Yes
Option group	default:mysql-8-4	Yes
Subnet group	rds-ec2-db-subnet-group-1	Yes
Automatic backups	Enabled	Yes
VPC security group	rds-ec2-2	Yes
Publicly accessible	No	Yes
Database port	3306	Yes
DB instance identifier	ttravelapp-database	Yes
DB engine version	8.4.8	Yes
DB parameter group	default:mysql8.4	Yes
Monitoring type	Database Insights - Standard	Yes
Performance insights	Not enabled	Yes
Monitoring	Not enabled	Yes
Maintenance	Auto minor version upgrade enabled	Yes
Delete protection	Not enabled	Yes

- b. Under the Connectivity & security tab, look for Endpoint.
- c. It will look like a long string.
- d. Copy this endpoint string and save it alongside password.

Connectivity & security

Endpoint
travelapp-database.klo6m6m05cp.us-east-1.rds.amazonaws.com

Port
3306

Networking

Availability Zone
us-east-1d

VPC
vpc-0d68c6d147bbd7d0e

Subnet group
rds-ec2-db-subnet-group-1

Subnets
subnet-0ef5dda0ec6f6487d
subnet-027253f9fe6204885
subnet-0da9cdd435dd3242c
subnet-04425f6a2a507dccc4
subnet-00f1dccb31a588d30

Network type
IPv4

Security

VPC security groups
rds-ec2-1 (sg-0866141fabee0390c)
Active

Publicly accessible
No

Certificate authority info
rds-ca-rsa2048-g1

Certificate authority date
May 26, 2061, 07:34 (UTC+08:00)

DB instance certificate expiration date
June 05, 2027, 22:17 (UTC+08:00)

Connected compute resources (1) info
Connections to compute resources that were created automatically by RDS are shown here. Connections to compute resources that were created manually aren't shown.

Resource identifier	Resource type	Availability Zone	VPC security group	Compute resource security group	Connected group
i-0940797b7d36c0805	EC2 Instance	us-east-1d	sg-ec2-1	sg-ec2-1	-

Security group rules (1)

Security group	Type	Rule
sg-ec2-1 (sg-0866141fabee0390c)	EC2 Security Group - Inbound	sg-36c147503093086260


Replication (1)

DB identifier	Role	Region & AZ	Replication source	Replication status	Log
travelapp-database	Instance	us-east-1d	-	-	-


3.0 Instance Setup

3.1 Launch the EC2 Instance

- In the top AWS search bar, type EC2 and click on it.
- On the EC2 Dashboard, click the orange Launch instance button.

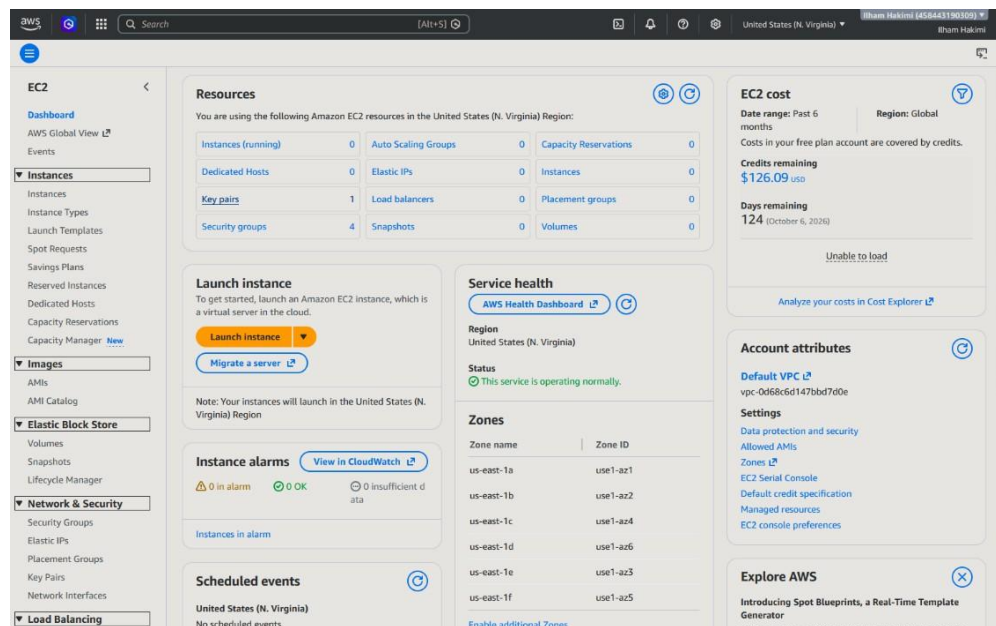


- Name: TravelApp-WebServer
- Application and OS Images (Amazon Machine Image): Select Ubuntu (Ubuntu Server 24.04 LTS or 22.04 LTS).
- Instance type: Select t2.micro

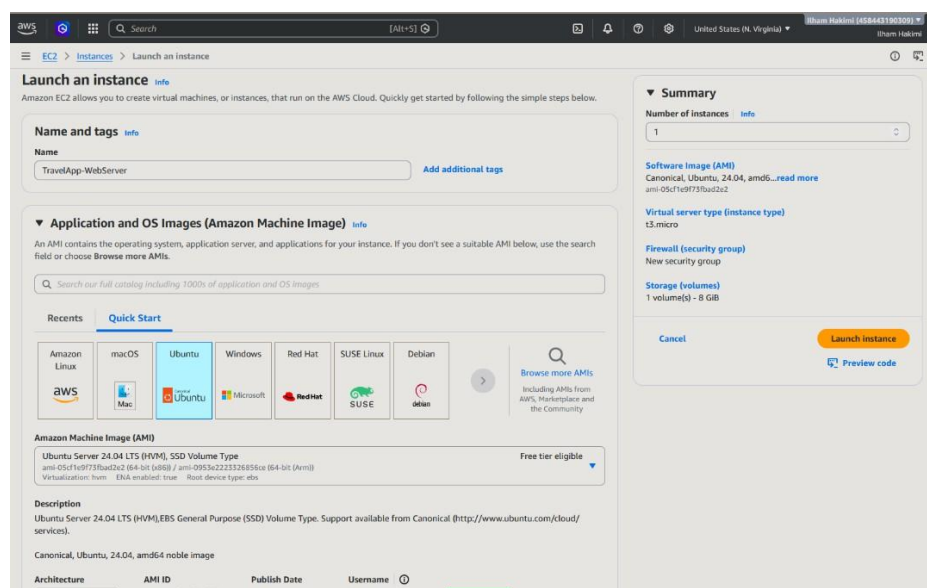

3.2 Create a Key Pair

- Under Key pair (login), click Create new key pair
- Key pair name: travelapp-key
- Key pair type: RSA
- Private key file format: Select .pem if you use Mac, Linux, or Windows 10/11
- Click Create key pair.

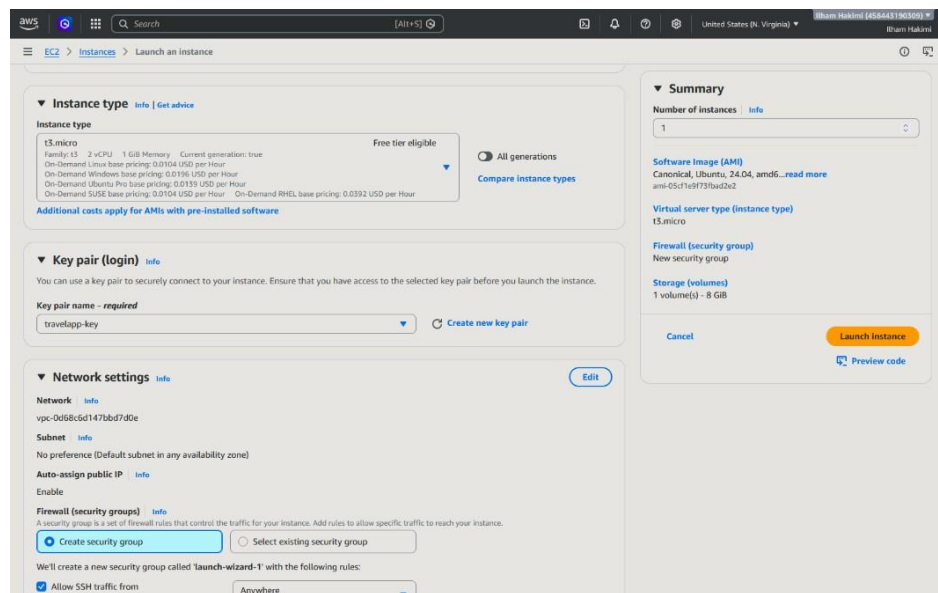

3.3 Network Settings & Security Groups

- Next to Network settings, click Edit
- VPC: Leave it on the Default VPC.
- Auto-assign public IP: Ensure this is set to Enable.
- Firewall (security groups): Select Create security group.
- Security group name: EC2-Flash-SG
- Description: Allow Web and SSH traffic.

Network settings [Info](#)

VPC - **required** [Info](#)
vpc-0d58c5d147b0d7d0e (default) [↻](#)

Subnet [Info](#)
No preference [↕](#) [Create new subnet](#) [↗](#)

Availability Zone [Info](#)
No preference [↕](#) [Enable additional zones](#) [↗](#)

Auto-assign public IP [Info](#)
Enable [↕](#)

Firewall (security groups) [Info](#)
A security group is a set of firewall rules that control the traffic for your instance. Add rules to allow specific traffic to reach your instance.

☒ Create security group ☐ Select existing security group

Security group name - **required**
EC3-Flash-SG

This security group will be added to all network interfaces. The name can't be edited after the security group is created. Max length is 255 characters. Valid characters: a-z, A-Z, 0-9, -, spaces, and _ (Powershell: [a-zA-Z0-9- _]).

Description - **required** [Info](#)
Allow Web and SSH

Inbound Security Group Rules

[↕](#) Security group rule 1 (TCP: 22, 0.0.0.0/0) [Remove](#)

Type	Protocol	Port range
ssh	TCP	22

Source type [Info](#) Source [Info](#) Description - **optional** [Info](#)

Anywhere [↕](#) [Add CIDR, prefix list or security group](#) [↗](#) [0.0.0.0/0](#) [✕](#) [e.g. SSH for admin desktop](#)

Summary [Info](#)

Number of instances [Info](#)
1 [↕](#)

Software image (AMI) [Info](#)
Canonical, Ubuntu, 24.04, amd64...[read more](#)
ami-05c11e9f73ba22e2

Virtual server type (instance type)
t3.micro

Firewall (security group)
New security group

Storage (volumes)
1 volume(s) - 8 GiB

[Cancel](#) [Launch instance](#) [Preview code](#) [↗](#)

3.4 Launch

Success
Successfully initiated launch of instance (i-09407e7bc743e5868)

Launch log

Next Steps
What would you like to do next with this instance, for example "create alarm" or "create backup" [↗](#)

Create billing usage alerts
To manage costs and avoid surprise bills, set up email notifications for billing usage thresholds.
[Create billing alerts](#) [↗](#)

Connect to your instance
Once your instance is running, log into it from your local computer.
[Connect to instance](#) [↗](#)
[Learn more](#) [↗](#)

Connect an RDS database
Configure the connection between an EC2 instance and a database to allow traffic flow between them.
[Connect an RDS database](#) [↗](#)
[Create a new RDS database](#) [↗](#)
[Learn more](#) [↗](#)

Create EBS snapshot policy
Create a policy that automates the creation, retention, and deletion of EBS snapshots
[Create EBS snapshot policy](#) [↗](#)

Manage detailed monitoring
Enable or disable detailed monitoring for the instance. If you enable detailed monitoring, the Amazon EC2 console displays monitoring graphs with a 1-minute period.
[Manage detailed monitoring](#) [↗](#)

Create Load Balancer
Create a application, network gateway or classic Elastic Load Balancer
[Create Load Balancer](#) [↗](#)

Create AWS budget
AWS Budgets allows you to create budgets, forecast spend, and take action on your costs and usage from a single location.
[Create AWS budget](#) [↗](#)

Manage CloudWatch alarms
Create or update Amazon CloudWatch alarms for the instance.
[Manage CloudWatch alarms](#) [↗](#)

[View all instances](#)

4.0 Integration and Web Development

4.1 Deploying a Clean Frontend to EC2 Instance

a) Log Into EC2 Instance

```
C:\Users\Iwham\Downloads>ssh -i "travelapp-key.pem" ubuntu@13.217.36.169
The authenticity of host '13.217.36.169 (13.217.36.169)' can't be established.
ED25519 key fingerprint is SHA256:/WOWFG+F9MabZDXbXHyvK39Dwk+DsuTrvas3sy3JAig.
This key is not known by any other names.
Are you sure you want to continue connecting (yes/no/[fingerprint])? yes
Warning: Permanently added '13.217.36.169' (ED25519) to the list of known hosts.
Welcome to Ubuntu 24.04.4 LTS (GNU/Linux 6.17.0-1012-aws x86_64)

 * Documentation:  https://help.ubuntu.com
 * Management:    https://landscape.canonical.com
 * Support:       https://ubuntu.com/pro

System information as of Fri Jun  5 16:10:39 UTC 2026

System load:  0.0           Temperature:   -273.1 C
Usage of /:   33.9% of 6.71GB Processes:      110
Memory usage: 33%          Users logged in: 0
Swap usage:   0%           IPv4 address for ens5: 172.31.36.41

 * Ubuntu Pro delivers the most comprehensive open source security and
   compliance features.

https://ubuntu.com/aws/pro

Expanded Security Maintenance for Applications is not enabled.

6 updates can be applied immediately.
To see these additional updates run: apt list --upgradable

Enable ESM Apps to receive additional future security updates.
See https://ubuntu.com/esm or run: sudo pro status

*** System restart required ***

The programs included with the Ubuntu system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Ubuntu comes with ABSOLUTELY NO WARRANTY, to the extent permitted by
applicable law.
```

b) Install the Web Server Software

```
ubuntu@ip-172-31-36-41:~$ sudo apt install nginx -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  nginx-common
Suggested packages:
  fcgiwrap nginx-doc ssl-cert
The following NEW packages will be installed:
  nginx nginx-common
0 upgraded, 2 newly installed, 0 to remove and 7 not upgraded.
Need to get 566 kB of archives.
After this operation, 1598 kB of additional disk space will be used.
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 nginx-common all 1.24.0-2ubuntu7.9 [44.2 kB]
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 nginx amd64 1.24.0-2ubuntu7.9 [522 kB]
Fetched 566 kB in 0s (16.6 MB/s)
Preconfiguring packages ...
Selecting previously unselected package nginx-common.
(Reading database ... 104813 files and directories currently installed.)
Preparing to unpack .../nginx-common_1.24.0-2ubuntu7.9_all.deb ...
Unpacking nginx-common (1.24.0-2ubuntu7.9) ...
Selecting previously unselected package nginx.
Preparing to unpack .../nginx_1.24.0-2ubuntu7.9_amd64.deb ...
Unpacking nginx (1.24.0-2ubuntu7.9) ...
Setting up nginx-common (1.24.0-2ubuntu7.9) ...
Created symlink /etc/systemd/system/multi-user.target.wants/nginx.service → /usr/lib/systemd/system/nginx.service.
Setting up nginx (1.24.0-2ubuntu7.9) ...
 * Upgrading binary nginx
Processing triggers for man-db (2.12.0-4build2) ...
Processing triggers for ufw (0.36.2-6) ...
Scanning processes...
Scanning candidates...
Scanning linux images...

Pending kernel upgrade!
Running kernel version:
  6.17.0-1012-aws
Diagnostics:
  The currently running kernel version is not the expected kernel version 6.17.0-1017-aws.

Restarting the system to load the new kernel will not be handled automatically, so you should consider rebooting.

Restarting services...

Service restarts being deferred:
/etc/needrestart/restart.d/dbus.service
systemctl restart networkd-dispatcher.service
systemctl restart systemd-logind.service
systemctl restart unattended-upgrades.service

No containers need to be restarted.
```

c) Server Package Updates

- System Update
- Dependency Provisioning: The PHP process manager, MySQL native extensions, and a command-line MySQL client were installed.

```
ubuntu@ip-172-31-36-41:~$ sudo apt update
Hit:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble InRelease
Get:2 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates InRelease [126 kB]
Hit:3 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-backports InRelease
Hit:4 http://security.ubuntu.com/ubuntu noble-security InRelease
Get:5 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 Packages [2064 kB]
Fetched 2190 kB in 1s (3055 kB/s)
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
6 packages can be upgraded. Run 'apt list --upgradable' to see them.
ubuntu@ip-172-31-36-41:~$ sudo apt install php-fpm php-mysql mysql-client -y
Reading package lists... Done
Building dependency tree... Done
Reading state information... Done
The following additional packages will be installed:
  mysql-client-8.0 mysql-client-core-8.0 mysql-common php-common php8.3-cli php8.3-common php8.3-fpm php8.3-mysql
  php8.3-opcache php8.3-readline
Suggested packages:
  php-pear
The following NEW packages will be installed:
  mysql-client mysql-client-8.0 mysql-client-core-8.0 mysql-common php-common php-fpm php-mysql php8.3-cli
  php8.3-common php8.3-fpm php8.3-mysql php8.3-opcache php8.3-readline
0 upgraded, 13 newly installed, 0 to remove and 6 not upgraded.
Need to get 7893 kB of archives.
After this operation, 84.8 MB of additional disk space will be used.
Get:1 http://us-east-1.ec2.archive.ubuntu.com/ubuntu noble-updates/main amd64 mysql-client-core-8.0 amd64 8.0.46-0ubuntu
```

d) Remote Database Connection & Schema Initialization

- Remote Connection Establishment: Connection to the cloud database endpoint was initiated from the EC2 terminal using the admin user credentials:

```
ubuntu@ip-172-31-36-41:~$ mysql -h travelapp-database.cklo6m6m05cp.us-east-1.rds.amazonaws.com -u admin -p
Enter password:
Welcome to the MySQL monitor.  Commands end with ; or \g.
Your MySQL connection id is 742
Server version: 8.4.8 Source distribution

Copyright (c) 2000, 2026, Oracle and/or its affiliates.

Oracle is a registered trademark of Oracle Corporation and/or its
affiliates. Other names may be trademarks of their respective
owners.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

mysql> |
```

- Database and Table Generation: A schema named travelapp was initialized, and a relational storage table named entries was structured to save individual user journals.

```
mysql> CREATE DATABASE travelapp;
mysql> USE travelapp;
Database changed
mysql> CREATE TABLE entries (
  ->   id INT AUTO_INCREMENT PRIMARY KEY,
  ->   title VARCHAR(255) NOT NULL,
  ->   story TEXT NOT NULL,
  ->   created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
  -> );
Query OK, 0 rows affected (0.05 sec)

mysql> EXIT;
Bye
ubuntu@ip-172-31-36-41:~$ |
```

e) Nginx Web Server Environment Configuration

- **Server Block Modification:** The virtual host configuration file `/etc/nginx/sites-available/default` was modified to prioritize `index.php` as an entry script directory and activate the PHP 8.3 FPM upstream gateway handler:
- **Syntax Testing & Server Reload:** The structural compliance of the modified configuration file was tested before applying it live.

```
ubuntu@ip-172-31-36-41:~$ sudo nano /etc/nginx/sites-available/default
ubuntu@ip-172-31-36-41:~$ sudo nano /etc/nginx/sites-available/default
ubuntu@ip-172-31-36-41:~$ sudo nginx -t
nginx: the configuration file /etc/nginx/nginx.conf syntax is ok
nginx: configuration file /etc/nginx/nginx.conf test is successful
ubuntu@ip-172-31-36-41:~$ sudo systemctl restart nginx
```

f) Core Application Development (index.php)

- **Directory Cleanup:** The legacy static splash screen file (`index.html`) was removed to avoid file hierarchy priority conflicts:

```
nginx: configuration file /etc/nginx/nginx.conf test is successful
ubuntu@ip-172-31-36-41:~$ sudo systemctl restart nginx
ubuntu@ip-172-31-36-41:~$ sudo rm /var/www/html/index.html
ubuntu@ip-172-31-36-41:~$ sudo nano /var/www/html/index.php
ubuntu@ip-172-31-36-41:~$ |
```

```
GNU nano 7 /var/www/html/index.php *
<?php
// Database configurations
$db_host = "travelapp-database.cklo6mf6m5cp.us-east-1.rds.amazonaws.com";
$db_user = "admin";
$db_pass = "travelapp-admin123";
$db_name = "travelapp-database";

// Connect to the RDS instance
$conn = new mysqli($db_host, $db_user, $db_pass, $db_name);

// Check database connection
if ($conn->connect_error) {
    die("Database Connection failed: " . $conn->connect_error);
}

// Process the form submission (POST Process)
if ($_SERVER["REQUEST_METHOD"] == "POST" && isset($_POST['publish'])) {
    $title = $conn->real_escape_string($_POST['title']);
    $story = $conn->real_escape_string($_POST['story']);

    if (empty($title) && empty($story)) {
        $sql = "INSERT INTO entries (title, story) VALUES ('$title', '$story')";
        $conn->query($sql);
        // Refresh page to show new data
        header("Location: index.php");
        exit();
    }
}

// DOCTYPE html
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-scale=1.0">
    <title>CloudVoyage - Dynamic Travel Journal</title>
    <style>
        body { font-family: 'Segoe UI', Tahoma, Geneva, Verdana, sans-serif; margin: 0; padding: 0; background-color: #f4f7f6; }
        header { background: linear-gradient(135deg, #e3e7f2 0%, #2d3728 100%); color: white; padding: 2rem; text-align: center; }
        .container { max-width: 1000px; margin: 2rem auto; padding: 0 1rem; }
        .upload-section { background: white; padding: 2rem; border-radius: 8px; box-shadow: 0 4px 6px rgba(0,0,0,0.1); margin-bottom: 2rem; }
        .grid { display: grid; grid-template-columns: repeat(auto-fill, minmax(300px, 1fr)); gap: 2rem; }
        .card { background: white; border-radius: 8px; overflow: hidden; box-shadow: 0 4px 6px rgba(0,0,0,0.1); }
        .card-content { padding: 1.5rem; }
        .btn { background-color: #007bff; color: white; border: none; padding: 0.5rem 1rem; border-radius: 4px; cursor: pointer; }
        input[type="text"], textarea { width: 100%; padding: 0.5rem; margin: 0.5rem 0 0.5rem 0.5rem; border: 1px solid #ccc; box-sizing: border-box; }
    </style>
</head>
<body>
    <h1>CloudVoyage</h1>
    <p>Live, Dynamic AWS Cloud-Hosted Travel Journal</p>
    <div class="container">
        <div class="upload-section">
            <form method="POST" action="index.php">
                <h3>Create a New Travel Entry</h3>
                <label>Destination Title</label>
                <input type="text" name="title" required placeholder="e.g., Summer in Kyoto, Japan">
                <label>Journal Story</label>
                <textarea rows="3" name="story" required placeholder="Share your experience..."></textarea>
                <button type="submit" name="publish" class="btn">Publish to AWS RDS</button>
            </form>
        </div>
        <h2>Recent Live Journals</h2>
        <div class="grid">
            <div>
                <div class="card">
                    <div class="card-content">
                        
                        <h3>
                            <!-- title -->
                        </h3>
                        <p>
                            <!-- story -->
                        </p>
                        <small style="color: #888;">Stored via RDS at: ' . $row['created_at'] . '</small>
                    </div>
                </div>
            </div>
        </div>
    </div>
    <p>No journals published yet. Try typing above to push live data to your cloud database!</p>
</body>
</html>
```

5.0 Web Data Verification & Live Test

CloudVoyage

A Live, Dynamic AWS Cloud-Hosted Travel Journal

Create a New Travel Entry

Destination Title

Winter Amsterdam 2025

Journal Story

I went around town with a tour guide and saw many landmarks and great cafes around town. I met Syamil too.

Publish to AWS RDS

Recent Live Journals

Winter Amsterdam 2025

I went around town with a tour guide and saw many landmarks and great cafes around town. I met Syamil too.

Stored via RDS at: 2026-06-06 14:53:55

Create a New Travel Entry

Destination Title

e.g., Summer in Kyoto, Japan

Journal Story

Share your experience...

Publish to AWS RDS

Recent Live Journals

Kyoto Amel

Saya gi makan udon sambil tido

Stored via RDS at: 2026-06-06 14:53:06

Task Division

Phase 1 VPC Setup	Qayyum
Phase 2 Database Setup	Ilham Hakimi
Phase 3 EC2 Instance Setup	Syamil
Phase 4 Integration & Web Development	Isyraf
Phase 4 Assist	Ilham Hakimi & Qayyum
AWS Hosting	Ilham Hakimi
Report Compilation	Isyraf
Video & Github Host	Ilham Hakimi