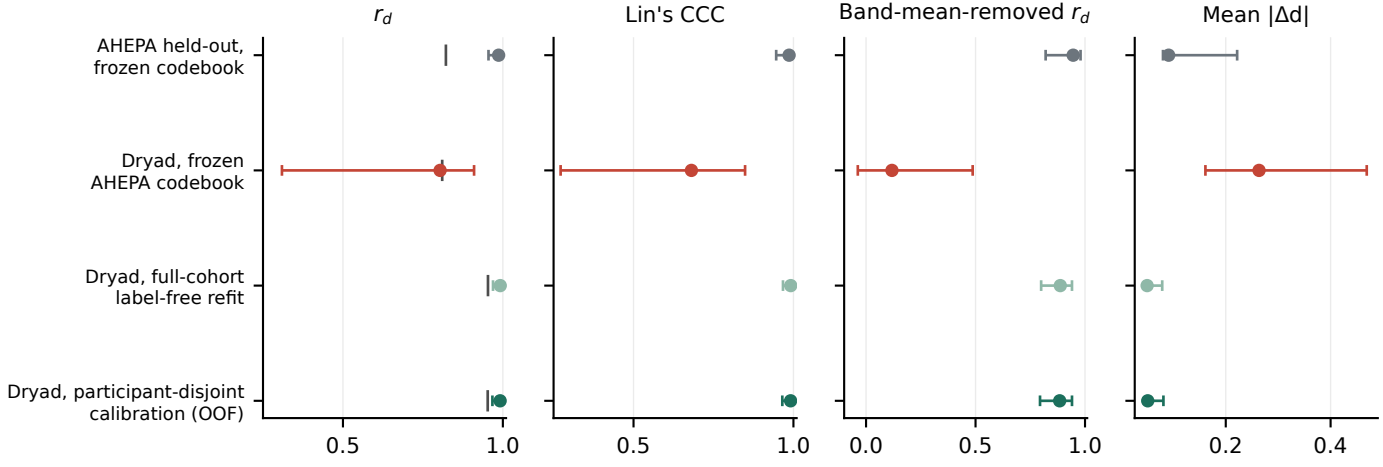

Points: estimate; bars: 95% participant bootstrap CI. Vertical tick on r_d: 95th percentile of the within-band channel-shuffle reference.
The four protocols are not equivalent: the AHEPA row is a different cohort; the full-cohort refit learns the codebook on the participants it encodes;
the participant-disjoint row decodes each participant with a codebook learned without its data. Only the frozen row tests cross-site transfer.