



MANISH KASHYAP

Aspiring Data Analyst

[Documentation](#) > [Github](#) > [Dashboard](#) >

PIZZA SALES ANALYSIS

END-TO-END ANALYSIS

• SQL PROJECT





MANISH KASHYAP


Aspiring data Analyst

[Home](#)[About](#)[Contact](#)

HELLO !

I'M MANISH KASHYAP ASPIRING
DATA ANALYST

An end-to-end data analytics project focused on querying, cleaning, and extracting actionable business insights from a retail pizza sales dataset using Data Query Language (DQL).


[Home](#)[Contact](#)

QUESTION | ANSWER

01 BASIC :

1. Retrieve the total number of orders placed.
2. Calculate the total revenue generated from pizza sales.
3. Identify the highest-priced pizza.
4. Identify the most common pizza size ordered.
5. List the top 5 most ordered pizza types along with their quantities.

04



01

ADVANCE :


[About](#)

[Contact](#)

1. Join the necessary tables to find the total quantity of each pizza category ordered.
2. Determine the distribution of orders by hour of the day.
3. Join relevant tables to find the category-wise distribution of pizzas.
4. Group the orders by date and calculate the average number of pizzas ordered per day.
5. Determine the top 3 most ordered pizza types based on revenue.
6. Calculate the percentage contribution of each pizza type to total revenue.
7. Analyze the cumulative revenue generated over time.
8. Determine the top 3 most ordered pizza types based on revenue for each pizza category.

\$30





[Home](#)[About](#)[Contact](#)

RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED

```
SELECT  
    COUNT(order_id) AS Total_Orders  
FROM  
    orders
```

Result Grid	
	Total_Orders
▶	21350

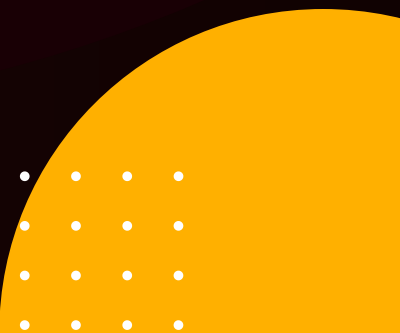

[Home](#)[About](#)[Contact](#)

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES

```
SELECT  
    ROUND(SUM(orders_details.quantity * pizzas.price),  
          2) AS Total_Revenue  
FROM  
    orders_details  
    JOIN  
    pizzas ON pizzas.pizza_id = orders_details.pizza_id
```

Result Grid	
	Total_Revenue
▶	817860.05

[About](#)[Contact](#)

IDENTIFY THE HIGHEST-PRICED PIZZA

```
SELECT
    pizza_types.name, pizzas.price
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
ORDER BY pizzas.price DESC
LIMIT 1;
```



Result Grid |   Filter Rows

	name	price
▶	The Greek Pizza	35.95

IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED

```
SELECT
    pizzas.size,
    COUNT(orders_details.order_details_id) AS order_count
FROM
    pizzas
    JOIN
    orders_details ON pizzas.pizza_id = orders_details.pizza_id
GROUP BY pizzas.size
ORDER BY order_count DESC;
```

Result Grid			Filter
	size	order_count	
▶	L	18526	
	M	15385	
	S	14137	
	XL	544	
	XXL	28	

LIST THE TOP 5 MOST ORDERED PIZZA TYPES ALONG WITH THEIR QUANTITIES

```
SELECT
    pizza_types.name, SUM(orders_details.quantity) AS Quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY quantity DESC
LIMIT 5;
```

Result Grid			Filter Rows:
	name	Quantity	
▶	The Classic Deluxe Pizza	2453	
	The Barbecue Chicken Pizza	2432	
	The Hawaiian Pizza	2422	
	The Pepperoni Pizza	2418	
	The Thai Chicken Pizza	2371	

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED.

```
SELECT
    pizza_types.category,
    SUM(orders_details.quantity) AS quantity
FROM
    pizza_types
    JOIN
    pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY quantity DESC;
```

	category	quantity
▶	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050

DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY

```
SELECT
    HOUR(order_time) as Hour , COUNT(order_id) as Count
FROM
    orders
GROUP BY HOUR(order_time);
```

Result Grid		
	Hour	Count
▶	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198


[About](#)

[Contact](#)

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```


Result Grid			Filter Rows
	category	count(name)	
▶	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	



GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY.

```
SELECT
    ROUND(AVG(quantity), 0) as Avg_Pizza_Ordererd_Per_Day
FROM
    (SELECT
        orders.order_date, SUM(orders_details.quantity) AS quantity
    FROM
        orders
    JOIN orders_details ON orders.order_id = orders_details.order_id
    GROUP BY orders.order_date) AS order_quantity;
```

Result Grid			 Filter Rows:
	Avg_Pizza_Ordererd_Per_Day		
▶	138		

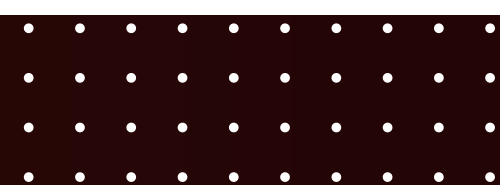

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE.

```
SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
    pizza_types
    JOIN
    pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
    JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

Result Grid			Filter Rows:
	name	revenue	
▶	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	

CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE.

```
SELECT pizza_types.category, ROUND(SUM(orders_details.quantity * pizzas.price) / (  
    SELECT SUM(orders_details.quantity * pizzas.price)  
    FROM orders_details JOIN pizzas  
    ON pizzas.pizza_id = orders_details.pizza_id  
    ) * 100,  
2  
) AS revenue FROM pizza_types JOIN pizzas ON  
pizza_types.pizza_type_id = pizzas.pizza_type_id  
JOIN orders_details  
    ON orders_details.pizza_id = pizzas.pizza_id  
GROUP BY pizza_types.category  
ORDER BY revenue DESC;
```

Result Grid				Filter
	category	revenue		
▶	Classic	26.91		
	Supreme	25.46		
	Chicken	23.96		
	Veggie	23.68		

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS.

```
SELECT  
    category, COUNT(name)  
FROM  
    pizza_types  
GROUP BY category;
```


Result Grid			Filter Rows
	category	count(name)	
▶	Chicken	6	
	Classic	8	
	Supreme	9	
	Veggie	9	

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME

[About](#)[Contact](#)

```
SELECT order_date,  
       SUM(revenue) OVER(ORDER BY order_date) AS cum_revenue FROM  
(  
  SELECT orders.order_date,  
         SUM(orders_details.quantity * pizzas.price) AS revenue  
  FROM orders_details JOIN pizzas  
    ON orders_details.pizza_id = pizzas.pizza_id  
  JOIN orders  
    ON orders.order_id = orders_details.order_id  
  GROUP BY orders.order_date  
) AS sales;
```


Result Grid			Filter Rows:
	order_date	cum_revenue	
▶	2015-01-01	2713.8500000000004	
	2015-01-02	5445.75	
	2015-01-03	8108.15	
	2015-01-04	9863.6	
	2015-01-05	11929.55	
	2015-01-06	14358.5	
	2015-01-07	16560.7	
	2015-01-08	19399.05	
	2015-01-09	21526.4	
	2015-01-10	23990.350000000002	
	2015-01-11	25862.65	

[About](#)[Contact](#)

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY.

```
SELECT name, revenue
FROM
( SELECT category, name, revenue,
      RANK() OVER(PARTITION BY category ORDER BY revenue DESC) AS rn
  FROM (SELECT pizza_types.category,
        pizza_types.name,
        SUM(orders_details.quantity * pizzas.price) AS revenue
    FROM pizza_types JOIN pizzas
      ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN orders_details
      ON orders_details.pizza_id = pizzas.pizza_id
    GROUP BY pizza_types.category, pizza_types.name
  ) AS a
) AS b
WHERE rn <= 3;
```

Result Grid   Filter Rows:		
	name	revenue
▶	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5
	The Classic Deluxe Pizza	38180.5
	The Hawaiian Pizza	32273.25
	The Pepperoni Pizza	30161.75
	The Spicy Italian Pizza	34831.25
	The Italian Supreme Pizza	33476.75
	The Sicilian Pizza	30940.5
	The Four Cheese Pizza	32265.700000000065
	The Mexicana Pizza	26780.75
	The Five Cheese Pizza	26066.5

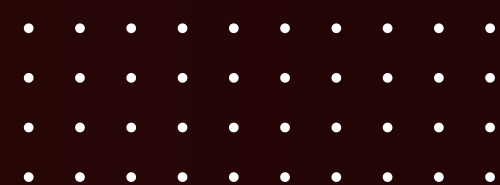

[About](#)

[Contact](#)

THANK YOU

FOR ATTENTION

● [GITHUB.COM\ILIKEMANISH](https://github.com/ILIKEMANISH)