

Decision-Value Evaluation of BESS Arbitrage Recommendations: A Reproducible Retrospective Study of Ukraine’s Day-Ahead Market

Illya Fefelov*

Neoversity

ORCID: 0009-0001-9500-4455

<https://github.com/ilyafefelov/Diploma>

Abstract

Battery energy storage system (BESS) arbitrage is often approached as an electricity-price forecasting problem, although forecast error is only indirectly related to the economic quality of a charge-discharge schedule. A prediction can have an acceptable average error and still misorder the few hours that determine arbitrage value, violate state-of-charge timing, or induce excessive throughput. This retrospective study presents an evidence-oriented pipeline for evaluating hourly BESS recommendations for Ukraine’s day-ahead market (DAM). Forecast and heuristic candidates are converted into feasible schedules and scored in a common linear-programming (LP) and oracle contour. Regret is the value lost relative to the schedule optimized with realized prices. The main descriptive window contains 18 distinct dates crossed with five configured BESS profiles, yielding 90 paired profile-date rows that share one DAM price process. It is also the latest of four adjacent rolling windows, not an additional independent test.

Raw and horizon-calibrated NBEATSx are reported as co-primary sensitivity sources because their relative status was assessed on the same retrospective window. With calibrated NBEATSx, Schedule/Value Learner V2+ had mean regret 174.77 UAH, versus 310.58 UAH for the strict comparator and 206.37 UAH for V2; the raw-source V2+ mean was 193.36 UAH, versus 310.58 and 225.44 UAH. The V2+ mean was below both comparators in four adjacent rolling windows for both sources. These are descriptive estimates, not confirmatory holdout results. A lineage audit found that a later artifact historically named `dt_v2_plus` is a random forest trained on exact timestamp-shifted copies of the evaluation packet. A 14-row time-separated RF suite has no improvement over V2+. A separate 36-run, return-conditioned Decision Transformer suite has zero train/evaluation content overlap: a decision-aware objective ties V2+ in 18/18 runs, while candidate-index cross entropy ties in 15/18 and is harmful in 3/18. Finally, a preregistered 72-run differentiable forecast-to-storage suite backpropagates through profile-specific `cvxpylayers` problems and then uses strict LP/oracle rescoring. No run beats V2+. Nevertheless, transformer correction has lower strict regret than a matched MLP in 28/36 comparisons and the forecast-loss transformer improves on the raw schedule in 15/18 runs. This is positive architecture evidence and negative promotion evidence, not a V2+ replacement.

The contribution is architectural and evidentiary: a reproducible separation of forecast quality, schedule value, shadow-model evidence, source governance, and execution readiness. No new forecasting, optimization, or sequence-model method is claimed. Intraday-market (IDM) support is an hourly read-model capability, not evaluated bidding performance, and market execution remains disabled.

Keywords— battery energy storage system; energy arbitrage; day-ahead market; decision-focused evaluation; regret; rolling-origin evaluation; evidence governance.

1 Introduction

Energy storage can transfer electricity across time, charging in relatively inexpensive hours and discharging when the value of energy is higher. The apparent simplicity of this description conceals an intertemporal control problem. A decision in one hour changes the state of charge (SOC), feasible power, and energy available later. Round-trip losses and degradation reduce gross price-spread value, while the operational meaning of a price row depends on when and how it became available. These features make storage arbitrage a useful test case for systems in which predictive accuracy and decision quality are related but not identical.

This distinction is consequential for electricity-price forecasting. Standard benchmark practice emphasizes MAE, RMSE, probabilistic losses, and careful temporal evaluation [1]. Those metrics answer whether a price series was predicted accurately. A storage owner, however, needs to know whether the resulting schedule captured valuable hours without violating the physical envelope. Improving errors in uneventful hours may have little operational effect, whereas reversing the order of a price minimum and maximum can change a schedule materially. Forecast evaluation should therefore be complemented by a common downstream decision problem.

Ukraine provides a particularly relevant setting. The energy system operates under exceptional security and flexibility pressures, and storage is potentially valuable as part of a broader resilience portfolio [2]. At the same time, an academic prototype must not imply authority to participate in a market. Historical and published hourly prices can support analysis and an operator-facing preview, but market execution requires legal responsibility, credentials, submission protocols, receipts, settlement, and operational monitoring. This paper deliberately addresses the narrower and verifiable question: how should forecast-derived BESS schedules be

*Based on a Master’s thesis defended in 2026.

evaluated and guarded before any execution layer exists?

The primary empirical scope is the Ukrainian day-ahead market. Official DAM rows from JSC Market Operator (OREE) provide the local market source [3]. Weather context can be assembled from a source such as Open-Meteo under explicit temporal-availability rules [4]. When an official row for a target hour is already published, the row is the price source for the preview; a machine-learning model is not used to re-predict a known price. When a target horizon is not yet published, forecast models may generate price scenarios that are then converted into candidate schedules. This “official row first” rule prevents a forecast from being presented as an official price and separates source provenance from model performance.

The central question is descriptive: within the preserved retrospective packet, how do prior-only schedule/value selectors compare with conservative controls when every candidate is evaluated in the same physical and economic contour? Schedule/Value Learner V2+ expands a deterministic schedule library and selects among candidates using evidence available before each anchor. It does not optimize a differentiable market-clearing model. Its role is to expose how schedule-family choice changes value under a common evaluator.

This framing places the work near predict-then-optimize and decision-focused learning (DFL). Smart Predict-then-Optimize formalizes the mismatch between prediction loss and downstream objective quality [5], while recent DFL surveys describe differentiable, surrogate, and gradient-free approaches for learning decisions under constraints [6]. Storage-specific work has shown why price learning should account for arbitrage outcomes [7]. The implementation in this paper is intentionally narrower than full differentiable DFL: the optimizer and evaluator are fixed, and the selector uses prior schedule-value evidence rather than back-propagating through a complete predict-then-bid stack. This limitation is part of the claim, not a detail hidden after the results.

The paper makes four bounded contributions.

1. It defines a reproducible evidence contour in which raw forecasts, calibrated forecasts, heuristic candidates, and learned selectors are converted into feasible hourly schedules and evaluated against the same realized-price oracle.
2. It reports raw and calibrated NBEATSx as co-primary sensitivity sources over 18 dates and five configured BESS profiles, with four adjacent evaluation windows, overlapping/expanding prior histories, capacity-normalized reporting, and no claim of independent replication.
3. It provides a claim-to-artifact and model-lineage audit that separates the main V2+ comparison from a random-forest exact-mirror diagnostic, Hugging Face transformer diagnostics, and a distinct read-model readiness packet.
4. It integrates source provenance and explicit claim boundaries into the system architecture, separating published DAM data, forecast scenarios, IDM read-model support, and any future execution context.

The distinction between an empirical estimate and an engineering artifact is explicit. Regret is measured under a fixed evaluator and time-ordered replay. Dagster materializations, strict contracts, an API, and a dashboard make the

evidence inspectable, but a functioning interface is not evidence of trading performance. The repository records manifests, run identifiers, hashes, and result tables [8].

The remainder reviews forecast, optimization, DFL, and sequence-model context; formulates the guarded pipeline; describes the retrospective protocol; presents co-primary source sensitivities and smoke diagnostics; explains the operator-preview surface; and closes with limitations and reproducibility statements.

2 Related Work

2.1 Electricity-price forecasting as an input to decisions

Electricity prices combine daily and weekly seasonality with weather, demand, system constraints, market rules, and rare spikes. Lago et al. provide a broad review and an open benchmark for day-ahead electricity-price forecasting, emphasizing sound evaluation practice and strong statistical and neural baselines [1]. Their analysis supports the use of rigorous time-series protocols, but it also highlights why a single error metric cannot describe every downstream application.

NBEATSx extends basis-expansion forecasting with exogenous variables and has demonstrated competitive performance in electricity-price forecasting [9]. It is well suited to a pipeline in which calendar, weather, and other point-in-time covariates are available. The present study uses NBEATSx as a forecast adapter. This wording matters: NBEATSx generates a price scenario, not a battery decision. A deterministic optimizer converts the scenario into a schedule, and realized prices determine its final value.

Temporal Fusion Transformer (TFT) is a multi-horizon architecture that combines static covariates, known future inputs, observed inputs, variable selection, recurrent processing, and attention-based interpretation [10]. Probabilistic variants can expose lower, median, and upper scenarios, as illustrated by penalized TFT work for electricity-price forecasting [11]. In a storage pipeline, these quantiles can diversify schedule candidates or diagnose uncertainty. They do not constitute three independent price authorities, and uncertainty-aware forecasts still require downstream constraint handling.

This paper treats NBEATSx and TFT as sources of candidate price paths. It does not rank one forecast architecture as universally superior. Raw and horizon-calibrated NBEATSx are co-primary sensitivity sources because both were inspected on the same retrospective slice. For the calibrated source, the raw schedule had mean regret 622.25 UAH and V2+ had 174.77 UAH; for the raw source, the corresponding values were 771.26 and 193.36 UAH. These within-source contrasts illustrate why a forecast vector should not be equated with a storage recommendation.

2.2 Constrained storage scheduling

Short-term storage scheduling can be expressed with linear energy-balance, SOC, charging, discharging, power, and efficiency constraints. Park et al. give a linear formulation

for short-term energy-storage operation [12]. Such formulations are attractive as evaluators because every forecast or selector can be passed through the same feasible contour. The optimizer is deterministic, inspectable, and sufficiently fast for repeated rolling-origin analysis.

Battery representation determines the meaning of any economic result. Reviews of lithium-ion BESS models distinguish simple power-energy models from more detailed electrical, thermal, ageing, and electrochemical approaches [13]. Ageing-aware scheduling can integrate degradation into mixed-integer optimization [14], and nonlinear or semi-empirical degradation models can materially change preferred schedules [15, 16]. More recent profitability analysis likewise shows that dynamic efficiency and degradation affect net arbitrage value [17].

The evaluator used here is a techno-economic abstraction, not a full digital twin. It enforces SOC, power, and efficiency constraints and applies a throughput-based degradation penalty. This is suitable for controlled comparison, but the resulting UAH values should not be read as certified asset lifetime forecasts. Storage technology reports provide context for efficiency, cycle life, cost, and other parameters [18], while a production deployment would require commissioning data and asset-specific validation.

European analyses indicate that BESS value depends strongly on market design and available services [19]. The present study does not transfer a European revenue result to Ukraine. It uses Ukrainian DAM evidence and treats cross-border or neighboring-market data as separate governed research features. Similarly, reinforcement-learning work on energy and reserve bidding [20] and distributional approaches to imbalance arbitrage [21] motivate future research but do not establish the execution readiness of this system.

2.3 Decision-focused learning and multistage value

Predict-then-optimize systems can fail when minimizing prediction loss does not minimize decision loss. Elmachoub and Grigas formalize this problem and propose a loss linked to optimization quality [5]. DFL now includes optimization-layer differentiation, structured surrogates, perturbation methods, and other approaches [6]. Differentiable convex optimization layers [22] and OptNet [23] show how constrained problems can appear inside neural networks.

Storage arbitrage is not merely a one-shot decision. A charge action changes future feasible actions, so a multistage formulation is natural. Decision-focused electricity-price prediction for ESS arbitrage directly demonstrates the relevance of downstream regret [7]. Differentiable multistage forecasting further develops the connection between forecast parameters and sequential decisions [24]. Perturbed DFL has also been proposed for strategic storage [25], and predict-then-bid research extends the question toward bidding behavior [26].

These works define an important research direction but a stricter claim than the one supported here. V2+ is a schedule/value selector evaluated by regret. It is not trained end to end through market clearing, it does not model strategic

interaction, and it does not create bids. Calling it “full DFL” would obscure the difference between decision-aware selection and a differentiable predict-then-bid system. The paper therefore uses “decision-value evaluation” for the implemented contour and reserves “DFL” for the broader research family.

2.4 Decision Transformers and guarded shadows

Decision Transformer recasts offline reinforcement learning as return-conditioned sequence modeling [27]. Instead of fitting a conventional value or policy function, the model predicts actions from trajectories containing desired returns, states, and past actions. Its suitability depends on the coverage and quality of the offline dataset; empirical analysis has identified conditions under which Decision Transformers are more or less appropriate [28]. For a safety-relevant storage problem, sparse coverage of beneficial schedule switches is a serious constraint.

Two model lines must be separated in this study. First, the canonical safe-switch aggregate saved under `runs/dt_v2_plus/` is produced with `model_kind=random_forest`, using the ensemble family introduced by Breiman [29]. Its features summarize prior context and its target is regret improvement relative to the V2+ fallback. The directory name records the experiment lineage, not the estimator class. Second, Hugging Face Decision Transformer experiments form a distinct shadow line. An early apples-to-apples candidate-index experiment produced mean regret of 460.30 UAH, which is worse than V2+. Later HF value-aligned shadow packets use a finite candidate library, predicted value gaps, tail-risk guards, and deterministic safety checks. Those packets are useful operator-preview evidence, but they do not transform the random-forest result into a Decision Transformer result.

The guarded architecture is related to selective prediction: a challenger acts only when evidence exceeds a threshold; otherwise, it abstains to a known fallback. This is operationally preferable to forcing a model to issue a charge or discharge instruction on every day. In the present evidence, abstention is not classified as failure. It is the intended response when prior context does not support a safe switch.

2.5 Positioning and gap addressed by this paper

The literature provides the main technical components: price forecasting, constrained storage scheduling, decision-aware learning, sequence policies, and fallback behavior. This paper does not claim a new member of any of those method families.

Relative to DFL [5–7], the optimizer is not differentiated through and V2+ is a prior-only schedule-family selector. Relative to Decision Transformer [27,28], the canonical safe-switch is a random forest and the HF path is only a mirrored-training smoke. Relative to selective prediction, reject options, safe policy improvement, and fallback control, abstention to V2+ is an applied system pattern rather than a new theoretical guarantee.

The novelty is therefore an architecture and evidence-governance contribution in a Ukrainian DAM application. It connects source-timed price context, paired LP/oracle evaluation, explicit negative evidence, safe-switch abstention, artifact lineage, and an operator-preview boundary. The reproducibility contribution is the mapping from claims to configs, rows, run identifiers, and hashes; public packaging limitations are stated later.

The evidence contract enforces four distinctions:

- a forecast is not a feasible schedule;
- a lower offline regret is not an executable bid;
- a research-shadow model is not a deployed controller;
- source availability for a preview is not equivalent to submission and settlement readiness.

This contract is useful for an applied thesis and an emerging market context. It permits descriptive quantitative comparisons while retaining negative evidence and operational blockers. The estimates can therefore be inspected without being amplified by model nomenclature.

3 Problem Formulation and Guarded Decision Pipeline

3.1 Hourly storage value

Consider hourly intervals $t = 1, \dots, T$, with $T = 24$ for a daily schedule. Let p_t denote the realized or scenario price in UAH/MWh, $c_t \geq 0$ market-side charging power, $d_t \geq 0$ market-side discharging power, e_t stored energy, η_c and η_d charging and discharging efficiency, Δt the interval duration, and γ a throughput degradation-cost coefficient in UAH/MWh of throughput. For schedule s , the evaluated value is

$$V(s) = \sum_{t=1}^T [p_t(d_t - c_t)\Delta t - \gamma(c_t + d_t)\Delta t]. \quad (1)$$

Efficiency enters the energy dynamics,

$$e_{t+1} = e_t + \eta_c c_t \Delta t - \frac{d_t \Delta t}{\eta_d}, \quad (2)$$

The LP constrains the initial state, SOC bounds, and charge/discharge power. It does not impose terminal SOC equality. Charge and discharge variables are nonnegative and have no explicit complementarity constraint; efficiency losses and the positive throughput penalty discourage simultaneous operation, but do not make it structurally impossible. Revenue is evaluated at market-side flow, so efficiency is not multiplied into the revenue term twice. The same evaluator is applied row-for-row to raw, strict, V2, and V2+ candidates.

The oracle schedule s^* is computed with realized prices for evaluation only. Regret is

$$R(s) = V(s^*) - V(s). \quad (3)$$

Lower regret is better. The oracle does not provide a feature to the candidate generator or selector. It labels value lost after a decision has been fixed. Mean-regret improvement of candidate a over comparator b is

$$I(a, b) = \frac{\bar{R}_b - \bar{R}_a}{\bar{R}_b}. \quad (4)$$

The repository's internal evidence screen also considers median regret, rolling-window behavior, configured safety checks, and the no-execution flag. In this paper those fields are reported descriptively; a lower mean on one retrospective slice is not treated as confirmatory evidence.

3.2 Source and temporal-availability contract

The source contract is evaluated for each market venue, delivery date, and hour. For a published target, the official OREE row is the price context [3]. A forecast cannot be relabeled as the published price. For an unpublished target, a complete forecast scenario can be used as input to candidate generation, provided every covariate was available before the decision time. Weather histories and forecasts are governed in the same way [4].

This rule addresses two forms of leakage. The first is statistical future leakage, in which realized target values or later covariates enter training or selection. The second is publication leakage, in which a row is treated as known before the source actually made it available. Rolling-origin splitting addresses the first; source snapshots, timestamps, and provenance fields address the second. Observation time is not silently converted into an official publication timestamp.

The primary quantitative packet concerns DAM. The API and dashboard can display analogous hourly IDM recommendation rows, but the study does not evaluate intraday bid submission, 15-minute products, or settlement. IDM is therefore described as a read-model capability. This prevents the existence of a route or schema from being mistaken for empirical market performance.

3.3 Candidate generation and V2+ selection

The frozen `strict_similar_day` method is the conservative comparator and fallback. It is time-respecting and simple, making it useful even when it is not the lowest-regret method. A raw forecast candidate passes a price vector through the LP. V2 then uses prior evidence to choose among a frozen set of schedule families. V2+ keeps V2 as the default and adds deterministic candidates designed around diagnosed regret modes:

- `rank_extrema_perturbation_v2_plus`, which emphasizes the ordering of high and low price hours;
- `robust_spread_penalty_v2_plus`, which shrinks brittle high-spread shapes;
- `strict_neighborhood_shift_v2_plus`, which tests small timing shifts around the strict schedule;
- `temporal_block_reconciled_v2_plus`, which smooths or reconciles local temporal blocks;
- `soc_terminal_target_v2_plus`, which probes terminal-SOC pressure.

Candidate generation uses no realized price from the evaluated anchor. On earlier anchors, the selector compares V2 with V2+ families through prior regret evidence. It selects a V2+ family only when prior mean improvement over V2 reaches the configured 1% threshold; otherwise it returns V2.

The selected retrospective schedule is then evaluated by the same realized-price LP/oracle scorer as every comparator.

V2+ selection algorithm. For each profile and anchor, the frozen procedure is: (1) construct the strict and raw-forecast LP schedules; (2) construct the V2 schedule families and the five V2+ families listed above using only the current scenario and configured battery state; (3) collect, separately for each family, regret observations from earlier anchors only; (4) compute the prior mean improvement of each V2+ family over the V2 reference; (5) admit only families whose prior improvement is at least 1%, then select the lowest prior-regret admitted family, breaking ties by stable family/candidate identifier; and (6) return V2 when no family is admitted. Realized price and current-anchor regret enter only the subsequent common scorer. The stored mutation audit changes current-anchor regret without changing the selected family.

This separation is important. The selector may use prior family regret, forecast spread, forecast objective value, throughput, degradation proxy, SOC slack, and stable candidate identity. It may not use realized regret for the anchor being selected. A mutation audit changed evaluated-anchor regret while holding prior evidence fixed. Tie-breaking was corrected to use only prior-family regret and stable identifiers; the stored descriptive V2+ estimates were unchanged.

3.4 Internal evidence screens

The repository’s V2+ screen requires lower mean regret than V2, no median degradation, at least 5% mean improvement over strict, sufficient coverage, no violations under the configured LP checks, and a minimum number of passing rolling windows. Because forecast-source status was compared on the latest window, the screen is not treated here as a confirmatory promotion test. Its fields are retained as an auditable historical decision record.

The canonical random-forest safe-switch has a separate internal rubric. It predicts improvement relative to V2+ and switches only when predicted gain is at least 20 UAH and family tail-risk probability is at most 0.5; a tail loss is defined as regret at least 150 UAH worse than V2+. Otherwise it abstains. The frozen aggregate declares mean-regret cut-offs of 166.0 UAH (primary) and 178.26 UAH (secondary), but no dated pre-evaluation protocol was located. The paper therefore treats the 168.1566 UAH result as a retrospective smoke diagnostic; `promotion_gate_passed=false`.

3.5 Evidence architecture

The implementation is organized as an evidence pipeline. Bronze assets preserve source snapshots and provenance. Silver assets normalize timestamps, market rows, weather, tenant identifiers, and battery state. Gold assets create forecasts, candidate schedules, LP scores, selector traces, checks, and summaries. A read model exposes materialized evidence to an operator-facing interface. Strict schemas prevent a recommendation-preview contract from silently becoming an execution contract.

The pipeline produces artifacts rather than an opaque final score. The V2+ comparison packet contains a role summary,

selection trace, strict rows, regret-decomposition summary, rolling robustness table, run identifier, and claim boundary. The canonical random-forest run contains per-seed metrics, aggregate metrics, and a vector-parse manifest. This structure permits a reviewer to trace each number to rows and commands in the repository [8].

3.6 Guarded shadow path

The operator-facing shadow path is intentionally finite. Given a tenant, venue, delivery date, and source-backed 24-hour price context, it constructs a small library of fallback/SOC-maintain, conservative reference, balanced, and value-aligned templates. Features include estimated value, SOC path, throughput, degradation proxy, and deterministic safety violations. A shadow scorer estimates improvement and tail risk. Non-HOLD recommendations are displayed only when the value guard, risk cap, family guard, physical feasibility, and zero-safety-violation checks pass. Otherwise, the system shows an abstention and the V2+/HOLD fallback.

This is not a full optimizer. A finite candidate library can miss feasible schedules outside its templates. Nor is the scorer a market controller. It ranks preconstructed schedules for manual preview, and the response contains no `ProposedBid`, market order, or inverter command.

4 Data and Experimental Protocol

4.1 Sources and panel construction

The core market input is Ukrainian OREE DAM hourly data [3]. Calendar and weather context can be joined under point-in-time rules, with Open-Meteo as the documented weather source [4]. The global-panel lane uses five configured BESS profiles: a Kyiv mall, Lviv office, Dnipro factory, Kharkiv hospital, and Odesa hotel. They are simulation/configuration profiles, not claims of deployed commercial sites. All five use the same DAM price vector on a given date while differing in battery capacity, power, efficiency, and SOC settings.

The tracked V2+ configuration is described as a 365-anchor Ukrainian panel. The main retrospective slice contains 18 distinct anchor dates crossed with five configured profiles, hence 90 paired profile-date rows. The effective temporal sample is 18 dates, not 90 independent market outcomes. Each row represents one 24-hour schedule. Raw global-panel NBEATSx and its prior-only horizon-calibrated variant are co-primary sensitivity sources. Calibration uses earlier rolling residuals and excludes the current target’s realized values.

The role-summary artifact contains 90 rows for every source-role combination, with five profiles, 18 dates, regret, decision value, oracle value, and configured safety counts. For the calibrated source, mean oracle value is 3911.48 UAH per 24-hour profile-date schedule. Strict, V2, and V2+ mean decision values are 3600.90, 3705.12, and 3736.72 UAH. These are retrospective evaluator outputs for the configured profiles, not guaranteed revenue.

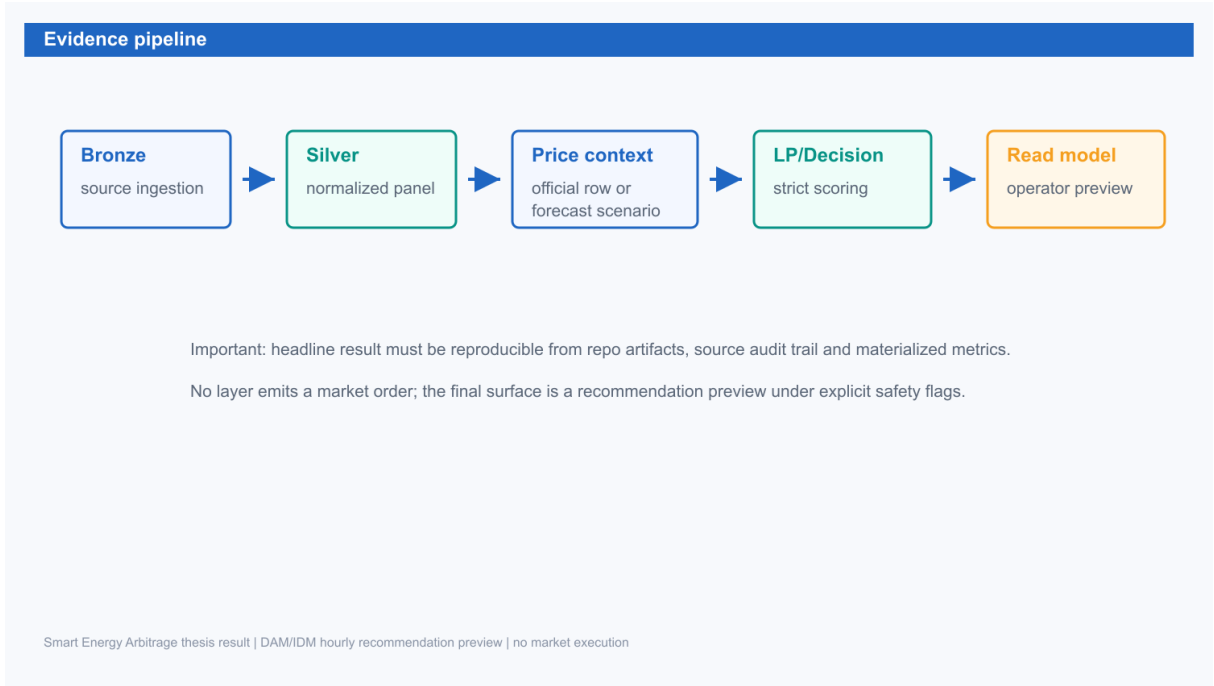


Figure 1: Evidence pipeline from governed sources to an operator read model.

Table 1: Evidence contract linking claims to minimum artifacts and forbidden interpretations.

Claim surface	Minimum auditable artifact	Interpretation explicitly excluded
V2+ retrospective regret	Paired source/role/profile/date rows, common scorer, date-cluster summaries, rolling table, hashes	Confirmatory holdout, independent five-site trial, or profit guarantee
Learned challenger	Estimator class/config, train/evaluation row lineage, selected rows, frozen threshold, independent-period flag	Model-family attribution from an artifact name; OOS claim from mirrored rows
Source-backed preview	Source mode, delivery horizon, publication/observation provenance, complete 24-row contract	Official price claim for a forecast or market-submission receipt
Safety/readiness	Modeled constraint checks, abstention reason, promotion and execution flags	Hardware safety, legal trading authority, or market execution

4.2 Rolling-origin evaluation

Random train-test shuffling would expose future regimes to a time-series selector and is unsuitable here. The study uses rolling-origin replay, following out-of-sample testing logic for temporally ordered data [30]. At each anchor, the selector sees only earlier information; realized prices are used afterward for scoring. Four adjacent windows each contain 18 dates crossed with five profiles. Window 1, dated 2026-04-12 to 2026-04-29 in the stored timestamps, is the same main retrospective slice reported in Tables 4 and 5. It is not an extra test in addition to the four windows.

The four windows span 2026-04-12 to 2026-04-29, 2026-03-17 to 2026-04-11, 2026-02-27 to 2026-03-16, and 2026-02-09 to 2026-02-26 in the stored timestamp convention. Minimum prior anchor counts are 347, 329, 311, and 293. Both sources use the same windows, and raw, strict, V2, and V2+ are paired row-for-row within each source/profile/date.

The repository labels a source robust when V2+ beats both strict and V2 in every window. Because the windows are adjacent, share one market process, and arise from one development history, they are sensitivity replays rather than

independent replications. They show that the ordering is not confined to the latest slice; they do not establish stationarity or confirmatory generalization.

4.3 Common LP/oracle scoring

Each candidate price vector or selected schedule family enters the same LP and scoring contour. The optimizer enforces the configured physical constraints, and the realized-price evaluator computes schedule value. The oracle uses the same battery configuration and realized prices. Thus, regret differences are attributable to candidate information and selection rather than to different evaluators.

The primary descriptive metrics are mean regret and median regret. Mean regret captures total decision-value loss but can be influenced by difficult anchors. Median regret shows typical behavior. Safety-violation counts verify the configured physical checks. Mean decision value provides an intuitive counterpart to regret, while mean oracle value confirms the common reference. Improvement ratios are derived from the unrounded regret values.

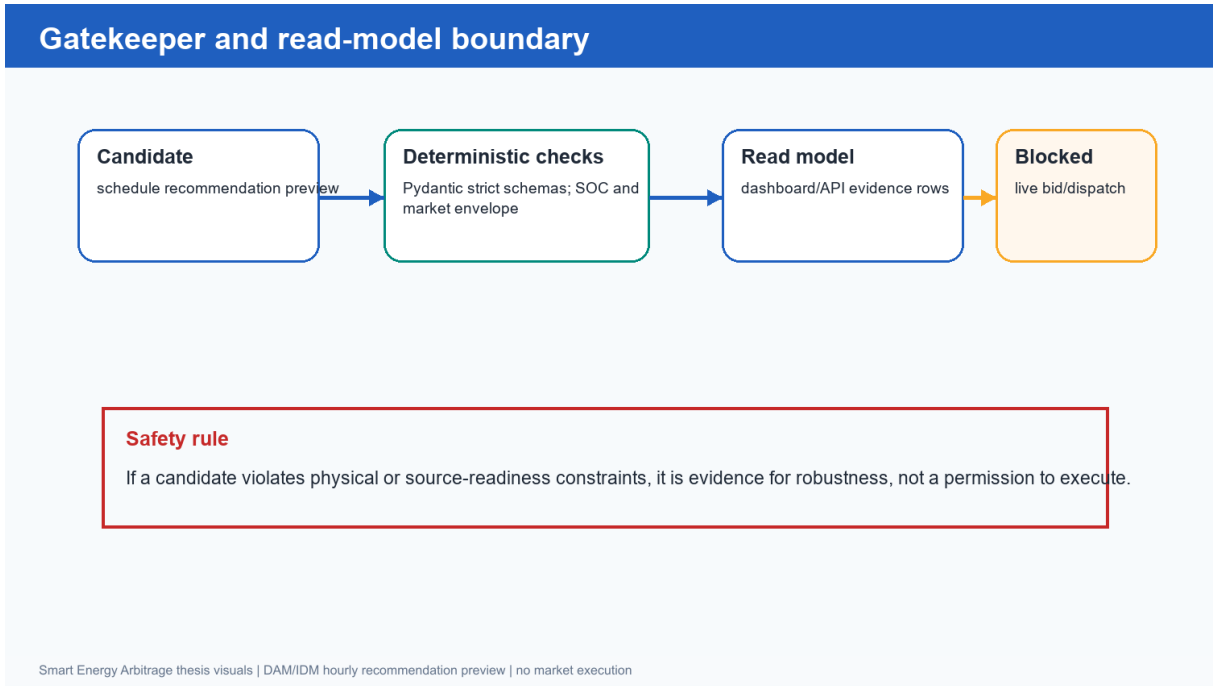


Figure 2: Gatekeeper and read-model boundary. Source, physical-feasibility, and risk checks either permit an operator preview or return abstention; no execution payload is emitted.

4.4 Comparators and challengers

The comparison includes four paired roles: raw forecast, strict reference, V2 reference, and V2+ selection. Raw and horizon-calibrated NBEATSx are reported symmetrically as co-primary sensitivity sources. No source is selected as confirmatory on the basis of the latest-window result.

Subsequent challengers are reported with their stored screen status. TFT quantiles test schedule diversity. Poland lag-24 tests governed neighboring-market context. The canonical random forest uses expanded prior context and seeds 42, 2026, and 7. Its features, 500 trees, depth 6, one-sample leaf minimum, 20 UAH switch threshold, 150 UAH tail-loss threshold, and 0.5 family-risk cap come from the frozen artifact; no evidence was located that these choices were fixed before the latest slice was inspected.

The HF Decision Transformer candidate-index experiment is a separate smoke path. Its training rows are copies of the same retrospective comparison rows shifted backward in time solely to exercise tensor construction and training. The configuration uses context length 4, three epochs, hidden dimension 48, two layers, two heads, and seed 20260526. This construction is not independent historical training data.

No new model experiment was run for this paper. Values are read from frozen packets, the metrics atlas, the evidence manifest, and tracked summaries. The dependence-aware summaries marked below are reconstruction analyses over frozen rows, not model retuning.

4.5 Comparator and evaluator configuration

Table 2 records the common physical configuration. Capacity, power, round-trip efficiency, initial SOC, and SOC bounds come from `simulations/tenants.yml`.

The LP horizon is 24 one-hour intervals. Charge and discharge efficiencies are each the square root of round-trip ef-

iciency. Initial SOC resets to the configured profile value for each profile-date evaluation; no terminal SOC equality is imposed. The LP has no explicit charge/discharge complementarity constraint. No post-solve feasibility repair is applied to raw, strict, V2, or V2+ schedules; they are generated within the same LP constraints.

The degradation proxy assumes 210 USD/kWh capex, 43.9129 UAH/USD, 15 years, and one cycle per day. Cycle cost is divided by twice the profile capacity, producing a common throughput penalty of approximately 842.17 UAH/MWh. It is an engineering proxy, not measured ageing.

The study does not assign the four rolling windows to independent tuning, validation, and test roles. They are repeated prior-only replays in one research sequence. Accordingly, “validation,” “test,” and “promotion” strings retained in artifact field names are provenance labels, not claims of a confirmatory design fixed before evaluation.


4.6 Reproducibility and trust checks

The V2+ packet records Dagster run `b09194b2-8bf7-42fb-bcc7-1567ca47037c`; the leakage-audit materialization is `8f93c0fe-d954-4690-84bf-e3c3f0ed8aa6`; and rolling replay is `8832f41e-e605-4107-ab6d-028676faa223`. The evidence manifest reports hashes and claim scope.

The random-forest aggregate reads three per-seed metric files and a frozen V2+ baseline. The corrected parser reports 720 non-empty vectors and maximum length 24 for actual-price, dispatch, forecast-price, and SOC fields. This establishes correct vector parsing, not model generalization.

The ancillary model-lineage audit pairs every training candidate with its evaluation candidate after shifting the timestamp by one year. Across 44 reported model-input and target columns, all 360 pairs are identical. The audit also

Rolling-origin validation

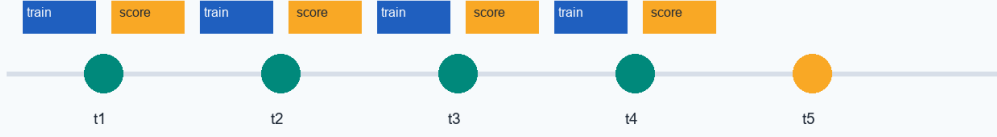

At each anchor the selector sees only prior information.

Final holdout is used for scoring only, so improvement claims avoid future leakage.

Rolling robustness checks whether the result survives several time windows.

Smart Energy Arbitrage thesis visuals | DAM/IDM hourly recommendation preview | no market execution

Figure 3: Rolling-origin protocol and point-in-time evidence boundary.

Table 2: Configured BESS profiles used in every paired comparison.

Configured profile	Capacity (kWh)	Max power (kW)	Round-trip efficiency	Initial SOC	SOC bounds
Kyiv mall	280	140	0.92	0.52	0.05–0.95
Lviv office	150	75	0.90	0.55	0.10–0.90
Dnipro factory	500	250	0.92	0.50	0.05–0.95
Kharkiv hospital	400	200	0.92	0.70	0.10–0.95
Odesa hotel	200	100	0.90	0.48	0.10–0.90

checks the selected-row packet and finds that every nonfall-back RF row is supported by the same delivery date, 2026-04-15. This construction is disclosed as leakage for performance estimation even though realized-regret fields are not passed as inference-time features.

5 Results

5.1 Main retrospective slice

Table 4 reports the calibrated-source details for the latest retrospective window. Its 90 rows are 18 dates crossed with five configured profiles sharing one DAM price vector per date. V2+ mean regret is 174.77 UAH, versus 310.58 UAH for strict and 206.37 UAH for V2. Median regret is 67.30 UAH, versus 198.39 and 96.02 UAH. The raw forecast schedule has mean regret 622.25 UAH and median 290.22 UAH.

Within this slice, V2+ mean regret is 43.73% below strict, 15.31% below V2, and 71.91% below the raw schedule. These are descriptive paired contrasts. The zero counts mean 0 of 90 profile-date schedules violated the LP’s modeled SOC/power checks for each row in Table 4. They do not test thermal behavior, telemetry errors, nonlinear ageing, market rules, or hardware control.

The raw result illustrates the paper’s methodological point. NBEATSx is a legitimate forecasting architecture [9],

but its output is not automatically a good storage schedule. Schedule value depends on extrema order, spread shape, SOC path, and throughput. V2+ operates at the schedule-family level, where these consequences become visible.


The strict comparator remains useful despite its higher regret. It provides a leakage-resistant control and a fallback when learned evidence is weak. V2+ should be interpreted as an improvement over that control within the evaluated packet, not as evidence that the control can be removed from the system.

5.2 Co-primary source sensitivity and grouped reporting

Table 5 reports both NBEATSx sources symmetrically. The calibrated source has lower V2+ mean regret in this slice, but it was not selected independently of these results. Therefore 174.77 and 193.36 UAH are co-primary sensitivity estimates rather than a chosen estimate and a secondary parity check.

For the raw source, V2+ mean regret is 193.36 UAH, versus 310.58 UAH for strict and 225.44 UAH for V2. The within-source reductions are 37.74% and 14.23%. Both sources preserve the same ordering, while absolute values remain source-sensitive.

Normalizing each profile’s regret by its configured energy capacity preserves the ordering despite capacities ranging



Regret compares selected schedule value with oracle LP value after realized prices are known.

The optimization is deterministic; ML may propose, rank, explain, or abstain before the strict gate.

Smart Energy Arbitrage thesis visuals | DAM/IDM hourly recommendation preview | no market execution

Figure 4: Common LP schedule and oracle scoring contour.

from 0.15 to 0.50 MWh. For the calibrated source, strict, V2, and V2+ means are 996.17, 678.83, and 584.18 UAH/MWh of capacity. For the raw source they are 996.17, 735.08, and 623.91 UAH/MWh. Equal weighting of configured profiles remains a design choice; this normalization is a scale sensitivity, not fleet external validity.

To preserve the shared daily price process, uncertainty is computed from paired date-cluster means rather than from 90 profile-date rows. A circular moving-block percentile bootstrap resamples three-date blocks for 20,000 replicates with seed 20260712. Three dates is a compromise between retaining several blocks in an 18-date series and preserving short local dependence. For the calibrated source, the mean strict-minus-V2+ regret difference is 135.81 UAH (95% bootstrap interval 64.27–217.10) and is positive on 14 of 18 dates; the V2-minus-V2+ difference is 31.60 UAH (12.88–50.51) and is positive on 12 dates. For the raw source, the corresponding differences are 117.22 UAH (57.97–185.21; 14/18 positive dates) and 32.08 UAH (13.48–53.18; 14/18). Repeating the percentile procedure with block lengths 2, 3, 4, and 6 leaves every interval above zero: lower bounds range from 56.69 to 64.27 UAH for calibrated strict-minus-V2+, 11.34 to 13.44 for calibrated V2-minus-V2+, 49.28 to 63.72 for raw strict-minus-V2+, and 12.00 to 13.89 for raw V2-minus-V2+. These intervals quantify retrospective paired effects under declared resampling schemes; they do not turn the adjacent dates into independent market replications.

Profile-level means expose heterogeneity while retaining the common 18-date window. Calibrated-source V2+ regret ranges from 97.82 UAH for the configured Lviv office profile to 291.43 UAH for the Dnipro factory profile. The raw-source ordering is similar but not identical: Lviv remains lowest at 90.28 UAH and Dnipro highest at 349.26 UAH. Thus the aggregate is not driven by a single configured profile, although the five rows below are descriptive profile summaries rather than independent market samples.

5.3 Rolling-window sensitivity

V2+ mean regret is below strict and frozen V2 in four of four windows for both sources. Table 8 gives calibrated-source values. Window 1 is the main retrospective slice, not an additional evaluation. The windows differ substantially in difficulty. In Window 4, strict, V2, and V2+ means are 1020.23, 922.63, and 882.01 UAH. The repeated ordering is useful sensitivity evidence, but adjacent windows are not independent replications.

The raw source has V2+ means of 193.36, 279.02, 411.50, and 820.12 UAH. Window 4 is the narrowest comparison, with 820.12 UAH for V2+ and 843.47 UAH for V2. Gains are not uniform, and no inference is made beyond the observed sequence.

5.4 Regret decomposition and residual opportunity

The regret-decomposition packet explains where V2 still loses value. For the calibrated source, 34 anchors are labeled `selector_chose_wrong_family`, with mean V2 regret 355.01 UAH and mean best-candidate regret 219.20 UAH. Nineteen anchors are labeled `forecast_extrema_rank_wrong`; 22 are `candidate_library_missing_good_schedule`; 11 are `strict_already_near_oracle`; and four retain a `decision_value_gap_remaining` label.

These categories do not claim causal identification, but they guide model design. “Selector chose wrong family” suggests that a better candidate existed in the finite library and that prior-only selection is the bottleneck. “Candidate library missing good schedule” indicates that no selector can recover value without new schedules. “Forecast extrema rank wrong” suggests a forecast-shape limitation. “Strict already near oracle” identifies anchors where aggressive switching has little upside.

Table 3: Comparator, selector, and evaluator information sets.

Component	Decision-time information and training	Candidate/fallback behavior	Evaluation role
Raw NBEATSx	One source-specific 24-hour forecast vector	LP schedule from the raw vector	Co-primary retrospective sensitivity source
Calibrated NBEATSx	Raw forecast plus horizon corrections estimated from earlier residuals	LP schedule from the calibrated vector	Co-primary retrospective sensitivity source
<code>strict_similar_day</code>	Historical observed prices only; repo lag rule is 24 h for weekday indices Tue–Fri and 168 h otherwise	One deterministic similar-day forecast; no learned fallback	Frozen comparator paired on every profile-date
V2	Earlier anchors; blend weights 0.25/0.5/0.75; at least 14 prior residual anchors	Chooses among frozen V2-era schedule families	Retrospective comparator
V2+	Earlier anchors; 1% prior mean-improvement threshold; added extrema, spread, ± 1 h shift, 3/6 h block, and terminal-target candidates	Defaults to V2 when prior evidence is insufficient	Retrospective schedule-family selector
Random-forest safe-switch	360 training candidates that are exact timestamp-shifted copies of the 360 evaluation candidates; 500 trees, depth 6, leaf minimum 1	Switches only if predicted improvement ≥ 20 UAH and family risk ≤ 0.5 ; otherwise V2+	Exact-mirror in-packet diagnostic; historical id <code>dt_v2_plus</code> ; not DT or OOS evidence
HF Decision Transformer	Mirrored copies of the same comparison packet; candidate-index cross-entropy; context 4, 3 epochs, hidden 48, 2 layers/heads	Chooses among raw, strict, V2, V2+ families	Tensor/training-path smoke only
Common LP/oracle	Profile parameters in Table 2; 24 h; realized prices unavailable to candidates	Oracle uses realized prices only after selection; same solver and rows for all roles	Per-profile-date retrospective scorer

Table 4: Calibrated-source DAM comparison on the main retrospective window (18 dates $\times$ five configured profiles).

Comparator	Mean regret (UAH)	Median regret (UAH)	Mean decision value (UAH)	Mean oracle value (UAH)	Configured safety violations (of 90)
Raw calibrated NBEATSx schedule	622.25	290.22	3289.24	3911.48	0
Frozen strict reference	310.58	198.39	3600.90	3911.48	0
Schedule/Value Learner V2	206.37	96.02	3705.12	3911.48	0
Schedule/Value Learner V2+	174.77	67.30	3736.72	3911.48	0

An oracle-gap audit performed after the tie-break correction gives a complementary view. For the calibrated source, V2+ selected the best available candidate on 71 of 90 anchors; on 19 anchors a better candidate existed but was not selected. The mean missed-candidate gap on those diagnostic rows is 101.83 UAH. For the raw source, the corresponding counts are 59 and 31, with a mean missed gap of 93.25 UAH. Realized regret is used only to label this audit after selection. The audit therefore motivates a future safe-switch model but cannot serve as an input to the historical decision.

5.5 Model-lineage audit and non-independent diagnostics

The next experiment targets rare cases in which a non-V2+ candidate appears beneficial. Its artifact lineage uses `dt_v2_plus`, but the command specifies `--model-kind random_forest`, `--feature-set expanded_prior_context_v1`, 500 trees, maximum depth 6, and a 20 UAH switch threshold. The estimator is a regret-aware random forest, not a Decision Transformer.

Its 360 training candidate rows are exact timestamp-shifted copies of its 360 evaluation candidate rows across every audited model input and target. It is therefore an in-packet construction diagnostic, not an out-of-sample experiment.

Across three stored seed runs, mean regret on the same packet is 168.1566 UAH, versus 174.77 UAH for calibrated-source V2+. Median regret is 61.71 versus 67.30 UAH. The selector switches on 4 of 90 profile-date rows and abstains on 86. All four changed profile rows occur on delivery date 2026-04-15; they are not four distinct market episodes. Realized scoring records three wins and one tie, with zero observed 150-UAH tail losses. These correlated, post-hoc counts do not estimate a switching success rate or zero risk.

The RF difference is narrow and entirely supported by one delivery date. Thresholds 0, 5, 10, and 20 UAH produce the same 168.16 UAH mean, four switches, and 86 abstentions; at 50 UAH, switches fall to three. Because these thresholds were examined on the same exact-mirror packet, this is construction sensitivity, not robustness evidence. Most rows still use V2+.

The 166.0 UAH cutoff declared in the frozen aggregate

Table 5: Co-primary retrospective sensitivity comparison by NBEATSx source.

Source	Strict mean regret	Raw mean regret	V2 mean regret	V2+ mean regret	V2+ vs. strict	V2+ vs. V2
Horizon-calibrated NBEATSx	310.58	622.25	206.37	174.77	43.73%	15.31%
Raw global-panel NBEATSx	310.58	771.26	225.44	193.36	37.74%	14.23%

Table 6: Paired date-cluster differences in mean regret (comparator minus V2+, UAH).

Source	Comparator	Mean difference	95% moving-block interval	Positive dates
Horizon-calibrated	Strict	135.81	[64.27, 217.10]	14/18
Horizon-calibrated	V2	31.60	[12.88, 50.51]	12/18
Raw global-panel	Strict	117.22	[57.97, 185.21]	14/18
Raw global-panel	V2	32.08	[13.48, 53.18]	14/18

Table 7: V2+ mean regret by configured BESS profile and co-primary source (UAH).

Configured profile	Horizon-calibrated	Raw global-panel
Kyiv mall	173.39	178.35
Lviv office	97.82	90.28
Dnipro factory	291.43	349.26
Kharkiv hospital	195.73	224.93
Odesa hotel	115.47	123.97

is missed by about 2.16 UAH. No dated pre-evaluation protocol for that cutoff, the feature set, hyperparameters, risk cap, or switch threshold was located. The legacy aggregate reports identical seed-level paths and means; its numerical p-value has no inferential interpretation. The corrected aggregate stores a null p-value and classifies the result as diagnostic only. The correct interpretation is an invariant in-packet diagnostic; `promotion_gate_passed=false` is preserved.

5.6 Post-defense temporal replay of the random-forest switch

After the lineage audit, the RF safe-switch was rerun over both co-primary NBEATSx sources and three time-separated rolling protocols. Evaluation window 1 trains on windows 4/3/2, window 2 on 4/3, and window 3 on 4. Every evaluation contains 360 candidate rows, 90 profile-date outcomes, and 18 market dates. Exact fingerprints over model inputs and targets find zero train/evaluation overlaps in all 14 materialized protocol rows, rather than the 360 of 360 overlap in the historical packet. This is a post-defense corrective suite, not part of the defended thesis.

Table 10 reports the frozen 20 UAH operating threshold. The latest window fully abstains for both sources and exactly reproduces the corresponding V2+ mean. Calibrated window 2 also abstains. The other three rows switch and increase regret. At primary seed 42, calibrated window 3 is 123.08 UAH worse than V2+, with 43 switches and 19 observed 150-UAH tail losses. Raw windows 2 and 3 are 65.18 and 96.44 UAH worse, with 4 of 5 and 5 of 8 primary-seed switches reaching the tail-loss definition. The sign remains harmful across seeds 42, 2026, and 7. Calibrated-

window-3 deltas range from 107.50 to 123.08 UAH with 36–43 switches; raw-window deltas remain 65.18 and 96.44 UAH, with 5 and 8–9 switches.

Latest-window thresholds 0, 5, 10, 20, and 50 UAH all produce zero switches for both sources; at threshold 0, every row still has predicted improvement below the threshold. Across the complete suite, zero protocol rows improve on V2+, eleven are full-abstention ties, and three are harmful. For calibrated window 3, the market-date-cluster mean-delta interval is [49.98, 202.10] UAH and 11 of 18 dates are losses. The raw-window-2 and raw-window-3 intervals are [0.00, 195.53] and [0.00, 289.32] because their losses are sparse and clustered.

The suite therefore does not reproduce the 168.1566 UAH mirror-packet diagnostic and supplies negative evidence for RF promotion. It was constructed after the mirror was discovered, so it remains retrospective rather than untouched prospective confirmation. Seeds, thresholds, and adjacent windows are sensitivity analyses, not independent market replications.

5.7 Separate transformer and read-model lineages

The Hugging Face Decision Transformer line is separate from the random forest. Its candidate-index smoke uses copies of the same 90 comparison rows shifted backward to exercise sequence construction and training. It selects no V2+ rows and yields mean regret 460.30 UAH, versus 174.77 UAH for calibrated-source V2+. The best-available after-the-fact diagnostic is 153.27 UAH.

This result shows only that this mirrored-row implementation and candidate-index objective did not recover V2+ on the packet. It is not an out-of-sample comparison and does not support a general negative conclusion about Decision Transformer or sequence modeling. The construction is especially narrow given known dependence on trajectory coverage and structure [28]. The later random forest learns a value gap and preserves V2+ as fallback; that change must not be attributed to Decision Transformer.

A later HF value-aligned shadow uses a genuine `DecisionTransformerModel` backbone over a finite schedule library and deterministic gates. Actions, rewards, and returns-to-go are zero in its scorer input, so it is a

Table 8: Rolling-window sensitivity for horizon-calibrated NBEATSx.

Window	Retrospective period	Prior anchors	Strict mean	V2 mean	V2+ mean	V2+ improvement vs. V2	Stored screen
1	2026-04-12 to 2026-04-29	347	310.58	206.37	174.77	15.31%	Pass
2	2026-03-17 to 2026-04-11	329	847.30	312.71	226.12	27.69%	Pass
3	2026-02-27 to 2026-03-16	311	664.68	497.07	393.27	20.88%	Pass
4	2026-02-09 to 2026-02-26	293	1020.23	922.63	882.01	4.40%	Pass

Table 9: Model-lineage audit: implementation identity, evidence packet, and permitted interpretation.

Lineage	Actual implementation	Stored observation	Permitted interpretation
V2+ main comparison	Prior-only deterministic schedule-family selector	174.77/193.36 UAH calibrated/raw mean regret; four adjacent windows	Main descriptive retrospective result
Historical dt_v2_plus	RandomForestRegressor, 500 trees, depth 6	168.16 UAH; 4/90 profile rows, all on one date	Exact-mirror in-packet diagnostic; not DT, OOS, or inferential evidence
HF candidate-index smoke	Hugging Face DecisionTransformerModel; hidden 48, 2 layers/heads	460.30 UAH on mirrored packet	Tensor/training-path diagnostic for this objective only
HF value-aligned scorer	Hugging Face DT backbone; hidden 64, 2 layers/heads, 170,400 parameters	158.71 UAH; threshold selected on mirrored packet	Non-independent scorer diagnostic, not a full return-conditioned policy
HF 32-day read-model audit	Loaded HF scorer over finite schedule templates	20/32 nonfallback; mean selected value 1174.29 UAH	Source/read-model readiness; no realized-regret outcome
Custom DT prototype / LAVA lane	Causal PyTorch transformer prototype / tabular-ridge readiness bridge	No canonical promoted thesis result	Architecture/prototype evidence only

transformer-backbone candidate scorer rather than a full return-conditioned DT policy. Its 158.71 UAH frozen diagnostic uses the same mirrored packet, and the operating threshold is selected on that packet. A separate DAM read-model packet covers 32 source-backed days and selects non-fallback candidates on 20, reporting mean selected value 1174.29 UAH but no realized regret. Its reported zero safety failures means zero violations under configured deterministic checks; it does not cover unmodeled thermal, telemetry, ageing, or market constraints.

These results are not directly interchangeable with the 90-row retrospective comparison. The HF proof has a different construction, finite templates, and a day-level packet. Its 158.71 UAH value is a frozen diagnostic. The value-aligned path is an engineering demonstration of guarded selection and abstention.

5.8 Time-separated Decision Transformer correction

After the lineage defect was identified, a separate temporal suite trained an actual Hugging Face DecisionTransformerModel on earlier rolling windows and evaluated later windows. Its trajectories contain nonzero action targets, regret-derived rewards, and nonzero returns-to-go; the train/evaluation candidate-content overlap count is zero in every run. The suite crosses two source lanes, three temporal protocols, candidate-index cross entropy and a decision-aware regret/value objective, and three seeds, for 36 runs.

No run improves on frozen V2+. The decision-aware objective abstains to V2+ and ties in 18/18 runs. Candidate-

index cross entropy ties in 15/18 and is harmful in 3/18, increasing mean regret by 10.12, 12.28, and 21.09 UAH in the affected protocol/seed runs. A 10-epoch sensitivity converts those switches to abstention rather than gains. This is stronger evidence than the mirrored smoke because it tests genuine temporal separation, but it is still retrospective and data-limited. It is published as negative DT evidence rather than hidden or promoted.

5.9 Preregistered differentiable forecast-to-storage suite

Version 1.2 also preregistered a distinct differentiable experiment before training. MLP and transformer price correctors were trained either with forecast loss or with realized storage value differentiated through strictly convex `cvxpylayers` problems. The decision loss uses each tenant’s capacity, power, starting SOC, efficiency, SOC bounds, and degradation contract; checkpoints use only an earlier inner-validation slice. Every schedule was then recomputed and scored by the frozen strict LP/oracle contour. The experiment uses the same two sources, three temporal protocols, and three seeds, yielding 72 runs of 90 profile rows over 18 dates. All safety-violation and content-overlap counts are zero; all 36 decision-focused runs use the differentiable layer without surrogate fallback.

The primary promotion result remains negative: zero of 72 runs beats V2+, and even the least harmful individual run is +196.11 UAH relative to it. The architecture comparison is more informative. Transformer correction has lower strict regret than matched MLP in 28/36 comparisons and by 136.74 UAH on average. Under forecast-loss training, the

Table 10: Post-defense RF temporal suite at the frozen 20 UAH threshold. Positive delta means higher regret than V2+. Switch and tail-loss counts use primary seed 42; the range covers seeds 42, 2026, and 7.

Source	Evaluation/train windows	RF mean	V2+ mean	RF minus V2+	Switches	Tail losses	Seed delta range
Horizon-calibrated	1 / 4,3,2	174.77	174.77	0.00	0	0	[0.00, 0.00]
Horizon-calibrated	2 / 4,3	226.12	226.12	0.00	0	0	[0.00, 0.00]
Horizon-calibrated	3 / 4	516.35	393.27	+123.08	43	19	[+107.50, +123.08]
Raw global-panel	1 / 4,3,2	193.36	193.36	0.00	0	0	[0.00, 0.00]
Raw global-panel	2 / 4,3	344.20	279.02	+65.18	5	4	[+65.18, +65.18]
Raw global-panel	3 / 4	507.94	411.50	+96.44	8	5	[+96.44, +96.44]

Table 11: Post-defense differentiable suite. Delta versus raw is negative when the trained model improves the raw schedule.

Objective	Model	Regret	Δ raw	Better/raw
Decision	MLP	836.39	+124.56	5/18
Decision	Transformer	741.06	+29.23	7/18
Forecast	MLP	854.21	+142.38	5/18
Forecast	Transformer	676.05	-35.78	15/18

transformer improves the raw schedule in 15/18 runs and in five of six source/window aggregates; their mean deltas are -31.71, -34.57, and -43.46 UAH for calibrated NBEATSx and -118.29, -7.20, and +20.54 UAH for raw NBEATSx. The one harmful aggregate is not suppressed.

The positive signal does not establish that the decision-focused objective is superior. Profile-aware decision training improves the MLP relative to matched forecast-loss training by 17.82 UAH, but worsens the transformer by 65.01 UAH and wins only 6/18 transformer comparisons. The defensible result is therefore narrower: sequence-aware price correction learns decision-relevant structure better than this MLP and often improves the raw schedule, but neither ordinary nor differentiable transformer training recovers the hand-designed V2+ candidate selector.

5.10 Negative and near-miss evidence

Additional experiments show where the repository retained its fallback. The best TFT quantile V2+ row has mean regret 225.47 UAH and median 121.00 UAH, worse than calibrated-source V2+ on the same packet. TFT remains useful for uncertainty and complementary schedules [10,11], but this packet does not support replacement.

A richer Poland lag-24 route has mean regret 177.34 UAH and median 39.46 UAH. A prior-only Poland veto has mean 167.05 UAH and median 55.97 UAH, with 34 challenger rows and 56 fallback rows. Its stored improvement ratio is 4.41%, below the internal 5% screen. These are retrospective near-miss diagnostics, not independent selection evidence.

The V13 source-readiness gate also remains blocked. Staged safe-switch support reaches the required 20 prior examples for the configured tenant/source pairs, but explicit OREE DAM/IDM source-publication evidence for the relevant preview contour is incomplete. A July 2026 public probe retrieved 24 DAM rows, but the rows had no source publication timestamp; HTTP Date and first-observed time were retained as retrieval evidence only. The official XMtrade/PXS specifica-

tion identifies an authenticated, signed response path, but credentials or a valid signed export are required. `promotable_v13_permitted_training_rows=0` remains the correct state.

6 Source-Backed Operator Preview

6.1 From evidence to a human-readable surface

An operator-facing read model should answer four questions: what source backs the selected horizon, what hourly schedule is being previewed, how the method performed against a fallback in historical evidence, and which gates prevent further action. The dashboard therefore displays a recommendation schedule, source mode, strategy label, value or regret evidence where available, and readiness status. It does not expose a market-order endpoint.

For published DAM hours, official OREE rows are used [3]. For unpublished targets, forecast-store or request-time scenarios can populate a preview with explicit labels such as pre-publication forecast or same-day refresh. Synthetic prices are not inserted when source context is absent; the request is blocked or returns an explicit abstention. This behavior makes an unavailable source visible rather than hiding it behind a plausible chart.

One materialized operator packet contains 24 DAM recommendation rows: one BUY, two SELL, and 21 HOLD. The action count is not a quality metric. A day with mostly HOLD can be correct when price spread, SOC, efficiency, degradation, or risk does not justify cycling. Historical decision value and gate status are more meaningful than the number of active labels.

6.2 DAM and IDM boundary

The primary paper evidence is DAM. The read model supports hourly DAM and IDM contexts for latest, today, tomorrow, and day+2 targets. A readiness packet evaluates eight combinations and returns 24 source-backed rows in all eight, with no blocked case and six cases containing at least one non-HOLD row. The source modes comprise two official published cases, one same-day forecast refresh, and five pre-publication forecasts.

This is a software and data-readiness result, not IDM performance evidence. The study does not implement or evaluate 15-minute intraday products, continuous trading, order matching, settlement, or market submission. Describing “8/8 readiness” without this qualification would be mislead-

ing. It means the operator surface can retrieve or materialize a complete hourly context for the tested requests.

This request-level retrieval check is distinct from the blocked V13 acquisition gate. The former asks whether eight selected API/read-model requests return a complete hourly context; the latter asks whether every tenant/source family has the governed examples and explicit source-publication evidence required to permit model training. Thus 8/8 retrieval and `permits_model_training=false` are compatible states.

6.3 Human oversight and abstention

The HF value-aligned source is manually selectable. A user chooses a tenant, venue, and date; the backend loads source-backed context; the finite candidate generator constructs feasible templates; the scorer ranks them; and deterministic guards either allow a non-HOLD preview or return V2+/HOLD. This sequence is designed for review. The user can inspect price context, SOC path, estimated value, and the reason for abstention.

Four supervisor/demo cases passed end-to-end evidence checks: two nonfallback examples and two guarded abstentions. The packet includes an official DAM proof value of 2765.72 UAH and a forecast DAM action value of 318.86 UAH. These are case-specific preview values, not realized profit claims. All execution flags remain false.

The abstention design is a practical safety contribution. Models trained on limited historical coverage are most uncertain precisely when conditions differ from prior examples. A forced-action interface would turn uncertainty into a charge or discharge label. The guarded interface instead makes insufficient evidence a visible state. This aligns the machine-learning behavior with operator responsibility.

6.4 No-execution contract

The system emits recommendation rows and evidence metadata, not `ProposedBid`, `ClearedTrade`, or `DispatchCommand` objects. It has no authorization to submit to OREE, no settlement reconciliation, and no inverter actuation. An internal evidence-screen label changes only the recorded research status; it does not change operational mode.

Future execution would require a separate bounded context: verified publication and submission timing, legal and contractual authority, credentials and signing, idempotent order handling, receipt capture, position and settlement reconciliation, telemetry validation, failsafe control, monitoring, and incident response. None of these requirements can be inferred from lower regret in a backtest.

7 Discussion and Limitations

7.1 What the result demonstrates

The main conclusion is architectural rather than brand-specific. In this retrospective packet, a constrained schedule-selection layer has lower regret than a raw forecast schedule and a conservative heuristic under a common LP/oracle. V2+ combines a deterministic candidate library, prior-only

family evidence, and V2 fallback. Similar ordering appears in mean and median summaries and four adjacent windows.

The study also demonstrates disciplined mixed evidence. TFT, Poland features, the corrected RF suite, the time-separated Decision Transformer suite, and the differentiable suite do not replace the fallback. The historical random forest remains an in-packet diagnostic because its training candidates are exact timestamp-shifted copies of evaluation candidates. The genuine temporal DT suite either abstains or harms. The differentiable suite supplies a narrower positive result: transformer correction outperforms a matched MLP in 28/36 comparisons and often improves the raw schedule, while remaining worse than V2+ in all 72 runs. Reporting both sides prevents an architecture signal from becoming a false controller claim.

For practitioners, the regret decomposition suggests that modeling effort should be targeted. If no useful candidate exists, selector complexity will not help. If a useful candidate exists but is missed, prior-context features and selective prediction are plausible targets. If strict is already near oracle, abstention is appropriate. This decomposition is more actionable than a single forecast score.

7.2 Statistical limitations

The main slice contains 90 profile-date rows but only 18 distinct dates. Five configured profiles share one market price process, and the dates are temporally ordered. The four windows are adjacent sensitivity replays within a limited 2026 period. The paired date-block summaries inserted in Section 5 treat each date as a cluster containing all five profiles; they are more appropriate than row-wise IID intervals but still cannot establish behavior outside the period.

The canonical random-forest aggregate uses three nominal seeds, but the selected path and mean regret are identical across seeds, producing zero aggregate standard deviation. The legacy numerical p-value has no inferential interpretation and is not evidence of stochastic replication; the corrected aggregate stores a null p-value. The paper relies on packet-level lineage and explicit caveats rather than statistical significance.

The corrective temporal suites use three seeds only as model-stability checks and adjacent windows as protocol sensitivity. Their runs are not independent market replications. The differentiable suite similarly has 90 profile rows per run but only 18 market dates, and model rows reuse the same declared windows. Counts such as 28/36 and 15/18 describe protocol stability; they are not binomial trials from independent markets.

The RF outcome is sparse and clustered: four profile-row switches on one delivery date drive the entire difference. Three are wins and one is a tie; 0 of 4 exceeds the configured 150 UAH tail-loss threshold. This is zero observed modeled tail losses in one correlated market episode, not a zero-risk estimate. Threshold sensitivity was performed on the same exact-mirror packet. A later period could remove or reverse the opportunity.

7.3 Data and market limitations

The primary performance evidence is DAM. IDM support is a read-model capability, and the paper does not

claim IDM bidding performance. The market context is Ukrainian; transferring the numerical result to another bidding zone would require local price, publication, currency, rules, and battery-context validation. Neighboring-market features require licensing, timezone/DST, publication-time, and domain-shift checks before they can become official training covariates.

The panel uses five configured BESS profiles rather than measured commercial sites. It varies capacity, power, efficiency, and SOC settings but does not prove fleet-scale external validity. Measured telemetry, sensor quality, outages, maintenance states, and operator constraints would add uncertainty absent from this replay.

Source-readiness evidence is incomplete for the V13 research gate. A first-seen observation cannot be assumed to be an official publication timestamp, and a source preview is not a submission receipt. These distinctions limit the claims but prevent a more serious provenance error.

7.4 Physical-model limitations

The LP uses a power-energy battery model with efficiency, SOC, power constraints, and a throughput degradation proxy. Initial SOC resets for each profile-date and terminal SOC is unconstrained, so reported decision value is conditional one-day evaluator value rather than a repeatable chained multi-day profit estimate. The formulation has no explicit charge/discharge complementarity constraint, and the compact bundle does not preserve enough hourly solver output to audit whether numerically simultaneous flows occur. It also does not capture temperature-dependent efficiency, cell imbalance, nonlinear voltage behavior, calendar ageing, detailed state of health, or manufacturer-specific control limits. Literature on electro-thermal and degradation-aware scheduling shows that these factors can change value [14–16].

The oracle is also conditional on this simplified model. It is an oracle for the configured LP and realized price vector, not a universal upper bound on realizable asset profit. A richer digital twin could change both selected and oracle schedules. The current strength is comparative consistency: every method faces the same abstraction.

7.5 Method limitations

V2+ searches a finite, hand-designed candidate library. It can miss feasible schedules outside the included families. Its prior-only selector can also miss a better available family, as the oracle-gap audit shows. A full differentiable decision-focused system might learn forecast parameters that better support optimization [6, 7], while a predict-then-bid formulation could model strategic market interaction [26]. Those are future systems, not alternate labels for V2+.

The HF value-aligned path is finite and cannot claim LP optimality. Its frozen 158.71 UAH diagnostic is threshold-selected on the same mirrored packet used to build its training representation; it is not independent of the co-primary V2+ packet. The separate 32-day read-model audit has no realized-regret outcome. The paper retains both as clearly separated engineering diagnostics only.

Decision Transformer remains exploratory. The old 460.30 UAH value comes from mirrored training rows. The

corrective 36-run suite uses genuine return conditioning and temporal separation but still produces no gain over V2+. This is evidence against the tested objectives and dataset, not a general DT conclusion. The differentiable price-transformer result suggests that hourly sequence structure is useful, but the small number of distinct price paths, relaxed/strict optimization mismatch, and finite V2+ schedule library remain important confounders.

7.6 Operational and ethical limitations

No human-subject data are used, but operator-facing energy recommendations can still create harm if presented as authorized commands. The interface must preserve source labels, uncertainty, fallback reasons, and the no-execution boundary. Human oversight is not a decorative confirmation button; the system has been designed so that there is no executable market or hardware action to confirm.

Economic values are backtest evidence, not promises of profit. They exclude parts of a production revenue stack and operational cost structure, including settlement effects, imbalance exposure, taxes, fees, downtime, and detailed ageing. Users should not make investment decisions from the reported UAH values alone.

7.7 Future work

The nearest research step remains prospective validation of the frozen v1.2 transformer challenger under the unchanged V2+ fallback and oracle scorer. The next protocol should add new market dates rather than tune the stored windows, preserve the forecast-loss transformer as declared, and require stable improvement over both raw and V2+ after costs. Terminal-SOC equality or value, chained SOC, and explicit non-simultaneous charge/discharge sensitivity should be aligned between relaxed training and strict evaluation before interpreting daily value as repeatable arbitrage value.

A second direction is candidate-library expansion. Teacher schedules from a richer LP or MIP could provide diverse but feasible actions. Distillation could predict schedule vectors or family scores, followed by deterministic projection and repair. Comparison against the optimizer must remain on frozen windows.

A third direction is stronger uncertainty and source context. TFT quantiles and governed neighboring-market covariates could be admitted only after point-in-time coverage and robustness gates. Better source-publication evidence would support more precise readiness claims, while market-submission receipts would remain a separate requirement.

Finally, user-specific operational constraints should enter the optimizer or repair layer explicitly: critical-load reserves, protected hours, minimum backup SOC, maintenance windows, tariff rules, and asset preferences. UI labels are not a substitute for formal constraints.

8 Conclusion

This retrospective study evaluated BESS arbitrage recommendations as decisions rather than forecasts. A common

LP/oracle contour converted candidate information into feasible schedules and measured regret against realized-price optimal schedules. The main slice contains 18 dates crossed with five configured BESS profiles sharing one DAM price process. Raw and horizon-calibrated NBEATSx are co-primary sensitivity sources: V2+ mean regret is 193.36 UAH for the raw source and 174.77 UAH for the calibrated source, versus 310.58 UAH for strict and 225.44/206.37 UAH for V2. V2+ has lower mean regret than both comparators in all four adjacent rolling windows for both sources. These are descriptive retrospective estimates, not confirmatory holdout results.

A post-defense lineage audit materially narrows the learned-challenger claims. The artifact historically named `dt_v2_plus` is a random forest, not a Decision Transformer, and its 168.16 UAH exact-mirror result is an in-packet diagnostic. Corrective time-separated suites find no RF or DT promotion evidence. A genuine 36-run return-conditioned DT suite ties V2+ in 33 runs and is harmful in three. A separate preregistered differentiable suite executes end-to-end profile-aware forecast-to-storage gradients, but zero of 72 runs beats V2+. It nevertheless provides a reproducible positive architecture signal: transformer correction has lower strict regret than a matched MLP in 28/36 comparisons, and the forecast-loss transformer improves on the raw schedule in 15/18 runs. The original thesis wording is therefore not recovered as a controller result, but a narrower transformer finding is supported without relabeling or result selection.

The contribution is a claim-safe architecture and evidence-governance pattern, not a new forecasting, optimization, random-forest, or sequence-model method. Official rows are used for published targets; forecasts supply scenarios for unpublished horizons; schedules share one evaluator; challengers can abstain; and the operator surface remains a read model. The repository exposes code and a frozen evidence subset [8].

9 Statements

9.1 Data Availability Statement

The corrected code, tracked configurations, paper sources, and evidence bundle are archived under the immutable repository tag cited in [8]. A compact bundle under `anc/evidence/frozen/` contains 720 paired source/role/profile/date rows, aggregate JSON, date-cluster summaries, and capacity-normalized profile summaries. `anc/evidence/reconstruct_headline.py` recomputes the co-primary tables, percentile moving-block intervals, and block-length sensitivity. The lineage bundle adds historical RF rows, compact HF summaries, RF and DT temporal suites, 72-run differentiable-suite summaries and 6,480 paired profile rows, and the OREE public-source audit. Stock-Python tests verify the headline reconstruction, model lineage, v1.2 run counts, temporal independence, and the still-open V13 gate; SHA-256 hashes are listed. Full raw-to-result rematerialization additionally requires the repository acquisition pipeline. The public market source is JSC Market Operator [3], and weather documentation is provided by Open-Meteo [4].

9.2 Code and Evidence Availability

The repository landing page provides project context. The immutable `v2026-arxiv-v1.1` tag preserves the correction release. The `v2026-arxiv-v1.2` tag adds preregistration, time-separated DT evidence, differentiable-suite code and paired results, and the OREE public-source audit without changing v1.1 or the defended thesis.

9.3 Ethics Declaration

This study did not involve human participants, personal data, animals, or clinical intervention. It used market, weather, configured tenant, and simulated/read-model evidence. The main ethical and safety concern is misrepresentation of a recommendation preview as an authorized trading or hardware-control system. The implementation prevents this by retaining human review, explicit source status, guarded abstention, and `market_execution_enabled=false`.

9.4 Author Contributions (CRediT)

Illya Fefelov: Conceptualization, Methodology, Software, Validation, Formal Analysis, Investigation, Data Curation, Visualization, Writing – Original Draft, Writing – Review & Editing, and Project Administration.

9.5 Conflict of Interest Statement

The author declares no known financial or personal conflict of interest that could have influenced the work reported in this paper.

9.6 Funding Acknowledgment

This research received no external funding.

9.7 AI Disclosure

AI Disclosure: This paper was prepared with AI assistance for literature-search planning, repository and model-lineage inspection, code-assisted aggregate checks, structure planning, draft revision, citation verification, and TeX/package preparation. The author inspected the cited source text, reran the frozen reconstruction and lineage checks, reviewed every claim against repository artifacts, and made all scientific and submission decisions. Illya Fefelov remains solely responsible for the accuracy, integrity, analyses, interpretations, and final text.

9.8 Thesis Provenance

This article is a revised and corrected derivative of the Master’s thesis *Development of an Evidence-Backed Hourly Recommendation System for BESS Energy Arbitrage in Ukraine’s DAM/IDM Markets*, defended in June 2026 at Neoversity [31]. It removes degree-administration material and focuses on the research question, verified results, limitations, and reproducibility evidence. A dated public erratum corrects the thesis’s attribution of the historical `dt_v2_plus` random-forest artifact to Decision Transformer.

9.9 Classification Note

The intended primary arXiv category remains `eess.SY` because the paper centers on a constrained energy-system decision pipeline and operator-facing safety boundary. Version 1.2 adds genuinely time-separated ML evidence but claims no new ML method; a `cs.LG` cross-list is optional rather than required. Category assignment remains subject to arXiv moderation.

References

- [1] J. Lago, G. Marcjasz, B. D. Schutter, and R. Weron, “Forecasting day-ahead electricity prices: A review of state-of-the-art algorithms, best practices and an open-access benchmark,” *Applied Energy*, vol. 293, p. 116983, 2021.
- [2] International Energy Agency, “Ukraine’s energy security and the coming winter,” 2024, accessed 2026-07-12. [Online]. Available: <https://www.iea.org/reports/ukraines-energy-security-and-the-coming-winter>
- [3] JSC Market Operator, “Day-ahead market data view,” 2026, accessed 2026-07-12. [Online]. Available: https://www.oree.com.ua/index.php/pricectr/data_view
- [4] Open-Meteo, “Historical weather api documentation,” 2026, accessed 2026-07-12. [Online]. Available: <https://open-meteo.com/en/docs/historical-weather-api>
- [5] A. N. Elmachoub and P. Grigas, “Smart “predict, then optimize”,” *Management Science*, vol. 68, no. 1, pp. 9–26, 2022.
- [6] J. Mandi, J. Kotary, S. Berden, M. Mulamba, V. Bucarey, T. Guns, and F. Fioretto, “Decision-focused learning: Foundations, state of the art, benchmark and future opportunities,” *Journal of Artificial Intelligence Research*, vol. 80, pp. 1623–1701, 2024.
- [7] L. Sang, Y. Xu, H. Long, Q. Hu, and H. Sun, “Electricity price prediction for energy storage system arbitrage: A decision-focused approach,” *IEEE Transactions on Smart Grid*, vol. 13, no. 4, pp. 2822–2832, 2022.
- [8] I. Fefelov, “Smart energy arbitrage 2026: Code and evidence artifacts,” 2026, immutable arXiv v1.2 research source and evidence tag; accessed 2026-07-13. [Online]. Available: <https://github.com/ilyafefelov/Diploma/tree/v2026-arxiv-v1.2>
- [9] K. G. Olivares, C. Challu, G. Marcjasz, R. Weron, and A. Dubrawski, “Neural basis expansion analysis with exogenous variables: Forecasting electricity prices with NBEATSx,” *International Journal of Forecasting*, vol. 39, no. 2, pp. 884–900, 2023.
- [10] B. Lim, S. Ö. Arık, N. Loeff, and T. Pfister, “Temporal fusion transformers for interpretable multi-horizon time series forecasting,” *International Journal of Forecasting*, vol. 37, no. 4, pp. 1748–1764, 2021.
- [11] H. Jiang, S. Pan, Y. Dong, and J. Wang, “Probabilistic electricity price forecasting based on penalized temporal fusion transformer,” *Journal of Forecasting*, vol. 43, no. 5, pp. 1465–1491, 2024.
- [12] Y.-G. Park, J.-B. Park, N. Kim, and K. Lee, “Linear formulation for short-term operational scheduling of energy storage systems in power grids,” *Energies*, vol. 10, no. 2, p. 207, 2017.
- [13] A. V. Vukhodtsev, D. Jang, Q. Wang, W. Rosehart, and H. Zareipour, “A review of modelling approaches to characterize lithium-ion battery energy storage systems in techno-economic analyses of power systems,” *Renewable and Sustainable Energy Reviews*, vol. 166, p. 112584, 2022.
- [14] H. C. Hesse, V. Kumtepelı, M. Schimpe, J. Reniers, D. A. Howey, A. Tripathi, Y. Wang, and A. Jossen, “Ageing and efficiency aware battery dispatch for arbitrage markets using mixed integer linear programming,” *Energies*, vol. 12, no. 6, p. 999, 2019.
- [15] A. Maheshwari, N. G. Paterakis, M. Santarelli, and M. Gibescu, “Optimizing the operation of energy storage using a non-linear lithium-ion battery degradation model,” *Applied Energy*, vol. 261, p. 114360, 2020.
- [16] V. Kumtepelı, H. C. Hesse, M. Schimpe, A. Tripathi, Y. Wang, and A. Jossen, “Energy arbitrage optimization with battery storage: 3d-MILP for electro-thermal performance and semi-empirical aging models,” *IEEE Access*, vol. 8, pp. 204 325–204 341, 2020.
- [17] A. Grimaldi, F. D. Minuto, J. Brouwer, and A. Lanzini, “Profitability of energy arbitrage net profit for grid-scale battery energy storage considering dynamic efficiency and degradation using a linear, mixed-integer linear, and mixed-integer non-linear optimization approach,” *Journal of Energy Storage*, vol. 95, p. 112380, 2024.
- [18] C. Augustine and N. Blair, “Storage futures study: Storage technology modeling input data report,” National Renewable Energy Laboratory, Tech. Rep. NREL/TP-5700-78694, 2021.
- [19] Y. Hu, M. Armada, and M. J. Sánchez, “Potential utilization of battery energy storage systems (BESS) in the major european electricity markets,” *Applied Energy*, vol. 322, p. 119512, 2022.
- [20] J. Li, C. Wang, Y. Zhang, and H. Wang, “Temporal-aware deep reinforcement learning for energy storage bidding in energy and contingency reserve markets,” *IEEE Transactions on Energy Markets, Policy and Regulation*, vol. 2, no. 3, pp. 392–406, 2024.
- [21] S. S. K. Madahi, B. Claessens, and C. Develder, “Distributional reinforcement learning-based energy arbitrage strategies in imbalance settlement mechanism,” *Journal of Energy Storage*, vol. 104, p. 114377, 2024. [Online]. Available: <https://arxiv.org/abs/2401.00015>
- [22] A. Agrawal, B. Amos, S. Barratt, S. Boyd, S. Diamond, and J. Z. Kolter, “Differentiable convex optimization layers,” in *Advances in Neural Information Processing Systems*, vol. 32, 2019. [Online]. Available: <https://arxiv.org/abs/1910.12430>

- [23] B. Amos and J. Z. Kolter, “OptNet: Differentiable optimization as a layer in neural networks,” in *Proceedings of the 34th International Conference on Machine Learning*, ser. Proceedings of Machine Learning Research, vol. 70, 2017, pp. 136–145. [Online]. Available: <https://proceedings.mlr.press/v70/amos17a.html>
- [24] E. Peršak and M. F. Anjos, “Decision-focused forecasting: A differentiable multistage optimisation architecture,” 2024. [Online]. Available: <https://arxiv.org/abs/2405.14719>
- [25] M. Yi, S. Alghumayjan, and B. Xu, “Perturbed decision-focused learning for modeling strategic energy storage,” *IEEE Transactions on Smart Grid*, vol. 16, no. 3, pp. 2574–2586, 2025. [Online]. Available: <https://arxiv.org/abs/2406.17085>
- [26] M. Yi, Y. Wu, S. Alghumayjan, J. Anderson, and B. Xu, “A decision-focused predict-then-bid framework for strategic energy storage,” 2025. [Online]. Available: <https://arxiv.org/abs/2505.01551>
- [27] L. Chen, K. Lu, A. Rajeswaran, K. Lee, A. Grover, M. Laskin, P. Abbeel, A. Srinivas, and I. Mordatch, “Decision transformer: Reinforcement learning via sequence modeling,” in *Advances in Neural Information Processing Systems*, vol. 34, 2021, pp. 15 084–15 097. [Online]. Available: <https://arxiv.org/abs/2106.01345>
- [28] P. Bhargava, R. Chitnis, A. Geramifard, S. Sodhani, and A. Zhang, “When should we prefer decision transformers for offline reinforcement learning?” in *The Twelfth International Conference on Learning Representations*, 2024. [Online]. Available: <https://openreview.net/forum?id=vpV7fOFQy4>
- [29] L. Breiman, “Random forests,” *Machine Learning*, vol. 45, pp. 5–32, 2001.
- [30] L. J. Tashman, “Out-of-sample tests of forecasting accuracy: An analysis and review,” *International Journal of Forecasting*, vol. 16, no. 4, pp. 437–450, 2000.
- [31] I. Fefelov, “Development of an evidence-backed hourly recommendation system for bess energy arbitrage in ukraine’s dam/idm markets,” Master’s thesis, Neoversity, Jun. 2026, defended Master’s thesis; original title in Ukrainian; public thesis; post-defense erratum in the repository.