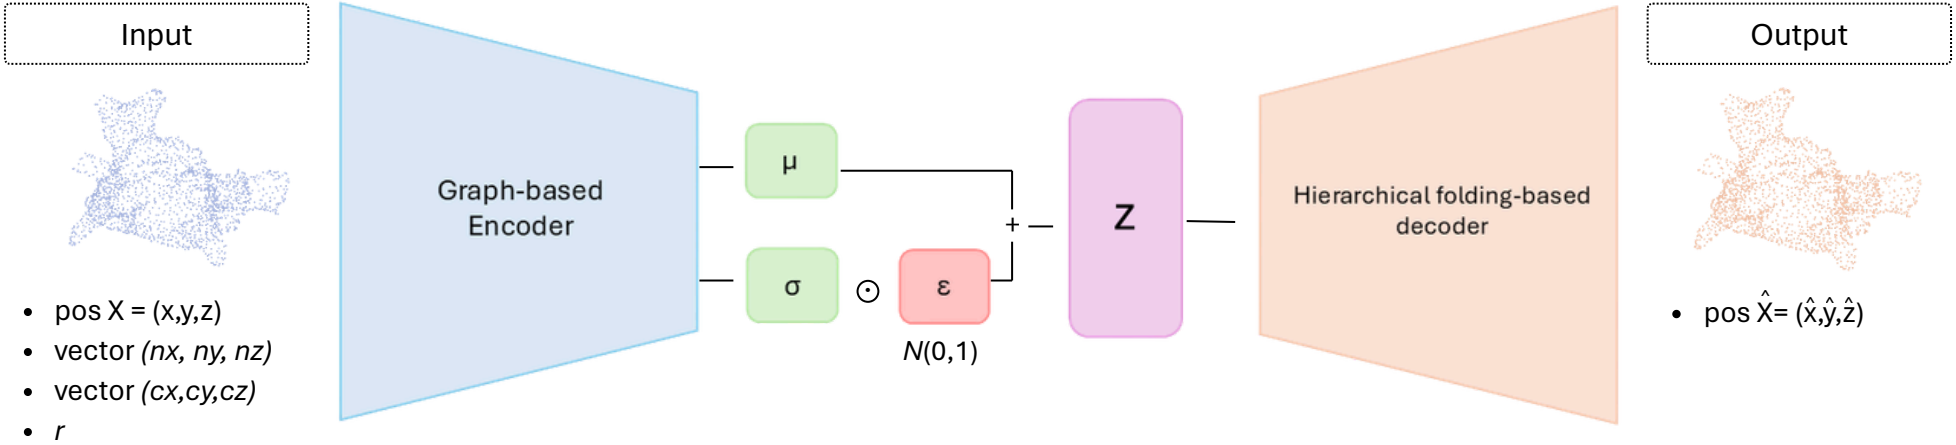
Input
pos X = (x,y,z)
vector (nx, ny, nz)
vector (cx,cy,cz)
r
Graph-based Encoder
μ
σ
ε
N(0,1)
Z
Hierarchical folding-based decoder
Output
pos X̂= (x̂,ŷ,ẑ)