Training-data fraction sensitivity
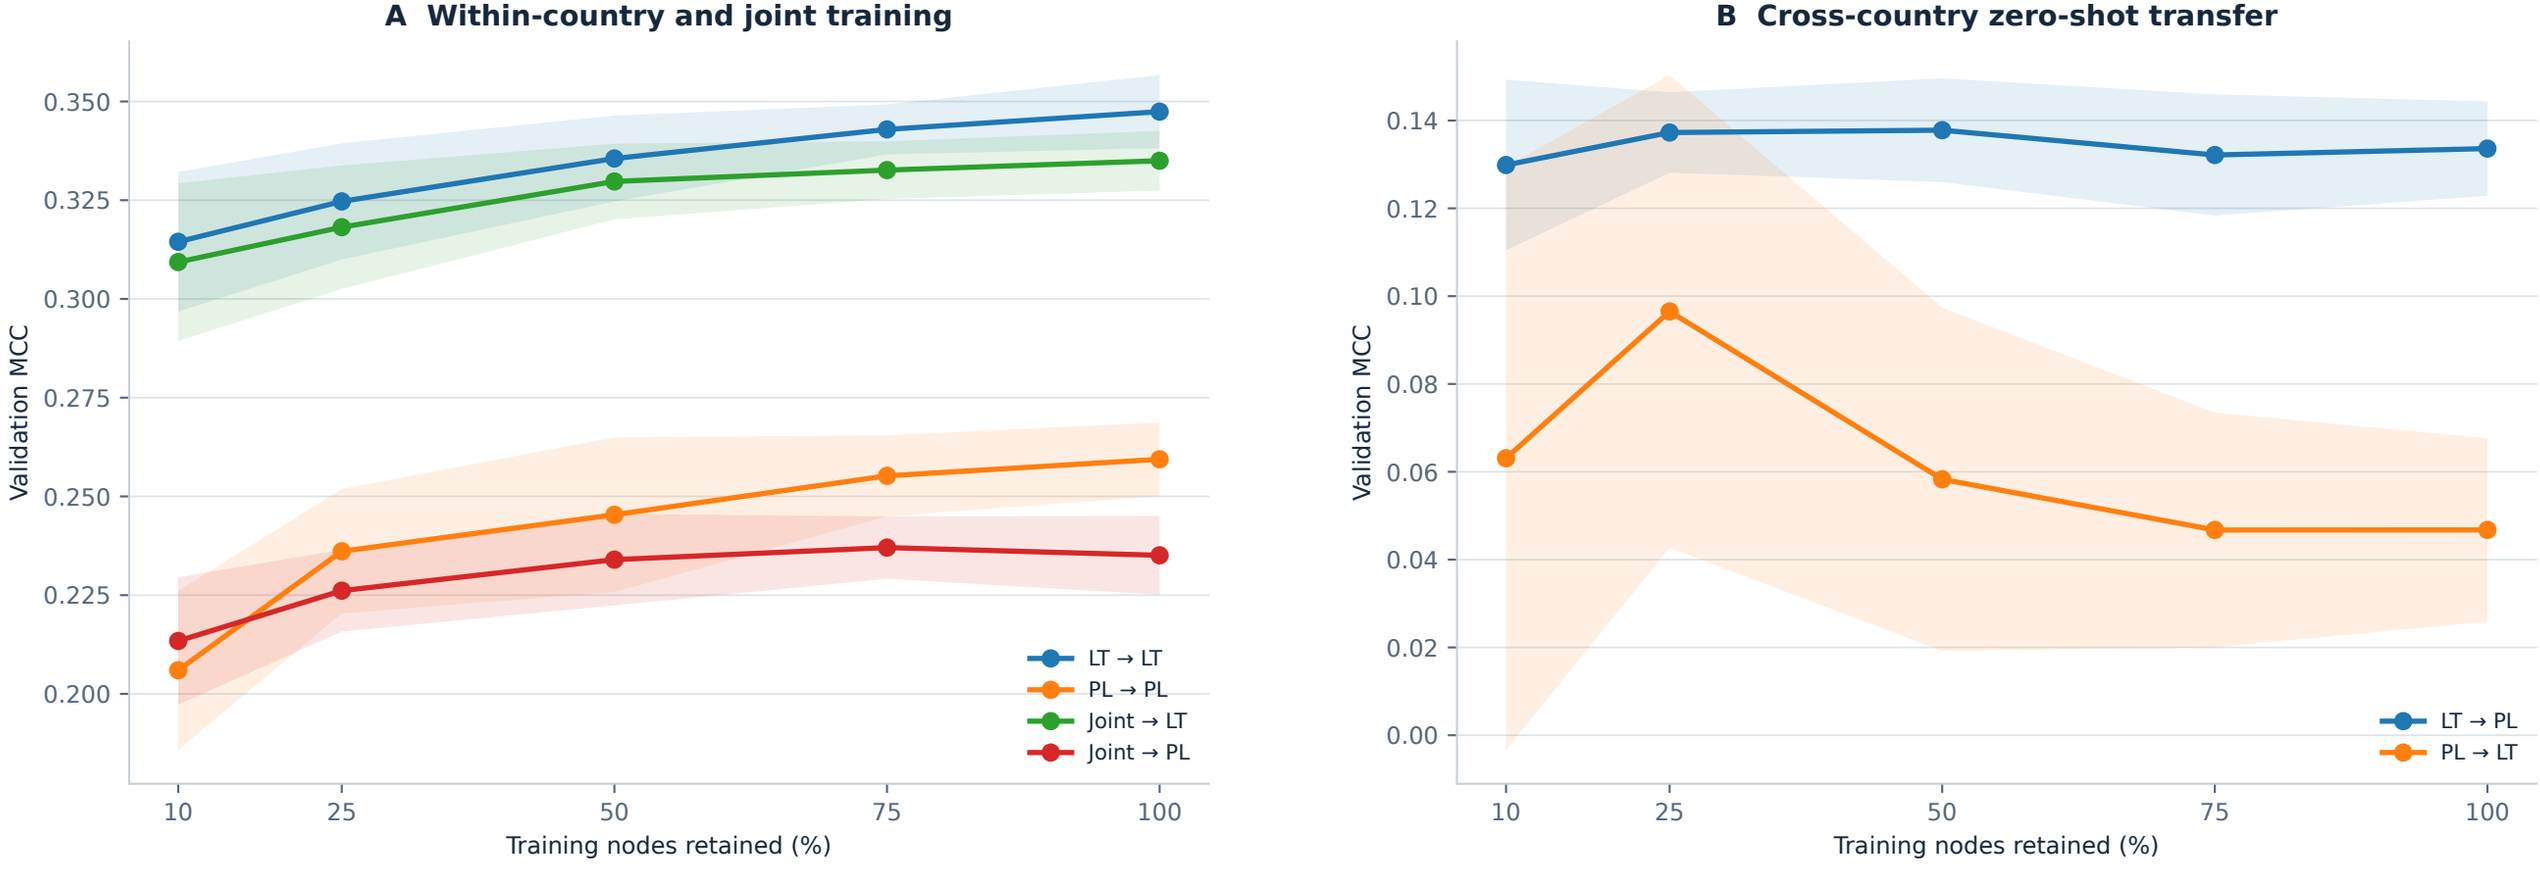
Node-level subsampling alters both sample count and graph density; ten matched seeds.