Next Update


00-00-01-11


- SequenceType
- State
- File kind – tgh


AACC - newline
TAAA - at-char

1. Encrypt and decrypt user data in every function call next update.
2. Make Google site for DNAGenre where it can be downloaded as an app.
3. Make some occasional uploads of Decode code that can be used to complete DNAGenre related tasks on google site.

Update 1

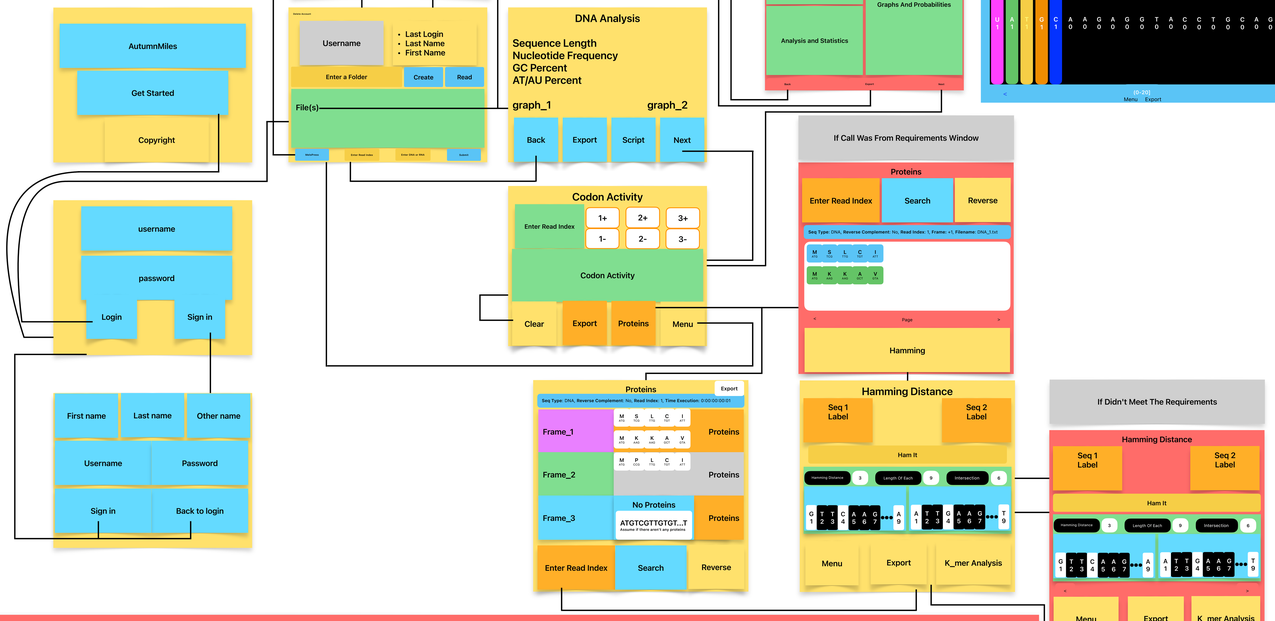





Update 2

Open DNA file from user normally
Read .ggh code into buffer for execution
Set variables
Execute Decode commands in the .ggh
Prepare information on screen

write to results list, just do - printr 1
Note: 0 is default in the index where no "printr"ed


Python
1. Get nucleotides into a list
2. Get user code
3. Do commands from Decode on the list
4. Return a list with those results
5. Tkinter gets the returned list
6. Show results

We need to make a, b defaults for the Decode while other letters can be used freely not a, b

a - end index - CANNOT be updated
b - start index - CANNOT be updated
c - counter - CAN be updated or index

Nucleotide list
to get nucleotide at index c; do -

Note:
1. Nucleotide CANNOT be changed but accessed
2. to get index, use c
3. printr to write to output list at index c
4. User can set a nucleotide on or off using 1 or 0 via printr



Update 3

1. user can export data into a JSON file formatted to be read by CSV, excel, google sheets, numbers, etc
2. save user code in script
3. user info, usage info, user code encrypt all these files
4. fix Decode code weirdness in the code
5. compress huge DNA files
6. decompress
7. resolve issue of using dictionaries wrongly
8. update README

In Logical

Check if all read indexes in file adhere to the law of not going above 50 nucleotides in each read index, read indexes are not more than 100

Ultra Display > 100 (graphs, tables, pages, threads, progress bars)
Logical Display < 100 (scrollable frames, frames)

Deleting A User - Delete Account

Noticed Problems

1. What if a user enters long credentials like username!
2. What if It is the year 2000010100, How do we manage that!
3. What if the user analyzes a 50-read-index file, use scrollable frame!
4. What if user wants to view more than 5 codon analysis graphs, call clear button!

