Update 4

AACC - newline
TAAA - at-char

00-00-01-11

- SequenceType
- State
- File kind - .fgh
- Is file length indivisible by 4
- How many bytes are allowed at the end of a file with file length that is indivisible by 4
- Is it a head file - file that is the first in compressed chunks from a big file

1. Research more on how to improve MeloPress to compress even improper length files.
2. Update Decode to use labels as branch marks and code indexes.
3. Intensive testing.
4. Handle improper read index(es) length before last read index.

Update 5

1. Make Google site for DNAGenre where it can be downloaded as an app.
2. Make some occasional uploads of Decode code that can be used to complete DNAGenre related tasks on google site.
3. Improve security since file header and file magic can be manipulated I can also depend on other variables.
4. Check the **clean_data** function.
5. There is a way to create more than 1000000 variables in Decode which when run could crash the system.

In Logical

Check if all read indexes in file adhere to the law of not going above 50 nucleotides in each read index, read indexes are not more than 100


Ultra Display > 100 (graphs, tables, pages, threads, progress bars)
Logical Display < 100 (scrollable frames, frames)


Deleting A User - Delete Account


Noticed Problems


1. **What if a user enters long credentials like username!**
2. **What if It is the year 2000010100, How do we manage that!**
3. **What if the user analyzes a 50-read-index file, use scrollable frame!**
4. **What if user wants to view more than 5 codon analysis graphs, call clear button!**


Update 1

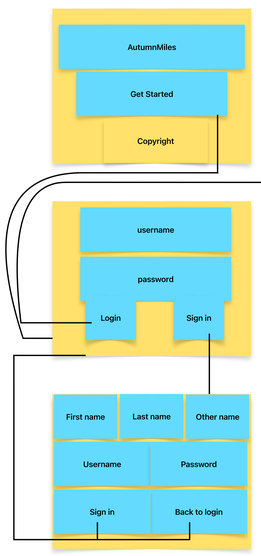
























Update 2

Open DNA file from user normally
Read .ggh code into buffer for execution
Set variables
Execute Decode commands in the .ggh
Prepare information on screen

write to results list, just do - printr 1
Note: 0 is default in the index where no "printr"ed

Python
1. Get nucleotides into a list
2. Get user code
3. Do commands from Decode on the list
4. Return a list with those results
5. Tkinter gets the returned list
6. Show results

We need to make a, b defaults for the Decode while other letters can be used freely not a, b

a - end index - CANNOT be updated
b - start index - CANNOT be updated
c - counter - CAN be updated or index

Nucleotide list
to get nucleotide at index c; do -

Note:
1. Nucleotide CANNOT be changed but accessed
2. to get index, use c
3. **printr** to write to output list at index c
4. User can set a nucleotide on or off using **1** or **0** via **printr**

Update 3

1. user can export data into a JSON file formatted to be read by CSV, excel, google sheets, numbers, etc
2. save user code in script
3. user info, usage info, user code encrypt all these files
4. fix Decode code weirdness in the code
5. compress huge DNA files
6. decompress
7. resolve issue of using dictionaries wrongly
8. update README

