In Logical

Check if all read indexes in file adhere to the law of not going above 50 nucleotides in each read index , read indexes are not more than 100 ✓

Ultra Display > 100 (graphs, tables, pages, threads, progress bars) ✓
Logical Display < 100 (scrollable frames, frames) ✓

Show process time for some areas ✓
Deleting A User - Delete Account ✓

Noticed Problems

1. **What if a user enters long credentials like username!** ✓
2. **What if It is the year 2000010100, How do we manage that!** ✓
3. **What if the user analyzes a 50-read-index file, use scrollable frame!** ✓
4. **What if user wants to view more than 5 codon analysis graphs, call clear button!** ✓

Notes:

Check for try and except when executing code like if use over uses heap, Python errors
Could access the variable in the other file by calling the file.the variable and access it
Check for typos in comments
Update READme with usage, analysis, tips and other detailed information
Check for bugs in destroying widgets and in flow of code
Manage memory with limits like if Python reaches its limit use try blocks to exit
When user signs in and getting file to work on, everything is in memory onward

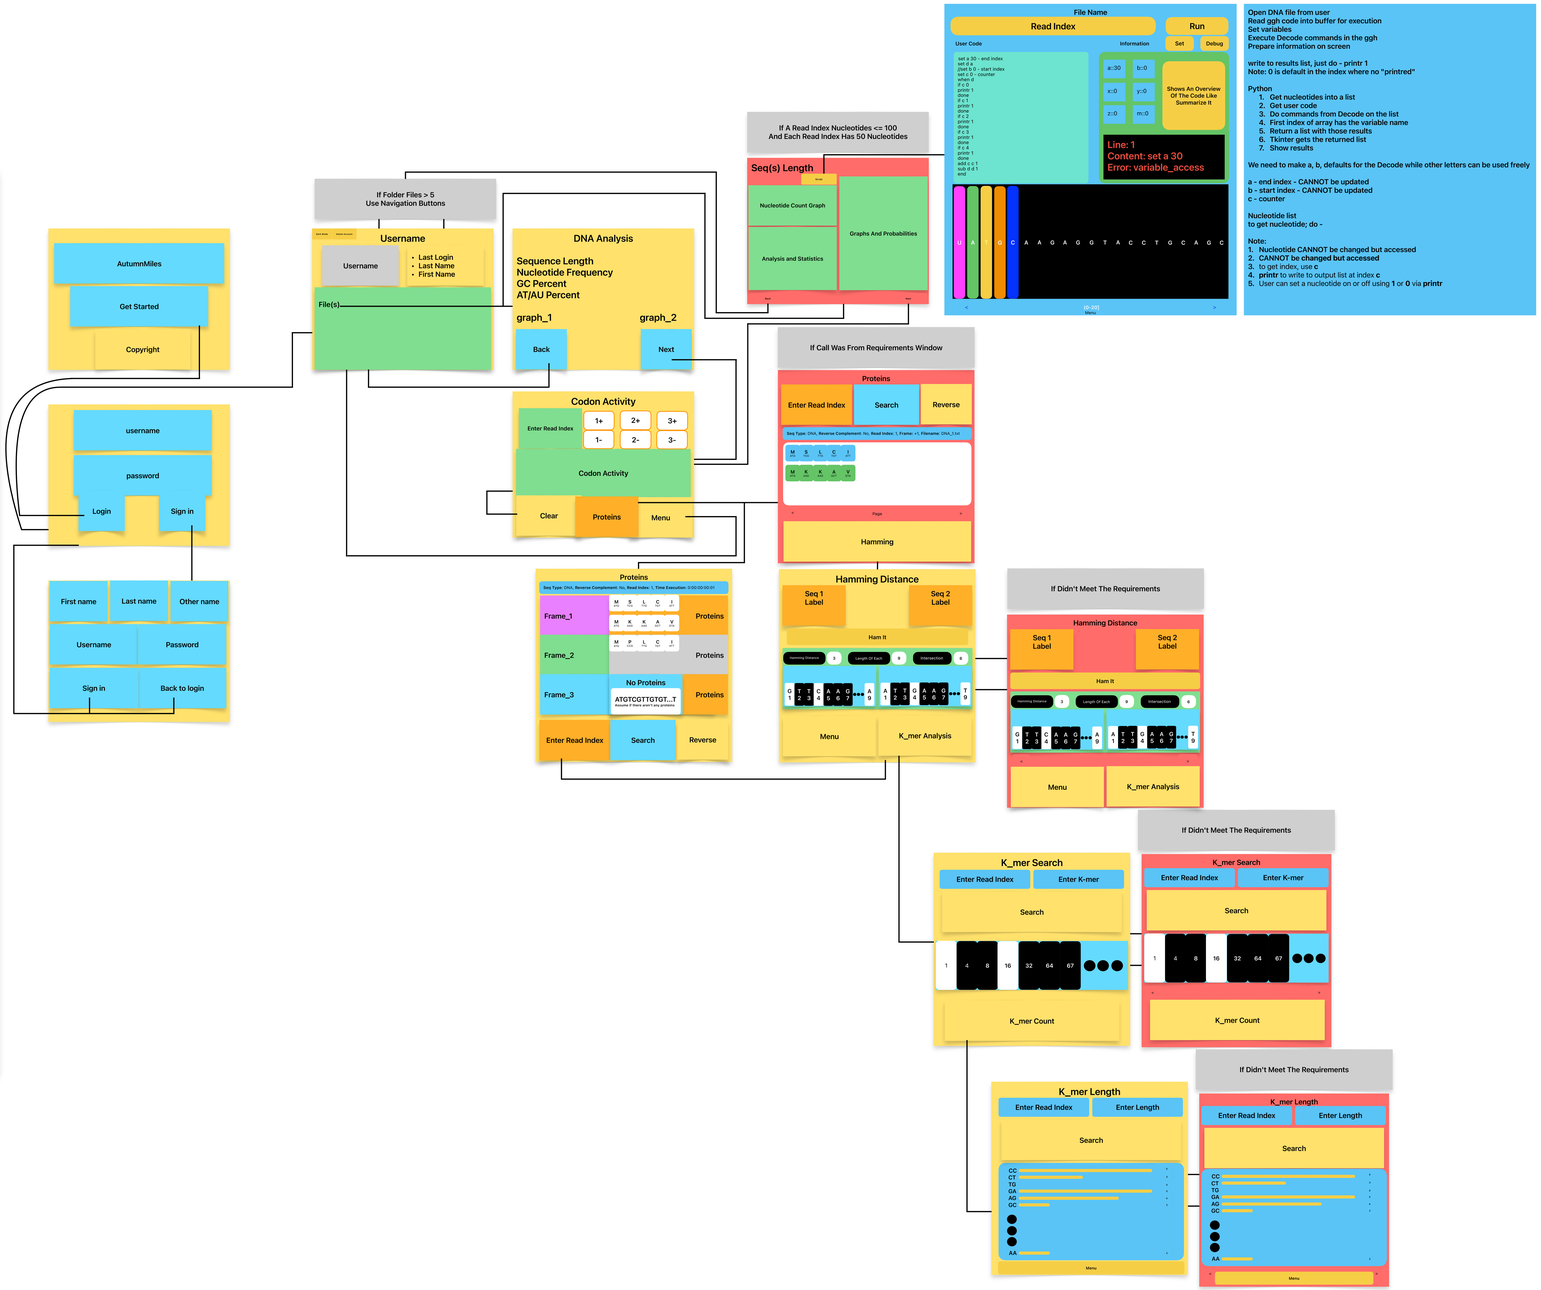

Open DNA file from user
Read ggh code into buffer for execution
Set variables
Execute Decode commands in the ggh
Prepare information on screen

write to results list, just do - printr 1
Note: 0 is default in the index where no "printred"

Python
1. Get nucleotides into a list
2. Get user code
3. Do commands from Decode on the list
4. First index of array has the variable name
5. Return a list with those results
6. Tkinter gets the returned list
7. Show results

We need to make a, b, defaults for the Decode while other letters can be used freely

a - end index - CANNOT be updated
b - start index - CANNOT be updated
c - counter

Nucleotide list
to get nucleotide; do -

Note:
1. Nucleotide CANNOT be changed but accessed
2. CANNOT be changed but accessed
3. to get index, use **c**
4. **printr** to write to output list at index **c**
5. User can set a nucleotide on or off using **1** or **0** via **printr**