# ATE accuracy across recorded contexts

200 contexts; 20 independent mechanisms; observed outcomes m = 50.

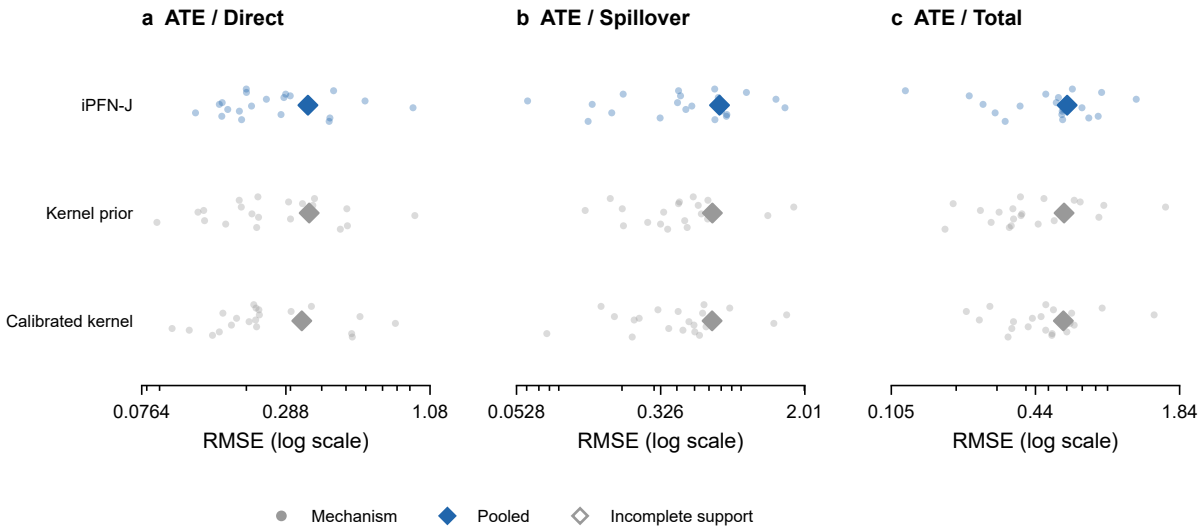


RMSE pools squared errors across recorded repeats before taking the square root.

Small points show mechanism summaries, not confidence limits. Counts and missing support are exported to CSV.