HTML5

What is HTML?

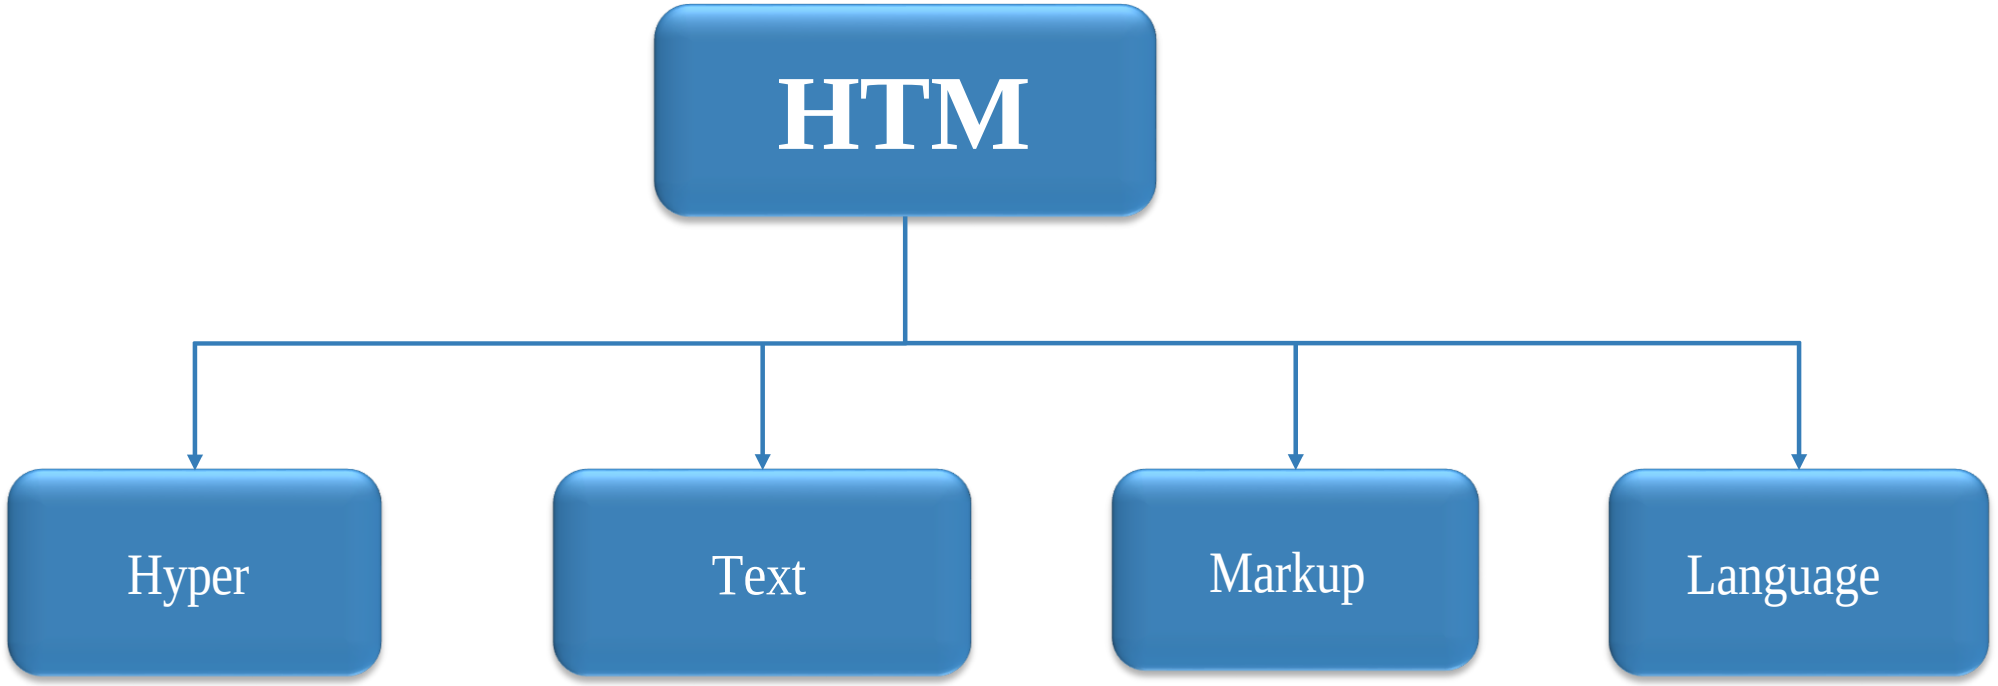

Reference/link

Data/information

Predefined/
Marked

Communication

History of HTML

TimBerners Lee

inetz TECHNOLOGIES

What is tag?

Tag is a keyword, which is enclosed with angular bracket ex :<html>,<head>,<body>,<h1>,<p>etc.

Types of Tags

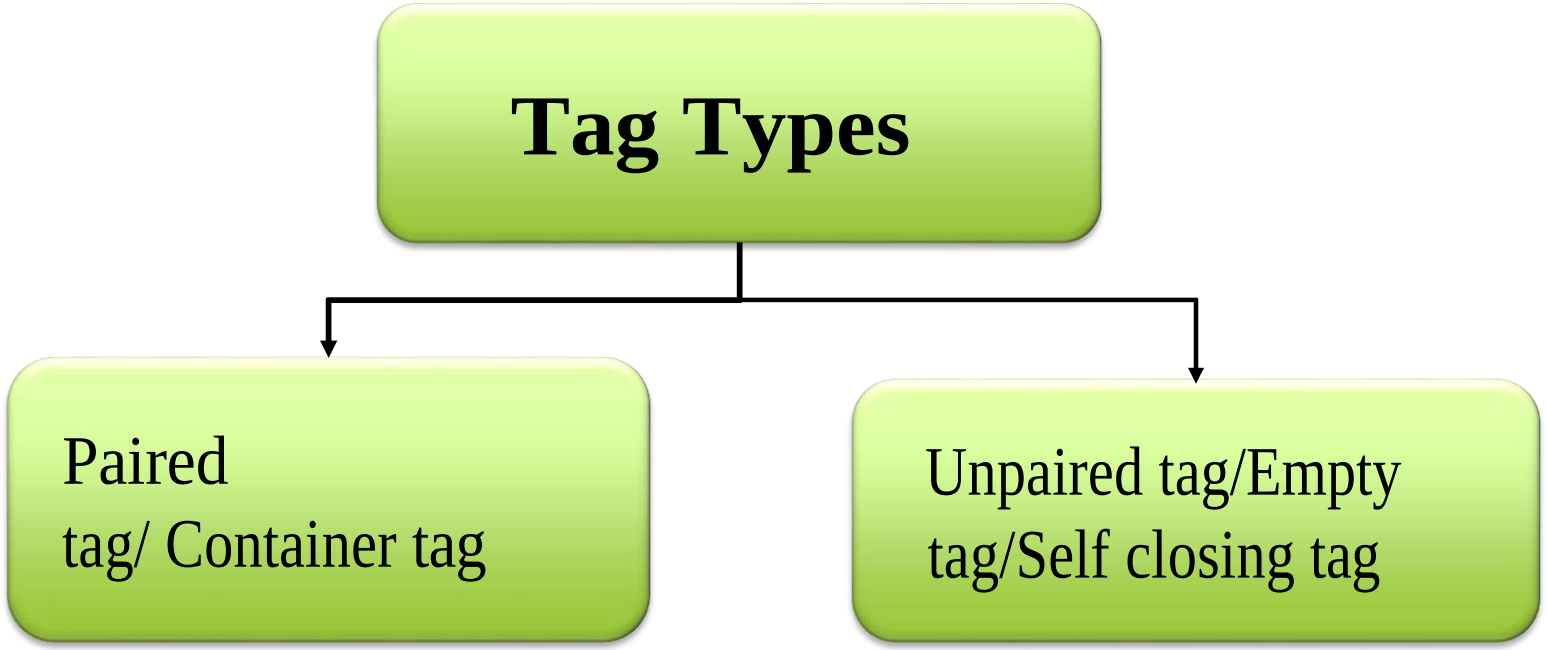

It Contains both start tag and end tag
Ex :<html>.....</html>

It contains only start tag
Ex :
,<img>etc.

HTML Elements

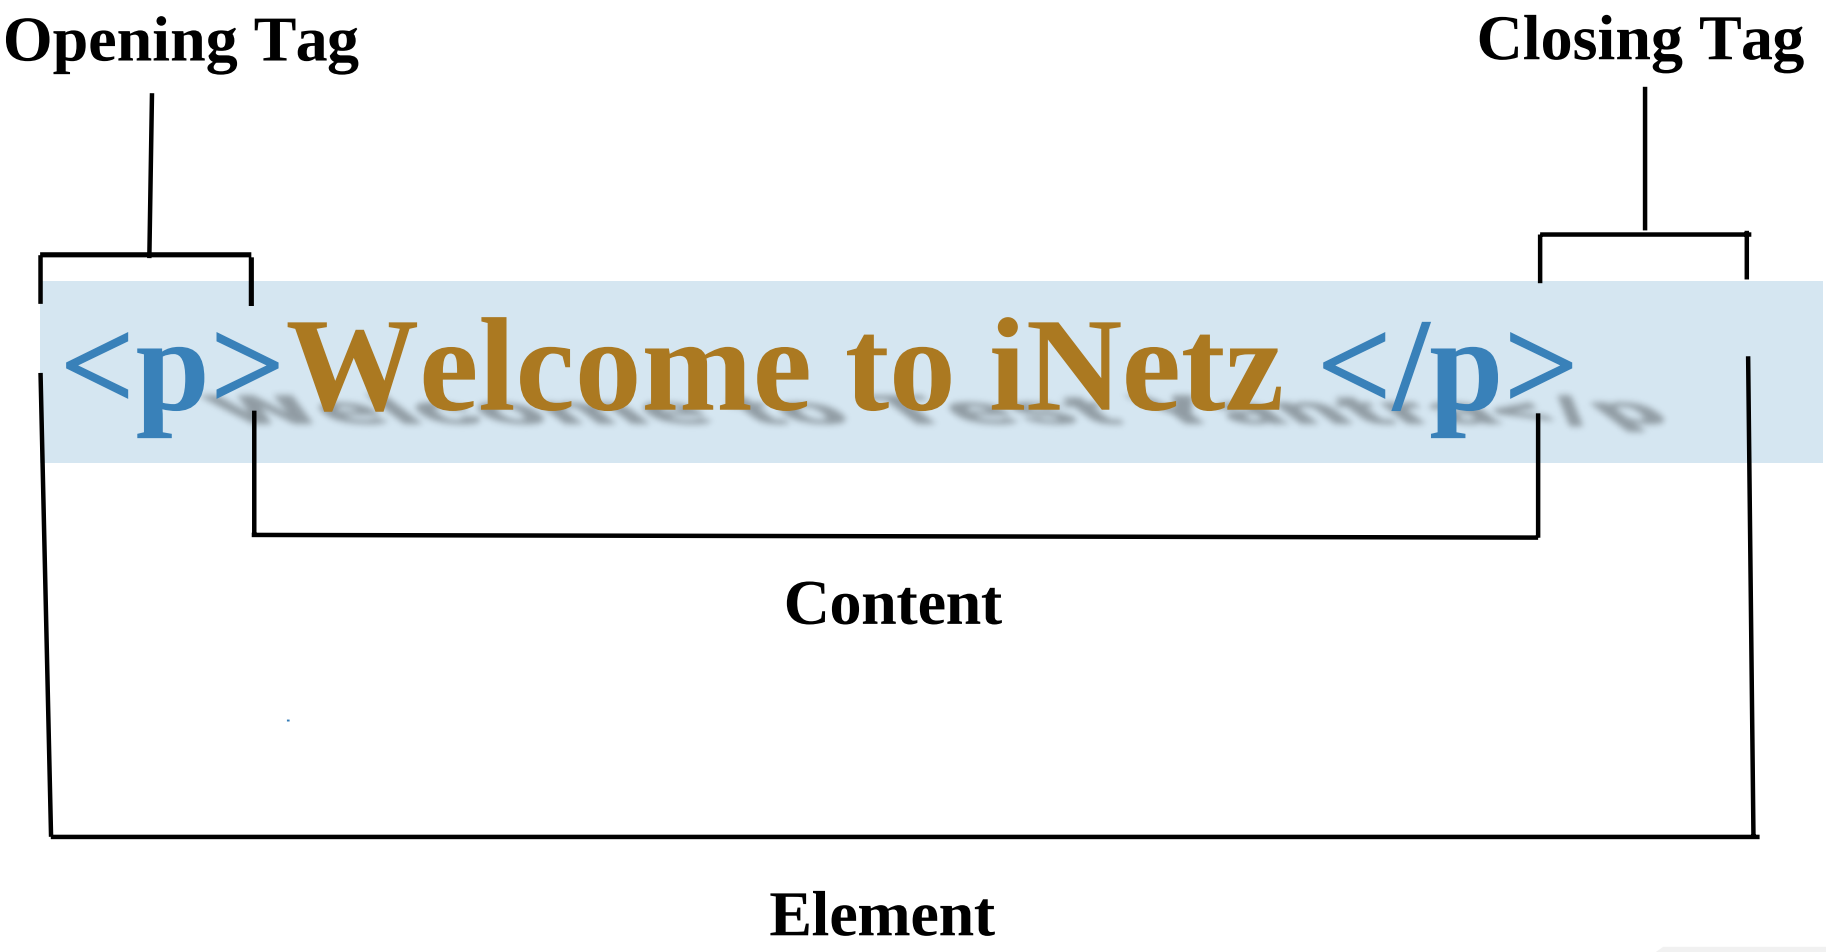

Structure of HTML

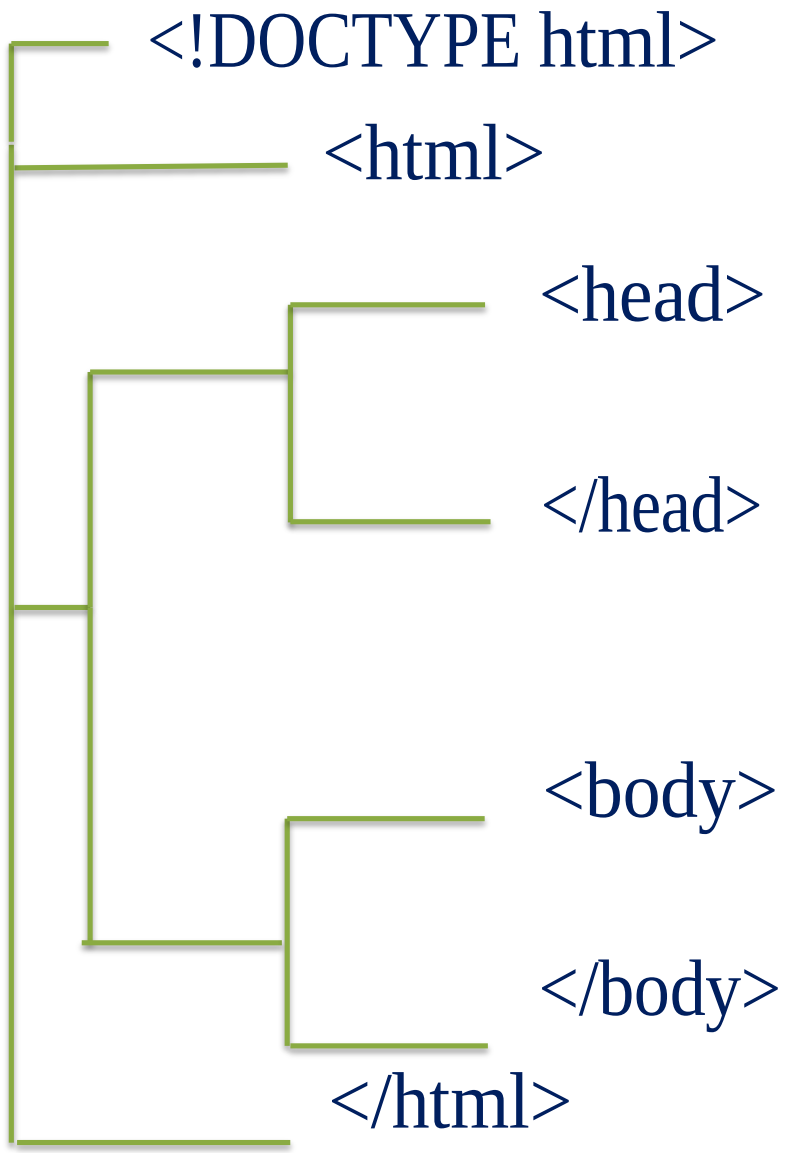

<!DOC TYPE html>:

The <!DOC TYPE> declaration must be the very first thing in your HTML document, before the <html> tag.

The<!DOC TYPE>declaration is not an HTML tag; it is an instruction to the web browser about what version of HTML the page is written in.

In HTML 4.01, the declaration is

<!DOCTYPE>

In HTML5 the declaration is <!DOCTYPE html>

Basic Tags

Tag	Description
<html>	This tag encloses the complete HTML document
<head>	This tag represents the documents header which Can keep other HTML tags like <title>,<link>….etc.
<body>	This tag represents the document body which keeps other HTML tags like <h1>, <p>…..etc.
<h1>to<h6>	Defines header 1 to header 6
<p>	Defines the paragraph
 	Inserts a single line break
<!-->	Defines a comment

Formatting Tags

Text Formatting tags

Tag	Description
<b>	Defines bold text
<big>	Defines big text
<i>	Defines italic text
<small>	Defines small text
	Defines strong text
	Defines emphasized text
<sub>	Defines subscripted text
<sup>	Defines superscripted text
<u>	Defines the Underline text

Attributes

- Attributes provide **additional information** about an element.
- Attributes are always specified in **the start tag.**
- Attributes usually come in name/value pairs like :**name="value”**

EX:<palign="left">This is left aligned</p>

Core Attribute

Types of Attributes:

- Id
- Title
- Class
- Style

Id Attribute:

EX:<pid="html">This para explains what is HTML</p>

Title Attribute:

EX:<h3title="Hello HTML!">Titled Heading Tag Example</h3>

Class Attribute: The **class** attribute is used to associate an element with a Style sheet, and specifies the class of element. Ex:

class =“classname1 classname2 classname3”**StyleAttribute:**

EX:<pstyle="font-family:arial;color:#FF0000;">Some text...</p>

Deprecated Tags in HTML5

The following elements are not available in HTML5 anymore and their function is better handled by CSS−

Tags	Description
<acronym>	Defines an acronym
<applet>	Defines an applet
<basefont>	Defines a base font for the page.
<big>	Defines big text
	Defines centered text
<font>	Defines text font, size, and color
<frame>	Defines a frame

DeprecatedTagsinHTML5

<frameset>	Defines a set of frames
<isindex>	Defines a single-line input field
<noframes>	Defines a no frame section
<s>	Defines strike through text
<strike>	Defines strike through text
<tt>	Defines teletype text
<u>	Defines underlined text

Deprecated Attributes in HTML

HTML5 has none of the presentational attributes that were in HTML4 as their functions are better handled by CSS. Some attributes from HTML4 are no longer allowed in HTML5 at all and they have been removed completely.

List of attributes are listed below

Attributes	From which Tags
rev	link, a
charset	Link and a
shape	a
coords	a
longdesc	Img and iframe.
target	link
nohref	area

DeprecatedAttributesinHTML5

profile	head
version	html
name	img
scheme	meta
archive	object
classid	object
codebase	object
codetype	object
declare	object
standby	object
Value type, type	param

Axis,abbr	Td and t
scope	td
align	caption, iframe, img, input, object, legend, table,hr,div,h1,h2,h3, h4,h5,h6,p,col, colgroup, tbody, td, tfoot,th,theadandtr.
alink	body
link	body
vlink	body
text	body

DeprecatedAttributesinHTML5

background	body
bgcolor	table, tr,td,thandbody.
border	tableandobject.
Cellpadding, cellspacing	table
Char,charoff	col,colgroup,tbody, td,tfoot,th,theadandtr.
clear	br
compact	dl,menu,olandul.
frame	table
compact	dl,menu,olandul.
frameborder	iframe

hspace, vspace	imgandobject.
marginheight, Marginwidth, scrolling	iframe
noshade	hr
nowrap	tdandth
rules	table
size	hr
type	li,olandul.
valign	col,colgroup,tbody,td, tfoot, th,thead andtr
width	hr,table,td,th,col, colgroupandpre.

Grouping Content

Block Level Element

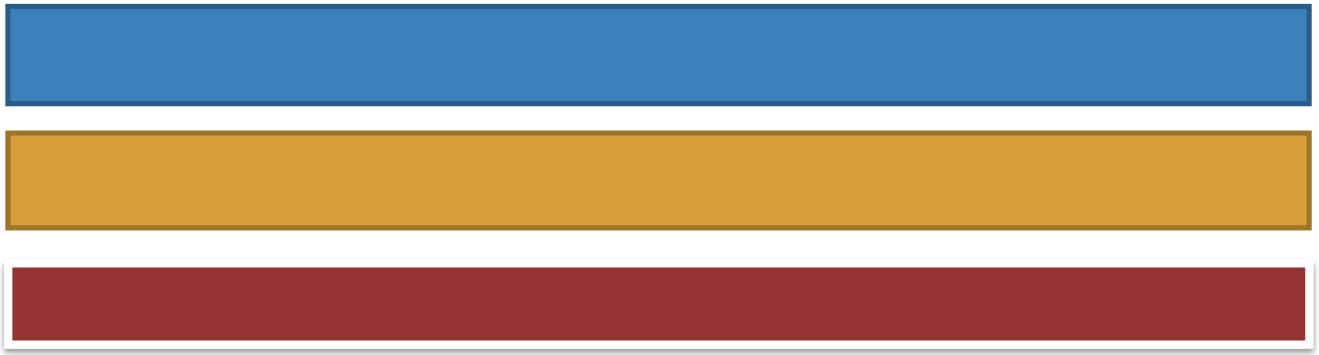

Inline Element

Difference b/w div and span

Div and Span tags are both used as content wrappers.

The difference between the Div and Span is, Div is a block element while Span is an inline element.

That is Div tag takes up the entire width of the screen where as Span conforms to the width of whatever element it contains

Lists

List

UnorderedList

<ultype="square">

<ultype="disc">

<ultype="circle">

OrderedList

<oltype="1">

<oltype="I">

<oltype="i">

<oltype="A">

<oltype="a">

DefintionList

<dl>-defines start of the list

<dt>-defining term

<dd>-defining defination

NestedLists

A nested list is a list with in a list.

inetz TECHNOLOGIES

Anchor tag and Href Attribute

HTML uses the <a> (anchor) tag to create a link to another document

Ananchor can point to any resource on the Web: an HTML page, animage, a sound file, a movie etc.

The syntax of creating An anchor:

<ahref="url">Text to beDisplayed</a>

The <a> tag is used to create an anchor to link from, the href attribute is used to address the document to link to, and the words between the open and close of the anchor tag will be displayed asa hyperlink

Image Handling

Attribute

Name

Value

Tables

The HTML tables allows us to arrange the data into rows and columns

Table row is defined using <tr> tag

HTML tables are created using the <table> tag

Table header is defined with <th> tag

Table data/cell is defined with <td> tag

Forms

HTML Forms are required, when you want to collect some data For example, during user registration you would like to collect information such as name, email address, etc.

There are various form elements available like text fields, text are a fields, drop-down menus, radio buttons, check boxes, etc.

The HTML **<form>** tag is used to create an HTML form.

It has following syntax:

```
<form action="ScriptURL"method="GET|POST">
 Form elements like input, text area etc.
</form>
```

Form Control

Text Input Controls
Checkboxes Controls
Radio Box Controls
Select Box Controls
File Select boxes
Hidden Controls
Clickable Buttons
Submit and Reset Button

Input types for Forms

```
<input type="button">
<input type="checkbox">
<input type="color">
<input type="date">
<input type="datetime-local">
<input type="email">
<input type="file">
<input type="hidden">
<input type="image">
<input type="month">
<input type="number">
<input type="password">
```

```
<input type="radio">
<input type="range">
<input type="reset">
<input type="search">
<input type="submit">
<input type="tel">
<input type="text">
<input type="time">
<input type="url">
<input type="week">
```

Thank You!!!