

RabbitMQ User Setup via the Management UI

GUI equivalent of the offline guide's step A5.5 — RabbitMQ user hardening for the security team

Companion to: `offline-installation-configuration-guide.html` (section **A5**, step 5) · **Placeholders**
`<RABBITMQ_USER>` / `<RABBITMQ_PASSWORD>` match that document.

Contents

- Before you start (prerequisites)
- Steps (Management UI)
- S1 · Open the Management UI
- S2 · Log in as guest
- S3 · Add the application user
- S4 · Grant permissions
- S5 · Re-login as an administrator
- S6 · Delete the guest user
- Repeat on every app node
- Placeholder glossary

Before you start (prerequisites — read first)

This procedure is entirely UI-driven, but it depends on three conditions being true first. The first is inherently a command-line step and is **not** something the UI can replace.

Three conditions must hold before the first screen will work.


- **The management plugin is already enabled.** The Management UI only exists after the Windows administrator has run `rabbitmq-plugins.bat enable rabbitmq_management` (offline guide A5, step 4). There is no UI way to enable it — the UI is what that step turns on. If `http://localhost:15672` does not answer, this step has not been done yet; stop and ask the Windows administrator.
- **You are at the server console (or its RDP session), not a remote machine.** The built-in `guest` account — the only account that exists at this point — is restricted by RabbitMQ to **localhost**. You must open the browser **on the RabbitMQ server itself** and use `http://localhost:15672`. It will not accept `guest` from another host.
- **The credentials are agreed.** The values for `<RABBITMQ_USER>` and `<RABBITMQ_PASSWORD>` have been decided and will be recorded on the deployment sign-off sheet for the application-deploy step.

Steps (all performed in the Management UI)

S1 Open the Management UI

On the RabbitMQ server, open a browser and go to the management address

`http://localhost:15672`. The RabbitMQ login page appears:

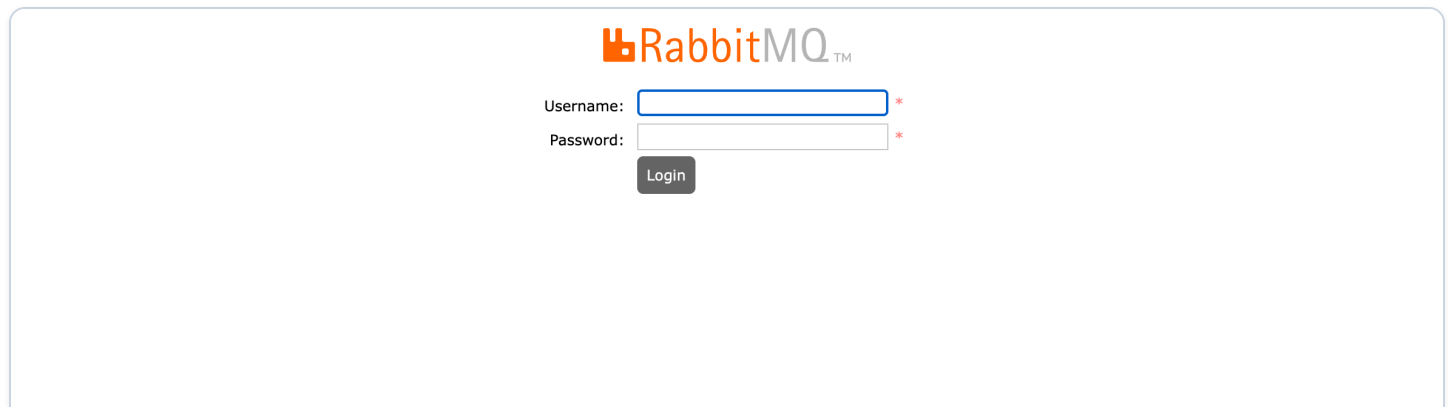

S1 — the Management UI login page at `http://localhost:15672`.

Verify: the login page loads. If the browser cannot connect, the management plugin is not enabled yet — see the prerequisites above.

S2 Log in as `guest`

Sign in with the built-in bootstrap account. This is the only account that exists so far, and it works only from the server console (localhost).

Field	Value
Username	<code>guest</code>
Password	<code>guest</code>

Verify: the **Overview** dashboard appears with a top menu bar (Overview · Connections · Channels · Exchanges · Queues and Streams · **Admin**).

S3 Add the application user

Click the **Admin** tab (top-right). It opens on **Users** — at this point only `guest` exists. Below the user list is an “**Add a user**” section:

 RabbitMQ 4.3.2 Erlang 27.3.4.14

Refreshed 2026-07-09 20:54

Overview

Connections

Channels

Exchanges

Queues and Streams

Admin

Users

▼ All users (1)

Pagination

Page 1 of 1 - Filter: ☐ Regex ?

Displaying 1 item , page size up to: 100

Name	Tags	Can access virtual hosts	Has password
guest	administrator	/	•

?

► Add a user

S3 — Admin › Users: only guest exists; the collapsible “Add a user” section is at the bottom.

Expand “Add a user” and fill it in, then click Add user:

Username: <RABBITMQ_USER> *

Password: ▼

..... *

..... * (confirm)

Tags:

Set Admin | Monitoring | Policymaker Management | Impersonator | None ?

administrator

Add user

S3 — the Add a user form, showing where <RABBITMQ_USER> / <RABBITMQ_PASSWORD> go. Set the Tags field with the quick buttons under “Set” (or by typing) — see the note below on which tag to use — then Add user.

Field	Value	Notes
Username	<RABBITMQ_USER>	The agreed application account name.
Password	<RABBITMQ_PASSWORD>	The agreed password.
(confirm)	<RABBITMQ_PASSWORD>	Must match Password.
Tags	see note below	Leave empty (click None) for a least-privilege application account, or administrator to match the offline guide. Either way the application needs the permissions granted in S4.

Application account vs administrator — which tag to use. The `administrator` tag grants full **RabbitMQ Management UI** rights (managing users, virtual hosts, policies). The application itself does not need that — it only **publishes and consumes messages**, which is governed entirely by the virtual-host permissions granted in S4, not by the tag.

- **Least-privilege application account (recommended for the app):** leave **Tags** empty (or click **None**) when adding the user. It cannot administer the broker or sign in to the Management console, but it publishes and consumes normally once S4 grants it `.*` / `.*` / `.*` on `/`.
- **Administrator account (matches offline guide A5):** set **Tags** to `administrator` (the **Admin** quick button). Use this if the same account is also meant for operators to log in to the Management console, or simply to stay identical to the offline guide.

Follow the bank's standard. A common split is: one least-privilege account for the **application** and a separate `administrator` account for the **operators** who need the console. The screenshots in this guide show the `administrator` tag (A5 baseline); every other step is identical for either choice.

Verify: `<RABBITMQ_USER>` is now listed under **Admin > Users** (with the tag you chose). Its “Can access virtual hosts” column is still empty — that is set in the next step.

S4 Grant permissions

In the Users list, click `<RABBITMQ_USER>` to open its detail page. Under “**Set permission**”, grant full access on the default virtual host, then click **Set permission**. This is what the application actually needs to publish and consume — it applies whether or not the account carries the `administrator` tag:

[Overview](#)
[Connections](#)
[Channels](#)
[Exchanges](#)
[Queues and Streams](#)
[Admin](#)

User: <RABBITMQ_USER>

This user does not have permission to access any virtual hosts.
Use "Set Permission" below to grant permission to access virtual hosts.

▼ Overview

Tags	
administrator	

Can log in with password

•

▼ Permissions

Current permissions

... no permissions ...

Set permission

Virtual Host: / ▼

Configure regexp: .*

Write regexp: .*

Read regexp: .*

Set permission

▼ Topic permissions

Current topic permissions

... no topic permissions ...

Set topic permission

Virtual Host: / ▼

Exchange: (AMQP default) ▼

Write regexp: .*

Read regexp: .*

Set topic permission

► Update this user

► Delete this user

S4 — User: <RABBITMQ_USER> . Set permission on virtual host / with Configure / Write / Read all .* .

Field	Value	Notes
Virtual Host	/	The default vhost. Select it from the dropdown.
Configure regexp	.*	Full configure rights (declare/delete resources).
Write regexp	.*	Full write rights (publish, bind).
Read regexp	.*	Full read rights (consume, get).

Verify: the user's **Current permissions** table now shows one row — virtual host / with .* / .* / .*

S5 Re-login as an administrator

Log out of `guest` using the link in the **top-right** corner, then log back in as an **administrator** account — either the account you just created (if you tagged it `administrator`) or a separate administrator account. This is required for two reasons: RabbitMQ will not let you delete the account you are currently logged in as, and only an administrator-tagged account can log in to the Management console to perform the deletion.

If the application account is least-privilege (no tag), do not log in as it here. A tag-less application account cannot sign in to the Management UI, so use an `administrator` account for S5–S6. The application account itself is verified separately by the app connection — it does not need console access.

Verify: you are signed in as an administrator (shown in the top-right of the header) and the **Admin** tab is available.

S6 Delete the `guest` user

Go to **Admin > Users** and click `guest` to open its detail page. Expand “**Delete this user**” at the bottom, click **Delete**, and confirm:



RabbitMQ 4.3.2

Erlang 27.3.4.14

Refreshed 2026-07-09 20:56

[Overview](#)[Connections](#)[Channels](#)[Exchanges](#)[Queues and Streams](#)[Admin](#)

Can't log in with password?

▼ Permissions

Current permissions

Virtual host	Configure regexp	Write regexp	Read regexp	
/	.*	.*	.*	<button>Clear</button>

Set permission

Virtual Host: Configure regexp: Write regexp: Read regexp: Set permission

▼ Topic permissions

Current topic permissions

... no topic permissions ...

Set topic permission

Virtual Host: Exchange: Write regexp: Read regexp: Set topic permission[► Update this user](#)

▼ Delete this user

Delete**S6** — User: guest, “Delete this user” expanded. Click **Delete** to remove the default account.

Verify: after deletion the **Users** list no longer contains `guest` — only the accounts you created remain. The default credential no longer exists on this node.

Done — final state on this node.

- **Admin > Users** lists your `<RABBITMQ_USER>` application account (and any separate administrator account you created); `guest` is gone.
- The application account has permissions `.* / .* / .*` on virtual host `/`.
- `guest` has been deleted.
- The UI still answers at `http://localhost:15672`.

The application connects to its own broker at `amqp://localhost:5672/` (default virtual host `/`) using the `<RABBITMQ_USER>` credentials.

Repeat on every app node

Each application server runs its own local RabbitMQ broker — there is no clustering. Production runs **two** IIS app nodes, and this user hardening is **per node**. Perform S1–S6 on **App Server 1**, then repeat identically on **App Server 2** (each at its own server console, `http://localhost:15672`). The same `<RABBITMQ_USER>` / `<RABBITMQ_PASSWORD>` values are used on both, and `guest` must be deleted on both.

- ☐ App Server 1 — application user created, permissions `.* / .* / .*` on `/`, `guest` deleted.
- ☐ App Server 2 — application user created, permissions `.* / .* / .*` on `/`, `guest` deleted.
- ☐ Credentials recorded on the deployment sign-off sheet for the application-deploy step.

Placeholder glossary

Replace every `<PLACEHOLDER>` in the screens above with the bank's real value. These are the same placeholders used in the offline guide's A5 section.

Placeholder	Meaning
<code><RABBITMQ_USER></code>	Application's RabbitMQ account name, created per node
<code><RABBITMQ_PASSWORD></code>	Password for that account, created per node

Collateral Appraisal System API — RabbitMQ User Setup via the Management UI. Companion to [docs/deployment/offline-installation-configuration-guide.html](#) (section A5, step 5). Covers UI-based user hardening only; installation of Erlang/RabbitMQ and enabling the management plugin are in that guide. Print to PDF via Chrome/Edge for distribution.