{php}IPAM

Open-source IP address management

SOMMAIRE :

Étape 1 – Introduction 3
Étape 2 – Installation de PHP 3
Étape 3 – Installation de Apache2 4
Étape 4 – Installation de Maria DB 5
Étape 5 – Installation de PHPIPAM 7

Étape 1 – Introduction

Lien : https://net-security.fr/system/presentation-installation-de-phpipam/

Lien : https://github.com/phpipam/phpipam

Lien : https://phpipam.net/documents/installation/

IPAM (= IP Address Management) est la gestion des adresse IP. Ça sert à planifier, suivre et gérer les adresses IP dans le réseau.

Dans notre cas, on va utiliser la solution PHP IPAM, qui une application web de gestion d'adresses IP libre et proposée sous licence GPLv3. Elle est développée en PHP et en Javascript.

Il y'a plusieurs prérequis pour l'installation : Apache2, MySQL et PHP

Étape 2 – Installation de PHP

/!\ en mode administrateur et les mises à jour avant tout /!

Commande : apt install php-y

```
root@debian13:~# apt install php
Installation de :
  php

Installation de dépendances :
  apache2        libapache2-mod-php8.4  php8.4-cli      php8.4-readline
  apache2-data   php-common             php8.4-common
  apache2-utils  php8.4                 php8.4-opcache

Paquets suggérés :
  apache2-doc              | apache2-suexec-custom  php-pear
  apache2-suexec-pristine  ufw

Sommaire :
  Mise à niveau de : 0. Installation de : 11Supprimé : 0. Non mis à jour : 0
Taille du téléchargement : 5 517 kB
  Espace nécessaire : 25,7 MB / 13,5 GB disponible

Continuer ? [O/n] o
```

On vérifie si c'est la dernière version de PHP que notre machine à installer.

Commande : php -v

```
root@debian13:~# php -v
PHP 8.4.11 (cli) (built: Aug  3 2025 07:32:21) (NTS)
Copyright (c) The PHP Group
Built by Debian
```

Étape 3 – Installation de Apache2

```
root@debian13:~# apt install apache2
apache2 est déjà la version la plus récente (2.4.65-2).
```

```
root@debian13:~# systemctl start apache2
```

```
root@debian13:~# systemctl enable  apache2
```

```
root@debian13:~# systemctl status  apache2
● apache2.service - The Apache HTTP Server
     Loaded: loaded (/usr/lib/systemd/system/apache2.service; enabled; preset:
     Active: active (running) since Thu 2025-11-13 10:43:22 CET; 1min 21s ago
 Invocation: ae05686dfb814f92baa4242b4f966c4d
       Docs: https://httpd.apache.org/docs/2.4/
   Main PID: 10128 (apache2)
      Tasks: 6 (limit: 16743)
```

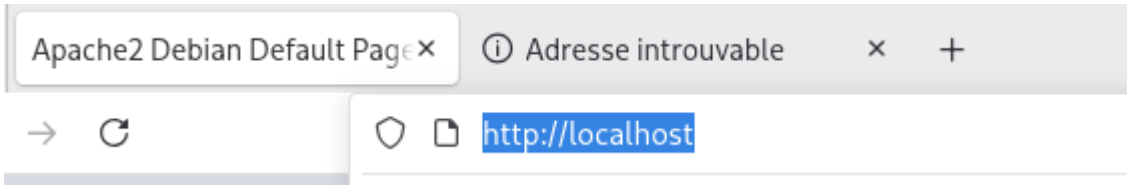

Étape 4 – Installation de Maria DB

Lien : https://mariadb.com/docs/server/server-management/install-and-upgrade-mariadb/installing-mariadb/binary-packages/installing-mariadb-deb-files

Lien : https://mariadb.org/download/?t=mariadb&p=mariadb&r=12.0.2&os=Linux&cpu=x86_64&i=systemd&mirror=icam

```
root@debian13:~# apt install mariadb-server -y
```

```
root@debian13:~# systemctl start mariadb
```

```
root@debian13:~# systemctl enable mariadb
```

```
root@debian13:~# mariadb-secure-installation

NOTE: MariaDB is secure by default in Debian. Running this script is
      useless at best, and misleading at worst. This script will be
      removed in a future MariaDB release in Debian. Please read
      mariadb-server.README.Debian for details.
```

```
Enter current password for root (enter for none):
OK, successfully used password, moving on...

Setting the root password or using the unix_socket ensures that nobody
can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

Switch to unix_socket authentication [Y/n] y
Enabled successfully (or at least no errors was emitted)!
Reloading privilege tables..
 ... Success!

Change the root password? [Y/n] n

Remove anonymous users? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Disallow root login remotely? [Y/n] y
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Remove test database and access to it? [Y/n] y
 - Dropping test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.
 - Removing privileges on test database...
SQL executed without errors!
The operation might have been successful, or it might have not done anything.

Reloading the privilege tables will ensure that all changes made so far
will take effect immediately.

Reload privilege tables now? [Y/n] y
 ... Success!

Cleaning up...

All done!  If you've completed all of the above steps, your MariaDB
installation should now be secure.

Thanks for using MariaDB!
```

```
root@debian13:~# systemctl status  mariadb
● mariadb.service - MariaDB 11.8.3 database server
     Loaded: loaded (/usr/lib/systemd/system/mariadb.service; enabled; preset: enabled)
     Active: active (running) since Thu 2025-11-13 11:34:14 CET; 1min 9s ago
 Invocation: a33511c3f1bb46bca6ef345b70fa292c
       Docs: man:mariadbd(8)
             https://mariadb.com/kb/en/library/systemd/
   Main PID: 3637 (mariadbd)
     Status: "Taking your SQL requests now..."
```

```
root@debian13:~# mysql -u root
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 33
```

```
MariaDB [(none)]> CREATE DATABASE phpipam;
Query OK, 1 row affected (0,000 sec)
```

```
MariaDB [(none)]> CREATE USER 'phpipam'@'172.20.34.133' IDENTIFIED BY 'root';
Query OK, 0 rows affected (0,002 sec)
```

```
MariaDB [(none)]> GRANT ALL PRIVILEGES ON phpipam.* TO 'phpipam'@'localhost';
ERROR 1133 (28000): Can't find any matching row in the user table
MariaDB [(none)]> GRANT ALL PRIVILEGES ON phpipam.* TO 'phpipam'@'172.20.34.133';
Query OK, 0 rows affected (0,004 sec)
```

Étape 5 – Installation de PHPIPAM

https://all-it-network.com/installer-phpipam/

https://first2host.co.uk/blog/how-to-install-phpipam-ubuntu-and-debian-servers/

```
root@debian13:~# cd /var/www/html/
```

```
root@debian13:/var/www/html# apt install git -y
```

```
root@debian13:/var/www/html# git clone https://github.com/phpipam/phpipam.git
Clonage dans 'phpipam'...
remote: Enumerating objects: 35284, done.
remote: Counting objects: 100% (108/108), done.
remote: Compressing objects: 100% (68/68), done.
remote: Total 35284 (delta 58), reused 49 (delta 38), pack-reused 35176 (from 2)
Réception d'objets: 100% (35284/35284), 26.50 Mio | 20.04 Mio/s, fait.
Résolution des deltas: 100% (26195/26195), fait.
```

```
root@debian13:~# ls /var/www/html
index.html  phpipam
```

```
root@debian13:~# cd /var/www/html/phpipam/
```

```
root@debian13:/var/www/html/phpipam# cp config.dist.php config.php
```

```
root@debian13:/var/www/html/phpipam# chown -R www-data:www-data /var/www/html/phpipam/
root@debian13:/var/www/html/phpipam# chmod -R 755 /var/www/html/phpipam/
```

```
root@debian13:/var/www/html/phpipam# nano config.php
```

```
<?php

/**
 *  Disable installation helper scripts /app/install/ after initial setup
 */
$disable_installer = false;

/**
 * database connection details
 ******************************/
$db['host'] = '172.20.34.133';
$db['user'] = 'phpipam';
$db['pass'] = 'root';
$db['name'] = 'phpipam';
$db['port'] = 3306;
```

```
root@debian13:~# a2enmod rewrite
Module rewrite already enabled
root@debian13:~# systemctl restart apache2
```

```
  GNU nano 8.4                    /etc/apache2/sites-available/phpipam.conf *
<VirtualHost * :80>
        ServerAdmin phpipam@172.20.34.133
        ServerName imane.ipam
        ServerAlias www.imane.ipam
        DocumentRoot /var/www/html/phpipam

        <Directory /var/www/html/phpipam>
                AllowOverride All
                Require all granted
        </Directory>

        ErrorLog ${APACHE_LOG_DIR}error.log
        CustomLog ${APACHE_LOG_DIR}/access.log combined

</VitualHost>
```