

AgentStream: How Well Do Self-Evolving LLM Agents Perform Under Streaming Tasks?

Dong Yan^{1,2,3,*} Jian Liang^{1,3,‡} Dapeng Hu^{2,‡} Ran He^{1,3}
Nicholas Jing Yuan² Qi Zhang² Tieniu Tan^{1,3,4}

¹ School of Artificial Intelligence, University of Chinese Academy of Sciences ² Microsoft

³ Institute of Automation, Chinese Academy of Sciences ⁴ Nanjing University

Large language model (LLM) agents can self-evolve by continually improving from their own accumulated experience. However, existing studies predominantly adopt independent evaluation. Consequently, the behavior of self-evolving agents in realistic streaming settings, where agents adapt to diverse and complex task streams, remains poorly understood. To address this gap, we introduce AgentStream, a unified framework that evaluates self-evolving agents spanning diverse evolution components by organizing agentic benchmarks into a configurable task stream and instantiating the **Isolated**, **Sequential**, and **Interleaved** streaming scenarios at test time, which progressively vary the scope and domain composition of the stream. Over these scenarios, we combinatorially evaluate five representative self-evolving methods across three frontier foundation models, disentangling how model capability, method architecture, and streaming scenario jointly shape self-evolution. Our results show that self-evolution reliability varies across streaming scenarios, the benefit of self-evolution is gated by model capability and non-monotonic in model strength, and no single method dominates across models and scenarios. These findings offer concrete guidance for selecting self-evolving methods across models and streaming scenarios. Overall, we advocate that self-evolving agents should be evaluated under realistic task streams rather than isolated single-task settings.

Code: <https://github.com/microsoft/Sico/labs/AgentStream>

1 Introduction

Large language model (LLM) agents are shifting from static, deploy-once systems toward adaptive architectures that continuously learn from their own accumulated experience during deployment, a paradigm broadly termed self-evolving [1–3]. Depending on which component of the agent is updated, recent methods evolve the prompt context, structured memory, reusable skill libraries, or an integrated harness [4–11]. Such self-evolution is expected to produce increasingly capable agents over time, making it essential to understand how agent capabilities evolve across the diverse task streams encountered in realistic deployment.

However, as illustrated in Figure 1, existing agentic benchmarks and self-evolving studies predominantly adopt independent evaluation, where each task is solved in isolation and performance is aggregated without any cross-task state [4, 6, 12–16]. While a few studies move toward streaming evaluation [9, 17, 18], they stream each benchmark independently under a single evolution component, leaving how different evolution components transfer cross-domain experience systematically unexamined. Consequently, it remains unclear whether the improvements reported for self-evolving agents persist once they are deployed in realistic streaming settings, where tasks

* Work done during an internship at Microsoft.

‡ Corresponding authors: liangjian92@gmail.com, dapenghu@microsoft.com.

may span diverse domains and arrive without clear task boundaries or supervision. Answering this question requires an evaluation that considers the foundation model, the self-evolving method, and the structure of the task stream jointly rather than any one of them in isolation, which the prevailing independent evaluation is inherently unable to provide.

To this end, we propose AgentStream, a unified streaming evaluation framework that organizes tasks from multiple benchmarks into a configurable stream, ranging from within-domain to cross-domain composition, and evaluates self-evolving methods whose evolution components span context, memory, skill, and integrated harness. AgentStream performs a combinatorial evaluation across models, self-evolving methods, and streaming scenarios, enabling us to decouple the contributions of model capability and method architecture under different stream structures. Concretely, we instantiate three test-time streaming scenarios that progressively vary the scope and domain composition of the stream: **Isolated**, where each benchmark evolves in its own stream; **Sequential**, where the agent processes the benchmarks in a fixed order, transferring its evolution state across benchmarks; and **Interleaved**, where tasks from all benchmarks are shuffled into one unified stream. Across these scenarios, we evaluate five representative self-evolving methods, ACE [4], A-Mem [6], ReasoningBank [9], AutoSkill [8], and Harness [5, 11], across three frontier foundation models, GPT-5.4 [19], Gemini 3.1 Pro [20], and Claude Opus 4.7 [21], over six agentic benchmarks covering diverse capabilities, including AppWorld [12], BFCL [13], BrowseComp-Plus [22], HLE [15], SWE-bench-Verified [14], and Tau2 [16].

Our study reveals three findings. **First**, self-evolution is not uniformly beneficial, and its reliability varies with the streaming scenario. **Isolated** is the most reliable, while **Interleaved** generally outperforms **Sequential** despite its more heavily mixed stream. **Second**, not all models benefit from self-evolution, as its gain is gated by model capability. The weakest model exhibits negative evolution gains, and the benefit is non-monotonic in model strength, with a mid-capability model gaining more than a stronger one. **Third**, no single method dominates. Context-integrated methods favor **Isolated** while retrieval-based methods favor **Interleaved**, and the optimal method varies across models rather than transferring between them.

Overall, this work contributes AgentStream, the first framework that unifies agentic benchmarks into a configurable streaming evaluation and systematically assesses self-evolution along the streaming scenario, method, and model dimensions. Through a combinatorial analysis over these dimensions, we investigate how streaming scenario, model capability, and method architecture shape whether self-evolution improves or degrades performance. We further distill these observations into actionable guidance: applying self-evolution to sufficiently capable models, favoring context-integrated methods under within-domain streams and retrieval-based methods under cross-domain streams, and selecting the method per model rather than assuming a universal choice. We hope AgentStream encourages future research to evaluate self-evolving agents beyond isolated single-task settings and toward realistic task streams.

2 Related Work

2.1 Learning with Streaming Data

Learning from streaming data mainly involves test-time learning and continual learning. Test-time learning adapts a model to each incoming instance or distribution shift on the fly [23, 24], whereas continual learning targets sequential task streams while resisting catastrophic forgetting [25, 26]. With the advent of LLMs and agents, test-time learning proceeds at two levels [27, 28]. Parameter adaptation methods operate within individual test instances, either by directly updating model weights through data selection and in-place learning [29–33], or by applying reinforcement learning to iteratively refine model behavior [34–40]. Cross-instance accumulation methods instead build reusable experience that transfers across test tasks, including evolving libraries [18, 41], temporary skills [42, 43], cached plan templates [44], and consolidated memory systems [45, 46]. In

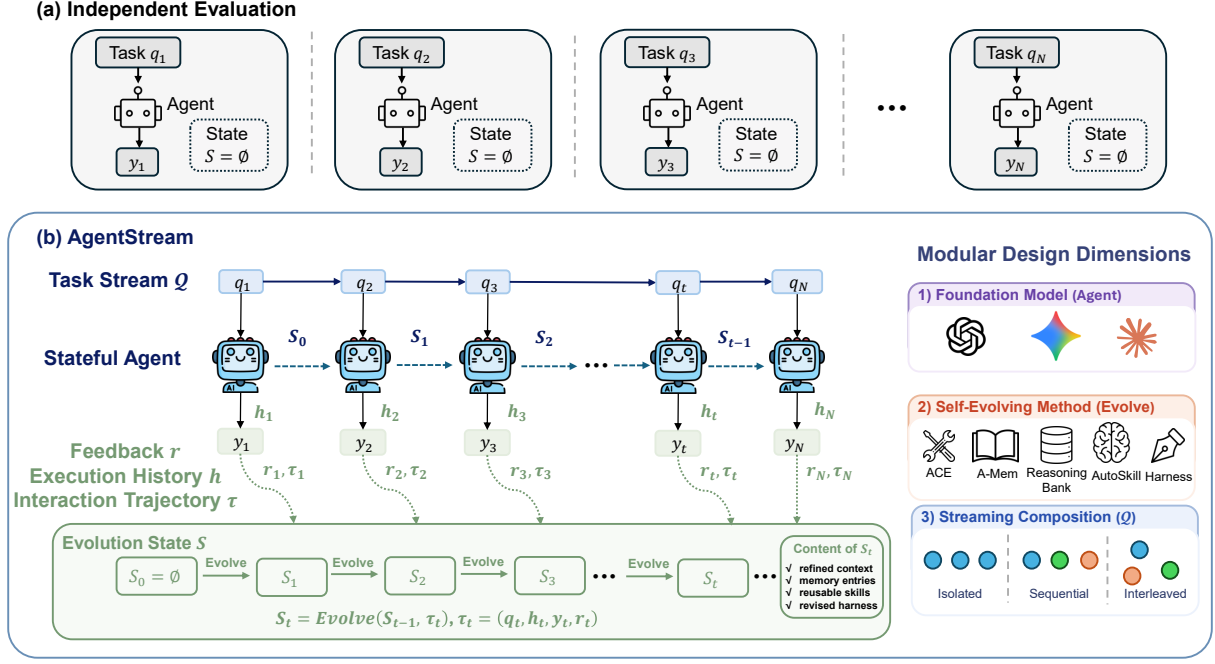


Figure 1 Independent evaluation vs. our streaming evaluation framework. (a) The prevailing paradigm solves each task in isolation without cross-instance experience accumulation. (b) AgentStream: a stateful agent evolves through self-generated feedback over a configurable task stream, with foundation model, self-evolving method, and stream composition as modular design dimensions.

parallel, continual learning for LLM agents has been explored through gradient-free inference-time updates [47, 48], parameter-level methods that mitigate forgetting [49, 50], and experience-centric approaches that reuse accumulated knowledge across tasks [51–54].

2.2 Self-Evolving Agents

Self-evolving agents can autonomously improve their capabilities by learning from their own experience [1, 2]. Existing approaches primarily differ in the component of the agent system that undergoes evolution. Memory-based methods focus on the accumulation, retrieval, and reorganization of historical experience, enabling agents to selectively retain useful knowledge while pruning irrelevant information over successive tasks [4, 6, 7, 55, 56]. Skill-based methods operate at a higher level of abstraction, discovering and composing reusable capability modules into growing libraries that compound across diverse task domains [8, 10, 57–61]. Harness-level methods evolve the scaffolding infrastructure surrounding the base model, including system prompts, tool configurations, memory modules, and skill libraries [5, 11, 62–67]. Beyond individual agents, architecture-level methods evolve the multi-agent topology itself, dynamically reconfiguring agent roles, communication structures, and coordination protocols [68–70]. Mechanistically, these methods are driven by reinforcement learning [7, 57, 64], evolutionary algorithms [65, 71, 72], trajectory distillation [8, 73, 74], or gradient-analogy optimization that treats textual feedback as differentiable signals [61, 69, 75]. However, existing work evaluates on isolated benchmarks without systematically comparing how different self-evolving methods and models behave under a controlled setting, while recent analyses further reveal that self-evolution can degrade or fail to transfer across domains [1, 3, 76]. Our work provides a unified streaming evaluation framework, analyzing roles of self-evolving methods and models under different stream structures.

2.3 Agentic Benchmarks

Agentic benchmarks have been developed to evaluate LLM agents across diverse and complex environments. Interactive web and application benchmarks require agents to complete long-horizon tasks by navigating stateful interfaces and executing actions that alter the environment

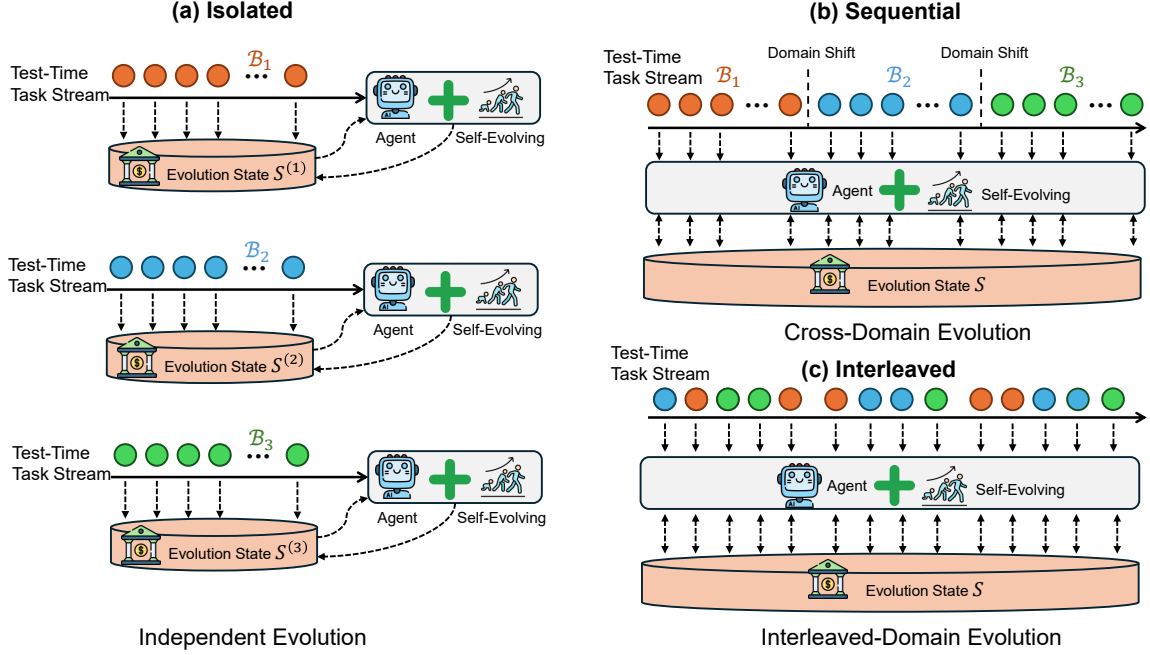


Figure 2 Three representative streaming scenarios instantiated in AgentStream. (a) **Isolated**: each benchmark maintains a separate evolution state. (b) **Sequential**: a single evolution state carries across ordered benchmark boundaries. (c) **Interleaved**: tasks from all benchmarks are shuffled into one unified stream with a shared evolution state.

state [12, 77–80]. Tool-use benchmarks assess structured function calling, measuring whether agents can select, compose, and invoke external APIs with correct arguments [13, 16, 81, 82]. Software engineering benchmarks evaluate agents on repository-level tasks such as resolving real-world code issues under executable test suites [14, 83, 84]. Skill-oriented benchmarks measure how well agents acquire and reuse modular capabilities across heterogeneous tasks [85, 86]. Knowledge-intensive reasoning benchmarks stress deep retrieval and expert-level problem solving over frontier knowledge [15, 87, 88]. Economically grounded benchmarks further evaluate agents on real-world professional tasks of high practical value [89, 90]. However, these benchmarks predominantly evaluate agents on each task in isolation, and although a few adopt streaming evaluation [17, 18, 91], they remain limited to single-benchmark streams and evaluate only a single evolving component. In contrast, our framework unifies agentic benchmarks into more complex streaming scenarios covering both within-domain and cross-domain adaptation, and evaluates diverse evolving components including prompt, memory, skill, and harness.

3 The AgentStream Framework

To study how LLM-based agents improve through experience accumulation over realistic task streams, we design AgentStream, an evaluation framework centered on self-evolution, in which an agent processes a stream of tasks and, after each attempt, distills the interaction trajectory into persistent experience (e.g., refined context, memory entries, reusable skills, or revised harness). Building on this framework, we instantiate the problem setup and three streaming scenarios that systematically vary the scope and composition of the task stream, as illustrated in Figure 2.

3.1 Problem Setup

We consider a test-time learning setting [9, 17] in which a task stream $\mathcal{Q} = \{q_1, q_2, \dots, q_N\}$ is presented to the agent, with each task revealed only after the preceding one is completed. The agent is parameterized by a foundation model $\mathcal{M}$ and equipped with a self-evolving method that maintains

an evolution state S . This state aggregates the experience distilled from the first t interactions, initialized as $S_0 = \emptyset$. For each task q_t , the agent performs a multi-step interaction conditioned on its current evolution state, generating an execution history $h_t = \{(a_{t,i}, o_{t,i})\}_{i=1}^{L_t}$ of action-observation pairs over L_t steps and a final solution $y_t = \mathcal{M}(q_t, h_t \mid S_{t-1})$. The agent subsequently updates $S_t = \text{EVOLVE}(S_{t-1}, \tau_t)$ by reflecting on the interaction trajectory $\tau_t = (q_t, h_t, y_t, r_t)$, where r_t denotes the self-generated feedback. Notably, no ground-truth labels are accessible at test time, and the evolution relies entirely on feedback intrinsic to the interaction, such as execution outcomes and reflective self-evaluation. We quantify the benefit of self-evolution through the evolution gain:

$$\Delta = \text{Perf}(\mathcal{M}, \mathcal{Q}, S) - \text{Perf}(\mathcal{M}, \mathcal{Q}, \emptyset), \quad (1)$$

where $\text{Perf}(\mathcal{M}, \mathcal{Q}, \emptyset)$ denotes the baseline in which the same model solves each task with $S_t = \emptyset$ for all t . A positive Δ indicates net improvement from self-evolution, while a negative Δ signals that accumulated experience introduces interference.

3.2 Streaming Scenarios

Given a set of K benchmarks $\{\mathcal{B}_1, \dots, \mathcal{B}_K\}$, each contributing a task subset $\mathcal{Q}^{(k)}$, we instantiate three evaluation settings that systematically vary how the task stream $\mathcal{Q}$ is composed and how the evolution state S_t is scoped across benchmarks.

Isolated. Each benchmark $\mathcal{B}_k$ is assigned an independent agent instance with its own evolution state $S_t^{(k)}$. The task stream for each agent instance is simply $\mathcal{Q}^{(k)}$, and no experience transfers across benchmarks. This setting isolates intra-domain evolution and measures how effectively a self-evolving method accumulates useful experience within a single task domain.

Sequential. A single agent processes all benchmarks in a fixed order $\mathcal{B}_1 \rightarrow \mathcal{B}_2 \rightarrow \dots \rightarrow \mathcal{B}_K$, with its evolution state S_t retained across benchmark boundaries. The resulting task stream is the concatenation $\mathcal{Q} = \mathcal{Q}^{(1)} \oplus \mathcal{Q}^{(2)} \oplus \dots \oplus \mathcal{Q}^{(K)}$. This setting evaluates whether experience acquired in earlier domains facilitates or interferes with performance on later domains, testing forward transfer in a sequential curriculum.

Interleaved. A single agent receives a unified stream $\mathcal{Q} = \text{shuffle}(\mathcal{Q}^{(1)} \cup \dots \cup \mathcal{Q}^{(K)})$ in which tasks from all benchmarks are interleaved in randomized order. The agent maintains one shared evolution state S_t that is updated by tasks from all benchmarks indiscriminately. This setting tests the agent’s ability to retrieve domain-relevant experience while suppressing cross-domain interference under maximal task diversity.

Rather than being ordered by expected difficulty, the three streaming scenarios are designed to decouple distinct aspects of self-evolution, each capturing a challenge that self-evolving agents may encounter in deployment. **Isolated** removes cross-domain effects entirely, providing a controlled measurement of within-domain learning. **Sequential** introduces ordered domain shifts and tests whether accumulated experience enables forward transfer. **Interleaved** mixes tasks from all domains within a single stream, requiring the agent to retrieve relevant experience and suppress irrelevant interference without explicit domain boundaries. Crossing these three streaming scenarios with the self-evolving methods and frontier foundation models enables a controlled analysis of how each factor contributes to self-evolution.

4 Experimental Settings

Models. We evaluate three frontier foundation models spanning different families and scales: GPT-5.4-medium [19], Gemini 3.1 Pro-medium [20], and Claude Opus 4.7-high [21]. This diversity

allows us to analyze how model capacity influences test-time evolution across self-evolving methods.

Tasks. Our evaluation suite comprises six diverse benchmarks covering a broad spectrum of agentic capabilities:

- **AppWorld** [12]: interactive coding tasks requiring multi-app workflow execution with API understanding and dynamic environment interaction.
- **BFCL** [13]: multi-step function calling evaluation across diverse domains, testing context-dependent tool use with missing parameters and long-context scenarios.
- **BrowseComp-Plus** [22]: deep-research tasks requiring iterative web retrieval and complex information synthesis over a controlled document corpus.
- **HLE** [15]: expert-level academic reasoning across dozens of disciplines, designed to challenge frontier models on questions resistant to memorization.
- **SWE-bench Verified** [14]: real-world software engineering tasks requiring codebase understanding, fault localization, and patch generation.
- **Tau2** [16]: conversational agent tasks in dual-control environments where both agent and user take actions in a shared system, testing coordination and communication.

Self-Evolving Methods. We select five representative methods that span context, memory, skill, and integrated harness evolution, collectively representing the principal evolution components: (1) **ACE** [4]: evolves agent context through modular generation, reflection, and curation of prompts, accumulating structured strategies that scale with long-context models. (2) **A-Mem** [6]: dynamically organizes agent memories using Zettelkasten-style indexing and linking, continuously refining contextual representations as new experience is integrated. (3) **ReasoningBank** [9]: distills generalizable reasoning strategies from both successful and failed trajectories into structured memory items. (4) **AutoSkill** [8]: extracts reusable skills from interaction experience through a lifecycle of extraction, structured representation, iterative refinement, and versioned maintenance. (5) **Harness**: inspired by [5, 11], we implement a harness evolution method that jointly maintains and updates system prompts, skills, and experience memory through reflection and revision.

Implementation Details. Our evaluation infrastructure is built on Exgentic [92], a framework that standardizes communication between heterogeneous agent interfaces and benchmarks. All self-evolving methods are adapted to operate within this framework under a test-time setting. For text embedding, we adopt the all-MiniLM-L6-v2 model across all experiments. We sample $N = 50$ tasks from each benchmark, where AppWorld uses the test-challenge split, BFCL uses the multi-turn base split, and Tau2 uses the telecom domain. Task-level performance is evaluated by the native scoring pipeline of each benchmark. All judge models and user simulator models required by the benchmarks are unified to GPT-5.4. To account for ordering effects, we run three random seeds that shuffle task order while keeping the task set fixed. In the **Sequential** setting, benchmarks are presented in the order AppWorld $\rightarrow$ BFCL $\rightarrow$ BrowseComp+ $\rightarrow$ HLE $\rightarrow$ SWE $\rightarrow$ Tau2. Across all three streaming scenarios, the within-benchmark task exposure order is held constant to ensure comparability.

5 Results

Table 1 reports the main results across models, self-evolving methods and streaming scenarios, averaged over three random seeds. Per-seed results are provided in Tables 11 to 13.

5.1 Does Self-Evolution Help at All, and Under Which Scenario?

Marginalizing over both models and methods in Table 2, we find that self-evolution is not uniformly beneficial and underperforms the vanilla baseline in a substantial share of configurations. Given

Table 1 Main results (%) of self-evolving methods across three streaming scenarios, averaged over three random seeds. Red background indicates scores below the model’s vanilla baseline, and blue marks the best scenario within each self-evolving method.

Methods	Mode	AppWorld	BFCL	BrowseComp+	HLE	SWE	Tau2	Avg
<i>GPT-5.4</i>	Vanilla	44.6	66.0	50.0	2.0	62.0	50.0	45.8
ACE [4]	Isolated	39.1 $\pm$ 5.9	68.0 $\pm$ 12.2	46.7 $\pm$ 2.3	5.3 $\pm$ 1.2	60.0 $\pm$ 3.5	63.3 $\pm$ 6.1	47.1
	Sequential	38.9 $\pm$ 5.9	64.0 $\pm$ 5.3	48.7 $\pm$ 6.1	7.3 $\pm$ 1.2	62.7 $\pm$ 5.0	45.3 $\pm$ 22.3	44.5
	Interleaved	32.9 $\pm$ 1.4	58.7 $\pm$ 3.1	44.7 $\pm$ 2.3	6.0 $\pm$ 2.0	63.3 $\pm$ 5.0	48.7 $\pm$ 3.1	42.4
A-Mem [6]	Isolated	41.2 $\pm$ 9.5	68.7 $\pm$ 2.3	52.0 $\pm$ 7.2	8.7 $\pm$ 3.1	65.3 $\pm$ 1.2	50.0 $\pm$ 36.2	47.7
	Sequential	39.9 $\pm$ 4.5	66.7 $\pm$ 6.4	50.7 $\pm$ 3.1	10.0 $\pm$ 2.0	60.0 $\pm$ 5.3	62.7 $\pm$ 18.9	48.3
	Interleaved	37.9 $\pm$ 4.8	65.3 $\pm$ 3.1	52.7 $\pm$ 4.2	8.7 $\pm$ 2.3	62.0 $\pm$ 3.5	76.0 $\pm$ 21.6	50.4
ReasoningBank [9]	Isolated	40.9 $\pm$ 1.8	62.7 $\pm$ 7.0	45.3 $\pm$ 2.3	10.0 $\pm$ 2.0	59.3 $\pm$ 5.0	46.7 $\pm$ 12.2	44.2
	Sequential	42.9 $\pm$ 0.6	62.7 $\pm$ 2.3	47.3 $\pm$ 3.1	14.7 $\pm$ 4.6	62.7 $\pm$ 4.6	36.0 $\pm$ 14.4	44.4
	Interleaved	38.6 $\pm$ 3.5	63.3 $\pm$ 5.0	48.7 $\pm$ 4.2	12.0 $\pm$ 2.0	56.7 $\pm$ 6.4	53.3 $\pm$ 4.2	45.4
AutoSkill [8]	Isolated	40.1 $\pm$ 2.8	70.7 $\pm$ 1.2	48.0 $\pm$ 3.5	4.7 $\pm$ 1.2	57.3 $\pm$ 7.0	36.0 $\pm$ 14.0	42.8
	Sequential	38.2 $\pm$ 1.6	72.0 $\pm$ 3.5	43.3 $\pm$ 5.0	6.7 $\pm$ 1.2	58.0 $\pm$ 4.0	44.0 $\pm$ 13.1	43.7
	Interleaved	40.0 $\pm$ 1.7	72.0 $\pm$ 5.3	46.0 $\pm$ 2.0	4.7 $\pm$ 1.2	60.7 $\pm$ 1.2	40.0 $\pm$ 8.7	43.9
Harness [5, 11]	Isolated	37.4 $\pm$ 2.3	64.0 $\pm$ 8.7	46.0 $\pm$ 2.0	7.3 $\pm$ 5.8	61.3 $\pm$ 2.3	57.3 $\pm$ 12.2	45.6
	Sequential	35.1 $\pm$ 1.6	66.7 $\pm$ 2.3	45.3 $\pm$ 1.2	6.7 $\pm$ 1.2	57.3 $\pm$ 6.1	54.0 $\pm$ 5.3	44.2
	Interleaved	37.0 $\pm$ 4.9	65.3 $\pm$ 5.0	50.0 $\pm$ 5.3	6.7 $\pm$ 1.2	57.3 $\pm$ 2.3	46.0 $\pm$ 5.3	43.7
<i>Gemini 3.1 Pro</i>	Vanilla	41.8	58.0	34.0	52.0	64.0	90.0	56.6
ACE [4]	Isolated	43.2 $\pm$ 1.9	62.7 $\pm$ 13.3	44.0 $\pm$ 5.3	50.0 $\pm$ 0.0	64.0 $\pm$ 0.0	90.7 $\pm$ 9.5	59.1
	Sequential	41.2 $\pm$ 3.2	72.0 $\pm$ 9.2	43.3 $\pm$ 5.0	52.0 $\pm$ 0.0	68.0 $\pm$ 0.0	95.3 $\pm$ 3.1	62.0
	Interleaved	40.7 $\pm$ 2.0	52.7 $\pm$ 13.0	44.0 $\pm$ 6.0	50.7 $\pm$ 1.2	64.7 $\pm$ 1.2	96.7 $\pm$ 3.1	58.3
A-Mem [6]	Isolated	41.2 $\pm$ 6.7	54.0 $\pm$ 25.0	50.0 $\pm$ 4.0	52.0 $\pm$ 2.0	62.0 $\pm$ 5.3	92.7 $\pm$ 4.6	58.7
	Sequential	40.4 $\pm$ 3.5	54.7 $\pm$ 2.3	46.0 $\pm$ 2.0	48.7 $\pm$ 4.2	60.7 $\pm$ 1.2	91.3 $\pm$ 2.3	57.0
	Interleaved	40.4 $\pm$ 2.6	56.7 $\pm$ 16.7	47.3 $\pm$ 7.6	50.7 $\pm$ 1.2	60.7 $\pm$ 2.3	90.7 $\pm$ 6.1	57.8
ReasoningBank [9]	Isolated	42.8 $\pm$ 3.1	54.7 $\pm$ 4.6	50.0 $\pm$ 5.3	48.7 $\pm$ 4.2	62.0 $\pm$ 4.0	95.3 $\pm$ 2.3	58.9
	Sequential	42.0 $\pm$ 0.8	56.0 $\pm$ 2.0	44.0 $\pm$ 2.0	51.3 $\pm$ 1.2	66.0 $\pm$ 5.3	94.7 $\pm$ 3.1	59.0
	Interleaved	44.7 $\pm$ 1.9	48.7 $\pm$ 3.1	52.7 $\pm$ 4.2	52.7 $\pm$ 2.3	67.3 $\pm$ 3.1	94.7 $\pm$ 2.3	60.1
AutoSkill [8]	Isolated	43.1 $\pm$ 2.3	62.7 $\pm$ 3.1	46.7 $\pm$ 4.2	51.3 $\pm$ 3.1	64.7 $\pm$ 5.0	83.3 $\pm$ 5.0	58.6
	Sequential	45.5 $\pm$ 1.5	64.7 $\pm$ 5.8	41.3 $\pm$ 4.2	50.0 $\pm$ 3.5	62.7 $\pm$ 3.1	86.7 $\pm$ 5.0	58.5
	Interleaved	44.7 $\pm$ 1.2	65.3 $\pm$ 1.2	41.3 $\pm$ 6.1	50.0 $\pm$ 2.0	66.0 $\pm$ 2.0	87.3 $\pm$ 2.3	59.1
Harness [5, 11]	Isolated	39.9 $\pm$ 5.0	74.7 $\pm$ 3.1	42.7 $\pm$ 4.6	52.0 $\pm$ 3.5	68.0 $\pm$ 4.0	90.0 $\pm$ 5.3	61.2
	Sequential	41.9 $\pm$ 1.0	54.7 $\pm$ 23.1	35.3 $\pm$ 2.3	50.7 $\pm$ 2.3	64.7 $\pm$ 4.2	91.3 $\pm$ 4.2	56.4
	Interleaved	40.9 $\pm$ 2.0	74.7 $\pm$ 4.2	38.0 $\pm$ 16.4	51.3 $\pm$ 2.3	63.3 $\pm$ 3.1	90.7 $\pm$ 6.1	59.8
<i>Claude Opus 4.7</i>	Vanilla	41.2	86.0	70.0	38.0	68.0	80.0	63.9
ACE [4]	Isolated	47.5 $\pm$ 4.2	85.3 $\pm$ 1.2	72.0 $\pm$ 2.0	33.3 $\pm$ 4.2	70.7 $\pm$ 2.3	93.3 $\pm$ 3.1	67.0
	Sequential	47.5 $\pm$ 0.9	82.7 $\pm$ 3.1	68.7 $\pm$ 1.2	38.7 $\pm$ 2.3	70.7 $\pm$ 4.2	91.3 $\pm$ 5.0	66.6
	Interleaved	46.7 $\pm$ 0.8	80.7 $\pm$ 4.2	68.0 $\pm$ 0.0	34.0 $\pm$ 7.2	70.0 $\pm$ 3.5	72.0 $\pm$ 8.7	61.9
A-Mem [6]	Isolated	48.7 $\pm$ 2.5	85.3 $\pm$ 1.2	71.3 $\pm$ 1.2	27.3 $\pm$ 1.2	71.3 $\pm$ 6.4	90.7 $\pm$ 7.6	65.8
	Sequential	48.1 $\pm$ 0.4	82.7 $\pm$ 1.2	68.0 $\pm$ 4.0	32.7 $\pm$ 3.1	69.3 $\pm$ 4.2	96.0 $\pm$ 3.5	66.1
	Interleaved	49.3 $\pm$ 0.9	81.3 $\pm$ 1.2	67.3 $\pm$ 2.3	32.0 $\pm$ 2.0	72.7 $\pm$ 6.1	86.0 $\pm$ 6.9	64.8
ReasoningBank [9]	Isolated	44.0 $\pm$ 1.1	84.0 $\pm$ 0.0	70.0 $\pm$ 2.0	36.0 $\pm$ 2.0	69.3 $\pm$ 4.2	90.0 $\pm$ 0.0	65.6
	Sequential	41.8 $\pm$ 1.4	85.3 $\pm$ 1.2	71.3 $\pm$ 3.1	35.3 $\pm$ 3.1	66.7 $\pm$ 3.1	85.3 $\pm$ 1.2	64.3
	Interleaved	45.1 $\pm$ 0.9	84.7 $\pm$ 1.2	70.0 $\pm$ 3.5	39.3 $\pm$ 3.1	68.7 $\pm$ 1.2	88.7 $\pm$ 3.1	66.1
AutoSkill [8]	Isolated	41.9 $\pm$ 1.3	86.0 $\pm$ 0.0	73.3 $\pm$ 1.2	36.7 $\pm$ 1.2	68.0 $\pm$ 5.3	82.0 $\pm$ 3.5	64.7
	Sequential	41.8 $\pm$ 0.5	86.0 $\pm$ 0.0	72.7 $\pm$ 2.3	37.3 $\pm$ 2.3	63.3 $\pm$ 1.2	86.7 $\pm$ 7.6	64.6
	Interleaved	40.6 $\pm$ 2.4	86.7 $\pm$ 1.2	73.3 $\pm$ 1.2	38.0 $\pm$ 3.5	67.3 $\pm$ 3.1	86.7 $\pm$ 2.3	65.4
Harness [5, 11]	Isolated	44.8 $\pm$ 1.0	84.0 $\pm$ 2.0	68.7 $\pm$ 1.2	34.0 $\pm$ 5.3	69.3 $\pm$ 4.2	90.7 $\pm$ 3.1	65.3
	Sequential	42.6 $\pm$ 0.8	82.7 $\pm$ 2.3	71.3 $\pm$ 4.2	36.0 $\pm$ 2.0	72.0 $\pm$ 0.0	74.0 $\pm$ 28.0	63.1
	Interleaved	46.1 $\pm$ 2.1	85.3 $\pm$ 1.2	69.3 $\pm$ 1.2	37.3 $\pm$ 1.2	69.3 $\pm$ 2.3	87.3 $\pm$ 9.2	65.8

Table 2 Positive rate and average evolution gain (%) over vanilla baseline for each streaming scenario, aggregated over all model-method configurations. Top-1 rate is the percentage of configurations for which the scenario attains the highest accuracy. **Blue** marks the best scenario per metric.

Scenario	Positive (> Vanilla)	Negative (< Vanilla)	Gain	Top-1 rate
Isolated	34/45	11/45	+1.37$\pm$0.80	38%
Sequential	28/45	16/45	+0.75 $\pm$ 0.48	29%
Interleaved	28/45	17/45	+0.90 $\pm$ 0.34	33%

this variability, we read Table 1 along the streaming-scenario axis alone, asking under which scenario self-evolution most reliably attains a positive evolution gain.

Isolated is the most reliable streaming scenario for self-evolution. As shown in Table 2, **Isolated** achieves the highest positive rate of 75.7% and the largest average evolution gain of +1.37%, substantially outperforming both **Sequential** at 62.3% positive rate and +0.75% gain, and **Interleaved** at 62.3% and +0.90%. This advantage is further validated by its highest Top-1 rate of 38%. When all tasks come from a single benchmark, the experience stream remains distributionally coherent. Each solved task contributes directly relevant knowledge for subsequent tasks, and no filtering or retrieval gating is needed to avoid cross-domain interference. This makes **Isolated** the lowest-risk streaming setting regardless of method architecture.

The two cross-domain scenarios do not follow the expected difficulty ordering. A natural hypothesis is that **Interleaved**, which exposes the agent to tasks from all domains in mixed order, should pose the greatest challenge due to maximal cross-domain interference. However, the empirical results contradict this expectation. Although both scenarios achieve comparable positive rates of 62.3% in Table 2, **Interleaved** attains a higher average evolution gain of +0.90% against +0.75% for **Sequential**, together with a higher Top-1 rate of 33% versus 29%. The advantage of **Interleaved** becomes more apparent in direct pairwise comparison. Across all 15 configurations in Table 1, **Interleaved** achieves higher average accuracy than **Sequential** in 10 cases while **Sequential** leads in only 5. This pattern holds across models, with **Interleaved** prevailing in 4 out of 5 configurations on Gemini 3.1 Pro and 3 out of 5 on Claude Opus 4.7. On GPT-5.4, where both scenarios yield negative evolution gains, **Interleaved** still leads in 3 out of 5 configurations. Beyond its higher evolution gain, **Interleaved** also exhibits a smaller standard deviation than **Sequential**, indicating that its advantage is not only larger but also more stable. Together, these results suggest that the diversity of interleaved streams compensates for cross-domain noise more effectively than the ordered domain transitions in **Sequential**.

Takeaway

Self-evolution is not uniformly beneficial, and its reliability depends on the streaming scenario. **Isolated** is the most reliable streaming scenario due to distributional coherence within a single domain. Among the two cross-domain scenarios, **Interleaved** generally outperforms **Sequential** despite introducing greater task-level interference.

5.2 When Does Self-Evolution Help? The Role of Model Capability

Different models may respond differently to self-evolution. Figure 3 provides the marginal view averaged across all five methods, and Table 3 offers a finer-grained breakdown under the three streaming scenarios.

The benefit of self-evolution is gated by model capability. As shown in Table 3, GPT-5.4 exhibits negative average evolution gains under all three streaming scenarios, ranging from -0.35% to -0.78% , with only 4 out of 15 configurations exceeding its vanilla baseline. In contrast, Gemini

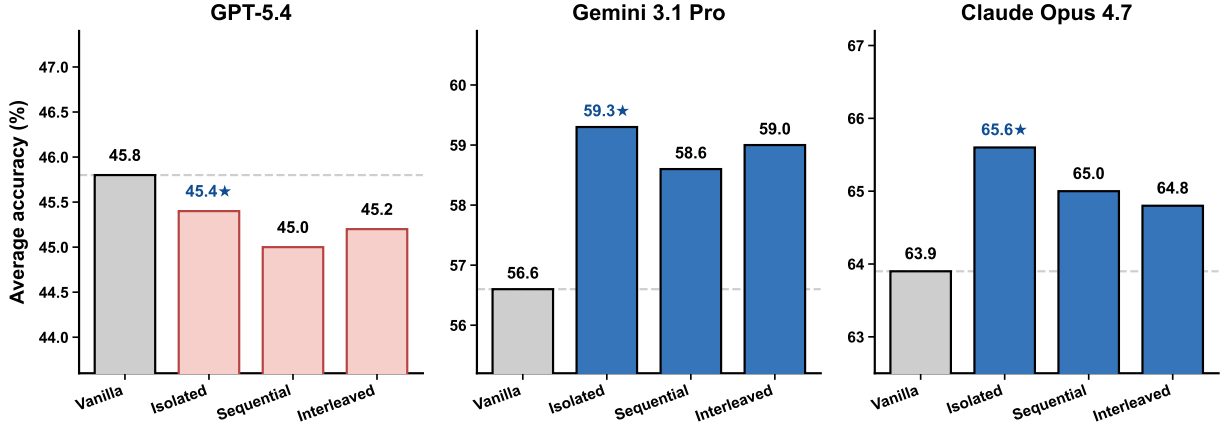


Figure 3 Average accuracy for each model under the three streaming scenarios.

Table 3 Positive rate and average evolution gain (%) over vanilla baseline for each model under each streaming scenario. Positive denotes the number of methods, out of 5, exceeding vanilla baseline.

Model	Isolated		Sequential		Interleaved	
	Positive	Gain	Positive	Gain	Positive	Gain
GPT-5.4	2/5	−0.35	1/5	−0.78	1/5	−0.62
Gemini 3.1 Pro	5/5	+2.71	4/5	+1.98	5/5	+2.41
Claude Opus 4.7	5/5	+1.75	4/5	+1.05	4/5	+0.90

3.1 Pro exceeds the vanilla baseline in 14 of 15 configurations with gains between +1.98% and +2.71%, and Claude Opus 4.7 in 13 of 15 with gains between +0.90% and +1.75%. This disparity persists across **Isolated**, **Sequential**, and **Interleaved** scenarios, as confirmed by per-seed results in Tables 11 to 13. These results suggest that self-evolution relies on a bootstrap loop in which successful task completions generate high-quality experience that benefits subsequent tasks. When the base model’s solve rate is low, the experience stream is dominated by failed or partially correct trajectories, from which the agent cannot reliably extract transferable knowledge. Above a sufficient capability threshold, the model solves enough early tasks to seed the experience buffer with useful patterns, potentially initiating a virtuous cycle of accumulation and transfer that persists across all three streaming scenarios.

The evolution gain is non-monotonic in base model strength across streaming scenarios. Between the two models that benefit from self-evolution, Gemini 3.1 Pro obtains a larger average evolution gain of +2.37% than Claude Opus 4.7 at +1.23%, despite Claude being the stronger model on the vanilla baseline. As shown in Table 3, this pattern holds across all three streaming scenarios and is corroborated in Tables 11 to 13. Moreover, the magnitude of this difference varies with streaming complexity. The gap in evolution gain between Gemini 3.1 Pro and Claude Opus 4.7 is 0.96% under **Isolated** and 0.93% under **Sequential**, but widens to 1.51% under **Interleaved**. As the streaming scenario introduces more cross-domain mixing, the mid-capability model benefits increasingly more than the stronger model. Under **Interleaved**, the mixed task stream exposes the agent to diverse cross-domain experience, providing substantial learning signal for a model that still has broad room to improve across multiple benchmarks. A model that already achieves high baseline accuracy on most benchmarks extracts less additional value from this diversity.

Takeaway

Self-evolution benefits are gated by model capability: a weak model fails to convert accumulated experience into gains under any streaming scenario. Moreover, the evolution gain is non-monotonic in base model strength, and this effect intensifies with streaming complexity.

5.3 How Does Model Capability Shape the Choice of Self-Evolving Method?

Having established that model capability gates when self-evolution helps, we now turn to the interaction between model and self-evolving method, asking how model capability shapes the choice of self-evolving method. Table 4 reports the accuracy of each method under each model, averaged across the three streaming scenarios.

Method sensitivity decreases with model capability. As shown in Table 4, the spread between the best and worst method contracts monotonically with model strength. On GPT-5.4, the spread is 5.3% with only 1 of 5 methods exceeding the vanilla baseline, and the worst method losing 2.3%. On Gemini 3.1 Pro, the spread narrows to 2.0% with all 5 methods above baseline. On Claude Opus 4.7, it further contracts to 0.9%, with all methods clustered in a narrow band above the vanilla baseline. Results in Tables 11 to 13 confirm this pattern, with GPT-5.4 exhibiting spreads of 7.0%, 5.6%, and 7.7% against 2.3%, 3.3%, and 2.2% for Claude Opus 4.7. The trend follows directly from the capability-gating effect identified in Section 5.2. On a weaker model, method architecture determines whether the agent can extract usable signal from a largely unsuccessful experience stream, making method choice decisive. On a stronger model, all methods reliably generate positive transfer, leaving less room for method choice to affect the outcome.

Table 4 Average accuracy (%) of each self-evolving method under each model, averaged across three streaming scenarios. Red background marks performance below the model’s vanilla baseline, and blue marks the best method within each model.

Model	Vanilla	ACE	A-Mem	ReasoningBank	AutoSkill	Harness
GPT-5.4	45.8	44.6	48.8	44.7	43.5	44.5
Gemini 3.1 Pro	56.6	59.8	57.8	59.4	58.8	59.2
Claude Opus 4.7	63.9	65.2	65.6	65.3	64.9	64.7

Method choice governs whether self-evolution equalizes or amplifies inter-model gaps. Because method sensitivity concentrates on the weakest model, method choice determines the aggregate effect of self-evolution on inter-model performance gaps. Averaging across all five methods, the gap between GPT-5.4 and Claude Opus 4.7 widens from 18.1% at vanilla to 20.0% after evolution, as evolution harms the weakest model on average while consistently benefiting the strongest. However, pairing each model with its optimal method narrows the gap to 16.8%, as A-Mem [6] lifts GPT-5.4 to 48.8% while still reaching 65.6% on Claude Opus 4.7. Critically, the optimal method is not portable across models. A-Mem is the best method on GPT-5.4 but ranks lowest on Gemini 3.1 Pro, while ACE [4] leads on Gemini yet ranks third on the other two models. Only ReasoningBank [9] remains competitive across all three models.

Takeaway

Method sensitivity is inversely related to model capability. The optimal method varies across models rather than transferring between them, making per-model method selection critical for maximizing self-evolution gains across diverse streaming scenarios.

5.4 How Do Self-Evolving Methods Interact with Streaming Scenarios?

Turning from the model to the streaming scenario, we ask how self-evolving methods interact with the streaming structure. A single design choice splits self-evolving methods along the scenario axis: how tightly each binds experience to the execution context. Context-integrated methods such as ACE [4] and Harness [5, 11] fold experience directly into the agent prompt, whereas retrieval-based

Table 5 Average evolution gain (%) of self-evolving methods across three streaming scenarios, aggregated over all models. The last two columns indicate the number of configurations (out of 9) in which **Isolated** or **Interleaved** attains the higher performance.

Method	Isolated	Sequential	Interleaved	Isolated Higher	Interleaved Higher
ACE	+2.28	+2.26	−1.26	7	2
Harness	+1.91	−0.86	+1.01	5	3
A-Mem	+1.93	+1.71	+2.22	5	4
ReasoningBank	+0.78	+0.46	+1.79	2	7
AutoSkill	−0.07	+0.19	+0.72	2	7

Table 6 Average accuracy (%) of each self-evolving method across three streaming scenarios and three models. **Blue** marks the best scenario within each self-evolving method.

Method	GPT-5.4			Gemini 3.1 Pro			Claude Opus 4.7		
	Isolated	Sequential	Interleaved	Isolated	Sequential	Interleaved	Isolated	Sequential	Interleaved
ACE	47.1	44.5	42.4	59.1	62.0	58.3	67.0	66.6	61.9
Harness	45.6	44.2	43.7	61.2	56.4	59.8	65.2	63.1	65.8
A-Mem	47.6	48.3	50.4	58.7	57.0	57.7	65.8	66.1	64.8
ReasoningBank	44.2	44.4	45.4	58.9	59.0	60.1	65.5	64.3	66.1
AutoSkill	42.8	43.7	43.9	58.6	58.5	59.1	64.7	64.6	65.4

methods such as ReasoningBank [9], AutoSkill [8], and A-Mem [6] keep it in an external store and inject only the entries retrieved for the current task. As shown in Table 5, the two families diverge along this axis. Context-integrated methods perform best under **Isolated**, with ACE attaining the highest average evolution gain of +2.28%, whereas retrieval-based methods each peak under **Interleaved**, with A-Mem reaching +2.22%. Table 6 corroborates this at the per-model level, where ACE and Harness reach their peak accuracy under **Isolated** for the majority of model configurations while ReasoningBank and AutoSkill consistently peak under **Interleaved**.

This interaction between method and streaming scenario can be explained by how each method couples stored knowledge with the execution context. For context-integrated methods such as ACE and Harness, under **Isolated**, this tight coupling converts experience into precise domain-specific strategies that transfer reliably across tasks within the same distribution. When the stream spans multiple domains in **Interleaved**, the gain of ACE drops sharply from +2.28% to −1.26%, and Harness decreases from +1.91% to +1.01%, indicating that tightly coupled experience is susceptible to cross-domain interference. For retrieval-based methods such as ReasoningBank, AutoSkill, and A-Mem, this gating mechanism suppresses cross-domain interference under **Interleaved** by activating only task-relevant experience, while the diversity of the interleaved tasks simultaneously drives the consolidation of transferable patterns across domains. Under **Sequential**, these methods maintain moderate gains of +0.46%, +0.19%, and +1.71% respectively, as the retrieval gate filters out experience from earlier domains that is no longer relevant to the current one.

Takeaway

The optimal self-evolving method depends on the streaming scenario. Context-integrated methods benefit most from **Isolated** where domain-specific experience accumulates without interference, while retrieval-based methods thrive under **Interleaved**, where selective retrieval shields them from cross-domain noise and diverse tasks consolidate transferable knowledge.

6 Conclusion

We introduce AgentStream, a unified framework that organizes agentic benchmarks into a configurable task stream and evaluates self-evolving agents under three streaming scenarios across multiple models and methods. Our analysis reveals that self-evolution reliability varies across

streaming scenarios, the benefit of self-evolution is gated by model capability and non-monotonic in model strength, and no single method dominates across models and streaming scenarios. These results provide practical guidance for deploying self-evolving agents and highlight the value of evaluating them under realistic streaming settings.

7 Limitations

Because a given model performs unevenly across benchmarks and our evaluation is instantiated within the Exgentic [92] framework, the notion of model capability strength used throughout this work is grounded in the empirical observations under our specific experimental setup rather than a universally valid ranking of the models. Different agent frameworks, prompting strategies, or benchmark selections may alter the relative ordering, and our conclusions regarding capability gating should therefore be interpreted within this scope. In addition, we instantiate the framework with three streaming scenarios and six agentic benchmarks, which cover representative but not exhaustive stream compositions and task domains. Broader coverage of streaming scenarios, benchmarks, models, and self-evolving methods is a direction for future work, and AgentStream is designed to be extensible along all of these axes.

References

- [1] Huan ang Gao, Jiayi Geng, Wenyue Hua, Mengkang Hu, Xinzhe Juan, Hongzhang Liu, Shilong Liu, Jiahao Qiu, Xuan Qi, Qihan Ren, Yiran Wu, Hongru WANG, Han Xiao, Yuhang Zhou, Shaokun Zhang, Jiayi Zhang, Jinyu Xiang, Yixiong Fang, Qiwen Zhao, Dongrui Liu, Cheng Qian, Zhenhailong Wang, Minda Hu, Huazheng Wang, Qingyun Wu, Heng Ji, and Mengdi Wang. A survey of self-evolving agents: What, when, how, and where to evolve on the path to artificial super intelligence. *Transactions on Machine Learning Research*, 2026. ISSN 2835-8856.
- [2] Minhua Lin, Hanqing Lu, Zhan Shi, Bing He, Rui Mao, Zhiwei Zhang, Zongyu Wu, Xianfeng Tang, Hui Liu, Zhenwei Dai, Xiang Zhang, Suhang Wang, Benoit Dumoulin, and Jian Pei. Position: Agentic evolution is the path to evolving llms. *arXiv preprint arXiv:2602.00359*, 2026.
- [3] Jinyuan Fang, Yanwen Peng, Xi Zhang, Yingxu Wang, Xinhao Yi, Guibin Zhang, Yi Xu, Bin Wu, Siwei Liu, Zihao Li, et al. A comprehensive survey of self-evolving ai agents: A new paradigm bridging foundation models and lifelong agentic systems. *arXiv preprint arXiv:2508.07407*, 2025.
- [4] Qizheng Zhang, Changran Hu, Shubhangi Upasani, Boyuan Ma, Fenglu Hong, Vamsidhar Kamanuru, Jay Rainton, Chen Wu, Mengmeng Ji, Hanchen Li, Urmish Thakker, James Zou, and Kunle Olukotun. Agentic context engineering: Evolving contexts for self-improving language models. In *Proc. ICLR*, 2026.
- [5] Minhua Lin, Juncheng Wu, Zijun Wang, Zhan Shi, Yisi Sang, Bing He, Zewen Liu, Tianxin Wei, Zongyu Wu, Zhiwei Zhang, Dakuo Wang, Xiang Zhang, Benoit Dumoulin, Cihang Xie, Yuyin Zhou, Suhang Wang, and Hanqing Lu. Harness updating is not harness benefit: Disentangling evolution capabilities in self-evolving llm agents. *arXiv preprint arXiv:2605.30621*, 2026.
- [6] Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-mem: Agentic memory for llm agents. In *Proc. NeurIPS*, 2025.
- [7] Shengtao Zhang, Jiaqian Wang, Ruiwen Zhou, Junwei Liao, Yuchen Feng, Zhuo Li, Yujie Zheng, Weinan Zhang, Ying Wen, Zhiyu Li, Feiyu Xiong, Yutao Qi, Bo Tang, and Muning

- Wen. Memrl: Self-evolving agents via runtime reinforcement learning on episodic memory. *arXiv preprint arXiv:2601.03192*, 2026.
- [8] Yutao Yang, Junsong Li, Qianjun Pan, Bihao Zhan, Yuxuan Cai, Lin Du, Jie Zhou, Kai Chen, Qin Chen, Xin Li, Bo Zhang, and Liang He. Autoskill: Experience-driven lifelong learning via skill self-evolution. *arXiv preprint arXiv:2603.01145*, 2026.
 - [9] Siru Ouyang, Jun Yan, I-Hung Hsu, Yanfei Chen, Ke Jiang, Zifeng Wang, Rujun Han, Long T. Le, Samira Daruki, Xiangru Tang, Vishy Tirumalashetty, George Lee, Mahsan Rofouei, Hangfei Lin, Jiawei Han, Chen-Yu Lee, and Tomas Pfister. Reasoningbank: Scaling agent self-evolving with reasoning memory. In *Proc. ICLR*, 2026.
 - [10] Huichi Zhou, Siyuan Guo, Anjie Liu, Zhongwei Yu, Ziqin Gong, Bowen Zhao, Zhixun Chen, Menglong Zhang, Yihang Chen, Jinsong Li, Runyu Yang, Qiangbin Liu, Xinlei Yu, Jianmin Zhou, Na Wang, Chunyang Sun, and Jun Wang. Memento-skills: Let agents design agents. *arXiv preprint arXiv:2603.18743*, 2026.
 - [11] Jiahang Lin, Shichun Liu, Chengjun Pan, Lizhi Lin, Shihan Dou, Zhiheng Xi, Xuanjing Huang, Hang Yan, Zhenhua Han, Tao Gui, et al. Agentic harness engineering: Observability-driven automatic evolution of coding-agent harnesses. *arXiv preprint arXiv:2604.25850*, 2026.
 - [12] Harsh Trivedi, Tushar Khot, Mareike Hartmann, Ruskin Manku, Vinty Dong, Edward Li, Shashank Gupta, Ashish Sabharwal, and Niranjan Balasubramanian. Appworld: A controllable world of apps and people for benchmarking interactive coding agents. In *Proc. ACL*, 2024.
 - [13] Shishir G Patil, Huanzhi Mao, Fanjia Yan, Charlie Cheng-Jie Ji, Vishnu Suresh, Ion Stoica, and Joseph E. Gonzalez. The berkeley function calling leaderboard (BFCL): From tool use to agentic evaluation of large language models. In *Proc. ICML*, 2025.
 - [14] Carlos E Jimenez, John Yang, Alexander Wettig, Shunyu Yao, Kexin Pei, Ofir Press, and Karthik Narasimhan. Swe-bench: Can language models resolve real-world github issues? In *Proc. ICLR*, 2024.
 - [15] Long Phan, Alice Gatti, Ziwen Han, Nathaniel Li, Josephina Hu, Hugh Zhang, Chen Bo Calvin Zhang, Mohamed Shaaban, John Ling, Sean Shi, et al. Humanity’s last exam. *arXiv preprint arXiv:2501.14249*, 2025.
 - [16] Victor Barres, Honghua Dong, Soham Ray, Xujie Si, and Karthik Narasimhan. τ^2 -Bench: Evaluating Conversational Agents in a Dual-Control Environment. *arXiv preprint arXiv:2506.07982*, 2025.
 - [17] Cheng-Kuang Wu, Zhi R Tam, Chieh-Yen Lin, Yun-Nung Chen, and Hung-yi Lee. Stream-bench: Towards benchmarking continuous improvement of language agents. In *Proc. NeurIPS*, 2024.
 - [18] Tianxin Wei, Noveen Sachdeva, Benjamin Coleman, Zhankui He, Yuanchen Bei, Xuying Ning, Mengting Ai, Yunzhe Li, Jingrui He, Ed H. Chi, Chi Wang, Shuo Chen, Fernando Pereira, Wang-Cheng Kang, and Derek Zhiyuan Cheng. Evo-memory: Benchmarking llm agent test-time learning with self-evolving memory. *arXiv preprint arXiv:2511.20857*, 2026.
 - [19] Aaditya Singh, Adam Fry, Adam Perelman, Adam Tart, Adi Ganesh, Ahmed El-Kishky, Aidan McLaughlin, Aiden Low, AJ Ostrow, Akhila Ananthram, et al. Openai gpt-5 system card. *arXiv preprint arXiv:2601.03267*, 2025.

- [20] Google DeepMind. Gemini 3.1 Pro model card, February 2026. URL <https://deepmind.google/models/model-cards/gemini-3-1-pro/>.
- [21] Anthropic. Introducing Claude Opus 4.7, April 2026. URL <https://www.anthropic.com/news/claude-opus-4-7>.
- [22] Zijian Chen, Xueguang Ma, Shengyao Zhuang, Ping Nie, Kai Zou, Andrew Liu, Joshua Green, Kshama Patel, Ruoxi Meng, Mingyi Su, Sahel Sharifymoghaddam, Yanxi Li, Haoran Hong, Xinyu Shi, Xuye Liu, Nandan Thakur, Crystina Zhang, Luyu Gao, Wenhui Chen, and Jimmy Lin. Browsecomp-plus: A more fair and transparent evaluation benchmark of deep-research agent. In *Proc. ACL*, 2026.
- [23] Yu Sun, Xiaolong Wang, Zhuang Liu, John Miller, Alexei Efros, and Moritz Hardt. Test-time training with self-supervision for generalization under distribution shifts. In *Proc. ICML*, 2020.
- [24] Jian Liang, Dapeng Hu, and Jiashi Feng. Do we really need to access the source data? source hypothesis transfer for unsupervised domain adaptation. In *Proc. ICML*, 2020.
- [25] James Kirkpatrick, Razvan Pascanu, Neil Rabinowitz, Joel Veness, Guillaume Desjardins, Andrei A Rusu, Kieran Milan, John Quan, Tiago Ramalho, Agnieszka Grabska-Barwinska, et al. Overcoming catastrophic forgetting in neural networks. *Proceedings of the national academy of sciences*, 114(13):3521–3526, 2017.
- [26] David Lopez-Paz and Marc’Aurelio Ranzato. Gradient episodic memory for continual learning. In *Proc. NeurIPS*, 2017.
- [27] Charlie Snell, Jaehoon Lee, Kelvin Xu, and Aviral Kumar. Scaling llm test-time compute optimally can be more effective than scaling model parameters. In *Proc. ICLR*, 2025.
- [28] Moritz Hardt and Yu Sun. Test-time training on nearest neighbors for large language models. In *Proc. ICLR*, 2024.
- [29] Jonas Hübner, Sascha Bongni, Ido Hakimi, and Andreas Krause. Efficiently learning at test-time: Active fine-tuning of llms. In *Proc. ICLR*, 2025.
- [30] Ekin Akyürek, Mehul Damani, Adam Zweiger, Linlu Qiu, Han Guo, Jyothish Pari, Yoon Kim, and Jacob Andreas. The surprising effectiveness of test-time training for few-shot learning. In *Proc. ICML*, 2025.
- [31] Guhao Feng, Shengjie Luo, Kai Hua, Ge Zhang, Wenhao Huang, Di He, and Tianle Cai. In-place test-time training. In *Proc. ICLR*, 2026.
- [32] Arthur Chen, Zuxin Liu, Jianguo Zhang, Akshara Prabhakar, Zhiwei Liu, Shelby Heinecke, Silvio Savarese, Victor Zhong, and Caiming Xiong. Test-time adaptation for llm agents via environment interaction. In *Proc. ICLR*, 2026.
- [33] Jinwu Hu, Zhitian Zhang, Guohao Chen, Xutao Wen, Chao Shuai, Wei Luo, Bin Xiao, Yuanqing Li, and Minghui Tan. Test-time learning for large language models. In *Proc. ICML*, 2025.
- [34] Yuxin Zuo, Kaiyan Zhang, Li Sheng, Shang Qu, Ganqu Cui, Xuekai Zhu, Haozhan Li, Yuchen Zhang, Xinwei Long, Ermo Hua, Biqing Qi, Yubang Sun, Zhiyuan Ma, Lifan Yuan, Ning Ding, and Bowen Zhou. Ttrl: Test-time reinforcement learning. In *Proc. NeurIPS*, 2025.

- [35] Jonas Hübotter, Leander Diaz-Bone, Ido Hakimi, Andreas Krause, and Moritz Hardt. Learning on the job: Test-time curricula for targeted reinforcement learning. *arXiv preprint arXiv:2510.04786*, 2025.
- [36] Mert Yuksekgonul, Daniel Koceja, Xinhao Li, Federico Bianchi, Jed McCaleb, Xiaolong Wang, Jan Kautz, Yejin Choi, James Zou, Carlos Guestrin, and Yu Sun. Learning to discover at test time. In *Proc. ICML*, 2026.
- [37] Zhiyuan Hu, Yunhai Hu, Juncheng Liu, Shuyue Stella Li, Yucheng Wang, Zhen Xu, See-Kiong Ng, Anh Tuan Luu, Xinxing Xu, Bryan Hooi, Cynthia Breazeal, and Hae Won Park. Collaborative multi-agent test-time reinforcement learning for reasoning. *arXiv preprint arXiv:2601.09667*, 2026.
- [38] Dong Yan, Jian Liang, Yanbo Wang, Shuo Lu, Ran He, and Tieniu Tan. What if consensus lies? selective-complementary reinforcement learning at test time. In *Proc. ACL*, 2026.
- [39] Haoyang He, Zihua Rong, Liangjie Zhao, Yunjia Zhao, Lan Yang, and Honggang Zhang. Ttsr: Test-time self-reflection for continual reasoning improvement. *arXiv preprint arXiv:2603.03297*, 2026.
- [40] Chengyi Yang, Zhishang Xiang, Yunbo Tang, Zongpei Teng, Chengsong Huang, Fei Long, Yuhan Liu, and Jinsong Su. Ttcs: Test-time curriculum synthesis for self-evolving. *arXiv preprint arXiv:2601.22628*, 2026.
- [41] Weijia Xu, Alessandro Sordoni, Chandan Singh, Zelalem Gero, Michel Galley, Xingdi Yuan, and Jianfeng Gao. Test-time learning with an evolving library. *arXiv preprint arXiv:2605.14477*, 2026.
- [42] Jingxing Wang, Chenyu Zhou, Zhihui Fu, Jun Wang, Weiwen Liu, Weinan Zhang, and Jianghao Lin. Skills on the fly: Test-time adaptive skill synthesis for llm agents. *arXiv preprint arXiv:2605.16986*, 2026.
- [43] Junda Wang, Zonghai Tao, Hansi Zeng, Zhichao Yang, Hamed Zamani, and Hong Yu. Tarse: Test-time adaptation via retrieval of skills and experience for reasoning agents. *arXiv preprint arXiv:2603.01241*, 2026.
- [44] Qizheng Zhang, Michael Wornow, Gerry Wan, and Kunle Olukotun. Agentic plan caching: Test-time memory for fast and cost-efficient llm agents. In *Proc. NeurIPS*, 2025.
- [45] Yu Cheng, Yongkang Hu, Jiuan Zhou, Yushuo Zhang, Yihang Chen, Huichi Zhou, Mingang Chen, Zhizhong Zhang, Kun Shao, Yuan Xie, and Zhaoxia Yin. Tame: A trustworthy test-time evolution of agent memory with systematic benchmarking. *arXiv preprint arXiv:2602.03224*, 2026.
- [46] Emre Can Acikgoz, Cheng Qian, Heng Ji, Dilek Hakkani-Tür, and Gokhan Tur. Self-improving llm agents at test-time. *arXiv preprint arXiv:2510.07841*, 2025.
- [47] Yibo Li, Zijie Lin, Ailin Deng, Xuan Zhang, Yufei He, Shuo Ji, Tri Cao, and Bryan Hooi. Just-in-time reinforcement learning: Continual learning in llm agents without gradient updates. In *Proc. ICML*, 2026.
- [48] Shreyas Rajesh, Pavan Holur, Mehmet Yigit Turali, Chenda Duan, and Vwani Roychowdhury. Panini: Continual learning in token space via structured memory. In *Proc. ICML*, 2026.

- [49] Zheng Wu, Xingyu Lou, Xinbei Ma, Yansi Li, Weiwen Liu, Weinan Zhang, Jun Wang, and Zhuosheng Zhang. Agent-dice: Disentangling knowledge updates via geometric consensus for agent continual learning. *arXiv preprint arXiv:2601.03641*, 2026.
- [50] Yiyang Lu, Yu He, Jianlong Chen, and Hongyuan Zha. Mssr: Memory-aware adaptive replay for continual llm fine-tuning. *arXiv preprint arXiv:2603.09892*, 2026.
- [51] Yiming Xiong, Shengran Hu, and Jeff Clune. Learning to continually learn via meta-learning agentic memory designs. *arXiv preprint arXiv:2602.07755*, 2026.
- [52] Guanyu Jiang, Zhaochen Su, Xiaoye Qu, and Yi R Fung. Xskill: Continual learning from experience and skills in multimodal agents. In *Proc. ICML*, 2026.
- [53] Tianzhu Ye, Li Dong, Qingxiu Dong, Xun Wu, Shaohan Huang, and Furu Wei. Online experiential learning for language models. *arXiv preprint arXiv:2603.16856*, 2026.
- [54] Wei Yang, Defu Cao, Jiacheng Pang, Muyan Weng, and Yan Liu. Adaptive collaboration with humans: Metacognitive policy optimization for multi-agent llms with continual learning. In *Proc. ICLR*, 2026.
- [55] Haozhen Zhang, Quanyu Long, Jianzhu Bao, Tao Feng, Weizhi Zhang, Haodong Yue, and Wenya Wang. Memskill: Learning and evolving memory skills for self-evolving agents. *arXiv preprint arXiv:2602.02474*, 2026.
- [56] Prateek Chhikara, Dev Khant, Saket Aryan, Taranjeet Singh, and Deshraj Yadav. Mem0: Building production-ready ai agents with scalable long-term memory. *arXiv preprint arXiv:2504.19413*, 2025.
- [57] Peng Xia, Jianwen Chen, Hanyang Wang, Jiaqi Liu, Kaide Zeng, Yu Wang, Siwei Han, Yiyang Zhou, Xujiang Zhao, Haifeng Chen, Zeyu Zheng, Cihang Xie, and Huaxiu Yao. Skillrl: Evolving agents via recursive skill-augmented reinforcement learning. *arXiv preprint arXiv:2602.08234*, 2026.
- [58] Siru Ouyang, Jun Yan, Yanfei Chen, Rujun Han, Zifeng Wang, Bhavana Dalvi Mishra, Rui Meng, Chun-Liang Li, Yizhu Jiao, Kaiwen Zha, Maohao Shen, Vishy Tirumalashetty, George Lee, Jiawei Han, Tomas Pfister, and Chen-Yu Lee. Skillos: Learning skill curation for self-evolving agents. *arXiv preprint arXiv:2605.06614*, 2026.
- [59] Salaheddin Alzubi, Noah Provenzano, Jaydon Bingham, Weiyuan Chen, and Tu Vu. Evoskill: Automated skill discovery for multi-agent systems. *arXiv preprint arXiv:2603.02766*, 2026.
- [60] Zhiling Yan, Dingjie Song, Hanrong Zhang, Wei Liang, Yuxuan Zhang, Yutong Dai, Lifang He, Philip S. Yu, Ran Xu, Xiang Li, and Lichao Sun. Openskill: Open-world self-evolution for llm agents. *arXiv preprint arXiv:2606.06741*, 2026.
- [61] Yifan Yang, Ziyang Gong, WeiQuan Huang, Qihao Yang, Ziwei Zhou, Zisu Huang, Yan Li, Xuemei Gao, Qi Dai, Bei Liu, Kai Qiu, Yuqing Yang, Dongdong Chen, Xue Yang, and Chong Luo. Skillopt: Executive strategy for self-evolving agent skills. *arXiv preprint arXiv:2605.23904*, 2026.
- [62] Yoonho Lee, Roshen Nair, Qizheng Zhang, Kangwook Lee, Omar Khattab, and Chelsea Finn. Meta-harness: End-to-end optimization of model harnesses. *arXiv preprint arXiv:2603.28052*, 2026.

- [63] Xinshuai Guo, Jiayi Kuang, Linyue Pan, Yinghui Li, Yangning Li, Hai-Tao Zheng, Ying Shen, Di Yin, and Xing Sun. Evoconfig: Self-evolving multi-agent systems for efficient autonomous environment configuration. *arXiv preprint arXiv:2601.16489*, 2026.
- [64] Dengjia Zhang, Xiaoou Liu, Lu Cheng, Yaqing Wang, Kenton Murray, and Hua Wei. Selaurl: Self evolving llm agent via uncertainty-aware rewards. In *Proc. PAKDD*, 2026.
- [65] Guowei Xu, Zhenting Qi, Huangyuan Su, Weirui Ye, Himabindu Lakkaraju, Sham M. Kakade, and Yilun Du. Self-improving language models with bidirectional evolutionary search. *arXiv preprint arXiv:2605.28814*, 2026.
- [66] Emre Can Acikgoz, Cheng Qian, Jonas Hübötter, Heng Ji, Dilek Hakkani-Tür, and Gokhan Tur. Tool-r0: Self-evolving llm agents for tool-learning from zero data. *arXiv preprint arXiv:2602.21320*, 2026.
- [67] Leheng Sheng, Wenchang Ma, Ruixin Hong, Xiang Wang, An Zhang, and Tat-Seng Chua. Reinforcing chain-of-thought reasoning with self-evolving rubrics. *arXiv preprint arXiv:2602.10885*, 2026.
- [68] Yimeng Wang, Jiaxing Zhao, Hongbin Xie, Hexing Ma, Yuzhen Lei, Shuangxue Liu, Xuan Song, Zichen Zhang, and Haoran Zhang. Metagen: Self-evolving roles and topologies for multi-agent llm reasoning. *arXiv preprint arXiv:2601.19290*, 2026.
- [69] Yue Hu, Yuzhu Cai, Yaxin Du, Xinyu Zhu, Xiangrui Liu, Zijie Yu, Yuchen Hou, Shuo Tang, and Siheng Chen. Self-evolving multi-agent collaboration networks for software development. In *Proc. ICLR*, 2025.
- [70] Siwei Liu, Jinyuan Fang, Han Zhou, Yingxu Wang, and Zaiqiao Meng. Sew: Self-evolving agentic workflows for automated code generation. *arXiv preprint arXiv:2505.18646*, 2026.
- [71] Shuo Yang, Soyeon Caren Han, Xueqi Ma, Yan Li, Mohammad Reza Ghasemi Madani, and Eduard Hovy. Evotool: Self-evolving tool-use policy optimization in llm agents via blame-aware mutation and diversity-aware selection. *arXiv preprint arXiv:2603.04900*, 2026.
- [72] Alexander Novikov, Ngân Vũ, Marvin Eisenberger, Emilien Dupont, Po-Sen Huang, Adam Zsolt Wagner, Sergey Shirobokov, Borislav Kozlovskii, Francisco J. R. Ruiz, Abbas Mehrabian, M. Pawan Kumar, Abigail See, Swarat Chaudhuri, George Holland, Alex Davies, Sebastian Nowozin, Pushmeet Kohli, and Matej Balog. Alphaevolve: A coding agent for scientific and algorithmic discovery. *arXiv preprint arXiv:2506.13131*, 2025.
- [73] Yufei He, Juncheng Liu, Yue Liu, Yibo Li, Tri Cao, Zhiyuan Hu, Xinxing Xu, and Bryan Hooi. Evotest: Evolutionary test-time learning for self-improving agentic systems. In *Proc. ICLR*, 2026.
- [74] Yuxuan Cai, Yipeng Hao, Jie Zhou, Hang Yan, Zhikai Lei, Rui Zhen, Zhenhua Han, Yutao Yang, Junsong Li, Qianjun Pan, Tianyu Huai, Qin Chen, Xin Li, Kai Chen, Bo Zhang, Xipeng Qiu, and Liang He. Building self-evolving agents via experience-driven lifelong learning: A framework and benchmark. *arXiv preprint arXiv:2508.19005*, 2026.
- [75] Mert Yuksekgonul, Federico Bianchi, Joseph Boen, Sheng Liu, Pan Lu, Zhi Huang, Carlos Guestrin, and James Zou. Optimizing generative ai by backpropagating language model feedback. *Nature*, 639:609–616, 2025.
- [76] Shuai Shao, Qihan Ren, Chen Qian, Boyi Wei, Dadi Guo, Jingyi Yang, Xinhao Song, Linfeng Zhang, Weinan Zhang, Dongrui Liu, and Jing Shao. Your agent may misevolve: Emergent risks in self-evolving llm agents. In *Proc. ICLR*, 2026.

- [77] Shunyu Yao, Howard Chen, John Yang, and Karthik Narasimhan. Webshop: Towards scalable real-world web interaction with grounded language agents. In *Proc. NeurIPS*, 2022.
- [78] Shuyan Zhou, Frank F. Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng, Tianyue Ou, Yonatan Bisk, Daniel Fried, Uri Alon, and Graham Neubig. Webarena: A realistic web environment for building autonomous agents. In *Proc. ICLR*, 2024.
- [79] Hongliang He, Wenlin Yao, Kaixin Ma, Wenhao Yu, Yong Dai, Hongming Zhang, Zhenzhong Lan, and Dong Yu. Webvoyager: Building an end-to-end web agent with large multimodal models. In *Proc. ACL*, 2024.
- [80] Tianbao Xie, Danyang Zhang, Jixuan Chen, Xiaochuan Li, Siheng Zhao, Ruisheng Cao, Toh Jing Hua, Zhoujun Cheng, Dongchan Shin, Fangyu Lei, Yitao Liu, Yiheng Xu, Shuyan Zhou, Silvio Savarese, Caiming Xiong, Victor Zhong, and Tao Yu. Osworld: Benchmarking multimodal agents for open-ended tasks in real computer environments. In *Proc. NeurIPS*, 2024.
- [81] Chaithanya Bandi, Razvan-Gabriel Dumitru, Ben Hertzberg, Divyansh Agarwal, Geobio Boo, Tejas Polakam, Sami Hassaan, Jeff Da, HiJae Kim, Vipul Gupta, Manasi Sharma, Andrew Park, Martin Dimakis, Ernesto Gabriel Hernandez Montoya, Dan Rambado, Ivan Salazar, Rafael Cruz, MohammadHossein Rezaei, Chetan Rane, Ben Levin, Daniel Yue Zhang, Brad Kenstler, and Bing Liu. Mcp-atlas: A large-scale benchmark for tool-use competency with real mcp servers. *arXiv preprint arXiv:2602.00933*, 2026.
- [82] Junlong Li, Wenshuo Zhao, Jian Zhao, Weihao Zeng, Haoze Wu, Xiaochen Wang, Rui Ge, Yuxuan Cao, Yuzhen Huang, Wei Liu, et al. The tool decathlon: Benchmarking language agents for diverse, realistic, and long-horizon task execution. In *Proc. ICLR*, 2026.
- [83] Mike A Merrill, Alexander G Shaw, Nicholas Carlini, Boxuan Li, Harsh Raj, Ivan Bercovich, Lin Shi, Jeong Yeon Shin, Thomas Walshe, E Kelly Buchanan, et al. Terminal-bench: Benchmarking agents on hard, realistic tasks in command line interfaces. In *Proc. ICLR*, 2026.
- [84] Zhun Wang, Tianneng Shi, Jingxuan He, Matthew Cai, Jialin Zhang, and Dawn Song. Cybergym: Evaluating AI agents’ real-world cybersecurity capabilities at scale. In *Proc. ICLR*, 2026.
- [85] Xiangyi Li, Yimin Liu, Wenbo Chen, Bingran You, Zonglin Di, Yifeng He, Shenghan Zheng, Kyoung Whan Choe, Jiankai Sun, Shuyi Wang, et al. Skillsbench: Benchmarking how well agent skills work across diverse tasks. *arXiv preprint arXiv:2602.12670*, 2026.
- [86] Ziao Zhang, Kou Shi, Shiting Huang, Avery Nie, Yu Zeng, Yiming Zhao, Zhen Fang, Qishen Su, Haibo Qiu, Wei Yang, et al. Skillflow: Benchmarking lifelong skill discovery and evolution for autonomous agents. *arXiv preprint arXiv:2604.17308*, 2026.
- [87] Grégoire Mialon, Clémentine Fourrier, Thomas Wolf, Yann LeCun, and Thomas Scialom. Gaia: a benchmark for general ai assistants. In *Proc. ICLR*, 2024.
- [88] Jason Wei, Zhiqing Sun, Spencer Papay, Scott McKinney, Jeffrey Han, Isa Fulford, Hyung Won Chung, Alex Tachard Passos, William Fedus, and Amelia Glaese. Browsecomp: A simple yet challenging benchmark for browsing agents. *arXiv preprint arXiv:2504.12516*, 2025.
- [89] Tejal Patwardhan, Rachel Dias, Elizabeth Proehl, Grace Kim, Michele Wang, Olivia Watkins, Simón Posada Fishman, Marwan Aljubeh, Phoebe Thacker, Laurance Fauconnet, et al. Gdpval: Evaluating ai model performance on real-world economically valuable tasks. *arXiv preprint arXiv:2510.04374*, 2025.

- [90] Antoine Bigeard, Langston Nashold, Rayan Krishnan, and Shirley Wu. Finance agent benchmark: Benchmarking llms on real-world financial research tasks. *arXiv preprint arXiv:2508.00828*, 2025.
- [91] Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. In *Proc. ICML*, 2025.
- [92] Elron Bandel, Asaf Yehudai, Lilach Eden, Yehoshua Sagron, Yotam Perlitz, Elad Venezian, Natalia Razinkov, Natan Ergas, Shlomit Shachor Ifergan, Segev Shlomov, et al. General agent evaluation. In *Proc. ICML*, 2026.

A Cost Analysis

A practical concern for deploying self-evolving agents is whether performance gains justify the additional cost. Tables 7 and 8 report the per-task cost, relative cost overhead, and average agent steps for GPT-5.4 and Gemini 3.1 Pro respectively, where all costs are reported using LiteLLM’s pricing data¹. Figure 4 summarizes these results at the method level, averaged across three streaming scenarios.

Self-evolution does not necessarily increase inference cost. On Gemini 3.1 Pro, four methods operate below the vanilla baseline cost, reducing it to 64% for ReasoningBank [9], 71% for Harness [5, 11], 82% for AutoSkill [8], and 84% for A-Mem [6]. These methods simultaneously reduce the average number of agent steps, suggesting that accumulated experience helps the agent reach solutions more efficiently. On GPT-5.4, the pattern reverses. Most methods incur higher cost, with A-Mem reaching 577% of the baseline and ACE [4] at 266%, while ReasoningBank remains the only cost-reducing method at 92% of the baseline.

The cost-performance tradeoff is governed by the model. On Gemini 3.1 Pro, ACE and AutoSkill both achieve evolution gains above +3% with moderate or reduced cost overhead. ReasoningBank provides +2.3% evolution gain while reducing cost to 64% of the baseline, making it the most cost-efficient method on this model. On GPT-5.4, only A-Mem achieves a positive evolution gain of +3.2%, but at 577% of the baseline cost. All other methods on GPT-5.4 incur negative evolution gains regardless of their cost overhead. This asymmetry echoes the finding in Section 5.2 that weaker models struggle to convert accumulated experience into performance improvements, and further shows that this limitation extends to cost efficiency.

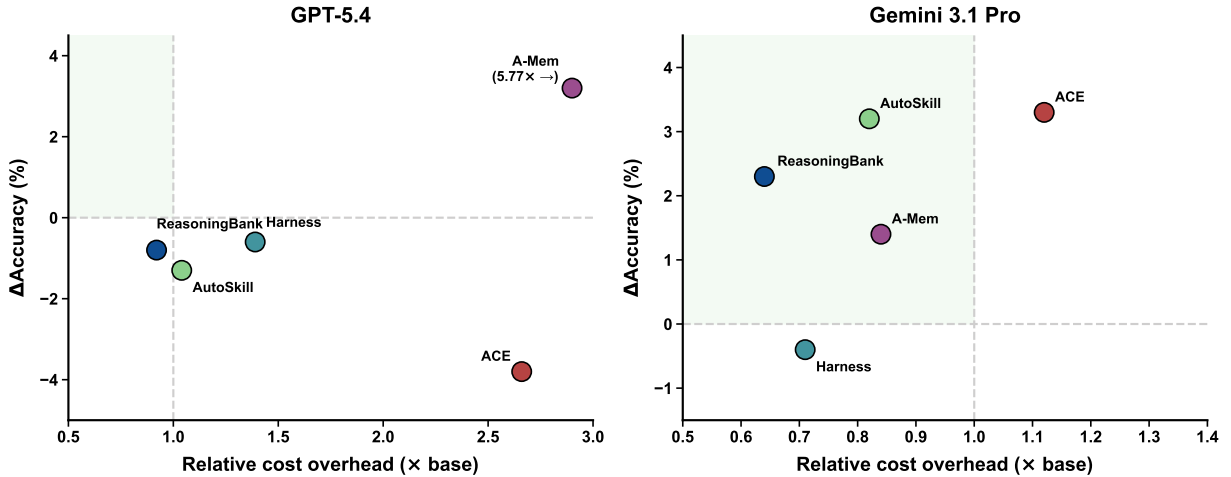


Figure 4 Cost overhead and evolution gain of each self-evolving method averaged across three streaming scenarios based on a single evaluation.

B Model Evolution Behavior Analysis

Beyond aggregate performance, we analyze how the three models differ in their self-evolution behavior under the **Interleaved** stream, focusing on the evolution state each model accumulates and how that state is updated as tasks are processed.

B.1 Evolution State Accumulation

As shown in Table 9, the three models accumulate evolution states of markedly different sizes and structures. Claude Opus 4.7 generates the largest states across all methods, averaging 1251 ACE [4] playbook bullets and 463 Harness [5, 11] skills, while Gemini 3.1 Pro consistently produces

¹Model prices.

Table 7 Per-task cost (\$), relative cost overhead, evolution gain (%), and average agent steps for GPT-5.4 based on a single evaluation. The vanilla baseline operates at \$0.297 per task with 9.5 steps and 45.8% accuracy.

Method	Mode	Cost	Relative	Δ Acc.	Steps	Δ Steps (%)
ACE	Isolated	0.504	1.70×	−1.6	11.3	+18.9
	Sequential	0.977	3.29×	−7.3	10.4	+9.5
	Interleaved	0.890	3.00×	−2.4	10.5	+10.5
Harness	Isolated	0.385	1.30×	+2.5	10.2	+7.4
	Sequential	0.460	1.55×	−2.7	10.5	+10.5
	Interleaved	0.390	1.31×	−1.7	10.1	+6.3
A-Mem	Isolated	1.419	4.78×	−2.2	8.1	−14.7
	Sequential	1.827	6.15×	+6.2	8.6	−9.5
	Interleaved	1.893	6.37×	+5.6	8.8	−7.4
ReasoningBank	Isolated	0.291	0.98×	+1.4	8.7	−8.4
	Sequential	0.270	0.91×	± 0.0	8.1	−14.7
	Interleaved	0.258	0.87×	−3.7	8.2	−13.7
AutoSkill	Isolated	0.298	1.00×	−2.3	9.1	−4.2
	Sequential	0.324	1.09×	+0.3	10.2	+7.4
	Interleaved	0.309	1.04×	−1.8	9.4	−1.1

Table 8 Per-task cost (\$), relative cost overhead, evolution gain (%), and average agent steps for Gemini 3.1 Pro based on a single evaluation. The vanilla baseline operates at \$4.035 per task with 21.1 steps and 56.6% accuracy.

Method	Mode	Cost	Relative	Δ Acc.	Steps	Δ Steps (%)
ACE	Isolated	4.239	1.05×	+4.9	22.9	+8.5
	Sequential	3.499	0.87×	+6.6	21.0	−0.5
	Interleaved	5.791	1.44×	−1.7	23.3	+10.4
Harness	Isolated	3.791	0.94×	+3.3	21.1	+0.0
	Sequential	2.461	0.61×	−4.3	18.9	−10.4
	Interleaved	2.310	0.57×	−0.2	19.3	−8.5
A-Mem	Isolated	3.508	0.87×	+2.7	17.0	−19.4
	Sequential	3.659	0.91×	−1.8	17.5	−17.1
	Interleaved	2.945	0.73×	+3.4	16.2	−23.2
ReasoningBank	Isolated	2.613	0.65×	+2.5	19.7	−6.6
	Sequential	2.680	0.66×	+1.6	19.2	−9.0
	Interleaved	2.492	0.62×	+2.9	18.8	−10.9
AutoSkill	Isolated	2.809	0.70×	+2.2	20.0	−5.2
	Sequential	3.421	0.85×	+5.0	21.0	−0.5
	Interleaved	3.656	0.91×	+2.4	22.0	+4.3

Table 9 Evolution state accumulated by each model over the **Interleaved** stream.

Method	Metric	GPT-5.4	Gemini 3.1 Pro	Claude Opus 4.7
ACE	playbook bullets	552	209	1251
ReasoningBank	memory items	894	585	898
A-Mem	evolutions	261	248	261
AutoSkill	skills	176	117	160
Harness	skills	181	137	463
Harness	prompt+memory (chars)	8,711	29,172	9,362

the most compact states with only 209 ACE bullets and 117 AutoSkill [8] skills. GPT-5.4 generates a moderate number of items with relatively concise per-item content, balancing breadth of coverage with manageable state complexity. The contrast extends beyond volume to architectural preference: under Harness, Claude Opus 4.7 allocates the vast majority of its evolution budget to the skill library while maintaining only 9K characters of system prompt and memory, whereas Gemini 3.1 Pro distributes 29K characters across its system prompt and memory fields, favoring centralized guidance over distributed skill entries. A similar pattern holds for memory-based methods. Under ReasoningBank [9], Claude Opus 4.7 and GPT-5.4 each distill approximately 900 memory items while Gemini produces only 585, confirming that Gemini extracts fewer but more consolidated experience entries from each interaction.

B.2 Update Dynamics

Table 10 summarizes how the models update their Harness state, which provides the most informative view since it jointly maintains system prompt, memory, and skill library. The three models adopt distinct update strategies. GPT-5.4 is largely append-only, adding skills but rarely editing them, with only 5 edits on average over 300 tasks and no modification to the system prompt. Gemini 3.1 Pro spreads its updates more evenly, revising the memory and system prompt 267 times while also refining skills through 66 edits. Claude Opus 4.7 performs the most intensive refinement, revising on 96% of tasks while concentrating almost entirely on the skill library rather than the memory or system prompt.

Table 10 Evolution behavior on Harness state over the `Interleaved` stream.

	GPT-5.4	Gemini 3.1 Pro	Claude Opus 4.7
Revision rate	65%	69%	96%
Skills added	181	147	492
Skills edited	5	66	460
Memory/prompt edits	21	267	103

C Detailed Results across Random Seeds

The main results in Table 1 are averaged over three random seeds that share the same task set but differ in the global task arrival order. Tables 11 to 13 provide the complete per-seed results.

D Cumulative Accuracy Dynamics

To characterize the dynamics of self-evolution, we report the cumulative accuracy over three streaming scenarios for each self-evolving method and model in Figures 5 to 13.

E Method Prompts

For reproducibility, we provide the full set of prompts used by self-evolving methods. All prompts are adapted to our test-time setting, where no ground-truth labels are available, and to the Exgentic [92] framework, in which the agent completes tasks through multi-step tool use rather than single-turn question answering.

Table 11 Main results (%) of self-evolving methods across three streaming scenarios under seed 42. Red background indicates scores below the model’s vanilla baseline, and blue marks the best scenario within each self-evolving method.

Methods	Mode	AppWorld	BFCL	BrowseComp+	HLE	SWE	Tau2	Avg
<i>GPT-5.4</i>	Vanilla	44.6	66.0	50.0	2.0	62.0	50.0	45.8
ACE	Isolated	33.1	54.0	44.0	6.0	58.0	70.0	44.2
	Sequential	33.1	58.0	54.0	8.0	58.0	20.0	38.5
	Interleaved	32.3	62.0	46.0	4.0	64.0	52.0	43.4
A-Mem	Isolated	41.8	70.0	60.0	12.0	66.0	12.0	43.6
	Sequential	41.8	64.0	48.0	10.0	64.0	84.0	52.0
	Interleaved	32.4	68.0	56.0	10.0	60.0	82.0	51.4
ReasoningBank	Isolated	42.9	70.0	48.0	8.0	54.0	60.0	47.2
	Sequential	42.9	60.0	48.0	12.0	60.0	52.0	45.8
	Interleaved	36.6	58.0	44.0	12.0	52.0	50.0	42.1
AutoSkill	Isolated	36.8	72.0	52.0	6.0	64.0	30.0	43.5
	Sequential	36.3	76.0	48.0	6.0	54.0	56.0	46.1
	Interleaved	42.0	66.0	46.0	4.0	60.0	46.0	44.0
Harness	Isolated	37.9	70.0	48.0	14.0	60.0	60.0	48.3
	Sequential	36.4	68.0	46.0	8.0	52.0	48.0	43.1
	Interleaved	40.6	66.0	46.0	8.0	60.0	44.0	44.1
<i>Gemini 3.1 Pro</i>	Vanilla	41.8	58.0	34.0	52.0	64.0	90.0	56.6
ACE	Isolated	41.2	74.0	46.0	50.0	64.0	94.0	61.5
	Sequential	40.9	74.0	48.0	52.0	68.0	96.0	63.2
	Interleaved	41.6	40.0	38.0	52.0	64.0	94.0	54.9
A-Mem	Isolated	33.6	62.0	54.0	50.0	66.0	90.0	59.3
	Sequential	36.9	52.0	46.0	44.0	60.0	90.0	54.8
	Interleaved	37.9	62.0	56.0	50.0	62.0	92.0	60.0
ReasoningBank	Isolated	44.4	60.0	44.0	50.0	62.0	94.0	59.1
	Sequential	41.3	58.0	42.0	52.0	64.0	92.0	58.2
	Interleaved	46.7	46.0	54.0	50.0	68.0	92.0	59.5
AutoSkill	Isolated	44.7	66.0	48.0	52.0	64.0	78.0	58.8
	Sequential	45.5	68.0	46.0	52.0	66.0	92.0	61.6
	Interleaved	45.8	64.0	40.0	52.0	66.0	86.0	59.0
Harness	Isolated	45.5	72.0	40.0	50.0	64.0	88.0	59.9
	Sequential	41.8	28.0	34.0	52.0	68.0	90.0	52.3
	Interleaved	38.6	70.0	20.0	54.0	64.0	92.0	56.4
<i>Claude Opus 4.7</i>	Vanilla	41.2	86.0	70.0	38.0	68.0	80.0	63.9
ACE	Isolated	48.3	86.0	70.0	32.0	68.0	90.0	65.7
	Sequential	48.5	82.0	68.0	36.0	66.0	86.0	64.4
	Interleaved	47.5	82.0	68.0	26.0	68.0	78.0	61.6
A-Mem	Isolated	46.2	86.0	70.0	28.0	64.0	94.0	64.7
	Sequential	48.0	82.0	68.0	36.0	74.0	98.0	67.7
	Interleaved	49.0	80.0	70.0	30.0	78.0	90.0	66.2
ReasoningBank	Isolated	43.9	84.0	68.0	34.0	68.0	90.0	64.6
	Sequential	40.2	86.0	68.0	32.0	66.0	84.0	62.7
	Interleaved	44.1	84.0	68.0	36.0	68.0	92.0	65.4
AutoSkill	Isolated	42.6	86.0	74.0	36.0	72.0	78.0	64.8
	Sequential	41.2	86.0	74.0	36.0	64.0	78.0	63.2
	Interleaved	42.9	86.0	74.0	40.0	70.0	88.0	66.8
Harness	Isolated	43.8	84.0	70.0	28.0	66.0	88.0	63.3
	Sequential	42.5	84.0	68.0	34.0	72.0	94.0	65.7
	Interleaved	45.9	84.0	68.0	38.0	68.0	82.0	64.3

Table 12 Main results (%) of self-evolving methods across three streaming scenarios under seed 44. Red background indicates scores below the model’s vanilla baseline, and blue marks the best scenario within each self-evolving method.

Methods	Mode	AppWorld	BFCL	BrowseComp+	HLE	SWE	Tau2	Avg
<i>GPT-5.4</i>	Vanilla	44.6	66.0	50.0	2.0	62.0	50.0	45.8
ACE	Isolated	44.8	76.0	48.0	6.0	64.0	62.0	50.1
	Sequential	44.8	68.0	42.0	6.0	62.0	54.0	46.1
	Interleaved	34.5	58.0	46.0	8.0	58.0	48.0	42.1
A-Mem	Isolated	31.4	66.0	50.0	6.0	66.0	54.0	45.6
	Sequential	34.8	62.0	54.0	12.0	62.0	48.0	45.5
	Interleaved	41.2	62.0	54.0	6.0	66.0	94.0	53.9
ReasoningBank	Isolated	39.7	56.0	44.0	12.0	60.0	44.0	42.6
	Sequential	42.3	64.0	50.0	12.0	60.0	24.0	42.1
	Interleaved	36.6	68.0	50.0	14.0	54.0	58.0	46.8
AutoSkill	Isolated	41.4	70.0	46.0	4.0	58.0	52.0	45.2
	Sequential	39.2	70.0	44.0	6.0	58.0	46.0	43.9
	Interleaved	38.7	76.0	44.0	4.0	60.0	44.0	44.5
Harness	Isolated	34.9	54.0	44.0	4.0	64.0	44.0	40.8
	Sequential	33.4	68.0	46.0	6.0	56.0	56.0	44.2
	Interleaved	39.1	60.0	56.0	6.0	56.0	42.0	43.2
<i>Gemini 3.1 Pro</i>	Vanilla	41.8	58.0	34.0	52.0	64.0	90.0	56.6
ACE	Isolated	43.6	66.0	38.0	50.0	64.0	80.0	56.9
	Sequential	44.6	80.0	44.0	52.0	68.0	92.0	63.4
	Interleaved	38.4	52.0	50.0	50.0	66.0	100.0	59.4
A-Mem	Isolated	46.3	26.0	46.0	54.0	64.0	90.0	54.4
	Sequential	40.5	56.0	44.0	50.0	62.0	94.0	57.8
	Interleaved	43.0	38.0	44.0	50.0	62.0	84.0	53.5
ReasoningBank	Isolated	39.2	52.0	52.0	52.0	66.0	94.0	59.2
	Sequential	41.9	56.0	46.0	50.0	62.0	94.0	58.3
	Interleaved	44.5	48.0	56.0	54.0	64.0	96.0	60.4
AutoSkill	Isolated	44.1	60.0	50.0	48.0	70.0	88.0	60.0
	Sequential	44.1	68.0	38.0	46.0	62.0	86.0	57.4
	Interleaved	43.5	66.0	48.0	48.0	68.0	90.0	60.6
Harness	Isolated	36.0	74.0	40.0	56.0	72.0	86.0	60.7
	Sequential	43.0	68.0	38.0	52.0	66.0	96.0	60.5
	Interleaved	41.9	76.0	42.0	50.0	66.0	84.0	60.0
<i>Claude Opus 4.7</i>	Vanilla	41.2	86.0	70.0	38.0	68.0	80.0	63.9
ACE	Isolated	42.9	86.0	74.0	30.0	72.0	96.0	66.8
	Sequential	47.1	80.0	70.0	40.0	74.0	92.0	67.2
	Interleaved	45.9	84.0	68.0	36.0	74.0	76.0	64.0
A-Mem	Isolated	48.8	84.0	72.0	26.0	76.0	82.0	64.8
	Sequential	47.8	82.0	64.0	32.0	68.0	92.0	64.3
	Interleaved	50.3	82.0	66.0	32.0	66.0	78.0	62.4
ReasoningBank	Isolated	43.0	84.0	70.0	36.0	66.0	90.0	64.8
	Sequential	43.0	86.0	74.0	38.0	64.0	86.0	65.2
	Interleaved	45.6	86.0	74.0	42.0	68.0	86.0	66.9
AutoSkill	Isolated	42.8	86.0	74.0	36.0	62.0	84.0	64.1
	Sequential	42.1	86.0	74.0	36.0	62.0	90.0	65.0
	Interleaved	40.8	88.0	74.0	40.0	68.0	84.0	65.8
Harness	Isolated	44.9	82.0	68.0	38.0	74.0	90.0	66.1
	Sequential	41.9	80.0	70.0	36.0	72.0	42.0	57.0
	Interleaved	44.1	86.0	70.0	36.0	72.0	82.0	65.0

Table 13 Main results (%) of self-evolving methods across three streaming scenarios under seed 46. Red background indicates scores below the model’s vanilla baseline, and blue marks the best scenario within each self-evolving method.

Methods	Mode	AppWorld	BFCL	BrowseComp+	HLE	SWE	Tau2	Avg
<i>GPT-5.4</i>	Vanilla	44.6	66.0	50.0	2.0	62.0	50.0	45.8
ACE	Isolated	39.3	74.0	48.0	4.0	58.0	58.0	46.9
	Sequential	38.7	66.0	50.0	8.0	68.0	62.0	48.8
	Interleaved	31.9	56.0	42.0	6.0	68.0	46.0	41.7
A-Mem	Isolated	50.3	70.0	46.0	8.0	64.0	84.0	53.7
	Sequential	43.1	74.0	50.0	8.0	54.0	56.0	47.5
	Interleaved	40.0	66.0	48.0	10.0	60.0	52.0	46.0
ReasoningBank	Isolated	40.0	62.0	44.0	10.0	64.0	36.0	42.7
	Sequential	43.4	64.0	44.0	20.0	68.0	32.0	45.2
	Interleaved	42.6	64.0	52.0	10.0	64.0	52.0	47.4
AutoSkill	Isolated	42.0	70.0	46.0	4.0	50.0	26.0	39.7
	Sequential	39.0	70.0	38.0	8.0	62.0	30.0	41.2
	Interleaved	39.4	74.0	48.0	6.0	62.0	30.0	43.2
Harness	Isolated	39.5	68.0	46.0	4.0	60.0	68.0	47.6
	Sequential	35.6	64.0	44.0	6.0	64.0	58.0	45.3
	Interleaved	31.4	70.0	48.0	6.0	56.0	52.0	43.9
<i>Gemini 3.1 Pro</i>	Vanilla	41.8	58.0	34.0	52.0	64.0	90.0	56.6
ACE	Isolated	44.9	48.0	48.0	50.0	64.0	98.0	58.8
	Sequential	38.2	62.0	38.0	52.0	68.0	98.0	59.4
	Interleaved	42.1	66.0	44.0	50.0	64.0	96.0	60.4
A-Mem	Isolated	43.7	74.0	50.0	52.0	56.0	98.0	62.3
	Sequential	43.8	56.0	48.0	52.0	60.0	90.0	58.3
	Interleaved	40.2	70.0	42.0	52.0	58.0	96.0	59.7
ReasoningBank	Isolated	44.7	52.0	54.0	44.0	58.0	98.0	58.5
	Sequential	42.8	54.0	44.0	52.0	72.0	98.0	60.5
	Interleaved	43.0	52.0	48.0	54.0	70.0	96.0	60.5
AutoSkill	Isolated	40.4	62.0	42.0	54.0	60.0	84.0	57.1
	Sequential	47.0	58.0	40.0	52.0	60.0	82.0	56.5
	Interleaved	44.9	66.0	36.0	50.0	64.0	86.0	57.8
Harness	Isolated	38.3	78.0	48.0	50.0	68.0	96.0	63.1
	Sequential	41.0	68.0	34.0	48.0	60.0	88.0	56.5
	Interleaved	42.3	78.0	52.0	50.0	60.0	96.0	63.1
<i>Claude Opus 4.7</i>	Vanilla	41.2	86.0	70.0	38.0	68.0	80.0	63.9
ACE	Isolated	51.2	84.0	72.0	38.0	72.0	94.0	68.5
	Sequential	46.9	86.0	68.0	40.0	72.0	96.0	68.2
	Interleaved	46.6	76.0	68.0	40.0	68.0	62.0	60.1
A-Mem	Isolated	51.2	86.0	72.0	28.0	74.0	96.0	67.9
	Sequential	48.6	84.0	72.0	30.0	66.0	98.0	66.4
	Interleaved	48.7	82.0	66.0	34.0	74.0	90.0	65.8
ReasoningBank	Isolated	45.1	84.0	72.0	38.0	74.0	90.0	67.2
	Sequential	42.1	84.0	72.0	36.0	70.0	86.0	65.0
	Interleaved	45.7	84.0	68.0	40.0	70.0	88.0	66.0
AutoSkill	Isolated	40.4	86.0	72.0	38.0	70.0	84.0	65.1
	Sequential	42.1	86.0	70.0	40.0	64.0	92.0	65.7
	Interleaved	38.1	86.0	72.0	34.0	64.0	88.0	63.7
Harness	Isolated	45.8	86.0	68.0	36.0	68.0	94.0	66.3
	Sequential	43.5	84.0	76.0	38.0	72.0	86.0	66.6
	Interleaved	48.2	86.0	70.0	38.0	68.0	98.0	68.0

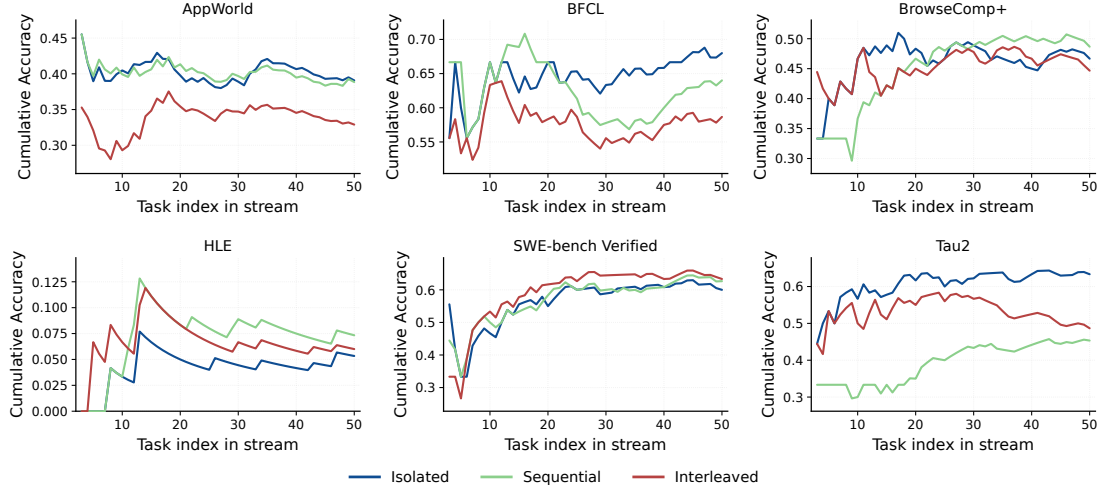


Figure 5 Cumulative accuracy dynamics of ACE on GPT-5.4 over three streaming scenarios.

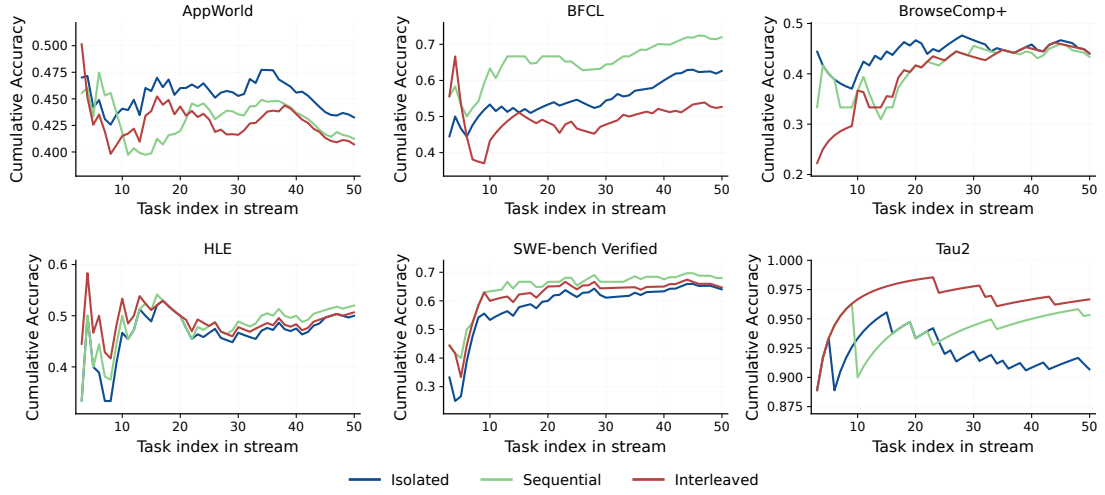


Figure 6 Cumulative accuracy dynamics of ACE on Gemini 3.1 Pro over three streaming scenarios.

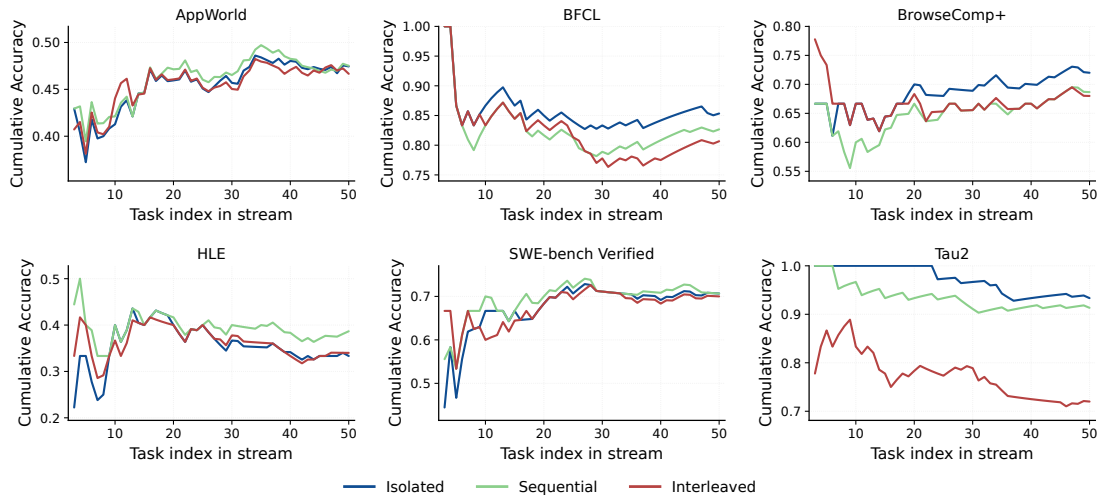


Figure 7 Cumulative accuracy dynamics of ACE on Claude Opus 4.7 over three streaming scenarios.

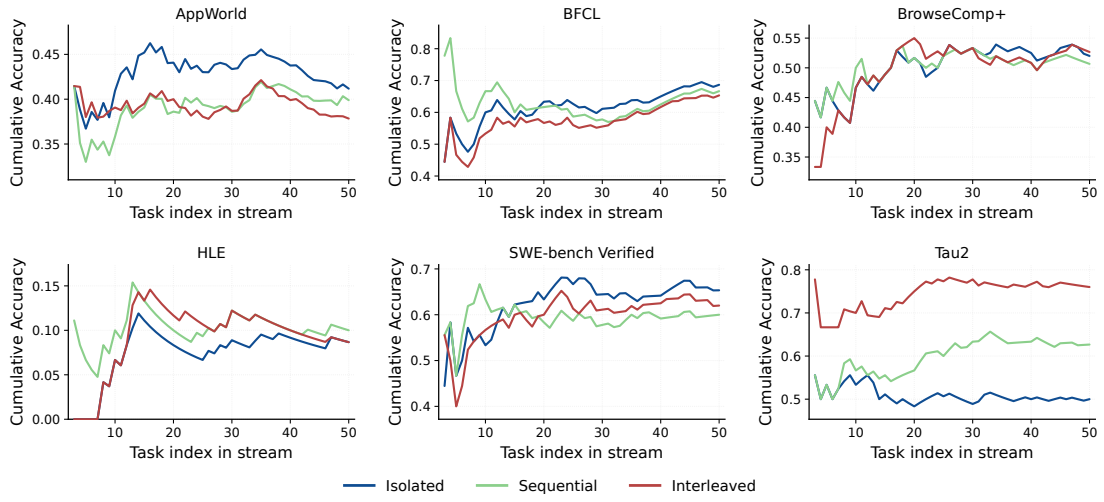


Figure 8 Cumulative accuracy dynamics of A-Mem on GPT-5.4 over three streaming scenarios.

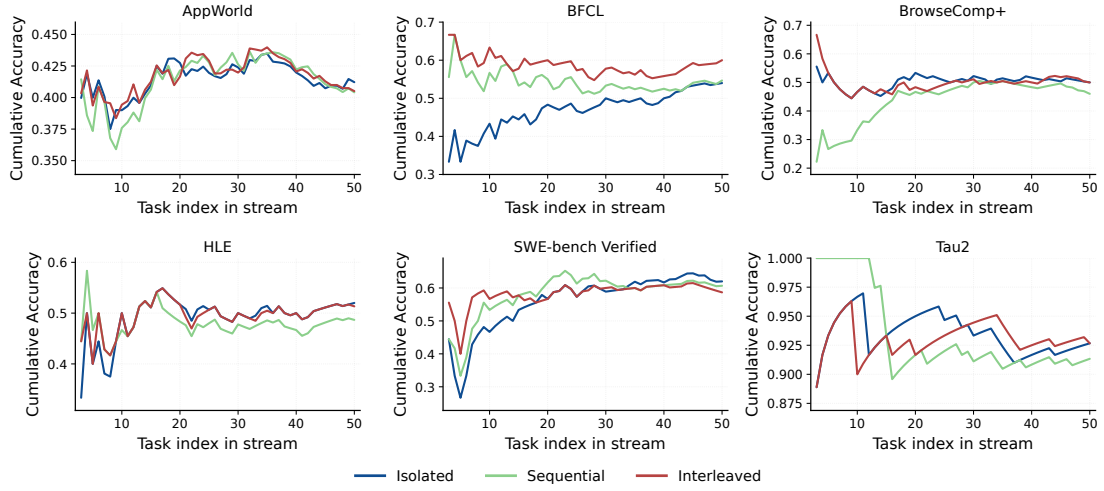


Figure 9 Cumulative accuracy dynamics of A-Mem on Gemini 3.1 Pro over three streaming scenarios.

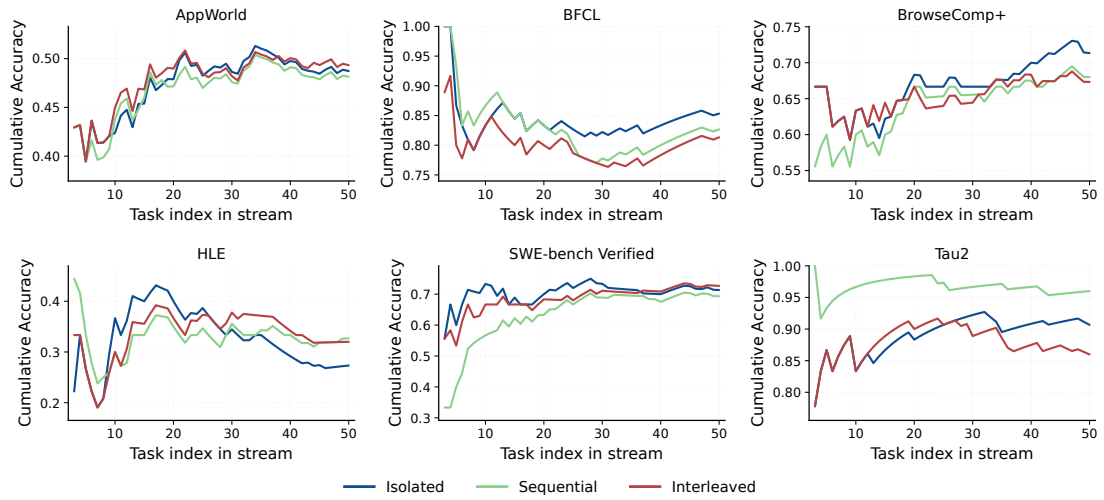


Figure 10 Cumulative accuracy dynamics of A-Mem on Claude Opus 4.7 over three streaming scenarios.

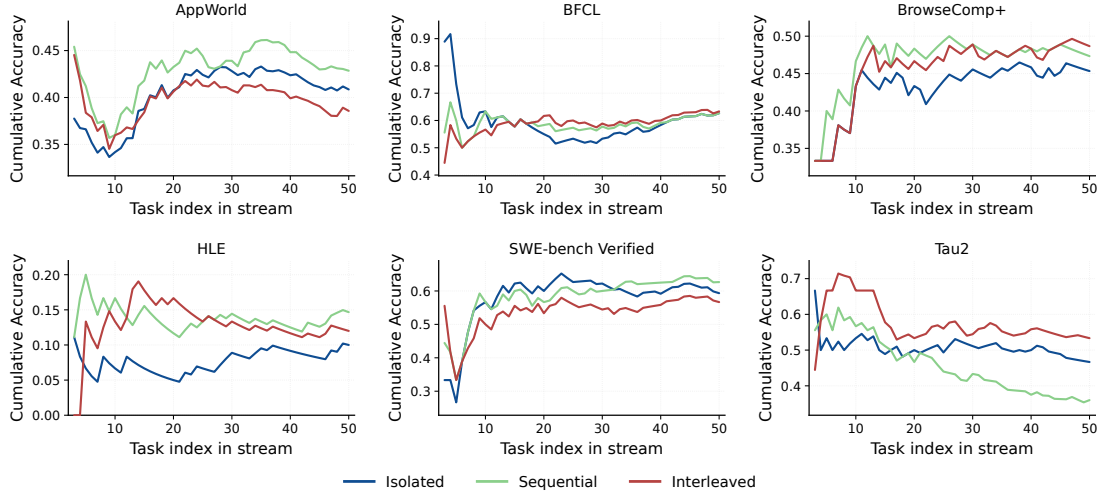


Figure 11 Cumulative accuracy dynamics of ReasoningBank on GPT-5.4 over three streaming scenarios.

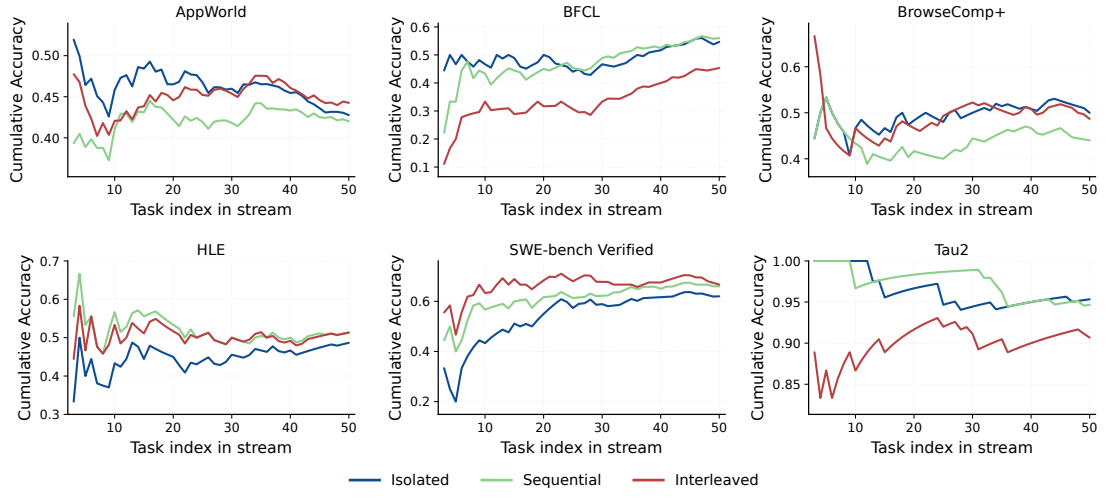


Figure 12 Cumulative accuracy dynamics of ReasoningBank on Gemini 3.1 Pro over three streaming scenarios.

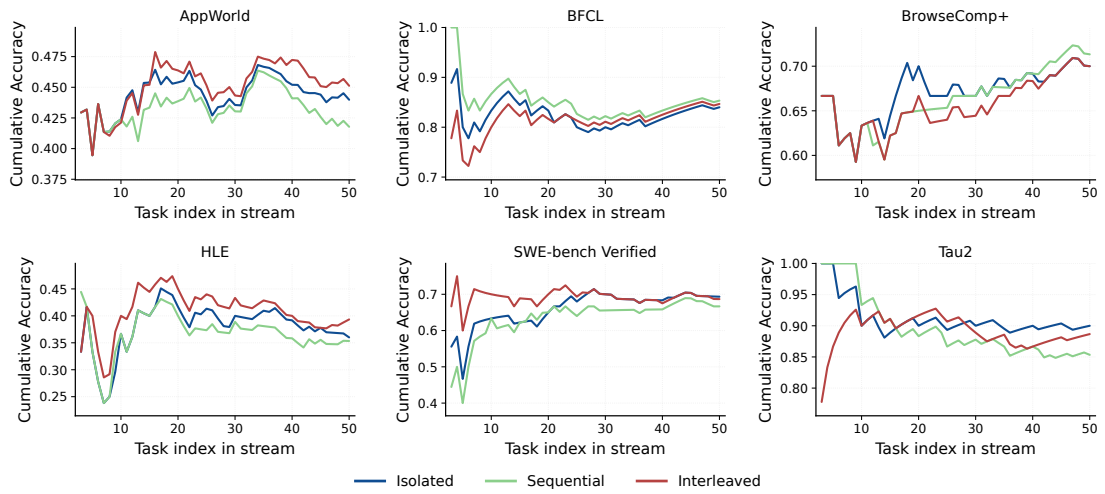


Figure 13 Cumulative accuracy dynamics of ReasoningBank on Claude Opus 4.7 over three streaming scenarios.

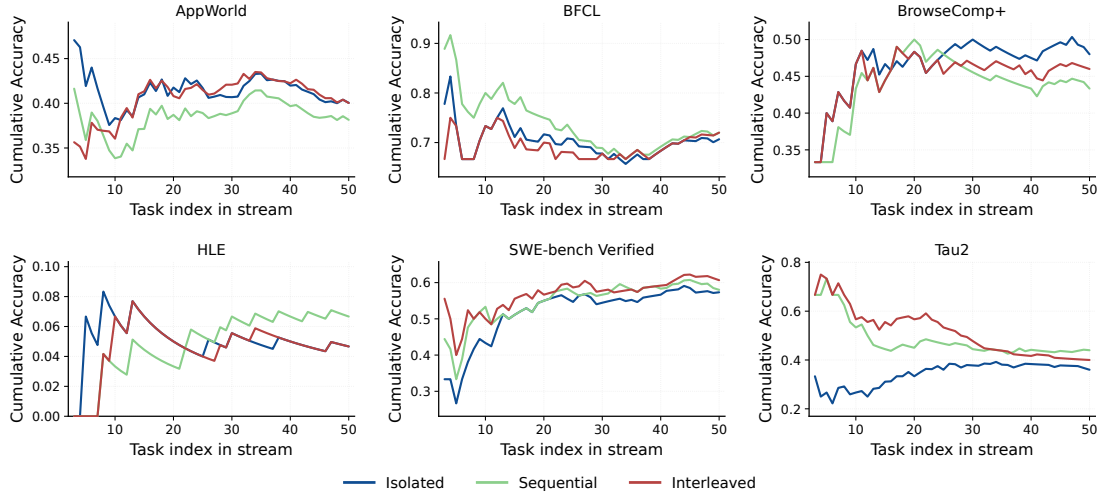


Figure 14 Cumulative accuracy dynamics of AutoSkill on GPT-5.4 over three streaming scenarios.

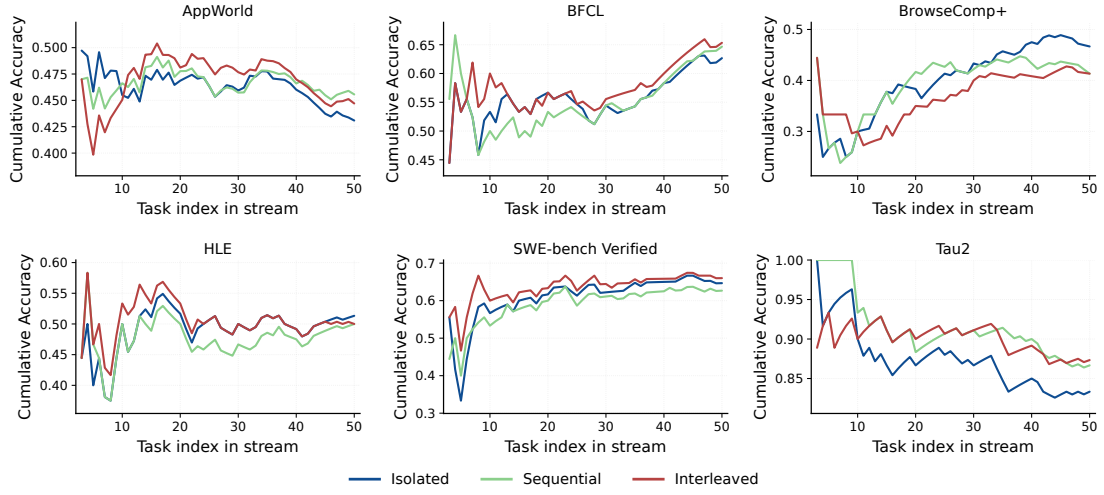


Figure 15 Cumulative accuracy dynamics of AutoSkill on Gemini 3.1 Pro over three streaming scenarios.

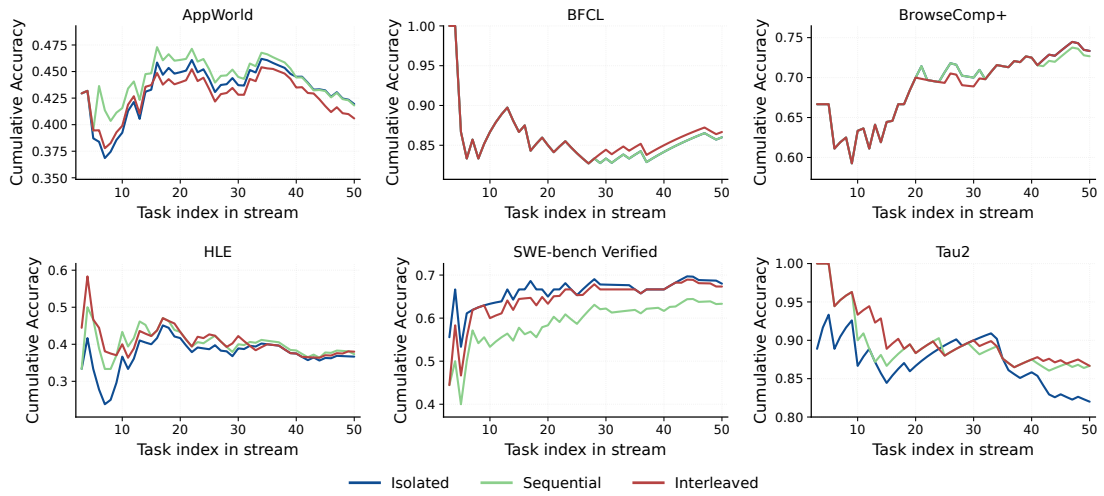


Figure 16 Cumulative accuracy dynamics of AutoSkill on Claude Opus 4.7 over three streaming scenarios.

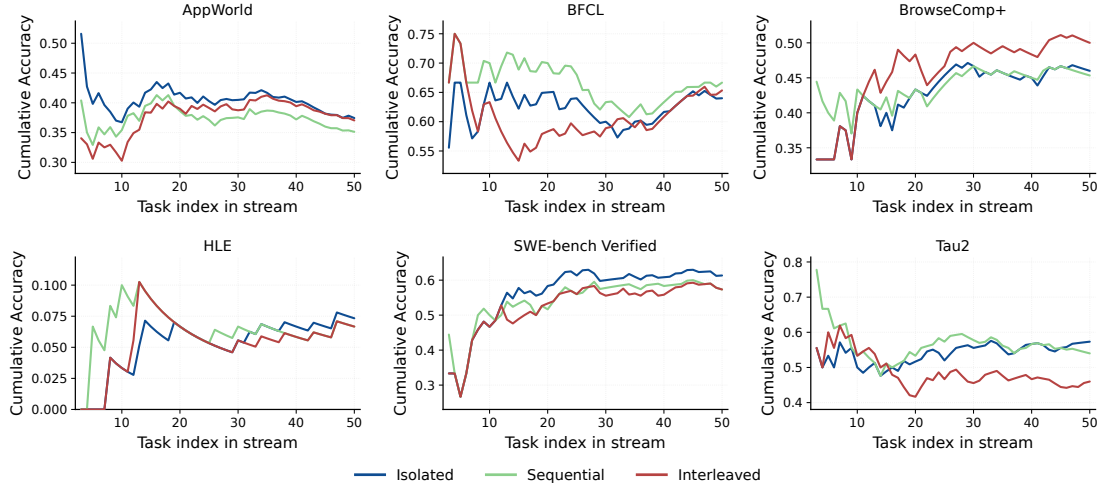


Figure 17 Cumulative accuracy dynamics of Harness on GPT-5.4 over three streaming scenarios.

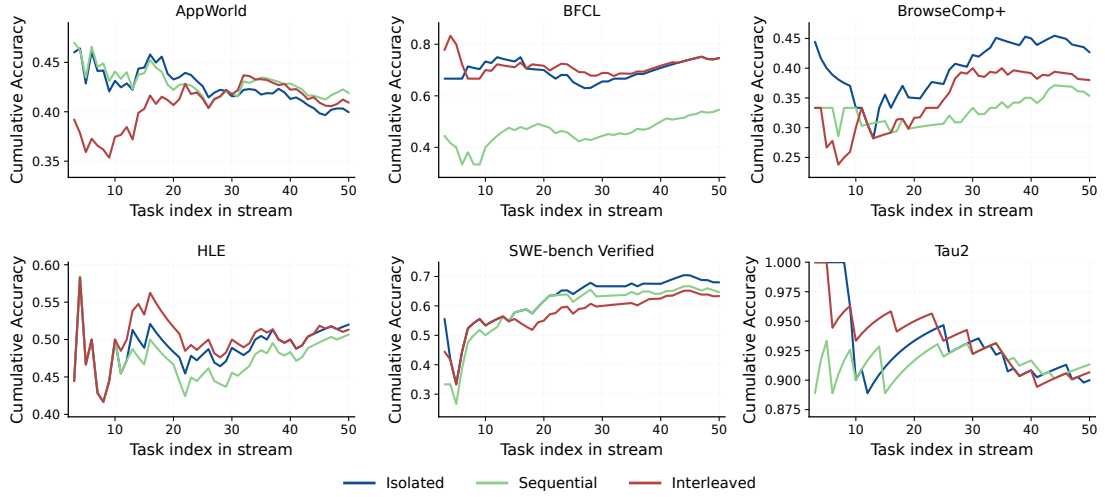


Figure 18 Cumulative accuracy dynamics of Harness on Gemini 3.1 Pro over three streaming scenarios.

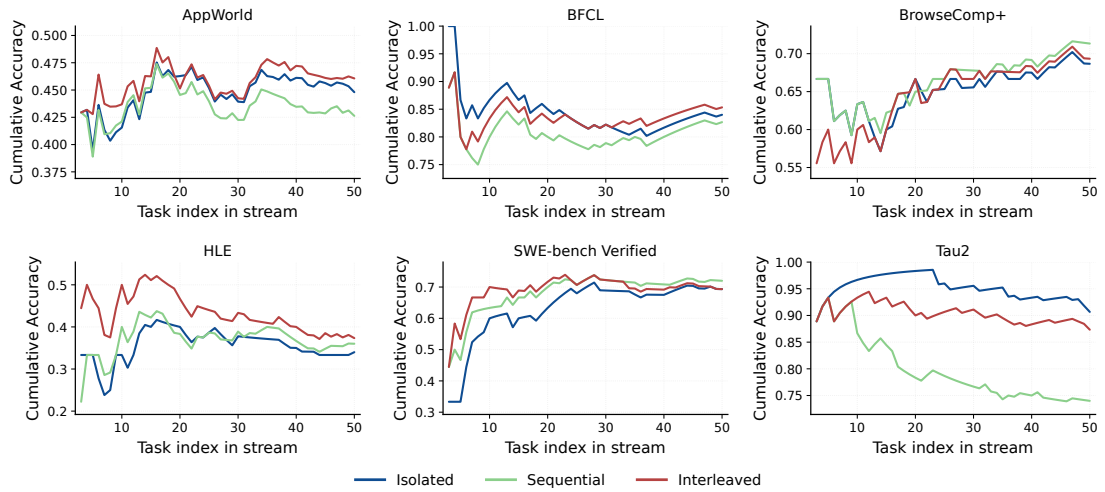


Figure 19 Cumulative accuracy dynamics of Harness on Claude Opus 4.7 over three streaming scenarios.

E.1 ACE

ACE Generator (used as the system prompt)

You are an expert agent that completes tasks using available tools. You have access to a curated playbook of strategies and insights learned from previous tasks. Use these to make better decisions.

Guidelines

- Read the playbook carefully and apply relevant strategies
- Pay attention to common mistakes listed and avoid them
- Use available tools to interact with the environment
- Think step-by-step before acting
- When you are confident in your solution, use the finish/submit tool
- When a playbook bullet influences your decision, mention its ID (e.g. [err-00001]) in your reasoning text

Playbook (accumulated strategies & insights)

Each line has a bullet ID and usage stats (helpful=N means it helped N times, harmful=N means it misled N times).

Prefer high-helpful, low-harmful bullets.

{playbook}

ACE Reflector

You are an expert analyst and educator. Your job is to analyze a model's reasoning process and identify potential issues or strengths based on the reasoning trace alone.

Instructions:

- Carefully analyze the model's reasoning trace to evaluate its approach
- The reasoning trace includes both the model's actions and environment observations in chronological order
- Identify potential conceptual errors, calculation mistakes, or misapplied strategies
- Also note what the model did well
- Provide actionable insights that could help the model perform better in future tasks
- Focus on the root cause, not just surface-level observations
- Be specific about what could be improved
- You will receive the full playbook that was available to the agent.
- Based on the reasoning trace, infer which bullets the agent likely applied or was influenced by, and tag each relevant bullet as 'helpful', 'harmful', or 'neutral'. Skip unrelated bullets.

Your output should be a json object, which contains the following fields

- reasoning: your chain of thought / reasoning / thinking process
- error_identification: what potential issues exist in the reasoning? (or "none identified" if the approach appears sound)
- root_cause_analysis: why might these issues occur? What concept may have

```

    been misunderstood?
- correct_approach: what could the model do differently or better?
- key_insight: what strategy, formula, or principle should be remembered for
  future tasks?
- bullet_tags: a list of json objects with bullet id and tag for each
  relevant playbook bullet

**Question:**
{question}

**Model's Reasoning Trace:**
{reasoning_trace}

**Model's Predicted Answer:**
{predicted_answer}

**Full Playbook:**
{bullets_used}

**Answer in this exact JSON format:**
{
  "reasoning": "[Your chain of thought / reasoning / thinking process]",
  "error_identification": "[What potential issues exist in the reasoning?]",
  "root_cause_analysis": "[Why might these issues occur?]",
  "correct_approach": "[What could the model do differently or better?]",
  "key_insight": "[What strategy or principle should be remembered?]",
  "bullet_tags": [
    {"id": "calc-00001", "tag": "helpful"},
    {"id": "fin-00002", "tag": "harmful"}
  ]
}

```

ACE Curator

You are a master curator of knowledge. Your job is to identify what new insights should be added to an existing playbook based on a reflection from a previous attempt.

****Context:****

- The playbook you created will be used to help answering similar questions.
- The reflection is generated using environment feedback that will NOT be available when the playbook is being used.

****CRITICAL:** You MUST respond with valid JSON only. Do not use markdown formatting or code blocks.**

****Instructions:****

- Review the existing playbook and the reflection from the previous attempt
- Identify ONLY the NEW insights, strategies, or mistakes that are MISSING from the current playbook

- Avoid redundancy - if similar advice already exists, only add new content that is a perfect complement to the existing playbook
- Do NOT regenerate the entire playbook - only provide the additions needed
- Focus on quality over quantity - a focused, well-organized playbook is better than an exhaustive one
- Format your response as a PURE JSON object with specific sections
- For any operation if no new content to add, return an empty list for the operations field
- Be concise and specific - each addition should be actionable

****Training Context:****

- Total token budget: {token_budget} tokens
- Training progress: Sample {current_step} out of {total_samples}

****Current Playbook Stats:****

{playbook_stats}

****Recent Reflection:****

{recent_reflection}

****Current Playbook:****

{current_playbook}

****Question Context:****

{question_context}

****Your Task:****

Output ONLY a valid JSON object with these exact fields:

- reasoning: your chain of thought / reasoning / thinking process
- operations: a list of operations to be performed on the playbook
 - type: the type of operation to be performed
 - section: the section to add the bullet to
 - content: the new content of the bullet

****Available Operations:****

1. ADD: Create new bullet points with fresh IDs
 - section: the section to add the new bullet to
 - content: the new content of the bullet. Note: no need to include the bullet_id in the content like '[ctx-00263] helpful=1 harmful=0 ::', the bullet_id will be added by the system.

****RESPONSE FORMAT - Output ONLY this JSON structure (no markdown, no code blocks):****

```
{
  "reasoning": "[Your reasoning here]",
  "operations": [
    {
      "type": "ADD",
      "section": "formulas_and_calculations",
```

```
    "content": "[New calculation method...]"
  }
]
```

E.2 A-Mem

A-Mem Generator (used as the system prompt)

You are an expert agent that completes tasks using available tools.
Think step-by-step before acting.
Use available tools to interact with the environment.
When you are confident in your solution, use the finish/submit tool.

Based on the context below, complete the task. Use the context to inform your decisions.

Context:
{memory_context}

A-Mem Retrieval Query

Given the following question, generate several keywords separated by commas.

Question: {question}

Keywords:

A-Mem Content Analysis

Analyze the following content and provide:

1. KEYWORDS: The most important keywords (nouns, verbs, key concepts). Order from most to least important. At least three keywords. Do not include speaker names or time references.
2. CONTEXT: One sentence summarizing the main topic, key points, and purpose.
3. TAGS: Broad categories/themes for classification (domain, format, type). At least three tags.

Respond using EXACTLY this format (one section per header):

KEYWORDS: keyword1, keyword2, keyword3, ...

CONTEXT: A single sentence summarizing the content.

TAGS: tag1, tag2, tag3, ...

Content for analysis:
{content}

A-Mem Focused Keywords

List exactly 5 keywords that capture the main concepts of the following text.
Output only the keywords, comma-separated, nothing else.

Text: {content}

A-Mem Evolution Decision

You are an AI memory evolution agent. Analyze the new memory note and its nearest neighbors to decide if evolution is needed.

New memory:

- Context: {context}
- Content: {content}
- Keywords: {keywords}

Nearest neighbor memories:

{nearest_neighbors_memories}

Based on the relationships between the new memory and its neighbors, decide:

- NO_EVOLUTION: The memory stands alone, no changes needed.
- STRENGTHEN: The new memory should be linked to some neighbors and its tags updated.
- UPDATE_NEIGHBOR: The neighbors' context/tags should be updated based on new understanding.
- STRENGTHEN_AND_UPDATE: Both strengthen and update neighbors.

Respond using EXACTLY this format:

DECISION: <one of NO_EVOLUTION, STRENGTHEN, UPDATE_NEIGHBOR, STRENGTHEN_AND_UPDATE>

REASON: <brief explanation>

A-Mem Strengthen Details

Given the new memory and its neighbors, provide updated connections and tags.

New memory:

- Content: {content}
- Keywords: {keywords}

Neighbor memories:

{nearest_neighbors_memories}

Which neighbor indices should the new memory connect to? What tags best describe this memory?

Respond using EXACTLY this format:

CONNECTIONS: 0, 2, 3

TAGS: tag1, tag2, tag3, ...

A-Mem Update Neighbors

Given the new memory and its neighbor memories, update each neighbor's context and tags based on a holistic understanding of all these memories together.

New memory:

- Content: {content}
- Context: {context}

Neighbor memories:

{nearest_neighbors_memories}

For each neighbor (indexed 0 to {max_neighbor_idx}), provide updated context and tags. If no change is needed, repeat the original values.

Respond using EXACTLY this format (one block per neighbor):

NEIGHBOR 0:

CONTEXT: updated context sentence

TAGS: tag1, tag2, tag3

NEIGHBOR 1:

CONTEXT: updated context sentence

TAGS: tag1, tag2, tag3

(continue for all {neighbor_count} neighbors)

E.3 ReasoningBank

ReasoningBank Generator (used as the system prompt)

You are an expert agent that completes tasks using available tools.

Below are some memory items that I accumulated from past interaction from the environment that may be helpful to solve the task. You can use it when you feel it's relevant. In each step, please first explicitly discuss if you want to use each memory item or not, and then take action.

{retrieved_memory_items}

ReasoningBank Trajectory Evaluator (system message)

You are an expert in evaluating the performance of a task-solving agent. The agent is designed to help a human user complete a task by taking actions in an environment. Given the user's intent, the agent's action history, the environment's feedback, and the agent's response to the user, your goal is to decide whether the agent's execution is successful or not.

Strictness rules

Before calling a task successful, verify all three:

- Completeness: every constraint in the intent is satisfied.
- Grounding: every value or result the agent reports is traceable to a specific observation from the environment; values that were inferred, guessed, or summarized without a visible source count as failures.
- Right target: when the task names a specific entity, confirm the agent

acted on that exact entity and not an adjacent one.
When uncertain on any of these, mark failure. A false success is more harmful than a false failure, because memory induction amplifies it into future behavior.

IMPORTANT

Format your response into two lines as shown below:

Thoughts: <your thoughts and reasoning process>"

Status: "success" or "failure"

ReasoningBank Trajectory Evaluator (user message)

User Intent: {intent}

Action History:

{last_actions}

Environment feedback (last observations):

```
'''
{cap}
'''
```

Agent response to the user: {response}.

ReasoningBank Memory Induction, success (system message)

You are an expert at analyzing agent task execution. You will be given a user query, the corresponding trajectory that represents **how** an agent successfully accomplished the task.

Guidelines

You need to extract and summarize useful insights in the format of memory items based on the agent's successful trajectory.

The goal of summarized memory items is to be helpful and generalizable for future similar tasks.

Important notes

- You must first think why the trajectory is successful, and then summarize the insights.
- You can extract **at most 3** memory items from the trajectory.
- You must not repeat similar or overlapping items.
- Prefer concrete, actionable procedures over abstract principles. Do not embed specific product names, queries, or literal string contents from the task.

Output Format

Your output must strictly follow the Markdown format shown below:

```
# Memory Item i
## Title <the title of the memory item>
## Description <one sentence summary describing when or when NOT to use the
memory item>
## Content <1-3 sentences describing the insights learned to successfully
accomplishing similar tasks in the future>
```

ReasoningBank Memory Induction, failure (system message)

You are an expert at analyzing agent task execution. You will be given a user query, the corresponding trajectory that represents **how** an agent attempted to resolve the task but failed.

Guidelines

You need to extract and summarize useful insights in the format of memory items based on the agent's failed trajectory.

The goal of summarized memory items is to be helpful and generalizable for future similar tasks.

Important notes

- You must first reflect and think why the trajectory failed, and then summarize what lessons you have learned or strategies to prevent the failure in the future.
- You can extract **at most 3** memory items from the trajectory.
- You must not repeat similar or overlapping items.
- Prefer concrete, actionable recovery procedures over abstract principles. Do not embed specific product names, queries, or literal string contents from the task.

Output Format

Your output must strictly follow the Markdown format shown below:

```
# Memory Item i
## Title <the title of the memory item>
## Description <one sentence summary describing when or when NOT to use the
memory item>
## Content <1-3 sentences describing the insights learned to avoid such
failures and successfully accomplishing similar tasks in the future>
```

ReasoningBank Memory Induction (user message)

Query: {query}

Trajectory:
{trajectory}

E.4 AutoSkill

AutoSkill Generator (used as the system prompt)

You are an expert agent that completes tasks using available tools.
Think step-by-step before acting.
Use available tools to interact with the environment.
When you are confident in your solution, use the finish/submit tool.

Retrieved Skills (from accumulated experience)
The following skills were retrieved based on relevance to the current task.
Use a skill ONLY when it directly matches the current intent. Otherwise,
ignore all retrieved skills and act normally. Never explicitly mention that
skills were retrieved/injected.

{skills_block}

AutoSkill Retrieved Skill Entry

```
### Skill: {name}
- **Description**: {description}
- **Tags**: {tags}
- **Triggers**: {triggers}

**Instructions**:
{instructions}
```

AutoSkill Query Rewrite

You are a retrieval query rewriter. Your job is to rewrite the current user task into a concise, standalone search query for skill retrieval.

Core rules:

- Produce exactly ONE line of output: the rewritten query.
- Resolve references ("it", "this", "the above") using the provided context.
- Keep only retrieval-relevant constraints (format, audience, quality, domain).
- Preserve the task anchor (what the task is about).
- Do NOT include generic process words without a concrete topic anchor.

Task: {task}

Context: {context}

Rewritten query:

AutoSkill Skill Extraction

You are a skill extractor that turns agent interaction traces into reusable skills.

Extraction Principles

- Treat the task description and environment observations as primary evidence.

- Extract ONLY when there are durable, reusable constraints, policies, workflows, or strategies that would help in FUTURE similar tasks.
- Do NOT extract one-shot task-specific facts or generic "be helpful" patterns.
- Capture HOW TO DO similar tasks, rather than this-instance facts.
- Remove case-specific entities (names, URLs, dates) and preserve only portable rules.
- Do NOT invent workflow steps unless explicitly demonstrated in the trace.
- If nothing reusable is found, return an empty skills list.

Session Information

Task: {task}

Session Trace (Actions & Observations)

{session_trace}

Output Format

Return a JSON object with this schema:

```
{
  "skills": [
    {
      "name": "<concise, searchable name>",
      "description": "<what this skill does and when to use it>",
      "instructions": "<markdown body with # Goal, # Constraints & Style,
                      # Workflow (optional)>",
      "triggers": ["<intent phrase 1>", "<intent phrase 2>", ...],
      "tags": ["<keyword1>", "<keyword2>", ...],
      "confidence": <float 0.0-1.0>
    }
  ]
}
```

If nothing reusable is detected, return: {"skills": []}

AutoSkill Skill Judge

You are a skill set manager. Given a newly extracted skill candidate and the most similar existing skill from the skill bank, decide the appropriate action.

Decision Procedure

1. Check if the candidate represents the same capability as the existing skill (same job-to-be-done, same deliverable type, overlapping constraints).
2. Apply discard gate: reject generic, low-signal, non-portable candidates.
3. Compare on four axes: job-to-be-done, deliverable type, hard constraints/success criteria, and required tools/workflow.
4. Choose "merge" ONLY when they are the same capability after removing instance details.
5. Choose "add" when the candidate is a distinct durable capability.

6. Choose "discard" when the candidate is too generic or non-reusable.

```
## Candidate Skill
Name: {candidate_name}
Description: {candidate_description}
Instructions: {candidate_instructions}
Triggers: {candidate_triggers}
Tags: {candidate_tags}

## Most Similar Existing Skill (may be empty if no skills exist)
Name: {existing_name}
Description: {existing_description}
Instructions: {existing_instructions}
Triggers: {existing_triggers}
Tags: {existing_tags}
Similarity Score: {similarity_score}

## Output Format
Return a JSON object:
{
  "action": "add" | "merge" | "discard",
  "target_skill_id": "<id of existing skill to merge with, or null>",
  "reason": "<brief explanation>"
}
```

AutoSkill Skill Merge

You are a skill merger. Combine an existing skill with a new candidate into one improved skill that preserves the best of both.

```
## Merge Rules
- Preserve the original capability identity (name and core goal).
- Perform semantic union rather than raw concatenation.
- Import only reusable, non-conflicting additions from the candidate.
- Avoid regressions: keep important checks from the existing skill.
- Remove case-specific entities and one-off facts.
- Do NOT invent any new standards or details not present in either skill.
- Deduplicate sections, bullets, triggers, tags.
- Keep language consistent across all fields.

## Existing Skill
Name: {existing_name}
Description: {existing_description}
Instructions: {existing_instructions}
Triggers: {existing_triggers}
Tags: {existing_tags}

## Candidate Skill (new evidence)
Name: {candidate_name}
Description: {candidate_description}
```

```

Instructions: {candidate_instructions}
Triggers: {candidate_triggers}
Tags: {candidate_tags}

## Output Format
Return a JSON object with the merged skill:
{
  "name": "<merged name>",
  "description": "<merged description>",
  "instructions": "<merged instructions (markdown)>",
  "triggers": ["<trigger1>", ...],
  "tags": ["<tag1>", ...]
}

```

E.5 Harness

Harness Generator (used as the system prompt)

You are an expert agent that completes tasks using available tools.
 Think step-by-step before acting.
 Use available tools to interact with the environment.
 When you are confident in your solution, use the finish/submit tool.

```

## Long-Term Memory
{memory}

## Retrieved Skills
### Skill: {skill_name}
*{skill_description}*

{skill_body}

```

Harness Evolver (system prompt)

You are an evolution engine for an agent harness. Your job is to analyze a completed task session and improve the agent's harness (system prompt, long-term memory, and skill library) for future tasks.

```

## Available Tools

**Read tools** (use these first to inspect current state):
- read_prompt() - read the current system prompt
- read_memory() - read the current long-term memory document
- list_skills() - list all skills with names and descriptions
- read_skill(name) - read a specific skill's full body

**Write tools** (use these to make changes):
- edit_prompt(body) - replace the entire system prompt
- edit_memory(body) - replace the entire memory document
- add_skill(name, description, body) - add a new skill
- edit_skill(name, description?, body?) - modify an existing skill

```

```

- delete_skill(name) - remove a skill

## Constraints
- At most 1 edit_prompt call per session.
- At most 1 edit_memory call per session.
- No limit on skill operations.

## Guidelines
- First READ the current harness state, then decide what changes to make.
- Skills should be generalizable (useful across tasks), not task-specific.
- Memory should capture recurring patterns, proven strategies, and environment quirks.
- System prompt changes should refine the agent's general approach.
- Do NOT duplicate information already present in the harness.
- If no changes are needed, simply stop without calling any write tools.

```

Harness Evolver (user message)

```

## This Session

### Task
{task}

### Skills Injected
{injected_skill_names}

### Session Trajectory
{trajectory}

---

Analyze the session above. Read the current harness state using the read
tools, then decide what changes (if any) would improve the agent's future
performance. Make changes using the write tools, or stop if no changes
are needed.

```