Taxonomy Value

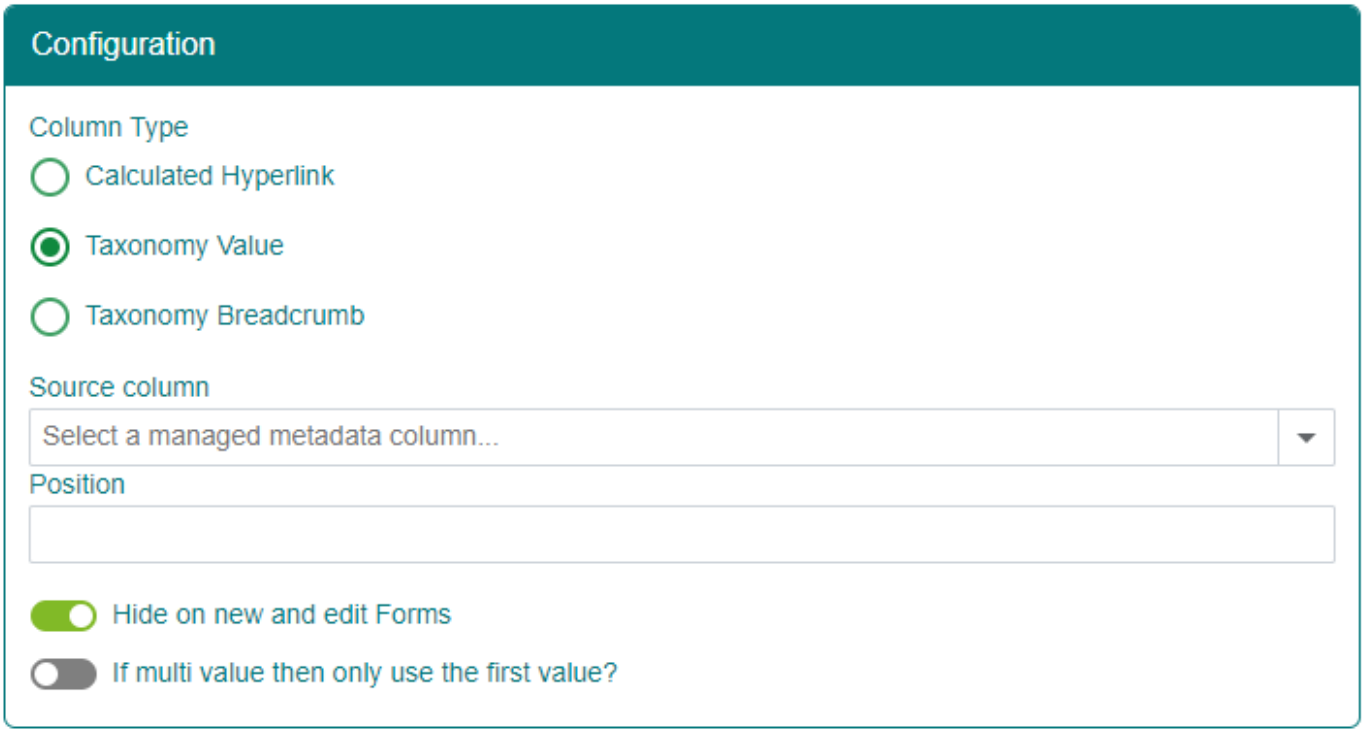

A value extracted from a certain level of a tree of a *Managed Metadata* column in the same list/library. This can also extract values from *other labels* or *custom properties* for the term in the term store.

The Taxonomy Value column type will only be available to configure if the selected library has a Managed Metadata column.

Source Column

The internal or display name of the Managed Metadata Column you wish to calculate the breadcrumb from. Internal names are recommended because if a user changes the display name of the column later, Smart Column will continue to work.

Position

Position mode

If a number has been entered, then Smart Columns will extract the value from that position of the tree for the selected value.

For example, if this was set to *2* and *New Brighton* was selected from the following term store then Smart Columns would return *Christchurch*:

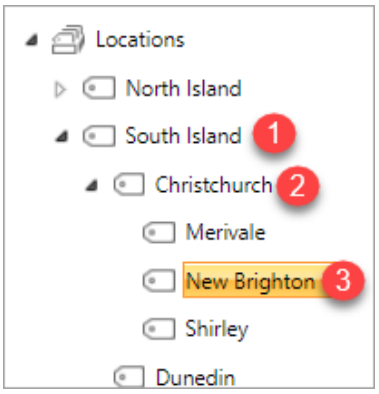

Parent Term retrieval of Shared Property information mode

An extension to Position mode (above); this option, added in June 2022, allows for you to retrieve Shared Properties of any level of Parent Term, based upon whatever child Term has been selected.

Smart Columns already supported retrieval of this data for the selected Term but was not able to traverse the tree to get the same data for parent terms.

ColumnsList ☆

Title	Tax	Function	FunctionURL	Activity	ActivityURL	Subactivity	SubactivityURL	OGCustomPro...	RegEx Value
Test item 1	4th level	Function Example	/sites/function	Activity Example	/sites/activity	Subactivity Example	/sites/subactivity		
Test item 2	Function Example	Function Example	/sites/function					/sites/function	
Test item 3	Activity Example	Function Example	/sites/function	Activity Example	/sites/activity			/sites/activity	
Test item 4	Subactivity Example	Function Example	/sites/function	Activity Example	/sites/activity	Subactivity Example	/sites/subactivity	/sites/subactivity	
Test item 5 RegEx	RegEx Term	RegEx Term							12345678910

This is particularly useful for Teams Framework implementations where there is a requirement to automate population of Breadcrumb values.

How to

First, ensure your Term Store has been updated and populated with an appropriate Shared Property (in Custom Properties for a Term). The Shared Property Name is what you'll target in subsequent steps.

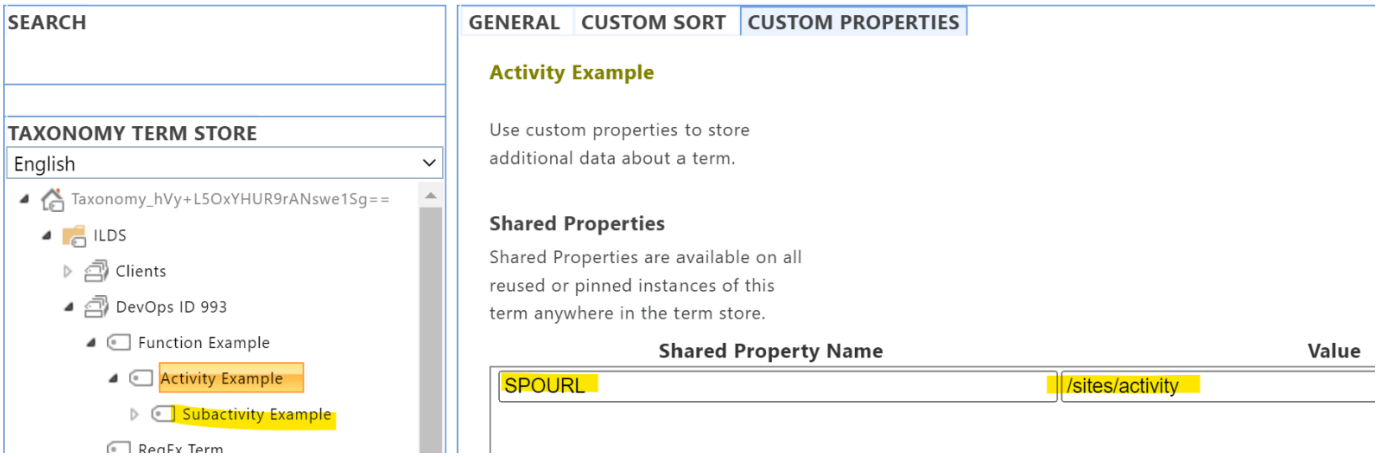

Returning to Smart Columns, with Taxonomy Value selected, select a Source Column per usual, e.g.

Next, use the following syntax to traverse to the parent item associated.

- [number]|@[Shared Property Name]
- Where:
  - Number = Position per Position mode above.
  - | = pipe, this tells Smart Columns to look for a Shared Property.
  - @ specifies the next characters will target a specific Shared Property.
  - Shared Property Name, matching the Term Store Custom Properties for a Term.

Position

2|@SPOURL

Important: The Pipe character must be the second character in the Position value.

Custom Property mode

This option allows you to extract a custom property from the selected term store property. To identify the custom property to extract you enter an @ followed by the name of the property.

For example, this configuration:

Source Column

Location

Position

@Nickname

Would extract *Windy* if *Wellington* was selected:

GENERAL | CUSTOM PROPERTIES

Wellington

Use custom properties to store additional data about a term.

Shared Properties

Shared Properties are available on all reused or pinned instances of this term anywhere in the term store.

Shared Property Name	Value
Nickname	Windy
Rugby Team	Hurricanes

Other Labels mode

This option allows you to extract values for other labels used for a term. Unfortunately, Term Stores to do not provide an easy way to identify terms as there is no name and the terms are sorted alphabetically so position retrieval does not work.

To make the identifiable these labels need a clear identifier at the start of the value like these:

Other Labels

Enter synonyms and abbreviations for this term. (You can enter a word or phrase per line.)

Street: Argyll Road

ID:1055

Legal: Lots 3-4 DP 490451

add new label

Regex can then be entered into the position box to identify and extract the value. To show regex is being used an L needs be added to the start, so to extract the ID in the example above the position text would look like this:

Position

LID:\w+

Multi value behaviour

If the Managed Metadata column has been configured to allow multiple values, then this can end up with a very large column value with lots of values selected. Enabling this option means that the breadcrumb is only displayed for the first value selected.