When to use subfolders

Smart Case Files can automatically create subfolders within your folder when its first created. The subfolders can inherit permissions from a parent folder, but they can also be set to 'confidential'. If confidential then they will have different permissions from the parent folder.

Taking HR employee folders as an example you may want to create a subfolder for Payroll to store payslips etc. The Payroll folder would be read only to the employee while Payroll would have read/write access. Its possible Payroll would have no access to the employee folder above.

There is no limit on the number of subfolders you can configure **Smart Case Files** to create. All of them are created directly under the top-level folder.

If you configure subfolders for a case register that already has existing items, then the subfolders will not be automatically added. If you edit an existing item, the new subfolders will be automatically added to the existing folder.

How to configure

To get to the subfolder configuration:

1. Go to *Site Content*
2. Click on *iWorkplace Smart Case Files*
3. Click on the *Sub Folders to Create* tab

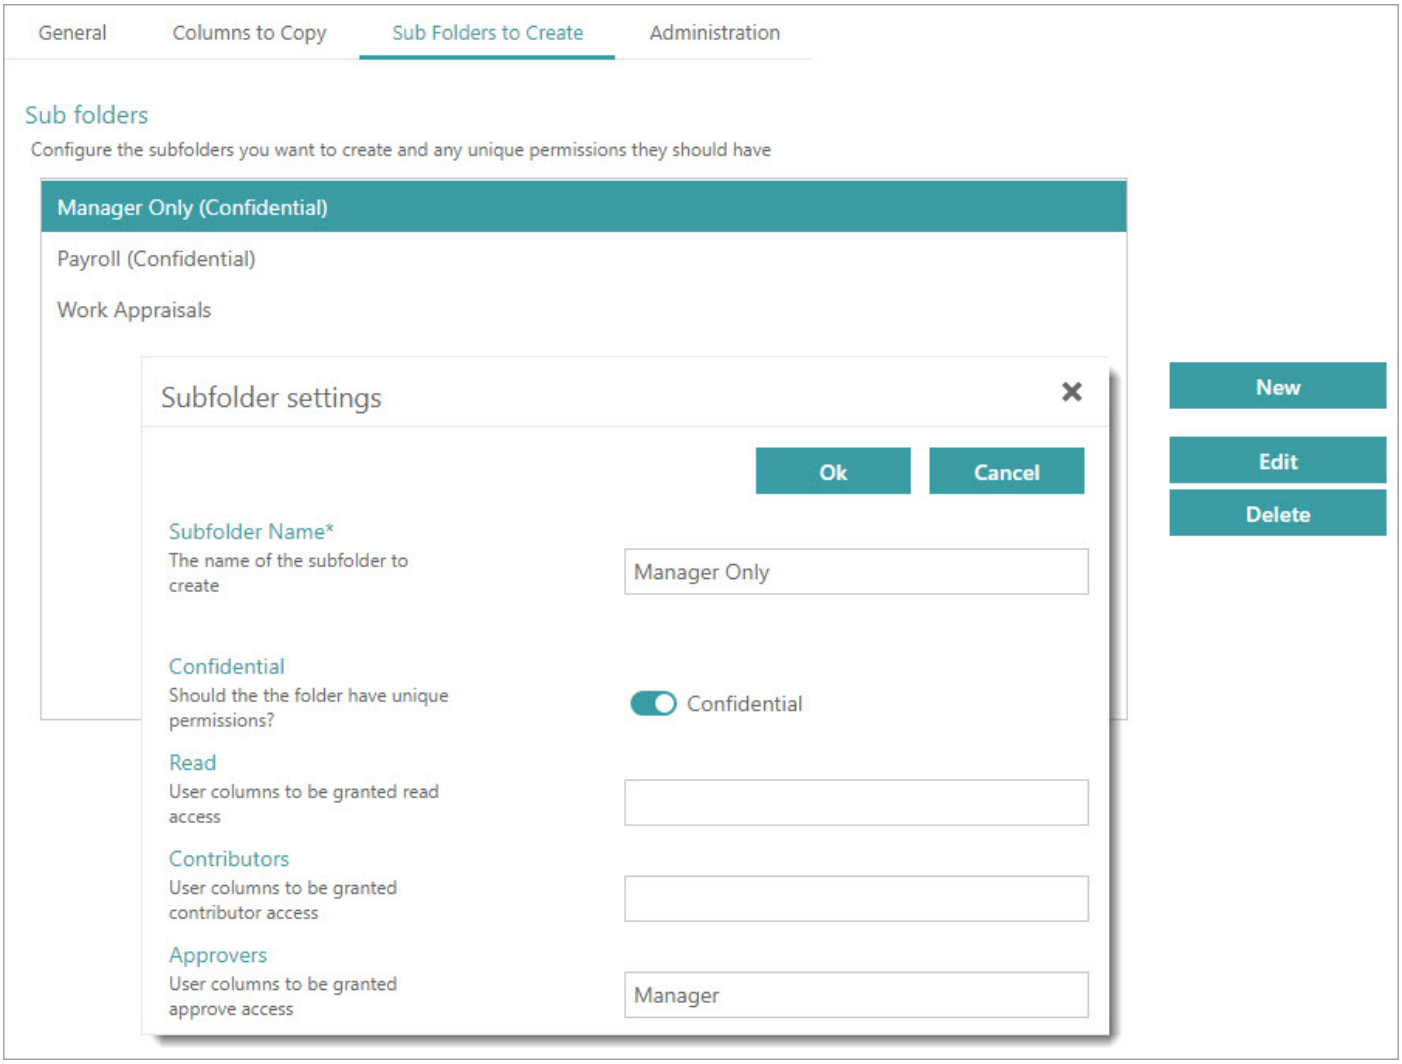

As shown above, when you click on new or edit a popup form is displayed that allows you to configure each subfolder setup.

For each folder, as well supplying its name, you can configure if the folder is *Confidential* i.e. has unique permissions, and if it does what columns in the **Smart Case Files** list map to the three permissions levels.

The columns you add to Read, Contribute and Approve don't have to match with the permissions they columns have in the root folder. For example, you could add the Approvers column to Read so approvers only had read access to this subfolder. You can enter the names of any people columns you have in your list, so you are not just limited to Viewers, Contributors and Approvers. You can enter multiple column names against a single access level by entering the column names as a comma separated list.

SharePoint security groups

Extra permissions can be granted to Subfolders using SharePoint security groups. This is described in detail in the *Applying permissions* section.