


n-tuple of subnomies


(internal to ONE nomy)



internal $\otimes$ operator

System of coupled realities

(external: multiple nomies)

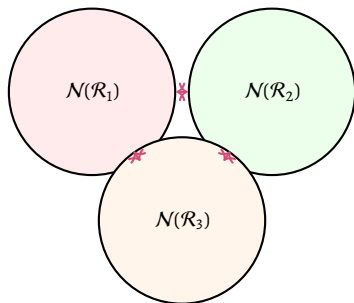

external channels between realities

Figure 42 – Conceptual distinction between the two planes. **On the left:** a single nomy $\mathcal{N}(\mathcal{R})$ decomposed *internally* into an n-tuple of subnomies $(\mathcal{N}_1, \dots, \mathcal{N}_n)$ coupled by the operator $\otimes$. **On the right:** a system of coupled realities, in which multiple parallel realities $(\mathcal{R}_1, \mathcal{R}_2, \mathcal{R}_3)$, each with its own nomy, interact through external channels (dashed lines). Each of these nomies may, in turn, admit its own decomposition into an internal n-tuple of subnomies.

