

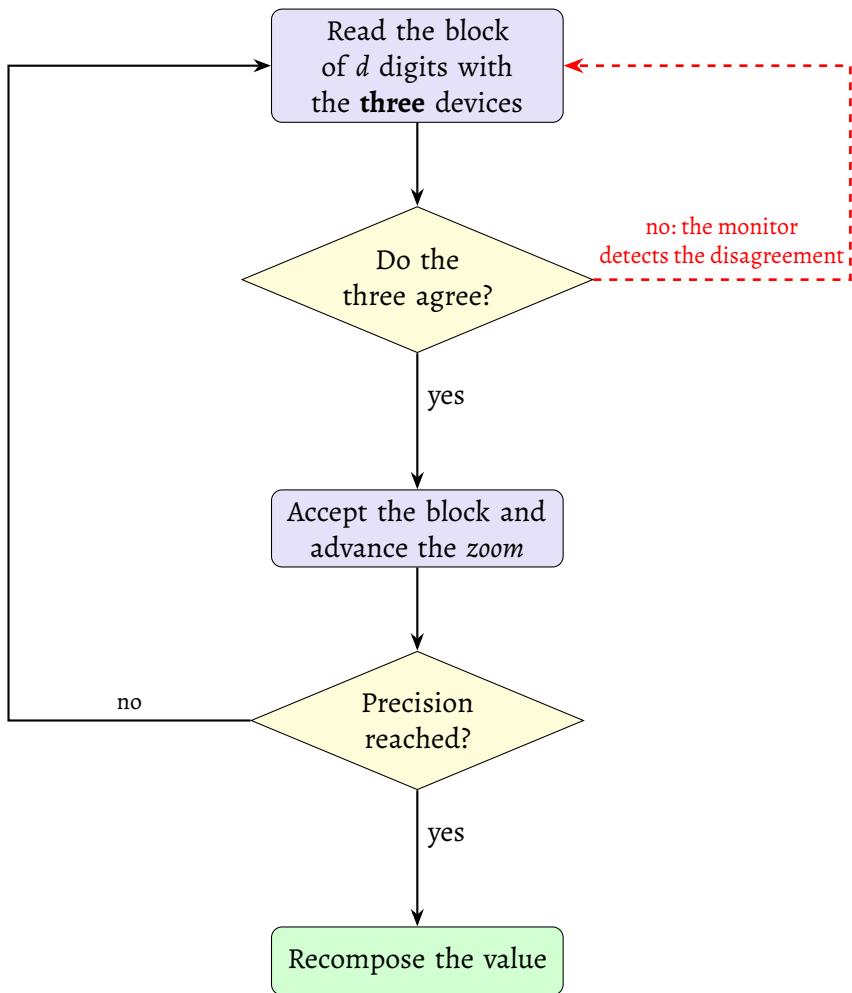


Figure 7 – Protocol of the simulated SZM. The three devices read the same block of digits; as long as there is no unanimity, the monitor orders a reprocess; once there is, the block is accepted and the *zoom* advances. The loop ends only when the requested precision is reached — this is why the value is always recovered, at the cost of time alone.

