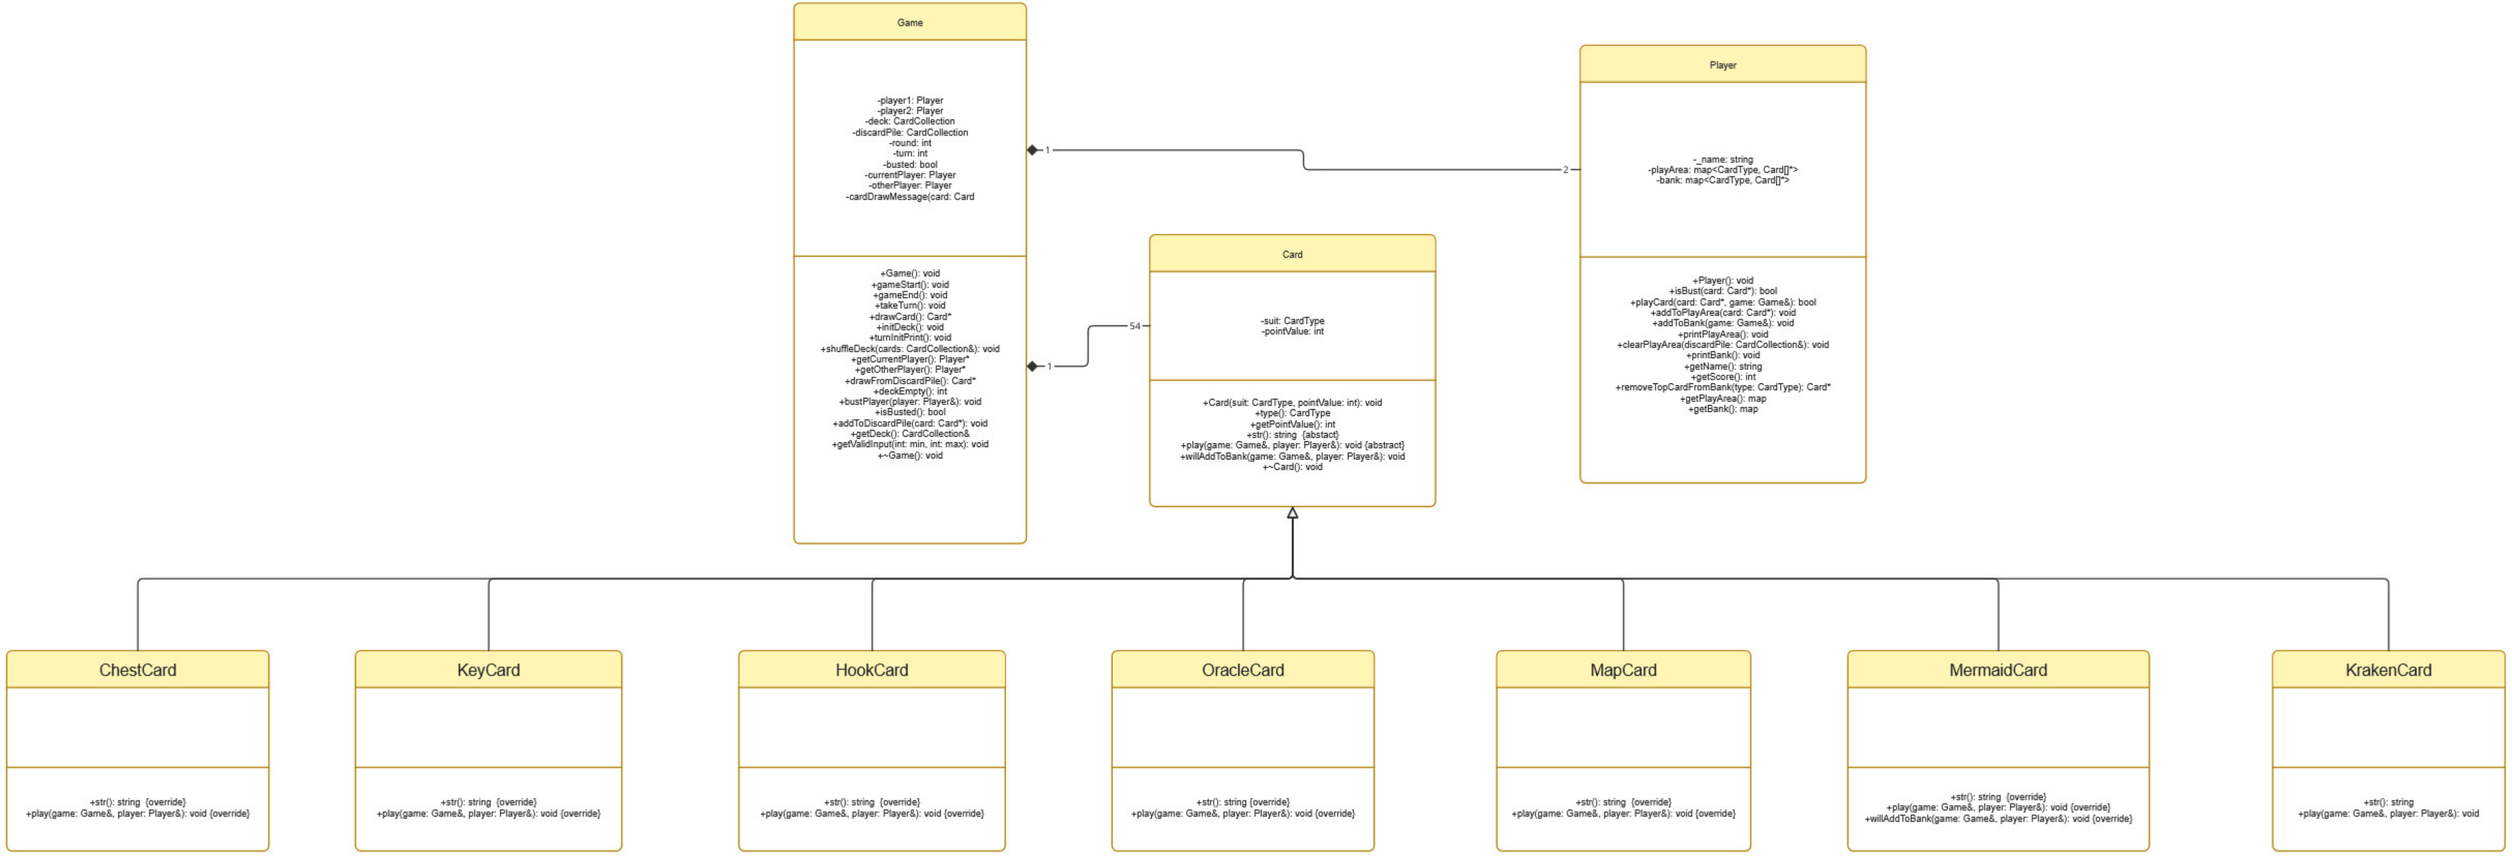
Game
-player1: Player
-player2: Player
-deck: CardCollection
-discardPile: CardCollection
-round: int
-turn: int
-busted: bool
-currentPlayer: Player
-otherPlayer: Player
-cardDrawMessage(card: Card
+Game(): void
+gameStart(): void
+gameEnd(): void
+takeTurn(): void
+drawCard(): Card*
+initDeck(): void
+turnInitPrint(): void
+shuffleDeck(cards: CardCollection&): void
+getCurrentPlayer(): Player*
+getOtherPlayer(): Player*
+drawFromDiscardPile(): Card*
+deckEmpty(): int
+bustPlayer(player: Player&): void
+isBusted(): bool
+addToDiscardPile(card: Card*): void
+getDeck(): CardCollection&
+getValidInput(int: min, int: max): void
+~Game(): void
1
2
1
54
Player
-_name: string
-playArea: map<CardType, Card[]*>
-bank: map<CardType, Card[]*>
+Player(): void
+isBust(card: Card*): bool
+playCard(card: Card*, game: Game&): bool
+addToPlayArea(card: Card*): void
+addToBank(game: Game&): void
+printPlayArea(): void
+clearPlayArea(discardPile: CardCollection&): void
+printBank(): void
+getName(): string
+getScore(): int
+removeTopCardFromBank(type: CardType): Card*
+getPlayArea(): map
+getBank(): map
Card
-suit: CardType
-pointValue: int
+Card(suit: CardType, pointValue: int): void
+type(): CardType
+getPointValue(): int
+str(): string {abstact}
+play(game: Game&, player: Player&): void {abstract}
+willAddToBank(game: Game&, player: Player&): void
+~Card(): void
ChestCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
KeyCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
HookCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
OracleCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
MapCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
MermaidCard
+str(): string {override}
+play(game: Game&, player: Player&): void {override}
+willAddToBank(game: Game&, player: Player&): void {override}
KrakenCard
+str(): string
+play(game: Game&, player: Player&): void