
Steps to install and configure MongoDB:-

1. Install MongoDB On Windows

To install MongoDB on Windows, first download the latest release of MongoDB from https://www.mongodb.com/try/download/community. Make sure you get the correct version of MongoDB depending on your Windows version.

1. In the **Version** dropdown, select the version of MongoDB to download.
2. In the **Platform** dropdown, select **Windows**.
3. In the **Package** dropdown, select **msi**.
4. Click **Download**.

2. Also we Install MongoDB Shell. Click on **https://www.mongodb.com/try/download/shell**

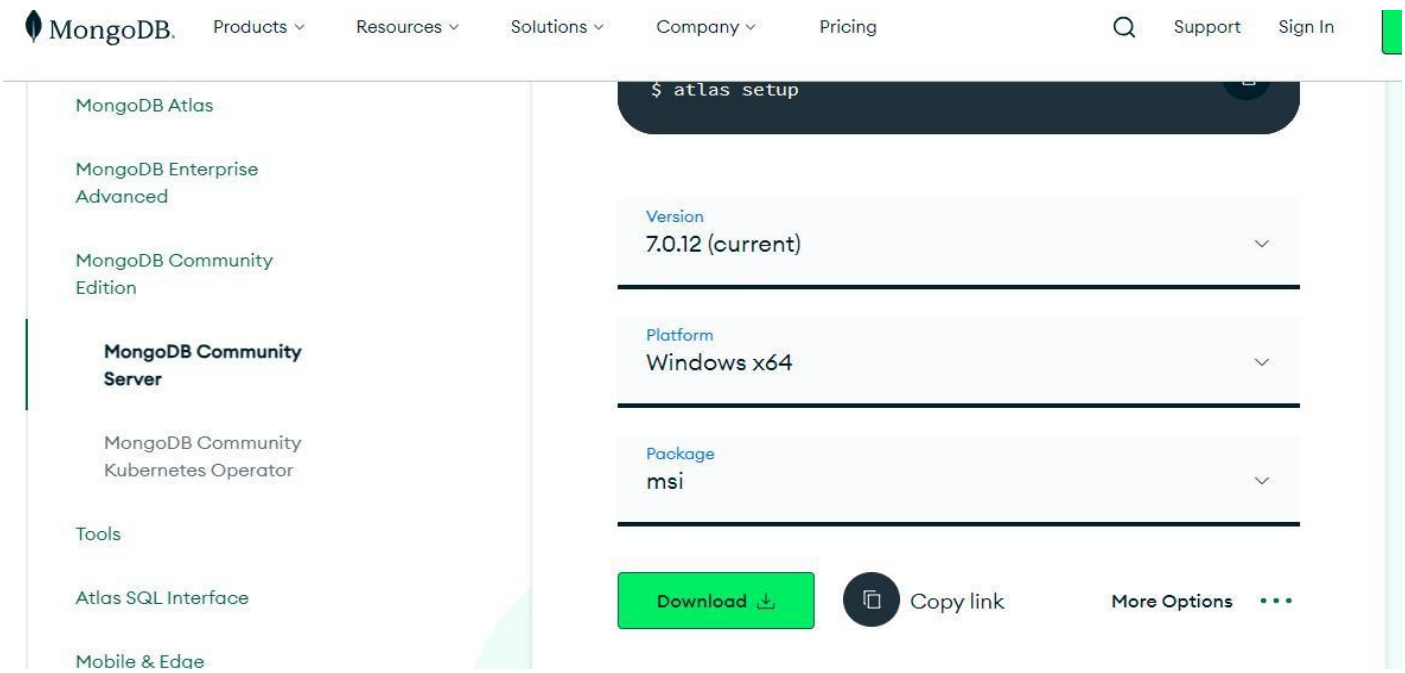

3. Run the MongoDB installer.

For example, from the Windows Explorer/File Explorer:

1. Go to the directory where you downloaded the MongoDB installer (.msi file). By default, this is your Downloads directory.


2 Double-click the .msi file.



3 Follow the MongoDB Community Edition installation wizard.


The wizard steps you through the installation of MongoDB and MongoDB Compass.


1. **Choose Setup Type**
   You can choose either the **Complete** (recommended for most users) or **Custom** setup type. The **Complete** setup option installs MongoDB and the MongoDB tools to the default location. The **Custom** setup option allows you to specify which executables are installed and where.

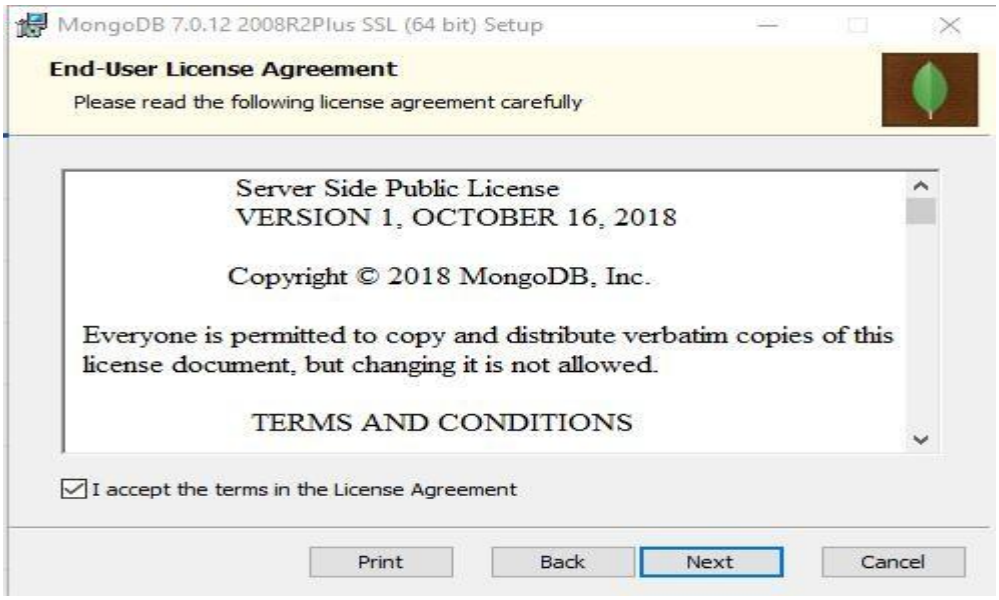

4 Service Configuration

Starting in MongoDB 5.0.9, you can set up MongoDB as a Windows service during the installation or just install the binaries.

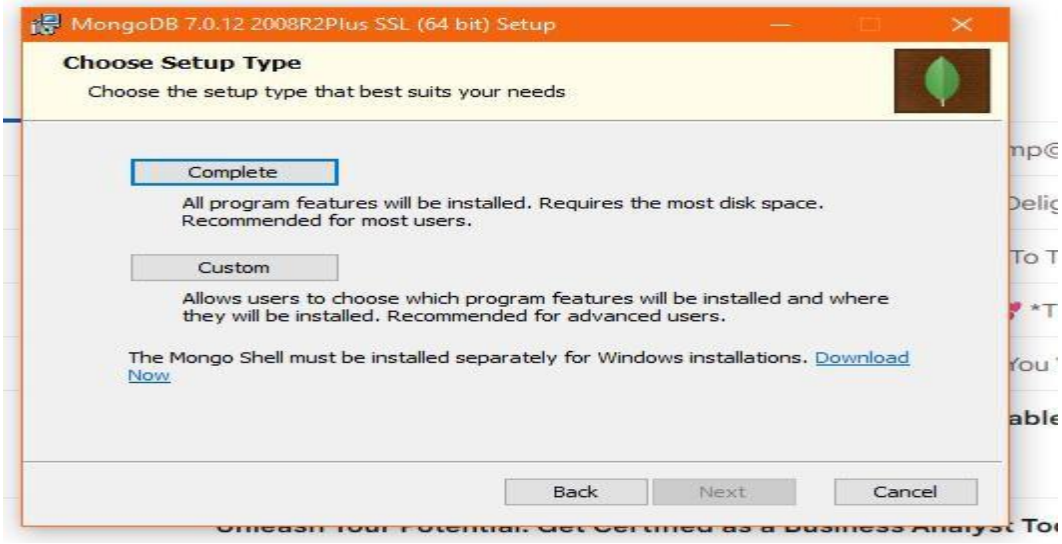


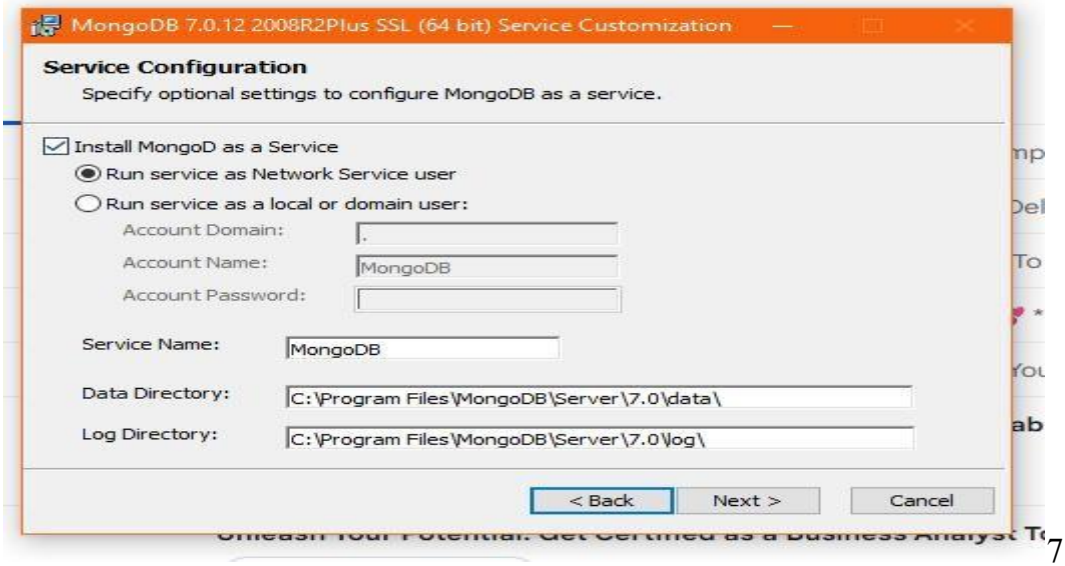

- Select **Install MongoDB as a Service**.
- Select:
  - **Run the service as a Network Service user** (Default)
    This is a Windows user account that is built-in to Windows
- **Service Name**. Specify the service name. The default name is MongoDB. You must choose another name if you already have a service with the specified name.
- **Data Directory**. Specify the data directory, which corresponds to the --dbpath. If the directory does not exist, the installer will create the directory and sets the directory access to the service user.
- **Log Directory**. Specify the Log directory, which corresponds to the --logpath. If the directory does not exist, the installer will create the directory and sets the directory access to the service user.


5 Install MongoDB Compass


Optional. To have the wizard install MongoDB Compass, select **Install MongoDBCompass** (Default)

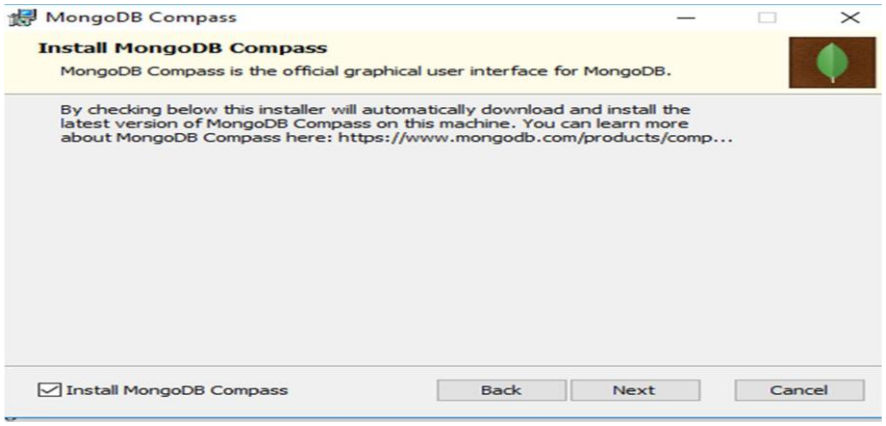




6 When ready, click **Install**.

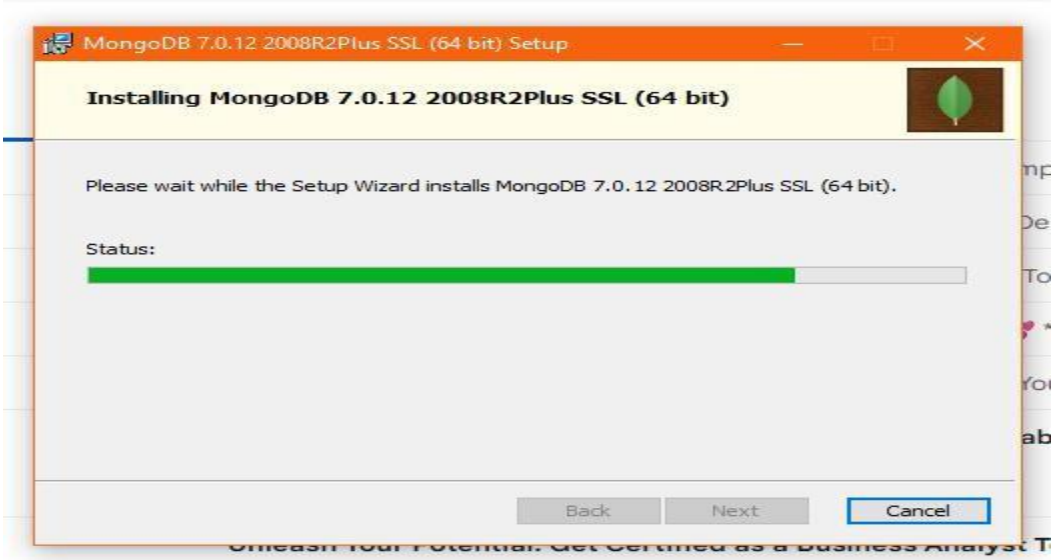


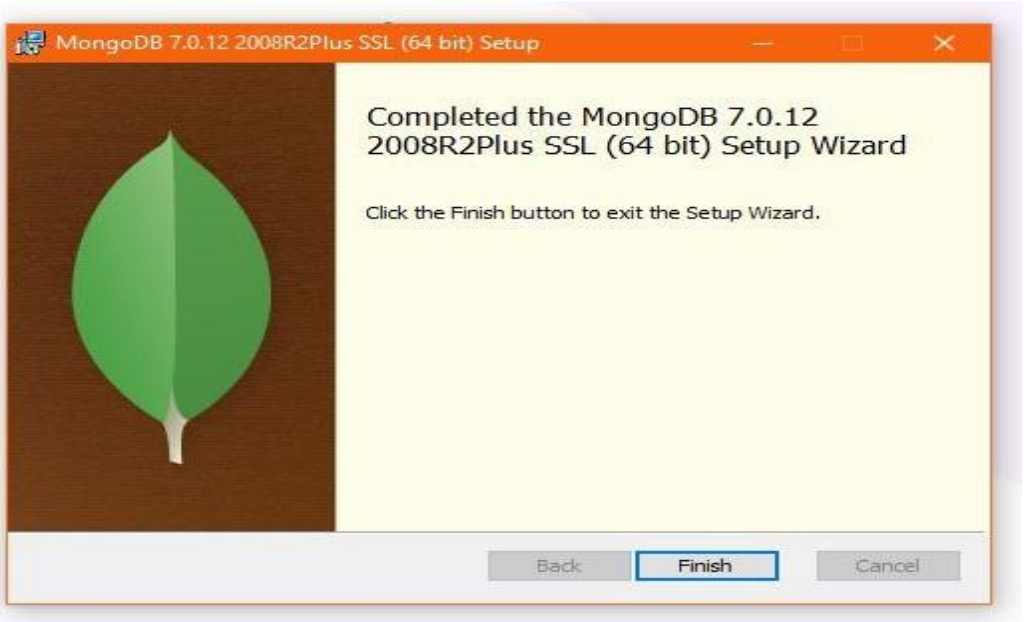
MongoDB 7.0.12 2008R2Plus SSL (64 bit) Setup
Completed the MongoDB 7.0.12 2008R2Plus SSL (64 bit) Setup Wizard
Click the Finish button to exit the Setup Wizard.
Back
Finish
Cancel

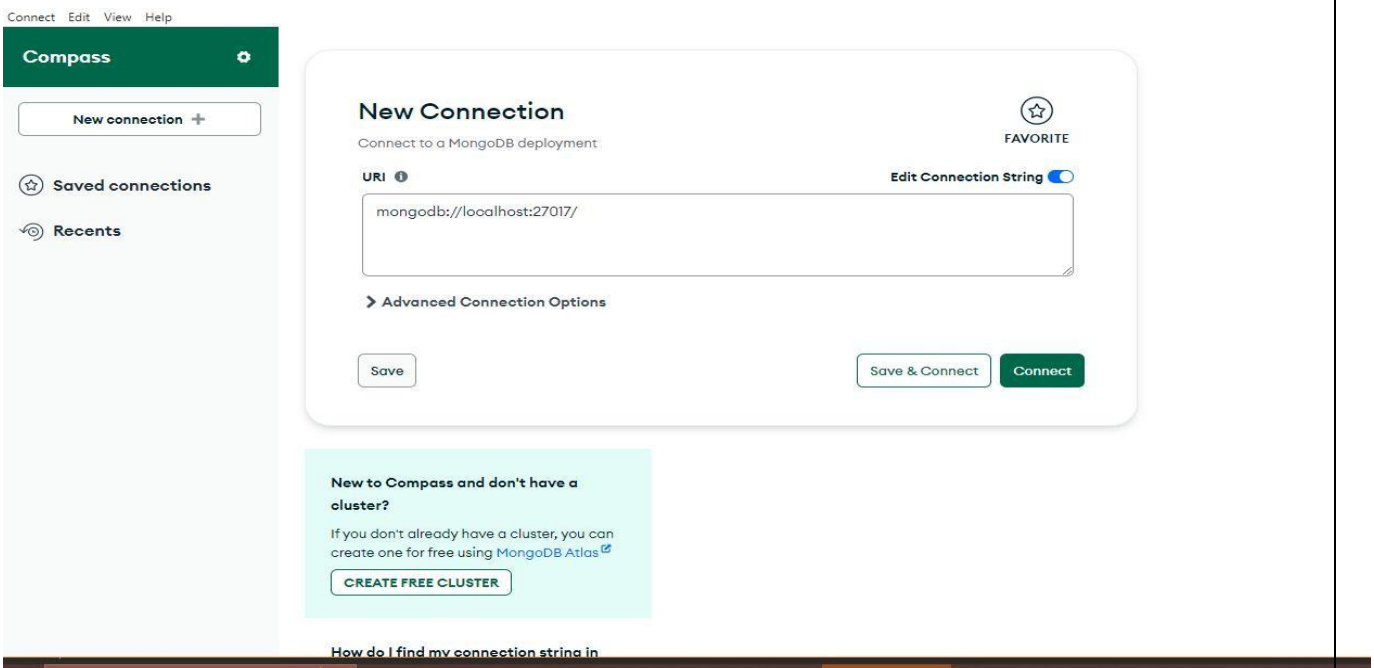
Connect Edit View Help
Compass
New connection
Saved connections
Recents
New Connection
Connect to a MongoDB deployment
FAVORITE
URI
Edit Connection String
mongodb://localhost:27017/
Advanced Connection Options
Save
Save & Connect
Connect
New to Compass and don't have a cluster?
If you don't already have a cluster, you can create one for free using MongoDB Atlas
CREATE FREE CLUSTER
How do I find my connection string in

7 Running MongoDB

Go to the location where mongo DB is installed "C:\Program Files\MongoDB\Server\5.0\bin" and open the command prompt at that location and execute the following command in the command prompt.

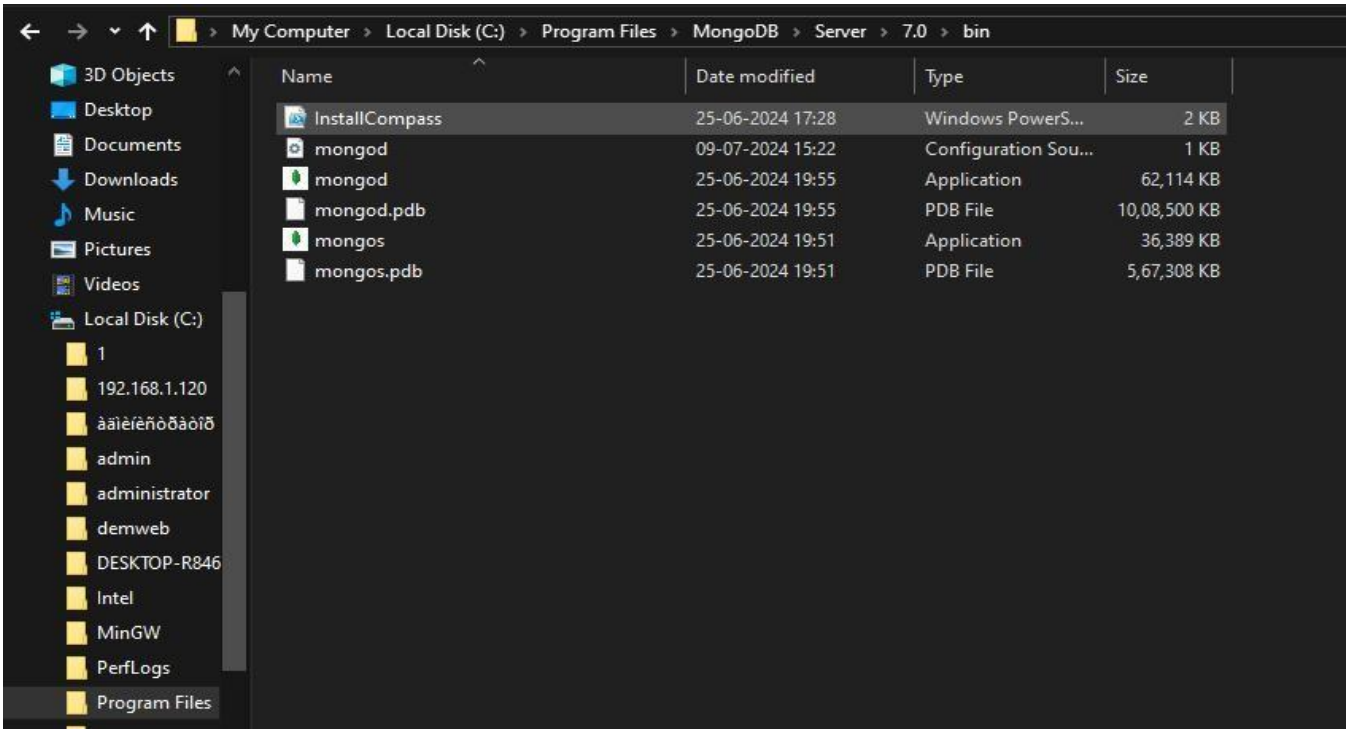

Output:-

```
Microsoft Windows [Version 10.0.22621.3880]
(c) Microsoft Corporation. All rights reserved.

C:\Users\Admin>mongod --version
db version v7.0.12
Build Info: {
    "version": "7.0.12",
    "gitVersion": "b6513ce0781db6818e24619e8a461eae90bc94fc",
    "modules": [],
    "allocator": "tcmalloc",
    "environment": {
        "distmod": "windows",
        "distarch": "x86_64",
        "target_arch": "x86_64"
    }
}

C:\Users\Admin>
```

```
mongosh mongodb://127.0.0.1:27017/?directConnection=true&serverSelectionTimeoutMS=2000
Microsoft Windows [Version 10.0.19045.6466]
(c) Microsoft Corporation. All rights reserved.

C:\Program Files\MongoDB\mongosh-2.9.2-win32-x64\bin>mongosh
Current Mongosh Log ID: 6a58aeccdb55bdcfaef45545
Connecting to:          mongodb://127.0.0.1:27017/?directConnection=true&serverSelectionTimeoutMS=2000&appName=mongosh+2.9.2
Using MongoDB:          8.0.26
Using Mongosh:          2.9.2

For mongosh info see: https://www.mongodb.com/docs/mongodb-shell/


------
   The server generated these startup warnings when booting
   2026-07-16T12:01:07.178+05:30: Access control is not enabled for the database. Read and write access to data and configuration is unrestricted
------

test> show dbs
admin   40.00 KiB
config  72.00 KiB
local   72.00 KiB
ybit    80.00 KiB
test> use BE
switched to db BE
BE> db.createCollection("Student")
{ ok: 1 }
BE> db.createCollection("Department")
{ ok: 1 }
BE> db.Student.insertOne({name:"xyz", address:"amboli"})
{
  acknowledged: true,
  insertedId: ObjectId('6a58b195db55bdcfaef45546')
}
BE> db.Student.insertOne({name:"mno", address:"pinguli"})
{
  acknowledged: true,
  insertedId: ObjectId('6a58b1b5db55bdcfaef45547')
}
BE> db.Department.insertMany([{id:1, name:"Comp"}, {id:1, name:"Mech"}, {id:1, name:"ENT"}])
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('6a58b2d0db55bdcfaef45548'),
    '1': ObjectId('6a58b2d0db55bdcfaef45549'),
    '2': ObjectId('6a58b2d0db55bdcfaef4554a')
  }
}
```

```
}
rmcetdb>  db.Department.insertMany([{id:1,name:"comp"},{id:1,name:"Mech"}])
{
  acknowledged: true,
  insertedIds: {
    '0': ObjectId('66b0b4a77dcd3ef452228fb7'),
    '1': ObjectId('66b0b4a77dcd3ef452228fb8')
  }
}
rmcetdb> db.student.findOne({ name: "abc" });
null
rmcetdb> db.Student.findOne({ name: "abc" });
{
  _id: ObjectId('66b0b3d17dcd3ef452228fb5'),
  name: 'abc',
  address: 'ambav'
}
rmcetdb>  db.Department.find().toArray();
[
  { _id: ObjectId('66b0b4a77dcd3ef452228fb7'), id: 1, name: 'comp' },
  { _id: ObjectId('66b0b4a77dcd3ef452228fb8'), id: 1, name: 'Mech' }
]
rmcetdb> show collections
Department
Student
rmcetdb> db.Student.deleteOne({ name: "abc" });
{ acknowledged: true, deletedCount: 1 }
rmcetdb> db.student.findOne({ name: "abc" });
null
```

```
mongosh mongodb://127.0.0.1:27017/?directConnection=true&serverSelectionTimeoutMS=2000
}
BE> db.Student.findOne({ name: "abc" });
null
BE> db.Student.findOne({ name: "xyz" });
{
  _id: ObjectId('6a58b195db55bdcfaef45546'),
  name: 'xyz',
  address: 'amboli'
}
BE> db.Department.findOne().toArray();
TypeError: db.Department.findOne().toArray is not a function
BE> db.Department.find().toArray();
[
  { _id: ObjectId('6a58b2d0db55bdcfaef45548'), id: 1, name: 'Comp' },
  { _id: ObjectId('6a58b2d0db55bdcfaef45549'), id: 1, name: 'Mech' },
  { _id: ObjectId('6a58b2d0db55bdcfaef4554a'), id: 1, name: 'ENT' }
]
BE> show collections
Department
Student
BE> db.Student.deleteOne({ name: "xyz" });
{ acknowledged: true, deletedCount: 1 }
BE> db.Student.findOne({ name: "xyz" });
null
BE> db.Employee.updateOne({name: "abc"}, {$set: {address: "new_address"} } );
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 0,
  modifiedCount: 0,
  upsertedCount: 0
}
BE> db.Department.updateOne({id:1}, {$set:{name:"IT"}});
{
  acknowledged: true,
  insertedId: null,
  matchedCount: 1,
  modifiedCount: 1,
  upsertedCount: 0
}
BE> db.Department.find().toArray():
Uncaught:
SyntaxError: Missing semicolon. (1:30)

> 1 | db.Department.find().toArray():
    |                              ^
```

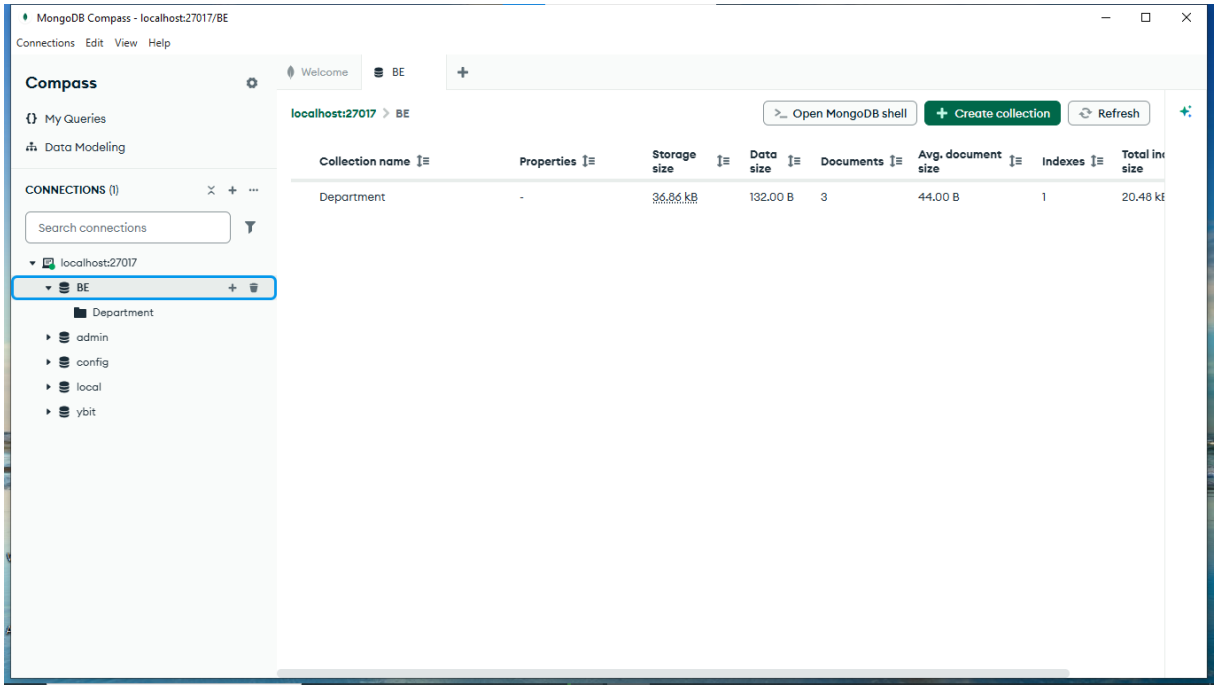
MongoDB Compass - localhost:27017/BE
Connections Edit View Help
Compass
My Queries
Data Modeling
CONNECTIONS (1)
Search connections
localhost:27017
BE
Department
admin
config
local
ybit
Welcome
BE
localhost:27017 > BE
Open MongoDB shell
Create collection
Refresh
Collection name
Properties
Storage size
Data size
Documents
Avg. document size
Indexes
Total in size
Department
-
36.86 kB
132.00 B
3
44.00 B
1
20.48 kB